

# TLM-1550M



## High Power Primary Li Metal Oxide Cell - Military Grade

### Electrical characteristics

(for batteries stored at RT for 1 year or less)

Open circuit voltage	3.95 to 4.07 V
Closed circuit voltage (at 0.1 sec on 0.5 A load)	3.88 V min.
Discharge capacity under 20 mA (at RT to 2.8 V)	470 mAh
Discharge capacity under 500 mA (at RT to 2.8 V)	425 mAh

### Mechanical characteristics

Length (without PTC)	51.0 +0/-1 mm
Diameter	14.8 ± 0.3 mm
Weight	20 g max.

### Operating conditions

Maximum discharge current:	
Continuous to 2.5 V	4.3 A
Pulse, 1 sec, to 2.6 V	15 A
Operating temperature range	-40 °C ÷ +85 °C
Storage temperature range	-55 °C ÷ +85 °C
Cell impedance at RT	< 100 mΩ at 1 kHz

Accumulated capacity loss (when tested at RT @ 20 mA to 2.8 V)

Storage Time (years)	Storage Temperature			
	22 °C	55 °C	72 °C	85 °C
1	3 %	6 %	10 %	N/A
5	7 %	22 %	40 %	N/A
10	11 %	32 %	N/A	N/A
15	15 %	42 %	N/A	N/A
20	18 %	N/A	N/A	N/A

### Environmental

### Compliance with military specification

Vibration	MIL-STD 810G	Method 514.6
Shock	MIL-STD 810G	Method 516.6
Temperature Shock	MIL-STD 810G	Method 503.5
Salt fog	MIL-STD 810G	Method 509.5
Altitude	MIL-STD 810G	Method 500.5
Acceleration	50,000 g <sub>n</sub>	
Spinning	30,000 rpm	

### Safety

### Tested according to:

Short circuit at RT and at +55 °C	UN, IEC
Oven at +150 °C	UL, IEC
Nail penetration	N/A
Over-charge & over-discharge (200 % at currents up to 2 A)	UL, UN, IEC
Impact	UL, UN, IEC
Crush	UL, IEC

UN Manual of Tests and Criteria, UL 1642, IEC 60086

**WARNING:**  
Fire, Explosion, And Severe Burn Hazard.  
Do Not Recharge, Crush, Disassemble, Heat Above 100°C, Incinerate Or Short Circuit.



### Technology

- Anode: Carbon based
- Cathode: Multi metal oxides
- Electrolyte: Organic
- Shut down separator

### Key Features

- High power 4 V cell
- Hermetically sealed (glass-to-metal)
- Wide operating temperature range
- Low self discharge
- Long storage life
- High g<sub>n</sub> survivability
- High homogeneity
- End of life indication capability
- High reliability
- Lightweight
- Safe design
- Assembled in custom packs (per request)

### Main Applications

- Ordnance fuzing power source
- Navigation systems
- Missile systems
- Telemetry
- Emergency systems
- Electronic warfare systems

### Ordering Part No.

■ TLM-1550M/S	72145622000
■ TLM-1550M/Z2/T*	72145622200
■ TLM-1550M/Z2/TP*	72145632200
■ TLM-1550M/Z2/PT2*	72145635200

\*Z2 indicates cells with a re-settable fuse (PTC)

[www.tadiranbatteries.com](http://www.tadiranbatteries.com)


THE INFORMATION PROVIDED HERE IS NECESSARILY OF A GENERAL NATURE. SINCE SPECIFIC PERFORMANCE DEPENDS ON ACTUAL OPERATING AND STORAGE CONDITIONS, OUR ENGINEERS WILL PROVIDE PARTICULAR APPLICATION INSTRUCTIONS UPON REQUEST. DATA SUBJECT TO REVISION WITHOUT NOTICE. ANY REPRESENTATION IN THIS BROCHURE CONCERNING PERFORMANCE ARE FOR INFORMATION PURPOSES ONLY AND NOT WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF FUTURE PERFORMANCE. TADIRAN'S STANDARD LIMITED WARRANTY, STATED IN ITS SALES CONTRACT OR ORDER CONFIRMATION FORM IS THE ONLY WARRANTY OFFERED BY TADIRAN.

# TLM-1550M




## Performance data


**Discharge capability at RT**

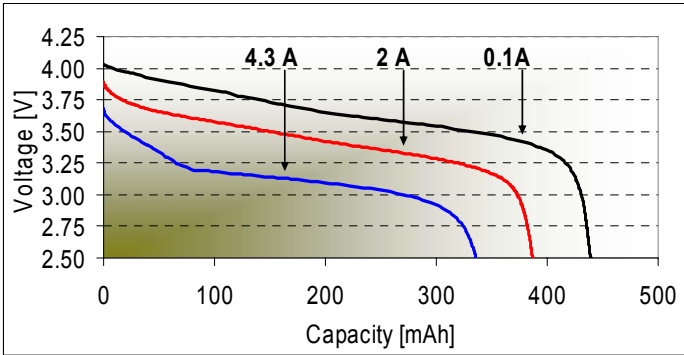


**Pulse capability at RT**

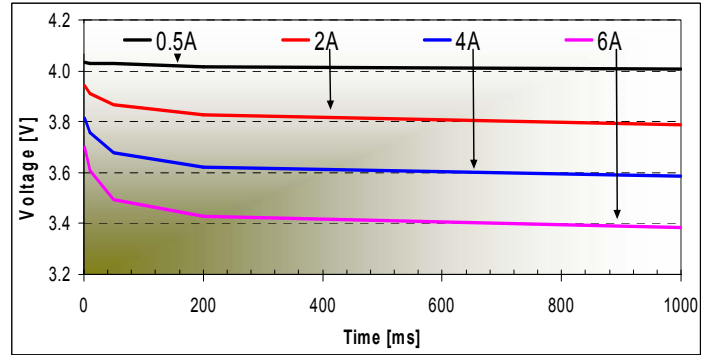


**Discharge capability of 1 A at several temperatures**

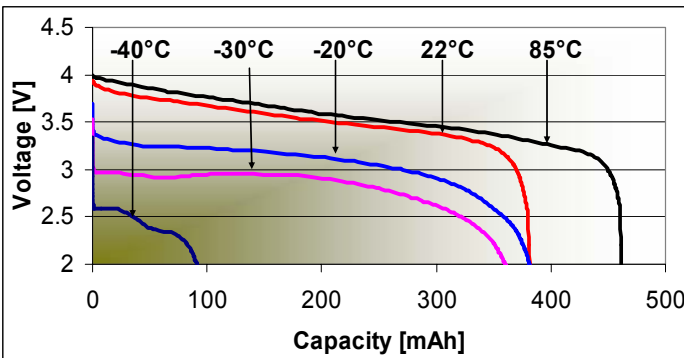


**Pulse capability of 1 A at several temperatures**

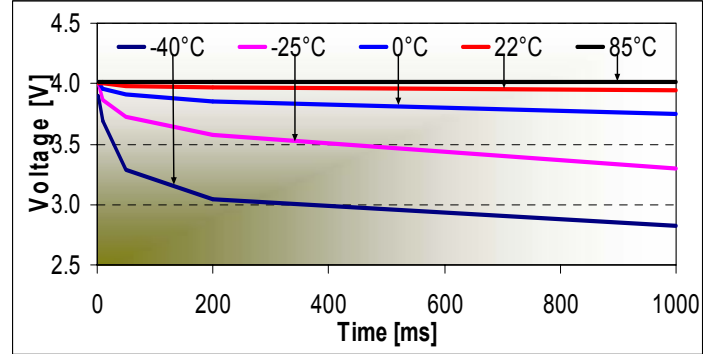

**Capacity vs. OCV**

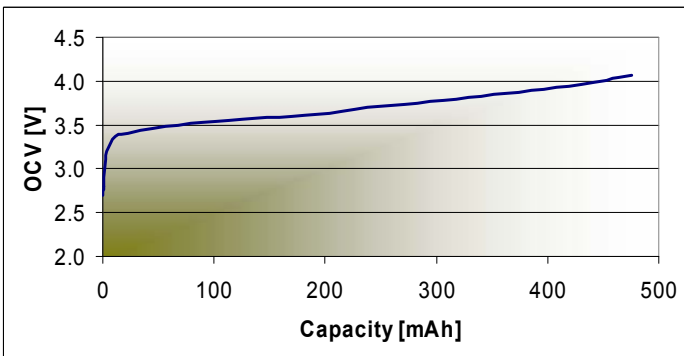

**Pulse capability of 0.5 A at several temperatures**

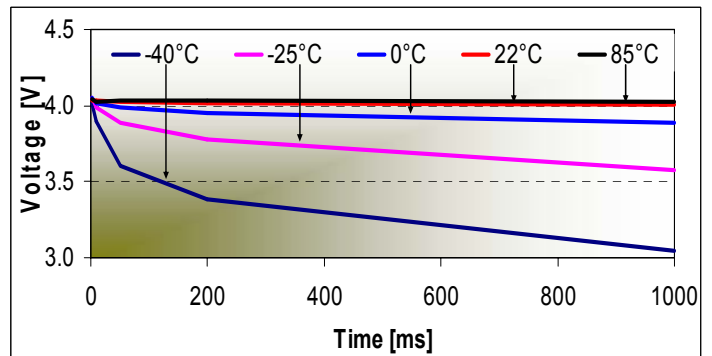


THE INFORMATION PROVIDED HERE IS NECESSARILY OF A GENERAL NATURE. SINCE SPECIFIC PERFORMANCE DEPENDS ON ACTUAL OPERATING AND STORAGE CONDITIONS, OUR ENGINEERS WILL PROVIDE PARTICULAR APPLICATION INSTRUCTIONS UPON REQUEST. DATA SUBJECT TO REVISION WITHOUT NOTICE. ANY REPRESENTATION IN THIS BROCHURE CONCERNING PERFORMANCE ARE FOR INFORMATION PURPOSES ONLY AND NOT WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF FUTURE PERFORMANCE. TADIRAN'S STANDARD LIMITED WARRANTY, STATED IN ITS SALES CONTRACT OR ORDER CONFIRMATION FORM IS THE ONLY WARRANTY OFFERED BY TADIRAN.

# TLM-1550M



## Lead terminations


**TLM-1550M/Z2/T (Soldering Tabs)**  
Cat. # 72145622200

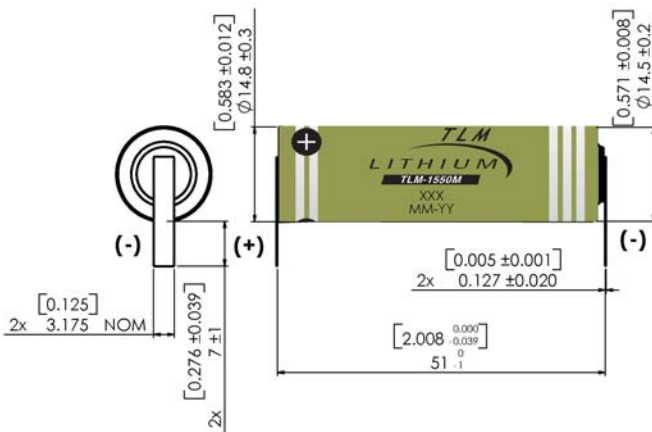


**TLM-1550M/S (Used in battery packs only)**  
Cat. # 72145622000



**TLM-1550M/Z2/TP (PCB Mountable - Polarized)**  
Cat. # 72145632200

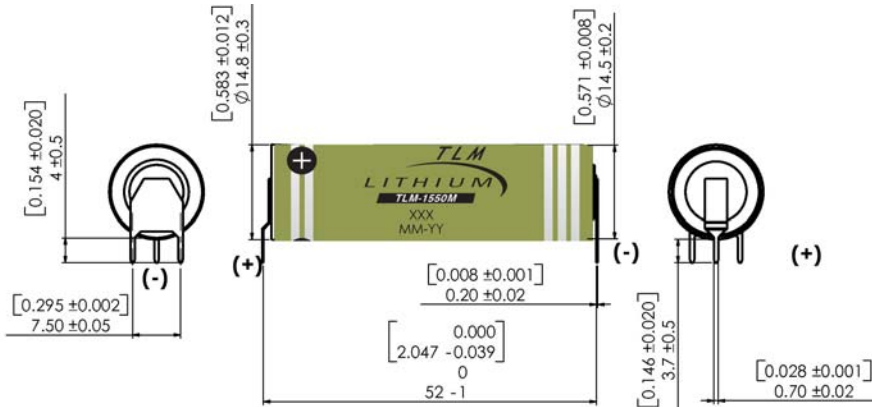

**TLM-1550M/Z2/PT2 (PCB Mountable)**  
Cat. # 72145635200

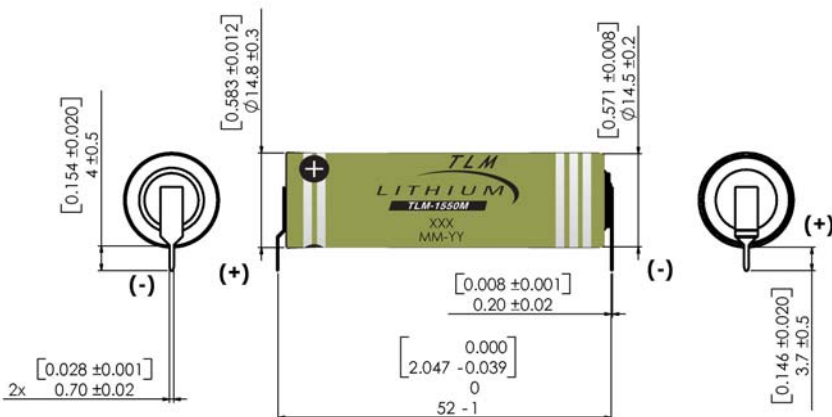

THE INFORMATION PROVIDED HERE IS NECESSARILY OF A GENERAL NATURE. SINCE SPECIFIC PERFORMANCE DEPENDS ON ACTUAL OPERATING AND STORAGE CONDITIONS, OUR ENGINEERS WILL PROVIDE PARTICULAR APPLICATION INSTRUCTIONS UPON REQUEST. DATA SUBJECT TO REVISION WITHOUT NOTICE. ANY REPRESENTATION IN THIS BROCHURE CONCERNING PERFORMANCE ARE FOR INFORMATION PURPOSES ONLY AND NOT WARRANTIES, EITHER EXPRESSED OR IMPLIED, OF FUTURE PERFORMANCE. TADIRAN'S STANDARD LIMITED WARRANTY, STATED IN ITS SALES CONTRACT OR ORDER CONFIRMATION FORM IS THE ONLY WARRANTY OFFERED BY TADIRAN.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.