



### FEATURES:

- RoHS compliant
- 24 Pin DIP Package
- Wide 2:1 input range
- High efficiency up to 85%
- Operating temperature -40°C to + 85°C
- Input / Output Isolation 1500 and 3500VDC
- Pin compatible with multiple manufacturers
- Continuous short circuit protection



### Models Single output

| Model          | Input Voltage (V) | Output Voltage (V) | Output Current max (mA) | Efficiency (%) | Capacitive load, max (μF) | Isolation (VDC) |
|----------------|-------------------|--------------------|-------------------------|----------------|---------------------------|-----------------|
| AM6T-0503SZ    | 4.5-9             | 3.3                | 1400                    | 73             | 1000                      | 1500            |
| AM6T-0505SZ    | 4.5-9             | 5                  | 1200                    | 76             | 1000                      | 1500            |
| AM6T-0512SZ    | 4.5-9             | 12                 | 500                     | 82             | 330                       | 1500            |
| AM6T-0515SZ    | 4.5-9             | 15                 | 400                     | 82             | 220                       | 1500            |
| AM6T-1203SZ    | 9-18              | 3.3                | 1400                    | 72             | 1000                      | 1500            |
| AM6T-1205SZ    | 9-18              | 5                  | 1200                    | 77             | 1000                      | 1500            |
| AM6T-1207SZ    | 9-18              | 7.2                | 830                     | 80             | 680                       | 1500            |
| AM6T-1209SZ    | 9-18              | 9                  | 660                     | 78             | 680                       | 1500            |
| AM6T-1212SZ    | 9-18              | 12                 | 500                     | 81             | 330                       | 1500            |
| AM6T-1215SZ    | 9-18              | 15                 | 400                     | 80             | 220                       | 1500            |
| AM6T-1218SZ    | 9-18              | 18                 | 330                     | 79             | 68                        | 1500            |
| AM6T-1224SZ    | 9-18              | 24                 | 250                     | 80             | 68                        | 1500            |
| AM6T-2403SZ    | 18-36             | 3.3                | 1400                    | 75             | 3300                      | 1500            |
| AM6T-2405SZ    | 18-36             | 5                  | 1200                    | 80             | 1000                      | 1500            |
| AM6T-2407SZ    | 18-36             | 7.2                | 830                     | 82             | 680                       | 1500            |
| AM6T-2409SZ    | 18-36             | 9                  | 660                     | 80             | 680                       | 1500            |
| AM6T-2412SZ    | 18-36             | 12                 | 500                     | 80             | 330                       | 1500            |
| AM6T-2415SZ    | 18-36             | 15                 | 400                     | 80             | 220                       | 1500            |
| AM6T-2418SZ    | 18-36             | 18                 | 330                     | 80             | 220                       | 1500            |
| AM6T-2424SZ    | 18-36             | 24                 | 250                     | 85             | 220                       | 1500            |
| AM6T-4803SZ    | 36-72             | 3.3                | 1400                    | 74             | 3300                      | 1500            |
| AM6T-4805SZ    | 36-72             | 5                  | 1200                    | 80             | 2200                      | 1500            |
| AM6T-4807SZ    | 36-72             | 7.2                | 830                     | 80             | 470                       | 1500            |
| AM6T-4809SZ    | 36-72             | 9                  | 660                     | 82             | 470                       | 1500            |
| AM6T-4812SZ    | 36-72             | 12                 | 500                     | 80             | 330                       | 1500            |
| AM6T-4815SZ    | 36-72             | 15                 | 400                     | 80             | 220                       | 1500            |
| AM6T-4818SZ    | 36-72             | 18                 | 330                     | 80             | 100                       | 1500            |
| AM6T-4824SZ    | 36-72             | 24                 | 250                     | 82             | 100                       | 1500            |
| AM6T-0503SH35Z | 4.5-9             | 3.3                | 1400                    | 73             | 1000                      | 3500            |
| AM6T-0505SH35Z | 4.5-9             | 5                  | 1200                    | 76             | 1000                      | 3500            |
| AM6T-0512SH35Z | 4.5-9             | 12                 | 500                     | 82             | 330                       | 3500            |
| AM6T-0515SH35Z | 4.5-9             | 15                 | 400                     | 82             | 220                       | 3500            |
| AM6T-1203SH35Z | 9-18              | 3.3                | 1400                    | 72             | 1000                      | 3500            |
| AM6T-1205SH35Z | 9-18              | 5                  | 1200                    | 77             | 1000                      | 3500            |
| AM6T-1207SH35Z | 9-18              | 7.2                | 830                     | 80             | 680                       | 3500            |
| AM6T-1209SH35Z | 9-18              | 9                  | 660                     | 78             | 680                       | 3500            |
| AM6T-1212SH35Z | 9-18              | 12                 | 500                     | 81             | 330                       | 3500            |
| AM6T-1215SH35Z | 9-18              | 15                 | 400                     | 80             | 220                       | 3500            |
| AM6T-1218SH35Z | 9-18              | 18                 | 330                     | 79             | 68                        | 3500            |
| AM6T-1224SH35Z | 9-18              | 24                 | 250                     | 80             | 68                        | 3500            |
| AM6T-2403SH35Z | 18-36             | 3.3                | 1400                    | 75             | 3300                      | 3500            |
| AM6T-2405SH35Z | 18-36             | 5                  | 1200                    | 80             | 1000                      | 3500            |
| AM6T-2407SH35Z | 18-36             | 7.2                | 830                     | 82             | 680                       | 3500            |
| AM6T-2409SH35Z | 18-36             | 9                  | 660                     | 80             | 680                       | 3500            |
| AM6T-2412SH35Z | 18-36             | 12                 | 500                     | 80             | 330                       | 3500            |
| AM6T-2415SH35Z | 18-36             | 15                 | 400                     | 80             | 220                       | 3500            |

## Models

### Single output (continued)

| Model          | Input Voltage (V) | Output Voltage (V) | Output Current max (mA) | Efficiency (%) | Capacitive load, max (μF) | Isolation (VDC) |
|----------------|-------------------|--------------------|-------------------------|----------------|---------------------------|-----------------|
| AM6T-2418SH35Z | 18-36             | 18                 | 330                     | 80             | 220                       | 3500            |
| AM6T-2424SH35Z | 18-36             | 24                 | 250                     | 85             | 220                       | 3500            |
| AM6T-4803SH35Z | 36-72             | 3.3                | 1400                    | 74             | 3300                      | 3500            |
| AM6T-4805SH35Z | 36-72             | 5                  | 1200                    | 80             | 2200                      | 3500            |
| AM6T-4807SH35Z | 36-72             | 7.2                | 830                     | 80             | 470                       | 3500            |
| AM6T-4809SH35Z | 36-72             | 9                  | 660                     | 82             | 470                       | 3500            |
| AM6T-4812SH35Z | 36-72             | 12                 | 500                     | 80             | 330                       | 3500            |
| AM6T-4815SH35Z | 36-72             | 15                 | 400                     | 80             | 220                       | 3500            |
| AM6T-4818SH35Z | 36-72             | 18                 | 330                     | 80             | 100                       | 3500            |
| AM6T-4824SH35Z | 36-72             | 24                 | 250                     | 82             | 100                       | 3500            |

## Models

### Dual output

| Model          | Input Voltage (V) | Output Voltage (V) | Output Current max (mA) | Efficiency (%) | Capacitive load, max (μF) | Isolation (VDC) |
|----------------|-------------------|--------------------|-------------------------|----------------|---------------------------|-----------------|
| AM6T-0503DZ    | 4.5-9             | ±3.3               | ±700                    | 73             | ±680                      | 1500            |
| AM6T-0505DZ    | 4.5-9             | ±5                 | ±600                    | 76             | ±330                      | 1500            |
| AM6T-0512DZ    | 4.5-9             | ±12                | ±250                    | 82             | ±100                      | 1500            |
| AM6T-0515DZ    | 4.5-9             | ±15                | ±200                    | 82             | ±100                      | 1500            |
| AM6T-1203DZ    | 9-18              | ±3.3               | ±700                    | 72             | ±680                      | 1500            |
| AM6T-1205DZ    | 9-18              | ±5                 | ±600                    | 75             | ±330                      | 1500            |
| AM6T-1207DZ    | 9-18              | ±7.2               | ±410                    | 80             | ±220                      | 1500            |
| AM6T-1209DZ    | 9-18              | ±9                 | ±330                    | 78             | ±220                      | 1500            |
| AM6T-1212DZ    | 9-18              | ±12                | ±250                    | 80             | ±100                      | 1500            |
| AM6T-1215DZ    | 9-18              | ±15                | ±200                    | 78             | ±100                      | 1500            |
| AM6T-1218DZ    | 9-18              | ±18                | ±160                    | 79             | ±100                      | 1500            |
| AM6T-1224DZ    | 9-18              | ±24                | ±125                    | 79             | ±100                      | 1500            |
| AM6T-2403DZ    | 18-36             | ±3.3               | ±700                    | 75             | ±1000                     | 1500            |
| AM6T-2405DZ    | 18-36             | ±5                 | ±600                    | 80             | ±680                      | 1500            |
| AM6T-2407DZ    | 18-36             | ±7.2               | ±410                    | 82             | ±330                      | 1500            |
| AM6T-2409DZ    | 18-36             | ±9                 | ±330                    | 80             | ±330                      | 1500            |
| AM6T-2412DZ    | 18-36             | ±12                | ±250                    | 80             | ±220                      | 1500            |
| AM6T-2415DZ    | 18-36             | ±15                | ±200                    | 80             | ±100                      | 1500            |
| AM6T-2418DZ    | 18-36             | ±18                | ±160                    | 80             | ±68                       | 1500            |
| AM6T-2424DZ    | 18-36             | ±24                | ±125                    | 80             | ±68                       | 1500            |
| AM6T-4803DZ    | 36-72             | ±3.3               | ±700                    | 74             | ±1000                     | 1500            |
| AM6T-4805DZ    | 36-72             | ±5                 | ±600                    | 80             | ±680                      | 1500            |
| AM6T-4807DZ    | 36-72             | ±7.2               | ±410                    | 80             | ±330                      | 1500            |
| AM6T-4809DZ    | 36-72             | ±9                 | ±330                    | 80             | ±330                      | 1500            |
| AM6T-4812DZ    | 36-72             | ±12                | ±250                    | 80             | ±220                      | 1500            |
| AM6T-4815DZ    | 36-72             | ±15                | ±200                    | 80             | ±100                      | 1500            |
| AM6T-4818DZ    | 36-72             | ±18                | ±160                    | 80             | ±47                       | 1500            |
| AM6T-4824DZ    | 36-72             | ±24                | ±125                    | 81             | ±47                       | 1500            |
| AM6T-0503DH35Z | 4.5-9             | ±3.3               | ±700                    | 73             | ±680                      | 3500            |
| AM6T-0505DH35Z | 4.5-9             | ±5                 | ±600                    | 76             | ±330                      | 3500            |
| AM6T-0512DH35Z | 4.5-9             | ±12                | ±250                    | 82             | ±100                      | 3500            |
| AM6T-0515DH35Z | 4.5-9             | ±15                | ±200                    | 82             | ±100                      | 3500            |
| AM6T-1203DH35Z | 9-18              | ±3.3               | ±700                    | 72             | ±680                      | 3500            |
| AM6T-1205DH35Z | 9-18              | ±5                 | ±600                    | 75             | ±330                      | 3500            |
| AM6T-1207DH35Z | 9-18              | ±7.2               | ±410                    | 80             | ±220                      | 3500            |
| AM6T-1209DH35Z | 9-18              | ±9                 | ±330                    | 78             | ±220                      | 3500            |
| AM6T-1212DH35Z | 9-18              | ±12                | ±250                    | 80             | ±100                      | 3500            |
| AM6T-1215DH35Z | 9-18              | ±15                | ±200                    | 78             | ±100                      | 3500            |
| AM6T-1218DH35Z | 9-18              | ±18                | ±160                    | 79             | ±100                      | 3500            |

## Models

### Dual output (continued)

| Model          | Input Voltage (V) | Output Voltage (V) | Output Current max (mA) | Efficiency (%) | Capacitive load, max (μF) | Isolation (VDC) |
|----------------|-------------------|--------------------|-------------------------|----------------|---------------------------|-----------------|
| AM6T-1224DH35Z | 9-18              | ±24                | ±125                    | 79             | ±100                      | 3500            |
| AM6T-2403DH35Z | 18-36             | ±3.3               | ±700                    | 75             | ±1000                     | 3500            |
| AM6T-2405DH35Z | 18-36             | ±5                 | ±600                    | 80             | ±680                      | 3500            |
| AM6T-2407DH35Z | 18-36             | ±7.2               | ±410                    | 82             | ±330                      | 3500            |
| AM6T-2409DH35Z | 18-36             | ±9                 | ±330                    | 80             | ±330                      | 3500            |
| AM6T-2412DH35Z | 18-36             | ±12                | ±250                    | 80             | ±220                      | 3500            |
| AM6T-2415DH35Z | 18-36             | ±15                | ±200                    | 80             | ±100                      | 3500            |
| AM6T-2418DH35Z | 18-36             | ±18                | ±160                    | 80             | ±68                       | 3500            |
| AM6T-2424DH35Z | 18-36             | ±24                | ±125                    | 80             | ±68                       | 3500            |
| AM6T-4803DH35Z | 36-72             | ±3.3               | ±700                    | 74             | ±1000                     | 3500            |
| AM6T-4805DH35Z | 36-72             | ±5                 | ±600                    | 80             | ±680                      | 3500            |
| AM6T-4807DH35Z | 36-72             | ±7.2               | ±410                    | 80             | ±330                      | 3500            |
| AM6T-4809DH35Z | 36-72             | ±9                 | ±330                    | 80             | ±330                      | 3500            |
| AM6T-4812DH35Z | 36-72             | ±12                | ±250                    | 80             | ±220                      | 3500            |
| AM6T-4815DH35Z | 36-72             | ±15                | ±200                    | 80             | ±100                      | 3500            |
| AM6T-4818DH35Z | 36-72             | ±18                | ±160                    | 80             | ±47                       | 3500            |
| AM6T-4824DH35Z | 36-72             | ±24                | ±125                    | 81             | ±47                       | 3500            |

## Input Specifications

| Parameters                     | Nominal        | Typical | Maximum | Units |
|--------------------------------|----------------|---------|---------|-------|
| Voltage range                  | 5              | 4.5-9   |         | VDC   |
|                                | 12             | 9-18    |         |       |
|                                | 24             | 18-36   |         |       |
|                                | 48             | 36-72   |         |       |
| Filter                         | π (Pi) Network |         |         |       |
| Turn on Transient process time |                |         | 350     | ms    |
| Start up time                  |                | 500     |         | ms    |
| Absolute Maximum Rating        | 5 Vin          | -0.7-15 |         | VDC   |
|                                | 12 Vin         | -0.7-24 |         |       |
|                                | 24 Vin         | -0.7-40 |         |       |
|                                | 48 Vin         | -0.7-80 |         |       |
| Peak Input Voltage time        |                | 100     |         | ms    |

## Isolation Specifications

| Parameters         | Conditions | Typical | Rated        | Units |
|--------------------|------------|---------|--------------|-------|
| Tested I/O voltage | 3 sec      |         | 1500 or 3500 | VDC   |
| Resistance         |            | > 1000  |              | MOhm  |
| Capacitance        |            | 470     |              | pF    |

## Output Specifications

| Parameters                                         | Conditions    | Typical | Maximum | Units |
|----------------------------------------------------|---------------|---------|---------|-------|
| Voltage accuracy                                   |               | ±1      |         | %     |
| Voltage balance                                    | Balanced Load | ±1      |         | %     |
| Short Circuit protection                           | Continuous    |         |         |       |
| Short circuit restart                              | Auto recovery |         |         |       |
| Over current protection                            | 120% Iout     |         |         |       |
| Line voltage regulation (Single)                   |               | ±0.5    |         | %     |
| Line voltage regulation (Dual)                     |               | ±0.5    |         | %     |
| Load voltage regulation (Single)                   | 0 – 100% load | ±0.5    |         | %     |
| Load voltage regulation (Single) 3.3V output model | 0 – 100% load | ±1.5    |         | %     |
| Load voltage regulation (Dual)                     | 0 – 100% load | ±0.5    |         | %     |

### Output Specifications (continued)

| Parameters                                             | Conditions            | Typical | Maximum | Units  |
|--------------------------------------------------------|-----------------------|---------|---------|--------|
| Load voltage regulation (Dual)<br>±3.3V output voltage | 0 – 100% load         | ±1.5    |         | %      |
| Temperature coefficient                                |                       | ±0.02   |         | %/°C   |
| Ripple & Noise                                         | At 20MHz<br>Bandwidth | 60      |         | mV p-p |
| Rising time                                            |                       | 10      |         | ms     |

### General Specifications

| Parameters            | Conditions                                                       | Typical                   | Maximum                  | Units |
|-----------------------|------------------------------------------------------------------|---------------------------|--------------------------|-------|
| Switching frequency   | 100% load                                                        | 266                       |                          | KHz   |
| Operating temperature | Full Load without Derating<br>(except 5V input models see chart) | -40 to +85                |                          | °C    |
| Storage temperature   |                                                                  | -40 to +125               |                          | °C    |
| Max Case temperature  |                                                                  |                           | +100                     | °C    |
| Cooling               | Free air convection                                              |                           |                          |       |
| Humidity              |                                                                  |                           | 90                       | %     |
| Case material         | Nickel coated copper                                             |                           |                          |       |
| Weight                |                                                                  | 17                        |                          | g     |
| Dimensions(L x W x H) | Tolerance ±0.5 mm or ±0.02 inches                                | 1.28 x 0.84 x 0.41 inches | 32.25 x 21.35 x 10.50 mm |       |
| MTBF                  | >1 121 000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C)          |                           |                          |       |

NOTE: All specifications noted in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.


### Safety Specifications

| Parameters                                   |                                                                   |
|----------------------------------------------|-------------------------------------------------------------------|
| Agency Approvals                             | CE                                                                |
| Standards                                    | EN55022 Class A, EN55024                                          |
|                                              | IEC61000-4-2, Perf. Criteria B                                    |
|                                              | IEC61000-4-3, Perf. Criteria A                                    |
|                                              | IEC61000-4-4, Perf. Criteria B (external 220uF/100V cap required) |
|                                              | IEC61000-4-5, Perf. Criteria B (external 220uF/100V cap required) |
|                                              | IEC61000-4-6, Perf. Criteria A                                    |
|                                              | IEC61000-4-8, Perf. Criteria A                                    |
| NOTE: also designed to meet IEC 60950-1:2001 |                                                                   |

### Pin Out Specifications

| Pin | 1500 & 3500VDC |           |
|-----|----------------|-----------|
|     | Single         | Dual      |
| 2   | -V Input       | -V Input  |
| 3   | -V Input       | -V Input  |
| 9   | NO PIN         | Common    |
| 11  | N. C.          | -V Output |
| 14  | +V Output      | +V Output |
| 16  | -V Output      | Common    |
| 22  | +V Input       | +V Input  |
| 23  | +V Input       | +V Input  |



### Dimensions

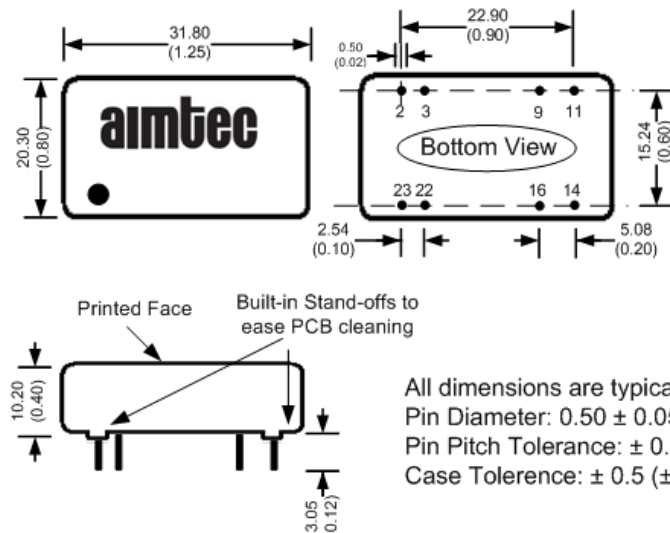

All dimensions are typical: millimeters (inches)  
Pin Diameter: 0.50 ± 0.05 (0.02 ± 0.002)  
Pin Pitch Tolerance: ± 0.35 (±0.014)  
Case Tolerance: ± 0.5 (±0.02)


## Test Circuits

### Conducted Emissions

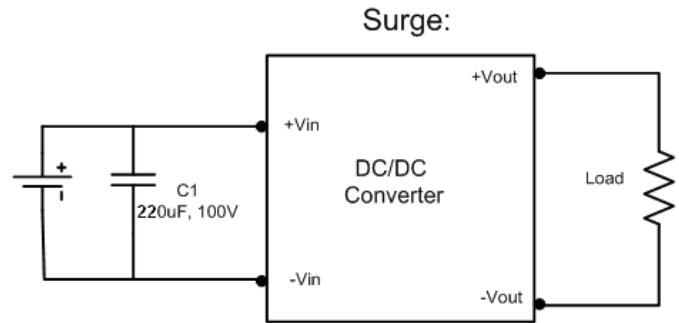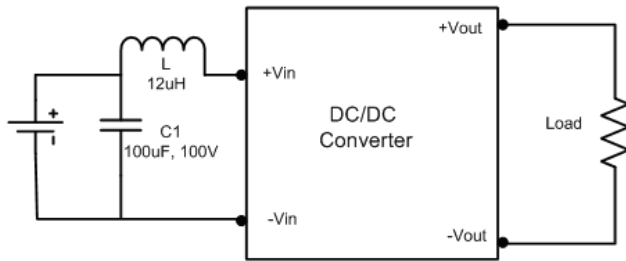

## Derating

(AM6T-05xxxx Devices only)

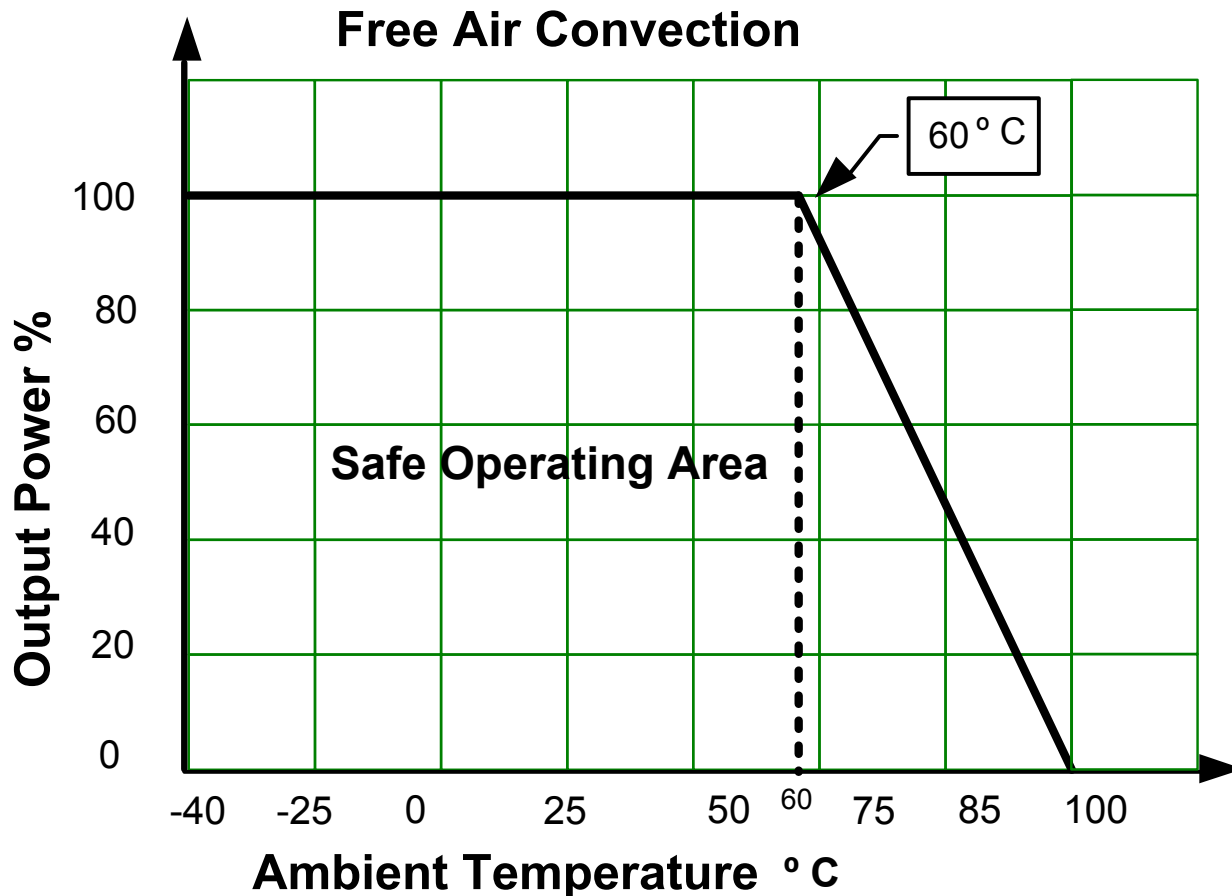

**NOTE:** 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.