
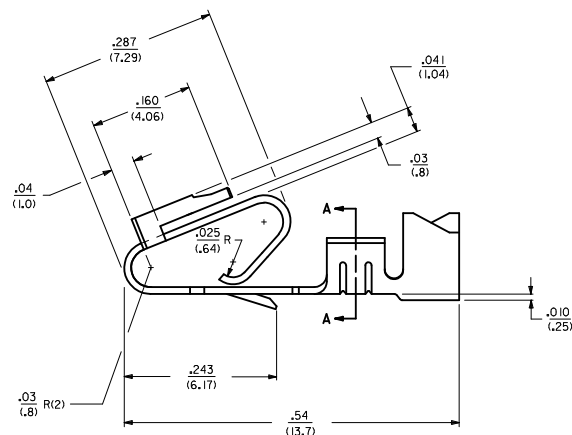
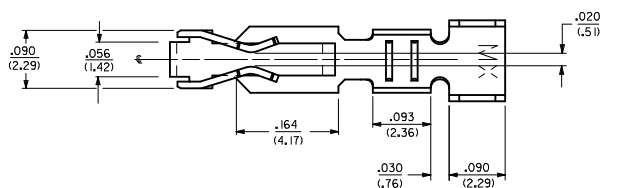






SECTION A-A


LEGEND: 6838-• (*) • •

MATERIAL: _____
(.27)/.0106 THK
BLANK=BRASS
A=PHOS BRONZE


WINDING
A= PER DETAIL A
BLANK= PER DETAIL B

FORM
BLANK= CHAIN
L= LOOSE

PLATING
SEE NOTE 2



INTERLEAF




INTERLEAF

102 TO 154 PLTG.		EC NO.: UC20202-821 DRAWING NO.: 2012/01/04 CHECKED BY: CHIKASHI PER APPR: F53H TH 2012/01/05 2012/02/02		QUALITY SYMBOLS ▽=0 ▽=0 ▽=0		GENERAL TOLERANCES (UNLESS SPECIFIED) mm INCH 4 PLACES ±.125 ±.005 3 PLACES ±.125 ±.010 2 PLACES ±.125 ±.015 1 PLACE ±.036 ±.001 ANGULAR ±1/2°		DIMENSION STYLE IN/MM DRAWN BY: GUZIK CHECKED BY: PATEL APPROVED BY: LENZ DATE: 11/15/89 DATE: 11/15/89 DATE: 11/15/89		SCALE: --- DESIGN UNITS: INCH THIRD ANGLE PROJECTION		SHEET NO.: 1 OF 2	
AR DRAWING TITLE: 102 TO 154 PLTG. DRAWING NO.: 2012/01/04 CHECKED BY: CHIKASHI PER APPR: F53H TH 2012/01/05 2012/02/02		DESCRIPTION DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		TRIFURC TERMINAL CRIMP TYPE, .156 CENTERS 18 TO 20 AWG WIRE MOLEX INCORPORATED		SEE CHART SD-6838		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		MOLEX		SHEET NO.: 1 OF 2	



	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
M	6838-(*)**					6838-A(*)**															M
	PART NO.	ENG. NO.				PART NO.	ENG. NO.														
	08-50-0187	6838-(P909)		SEE NOTE 1		08-58-0187	6838-A(P558)														
	08-50-0189	6838-(P909)L		SEE NOTE 1		08-58-0189	6838-A(P558)L														
	08-50-0275	6838-(P909)-A				08-52-0112	6838-A(P909)		SEE NOTE 1												
L						08-52-0113	6838-A(P909)L		SEE NOTE 1												L
						08-50-0024	6838-A(154)														
						08-50-0251	6838-A(154)L														
						08-58-0105	6838-A(P555)														
K						08-58-0106	6838-A(P555)L														K
						08-58-0110	6838-A(P56 I)		SEE NOTE 1												
						08-58-0111	6838-A(P56 I)L		SEE NOTE 1												
						08-58-0118	6838-A(56 I)														
						08-58-0119	6838-A(56 I)L														
J																					J
I																					I
H																					H
G																					G
F																					F
E																					E
D																					D
C																					C
B																					B
A																					A

NOTES:
1. PART MANUFACTURED WITH ALTERNATE GEOMETRY. SEE SHEET 1.

SEE SHEET 1 EC NO. UCP2012-1821 DRAWN BY: 2012/01/04 CHKD BY: 2012/01/05 APPD BY: 2012/02/02 AR	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED) <table><tr><th>mm</th><th>INCH</th></tr><tr><td>4 PLACES ± --- ± ---</td><td>± --- ± ---</td></tr><tr><td>3 PLACES ± --- ± ---</td><td>± --- ± ---</td></tr><tr><td>2 PLACES ± --- ± ---</td><td>± --- ± ---</td></tr><tr><td>1 PLACE ± --- ± ---</td><td>± --- ± ---</td></tr><tr><td colspan="2">ANGULAR ±1/2°</td></tr></table>	mm	INCH	4 PLACES ± --- ± ---	± --- ± ---	3 PLACES ± --- ± ---	± --- ± ---	2 PLACES ± --- ± ---	± --- ± ---	1 PLACE ± --- ± ---	± --- ± ---	ANGULAR ±1/2°		DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION
			mm	INCH															
			4 PLACES ± --- ± ---	± --- ± ---															
			3 PLACES ± --- ± ---	± --- ± ---															
			2 PLACES ± --- ± ---	± --- ± ---															
1 PLACE ± --- ± ---	± --- ± ---																		
ANGULAR ±1/2°																			
DRAWN BY GUZIK		DATE 11/15/89	TITLE TRIFURCON TERMINAL CRIMP TYPE .156 CENTERS 18 TO 20 AWG WIRE																
CHECKED BY PATEL		DATE 11/15/89	APPROVED BY LENZ																
MATERIAL NO. SEE CHART		DOCUMENT NO. SD-6838			 MOLEX INCORPORATED														
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE D		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION															

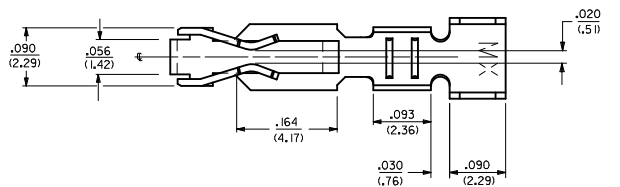

- NOTES:
1. MATERIAL: SEE LEGEND
 2. FINISH: 909 - OVERALL HOT TIN DIP: .000100/10.002541 MIN.
 3. PRODUCT SPECIFICATION: PS-40-02
 4. PACKAGING SPECIFICATION: PK-6838-001
 5. PART IS FOR USE WITH 18 TO 20 GA. WIRE WITH MAX. INSULATION DIA. OF .110/12.791, STRIP LENGTH OF .125/100 / (3.18/2.54).
 6. SEE 7258 SERIES FOR THIS PART WITH CRIMP FOR 22-26 AWG. WIRE.
 7. TERMINAL FOR USE IN 6442 AND 41695 SERIES HOUSINGS.
 8. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL ABOUT THOSE CENTERLINES WITHIN HALF THE TOTAL TOLERANCE.
 9. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

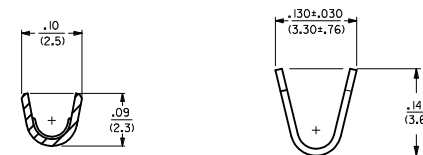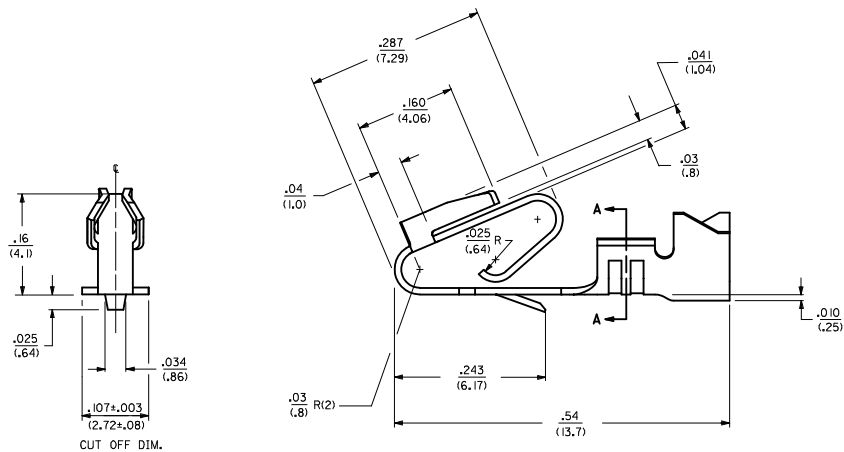



SECTION A-A

LEGEND: 6838- (P909) * *
WINDING
BLANK= PER DETAIL B
FORM
BLANK= CHAIN
PLATING PER SDES-88
SEE NOTE 2

MATERIAL:
(.27)/.0106 THK
BLANK=BRASS

WINDING DETAIL "A"

WINDING DETAIL "B"

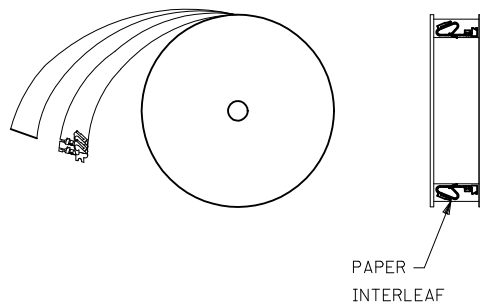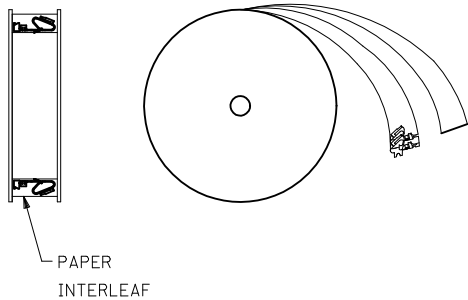

UPDATE GEOMETRY EC NO: UCP2011-0681 DRAWN/KIPER 2010/09/14 CHKD/SSOUSEK 2011/02/23 APPR/FSM TH 2011/02/25	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
		mm INCH		DRAWN BY JJS	DATE 07/29/04	TITLE TRIFURCON TERMINAL CRIMP TYPE .156 CENTERS 18 TO 20 AWG WIRE		
		4 PLACES ± --- ± ---		CHECKED BY KSS	DATE 07/29/04	MOLEX INCORPORATED		
		3 PLACES ± --- ± .010		APPROVED BY YM	DATE 07/29/04	DOCUMENT NO. SD-6838-001		
		2 PLACES ± 0.25 ± .015		MATERIAL NO. 50291639		SHEET NO. 1 OF 1		
NEW		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE D	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.