THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION – , – .
© COPYRIGHT – By – ALL RIGHTS RESERVED.

| LOC | DIST |
|---|---|
| H | — |

REVISIONS

| P | LTR | DESCRIPTION | DATE | DWN | APVD |
|---|---|---|---|---|---|
| | A | INITIAL DRAWING | 05FEB2015 | GSK | BvH |

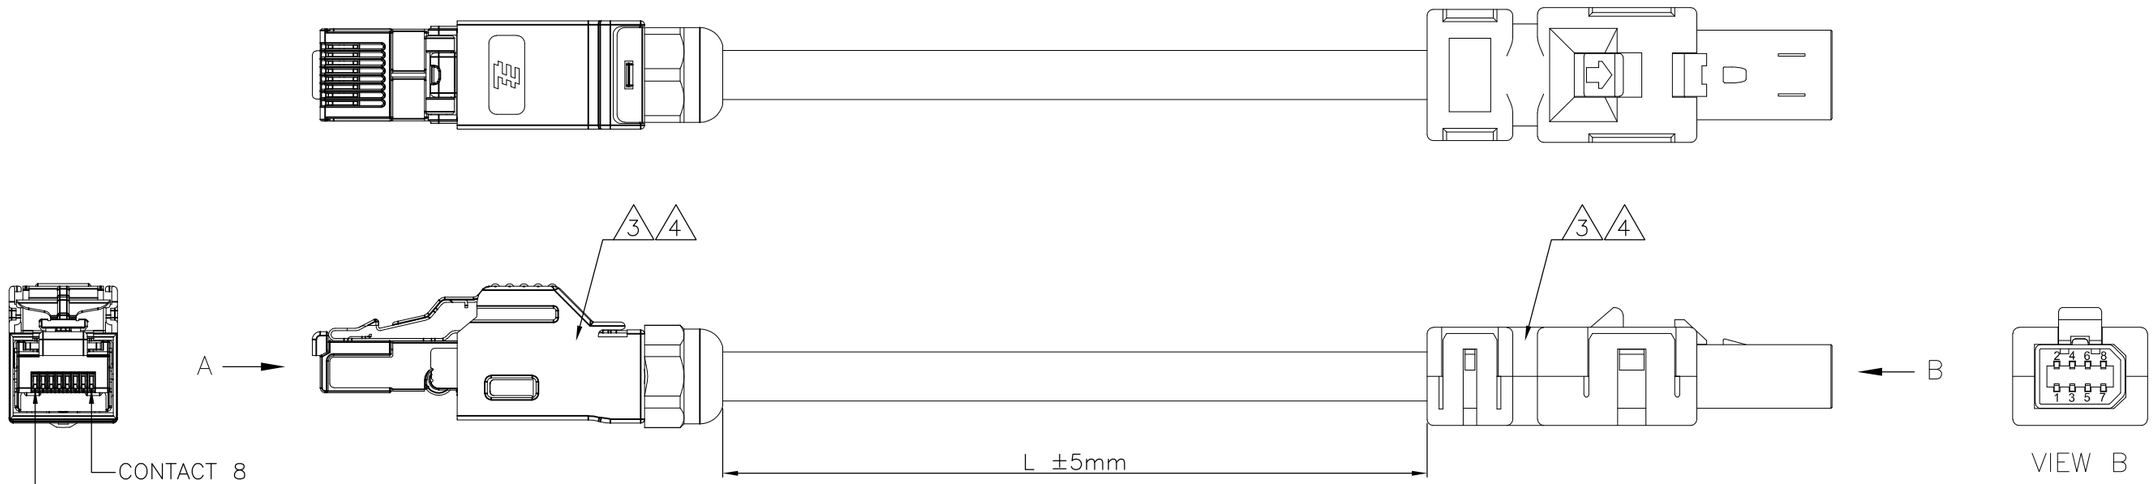


| | | |
|---|---|---|
| 10 | HiFlex MultiPurpose 70°C PUR | 2–2205133–6 |
| 5 | HiFlex MultiPurpose 70°C PUR | 2–2205133–5 |
| 3 | HiFlex MultiPurpose 70°C PUR | 2–2205133–4 |
| 2 | HiFlex MultiPurpose 70°C PUR | 2–2205133–3 |
| 1 | HiFlex MultiPurpose 70°C PUR | 2–2205133–2 |
| 0.5 | HiFlex MultiPurpose 70°C PUR | 2–2205133–1 |
| 10 | HI 125°C TPE | 1–2205133–6 |
| 5 | HI 125°C TPE | 1–2205133–5 |
| 3 | HI 125°C TPE | 1–2205133–4 |
| 2 | HI 125°C TPE | 1–2205133–3 |
| 1 | HI 125°C TPE | 1–2205133–2 |
| 0.5 | HI 125°C TPE | 1–2205133–1 |
| 10 | STD 110°C PVC | 2205133–6 |
| 5 | STD 110°C PVC | 2205133–5 |
| 3 | STD 110°C PVC | 2205133–4 |
| 2 | STD 110°C PVC | 2205133–3 |
| 1 | STD 110°C PVC | 2205133–2 |
| 0.5 | STD 110°C PVC | 2205133–1 |
| Length/m | Cable version | TE PN |

NOTES:

1 PACKAGING: ACC. TO TE SPEC. 107–18032

2 ELECTRICAL TEST ACCORDING TE SPECIFICATION 108–18857.
SHORT–CIRCUIT AND CONTINUITY TEST AT 500V DC, 0.1s

3 KEEP THE DIRECTION OF CONNECTOR TO THE CABLE ON BOTH SIDE THE SAME

4 WIRING SCHEMA ACC. TO TIA/EIA–568–B AS SHOWN IN WIRING SCHEDULE

WIRING SCHEDULE 4

| CAVITY SIDE A | COLOR | CAVITY SIDE B |
|---|---|---|
| 1 | WH/OG | 1 |
| 2 | OG | 2 |
| 3 | WH/GN | 3 |
| 4 | BU | 4 |
| 5 | WH/BU | 5 |
| 6 | GN | 6 |
| 7 | WH/BN | 7 |
| 8 | BN | 8 |

PRODUCT CHARACTERISTIC ACC. OMP EMEA_12
BESONDERE MERKMALE NACH OMP EMEA_12

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± –
4 PLC ± –
ANGLES ± 1°

MATERIAL –

FINISH –

DWN SATHISH KUMAR .G 05FEB2015
CHK B.VELDHOVEN 05FEB2015
APVD A.VAN ZANDVOORT 05FEB2015
PRODUCT SPEC 108–78955
APPLICATION SPEC 114–5506
WEIGHT –

TE Connectivity

NAME CA MINI IO TYPE I IND RJ45

| SIZE | CAGE CODE | DRAWING NO | RESTRICTED TO |
|---|---|---|---|
| A3 | 00779 | C–2205133 | — |

CUSTOMER DRAWING

| SCALE | SHEET | REV |
|---|---|---|
| NTS | 1 OF 1 | A |

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.

**Как с нами связаться**

**Телефон:** 8 (812) 309 58 32 (многоканальный)
**Факс:** 8 (812) 320-02-42
**Электронная почта:** org@eplast1.ru
**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.