
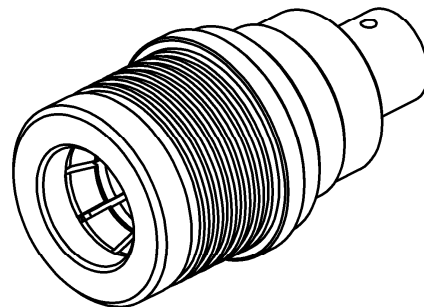



STRAIGHT PLUG SOLDER TYPE


R123W.055.000

CABLE .141

Series : WQMA

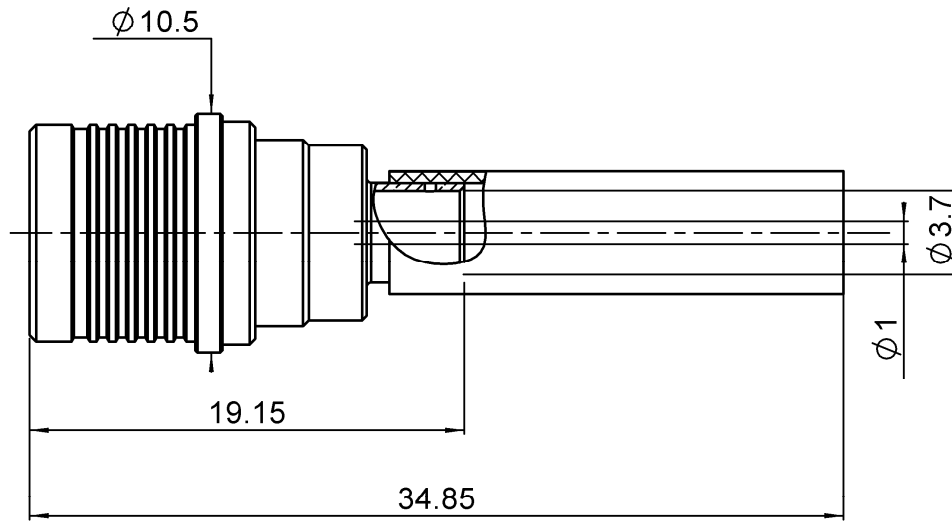

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (µm)
BODY	BRASS	BBR 2 Brasable
CENTER CONTACT	BRASS	NPGR
OUTER CONTACT	BRASS	BBR2
INSULATOR	PTFE	
GASKET	SILICONE RUBBER	
OTHERS PARTS	BRASS	BBR 2
-	-	-
-	-	-

Issue : 1029 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL

STRAIGHT PLUG SOLDER TYPE

R123W.055.000

CABLE .141

Series : WQMA

PACKAGING

Standard	Unit	Other
100	'W' option	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-6	GHz
VSWR	1.02 + 0,0200	x F(GHz) Maxi
Insertion loss	0.05	$\sqrt{F}$ (GHz) dB Maxi
RF leakage	- (***80)	- F(GHz)) dB Maxi
Voltage rating	335	Veff Maxi
Dielectric withstanding voltage	1000	Veff mini
Insulation resistance	5000	M Ω mini

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	NA N mini
Axial force – Opposite end	NA N mini
Torque	NA N.cm mini

Recommended torque	
Mating	NA N.cm
Panel nut	NA N.cm
Clamp nut	NA N.cm
A/F clamp nut	0,0000 mm

Mating life	100 Cycles mini
Weight	5.05 g

ENVIRONMENTAL

Operating temperature	-40/+105 °C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

SPECIFICATIONCABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	3,17	0,00	0,00	0,00	0,00	0,00
mm	3,17	0,00	13*	0,00	0,00	0,00

* for jacketed cable

Assembly instruction:

Recommended cable(s)

RG 402
KS 2

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	270 N mini
- torque	NA N.cm

TOOLING

Part Number	Description	Hexagon
.	.	.
R282.053.000	STRIPPING TOOL	
R282.067.000	POINTER GAUGE	
R282.740.000	SOLDERING MOUNTING	
R282.744.220	SOLDERING POSITIONER (CENTER CONTACT)	
R282.862.070	CONTROL GAUGE	

OTHER CHARACTERISTICS

*Interface ingress protection :

IP68(IEC60529) mated condition

**Intermod.: -120dBc at 1.8GHz (2 x 20W)

***RF leakage(interface) 3<F<6GHz:>70dB

Issue : 1029 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




STRAIGHT PLUG SOLDER TYPE

R123W.055.000

CABLE .141

Series : WQMA

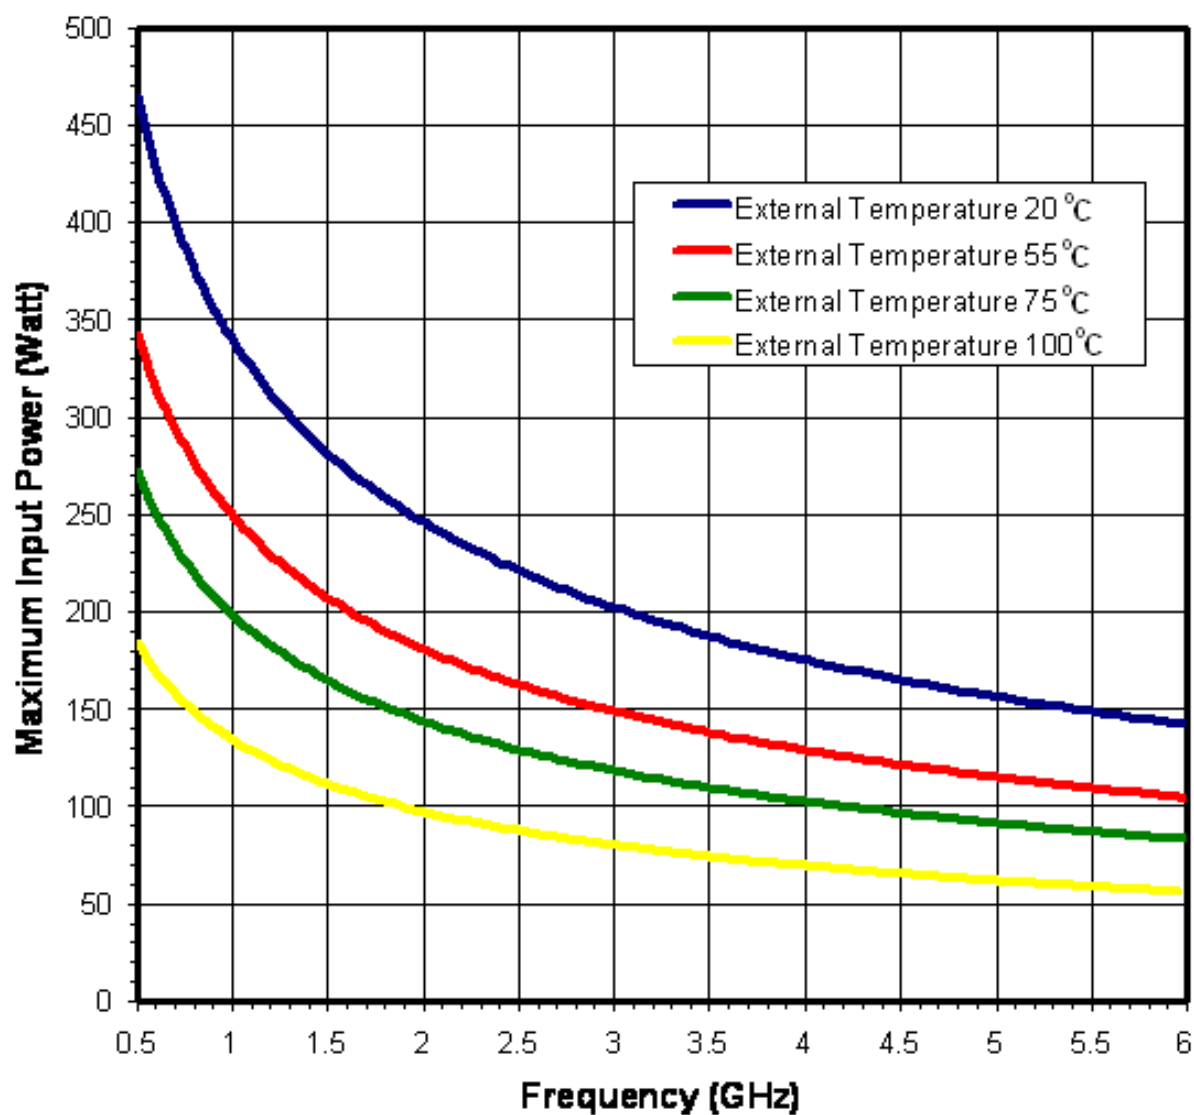POWER DERATING

Issue : 1029 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 


STRAIGHT PLUG SOLDER TYPE

R123W.055.000


CABLE .141

Series : WQMA

COMPONENTS

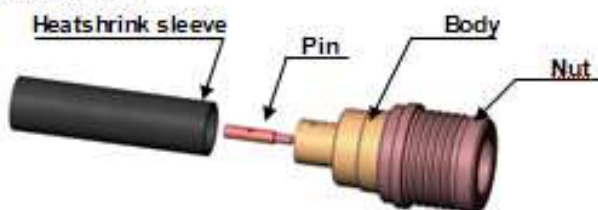


STRIPPING DIMENSIONS



We recommend a cable thermal preconditioning before assembly

1

For cables with a jacket, remove this one according to the quotation C before using the recommended tool. Insert the cable into the clamp element. Present the pointer in front of the clamp element. Push the cable until it stops, while holding the clamp element pushed on the hollow part of the pointer. Turn the clamp element until the release of the pointer.

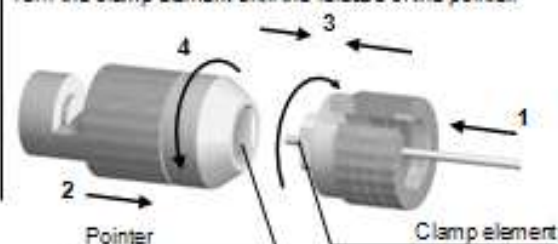


4

After cooling, remove the assembly from the jig. Positioning the connector onto the Assembly jig. Slide the cable into the connector until it bottoms against the insulator. Tighten. Put three rings of solder around the cable and solder. After cooling, remove the assembly from the jig.




2

Present the cutting element in front of the clamp element. Push and turn both elements, back part opposite to the front part. Once they reach the stop, pull without revolving.

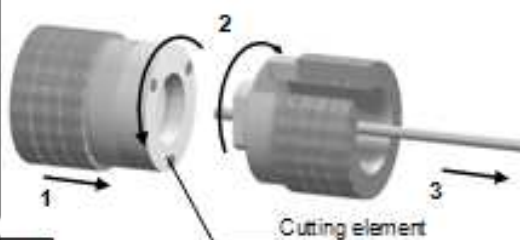

5


Slide the sleeve over the body and heatshrink it in place.

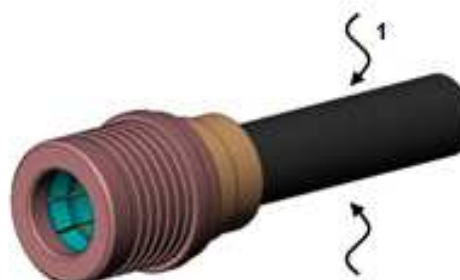

3

Mount the positioner A. Slide the centre contact into the positioner A. Insert the solder gauge between the centre contact and the cable. Tighten. Solder the contact.

1 - Positioner A

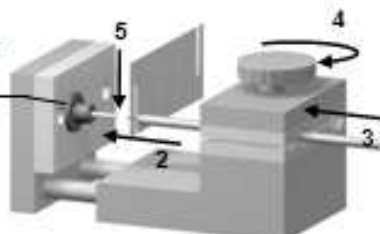

Issue :

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.