

NOTES:

- DRAWING TO BE INTERPRETED IN ACCORDANCE WITH THE CURRENT REVISION OF ASME Y14.5.
- THIS PART/PRODUCT IS TO BE MANUFACTURED WITH THE LATEST APPLICABLE REGULATIONS OF EC DIRECTIVES FOR THE RESTRICTION OF THE USE OF HAZARDOUS SUBSTANCES IN ELECTRICAL AND ELECTRONIC EQUIPMENT (ROHS), WASTE ELECTRICAL AND ELECTRONIC EQUIPMENT (WEEE) AND REGISTRATION, EVALUATION, AUTHORIZATION AND RESTRICTION OF CHEMICALS (REACH).
- OUTPUTS ARE FROM THE CENTER TO THE FULL TRAVEL POSITION.  
 OPTIONS "AA", "BB", "CC", "DD", "EE", "FF" PROVIDE INCREASED VOLTAGE IN +Y; AND DECREASING VOLTAGE IN -Y DIRECTION FROM ONE OUTPUT PER AXIS.  
 OPTIONS "GG" AND "HH" PROVIDE INCREASING VOLTAGES IN ALL DIRECTIONS (+Y, -Y) FROM 2 OUTPUTS PER AXIS.
- OPTIONS "BB" AND "EE" PROVIDE REDUNDANT OUTPUT 2 WHICH DUPLICATES OUTPUT 1.  
 OPTIONS "CC" AND "FF" PROVIDE REDUNDANT OUTPUT 2 WHICH IS INVERSE OF OUTPUT 1.
- SEE PAGE 3 FOR ALTERNATE BUTTON DESIGN. ONLY BUTTON STYLE "2", "5", AND "6" ARE OFFERED WITH A WATERTIGHT PANEL SEAL.
- MARKING TO INCLUDE: "OTTO" P/N & DATE CODE "YYWW".

# HTL2-

## HTL2-

| REV | OCN #  | DATE      | APR |
|-----|--------|-----------|-----|
| A   | 044213 | 17 JUL 08 | LBG |
| B   | 046891 | 19 JAN 09 | LBG |
| C   | 063013 | 19 SEP 11 | DCF |
| D   | 063582 | 28 OCT 11 | KLW |
| E   | 066712 | 27 JUL 12 | DCF |
| F   | 070736 | 31 MAY 13 | DCF |
| G   | 071505 | 08 AUG 13 | DCF |

- 5** BUTTON STYLE  
 1 = CASTLE  
 2 = EXTERNAL CASTLE BOOT  
 3 = SHORT DOUBLE STADIUM  
 4 = TALL CONCAVE STADIUM  
 5 = EXTERNAL BAT HANDLE BOOT  
 6 = EXTERNAL SMOOTH BOOT  
 7 = LONG CONCAVE Y AXIS BUTTON
- CASE STYLE**  
 1 = .970 SQ.
- 5** SEAL  
 1 = DUSTTIGHT  
 2 = WATERTIGHT
- TRAVEL**  
 1 = 25 DEGREES
- GATING**  
 1. SINGLE AXIS
- OPERATE FORCE**  
 1 = 16 OZ
- OUTPUT 1** **3**  
 AA = 2.5+/-2.0 VDC  
 BB = 2.5+/-2.0 VDC  
 CC = 2.5+/-2.0 VDC  
 DD = 2.5+/-1.5 VDC  
 EE = 2.5+/-1.5 VDC  
 FF = 2.5+/-1.5 VDC  
 GG = 0.5-4.5 VDC  
 HH = 1-4 VDC
- OUTPUT 2** **4**  
 NONE  
 2.5+/-2.0 VDC  
 2.5+/-2.0 VDC  
 NONE  
 2.5+/-1.5 VDC  
 2.5+/-1.5 VDC  
 0.5-4.5 VDC  
 1-4 VDC
- TERMINATION**  
 1 = WIRE LEADS, 22 AWG, UL1569  
 2 = PINS  
 3 = WIRE LEADS, 24 AWG, SAE AS22759
- BUTTON COLOR**  
 2 = BLACK

### PRODUCT SPECIFICATIONS

#### ELECTRICAL:

| RATED AT<br>V <sub>cc</sub> = 5V @ 20°C<br>LOAD = 1ma (4.7KΩ)                  | UNITS                   | MIN   | TYP  | MAX   |
|--|-------------------------|-------|------|-------|
| SUPPLY VOLTAGE, V <sub>cc</sub>  | VDC                     | 4.50  | 5.00 | 5.50  |
| OUTPUT VOLTAGE TOLERANCE AT CENTER (SEE APPROPRIATE GRAPH FOR OUTPUT VALUES)   | VDC @5V V <sub>cc</sub> | -.25  | NA   | +.25  |
| OUTPUT VOLTAGE TOLERANCE FULL TRAVEL (SEE APPROPRIATE GRAPH FOR OUTPUT VALUES) | VDC @5V V <sub>cc</sub> | -.25  | NA   | +.25  |
| SUPPLY CURRENT PER SENSOR<br>B=0, V <sub>cc</sub> =5V, I <sub>out</sub> =0     | mA                      | NA    | NA   | 10.0  |
| OUTPUT SOURCE CURRENT LIMIT<br>B=X*, V <sub>o</sub> =0                         | mA                      | -1.00 | NA   | 1.00  |
| OUTPUT RESISTANCE<br>I <sub>o</sub> < -2 mA                                    | Ω                       | NA    | 1.00 | 10.00 |

#### MECHANICAL:



| MECHANICAL LIFE ALL DIRECTIONS                    | 1,000,000 CYCLES |    |    |     |
|---|------------------|----|----|-----|
| TRAVEL ANGLE                                      | DEGREES          | 23 | 25 | 27  |
| OPERATING FORCE (W/BOOT) AT TOP OF BUTTON, @ 20°C | OZ               | NA | 16 | 20  |
| MAX. ALLOWABLE VERTICAL FORCE ON BUTTON           | LBS              | NA | NA | 25  |
| MAX. ALLOWABLE RADIAL FORCE ON BUTTON             | LBS              | NA | NA | 25  |
| MAX. ALLOWABLE TORQUE ON BUTTON ABOUT SHAFT AXIS  | IN-LBS           | NA | NA | 5.5 |

#### ENVIRONMENTAL:





|                            |   |     |    |    |
|----------------------------|---|-----|----|----|
| OPERATING TEMPERATURE      | °C  | -40 | 20 | 85 |
| ELECTRONICS SEAL INTEGRITY | WATERTIGHT PER IP68S, 1 METER             |     |    |    |
| EMI/RFI WITHSTAND          | PER SAE J1113 CONTACT FACTORY FOR DETAILS |     |    |    |

#### MATERIAL:

|          |  |
|----------|--|
| BOOT     | ELASTOMER, BLACK   |
| BUTTON   | THERMOPLASTIC, BLACK                                     |
| CASE     | THERMOPLASTIC, BLACK                                     |
| FLANGE   | THERMOPLASTIC, BLACK                                     |
| HARDWARE | 4X ITW FASTEX PANEL FASTENER P/N 36030002, OR EQUIVALENT |

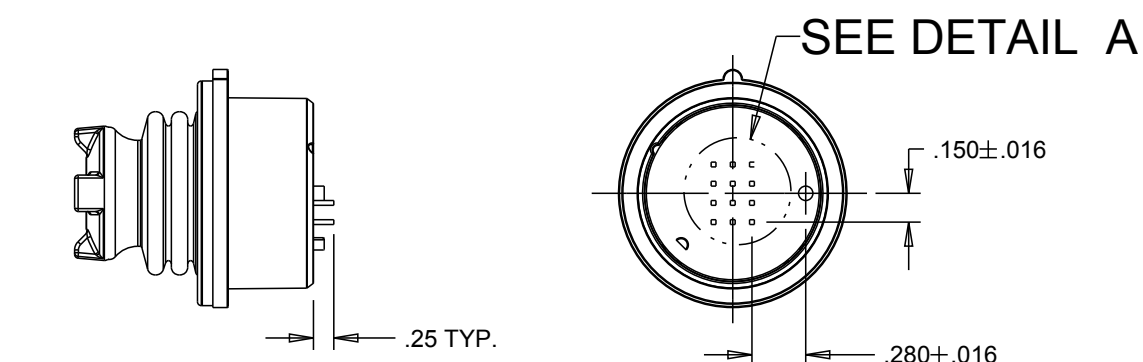
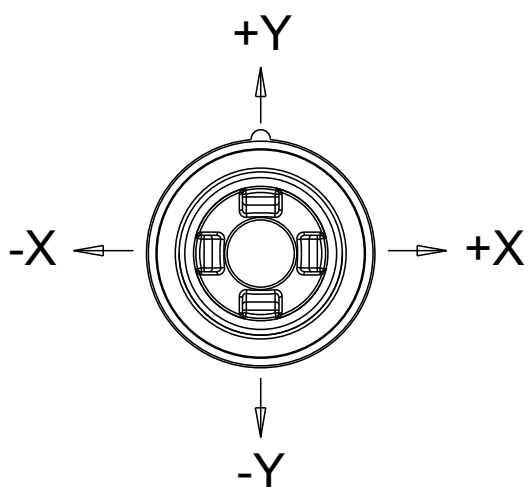


PINS NOT PRESENT IN ALL CONFIGURATIONS

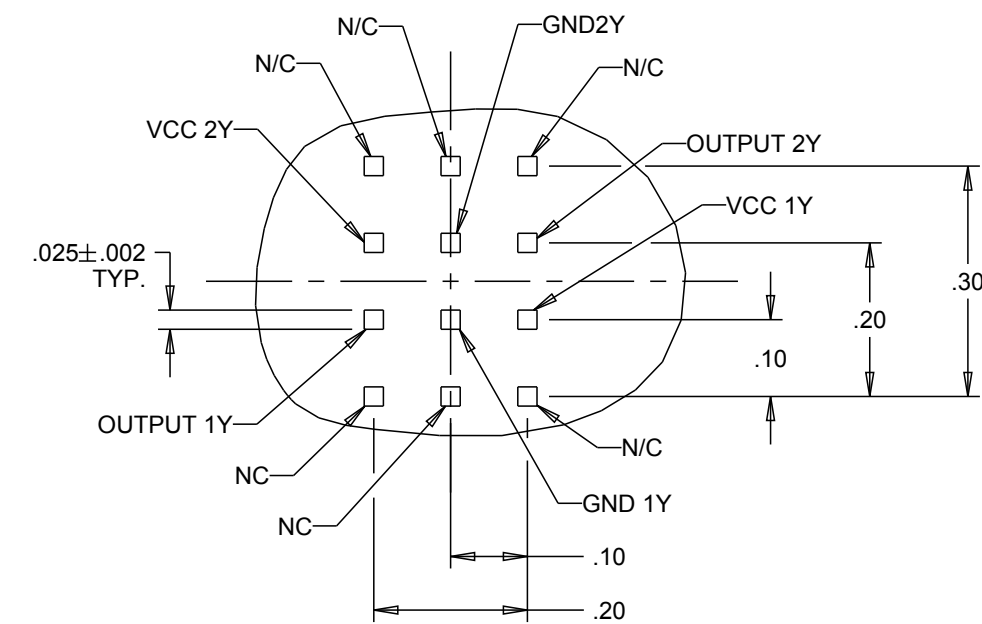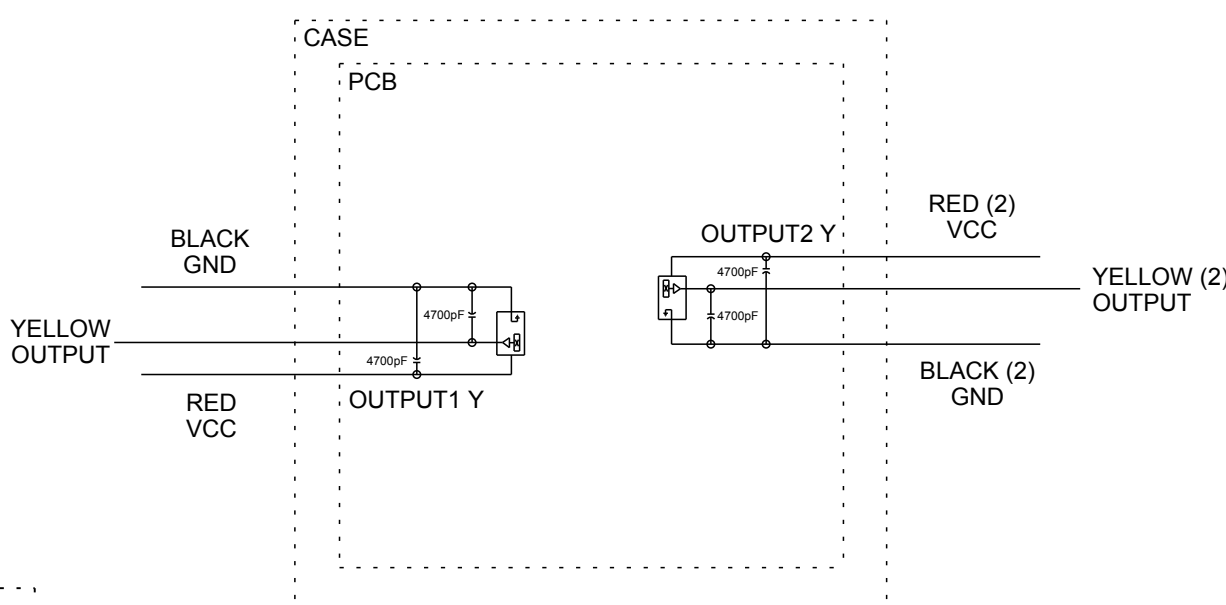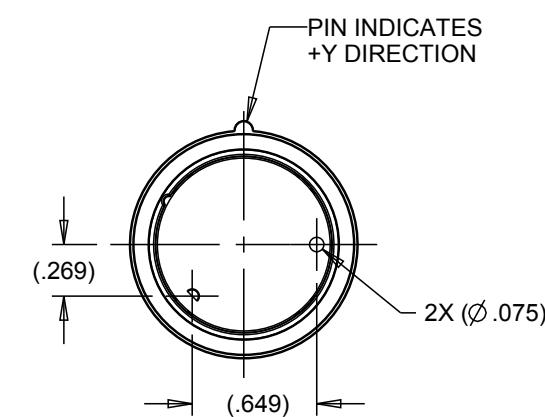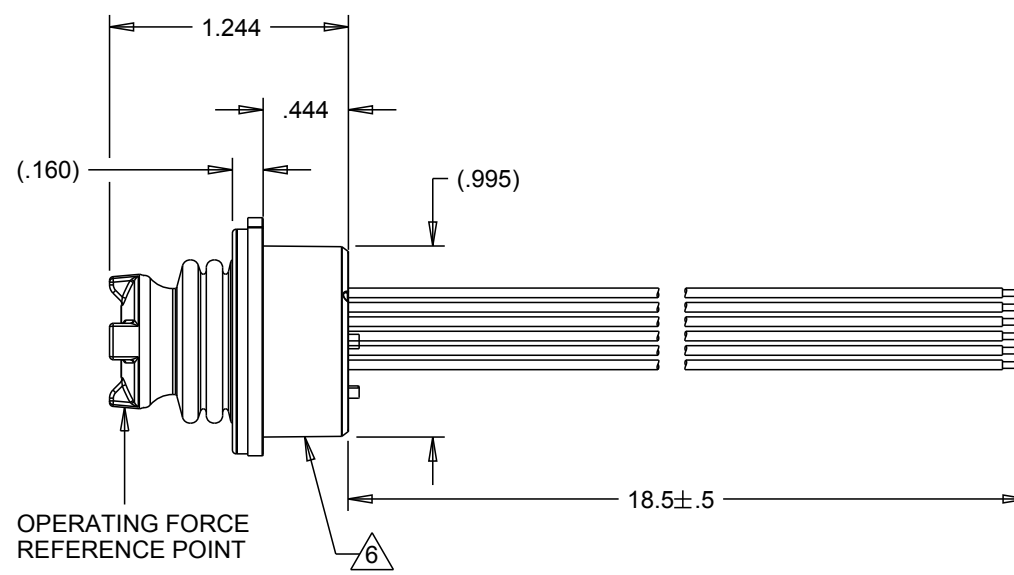

### DETAIL A

SCALE 4:1  
ALL PINS NOT PRESENT IN ALL CONFIGURATIONS

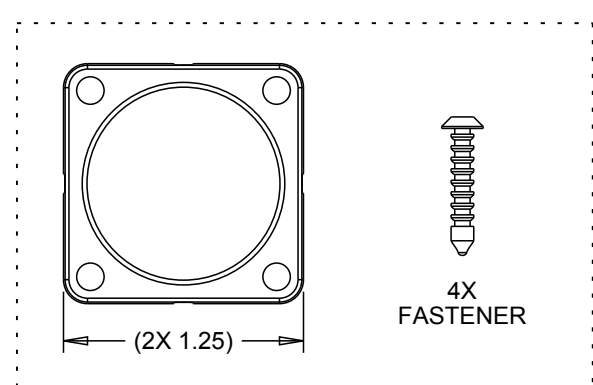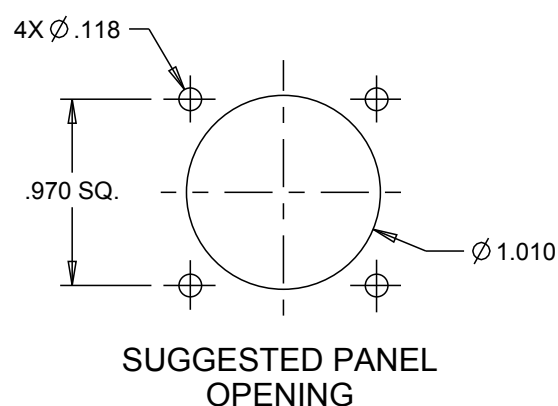

SHIPPED UNASSEMBLED

ALL WIRES NOT PRESENT IN ALL CONFIGURATIONS

OUTPUT2 NOT PRESENT IN ALL CONFIGURATIONS

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES. TOLERANCES: .XX ±.03, .XXX ±.010, ANGLES ±2°, DO NOT SCALE


KEY CHARACTERISTICS SPECIAL REQUIREMENT

**OTTO**  
CARPENTERSVILLE, ILLINOIS USA


DESCRIPTION  
HTL2, LINEAR HALL EFFECT  
2-WAY TOGGLE

|           |        |               |                   |        |
|-----------|--------|---------------|-------------------|--------|
| DRWN. JLW | SIZE C | FSCM NO 21649 | DRAWING NO. HTL2- | REV. G |
| CHKD. MRM |        |               |                   |        |
| APPD. AH  |        |               |                   |        |


### OPTION AA

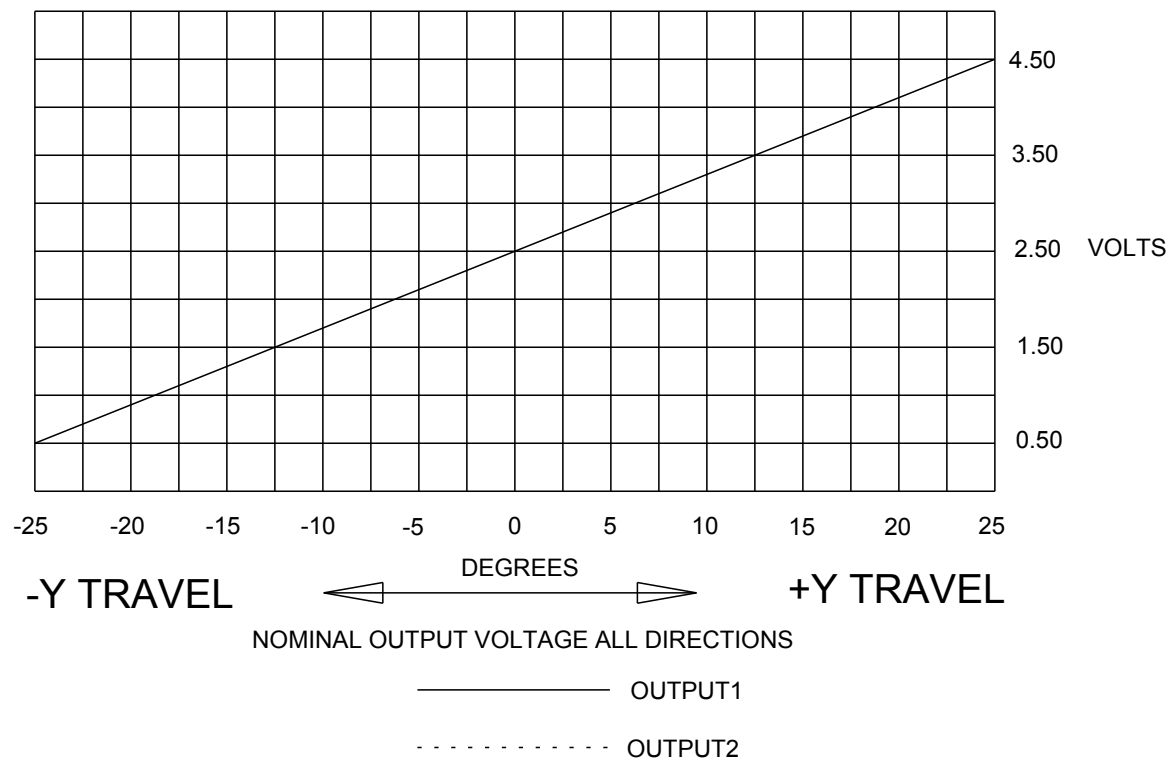


### OPTION BB

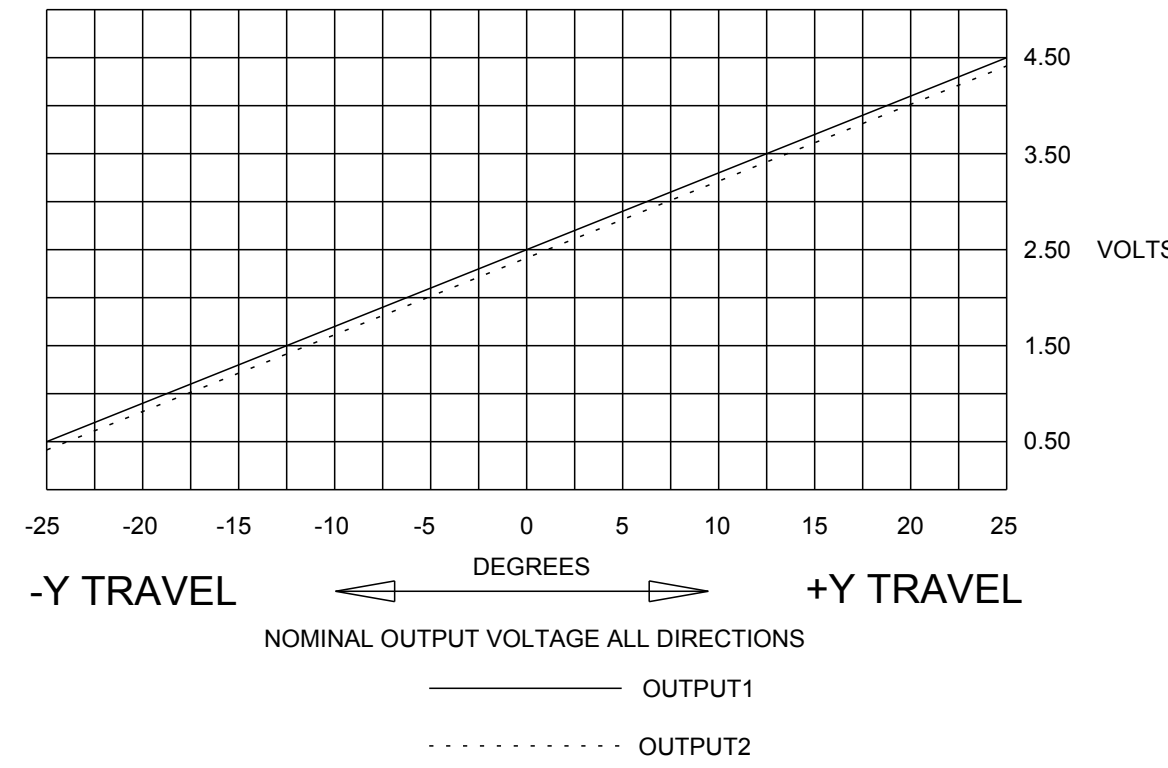


### OPTION CC

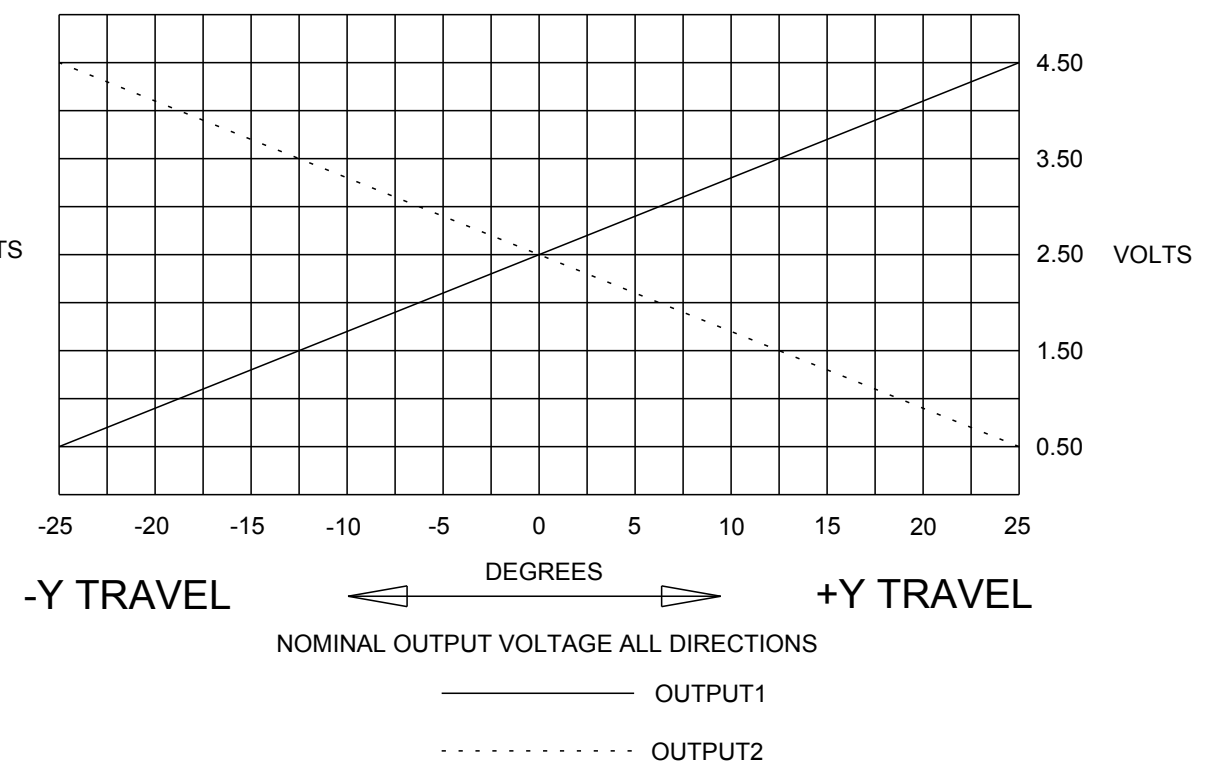


### OPTION DD

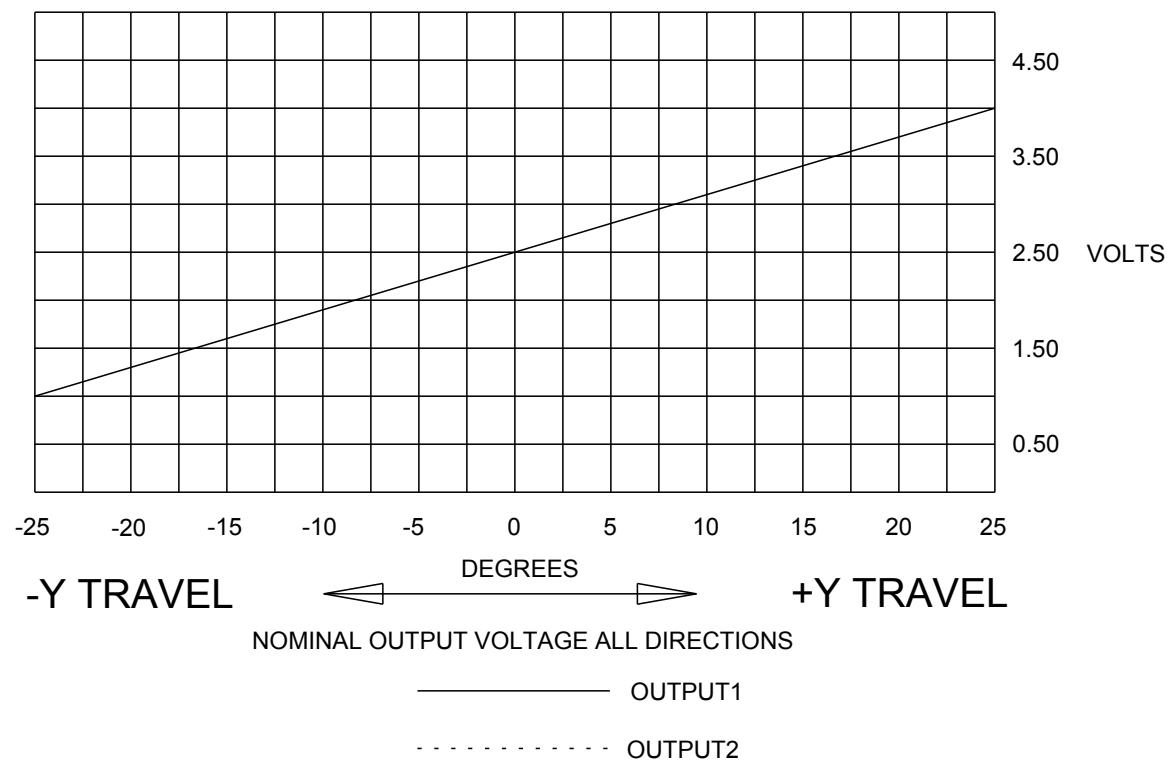


### OPTION EE

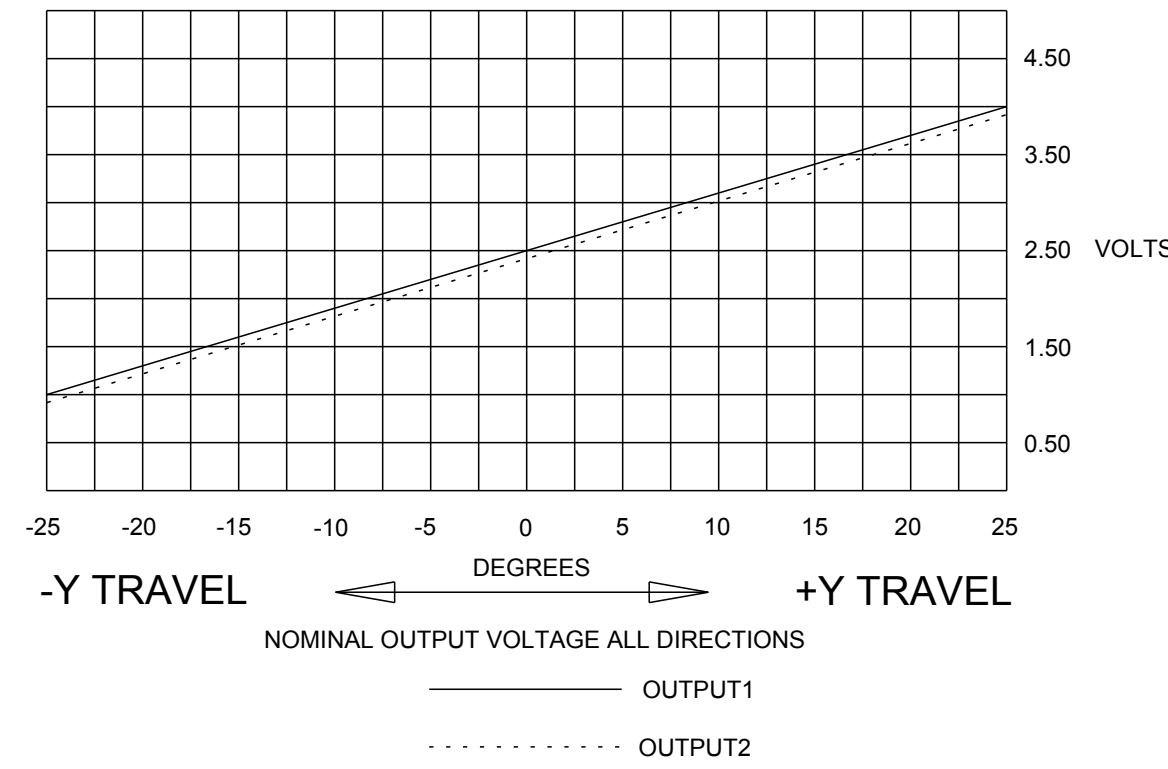


### OPTION FF

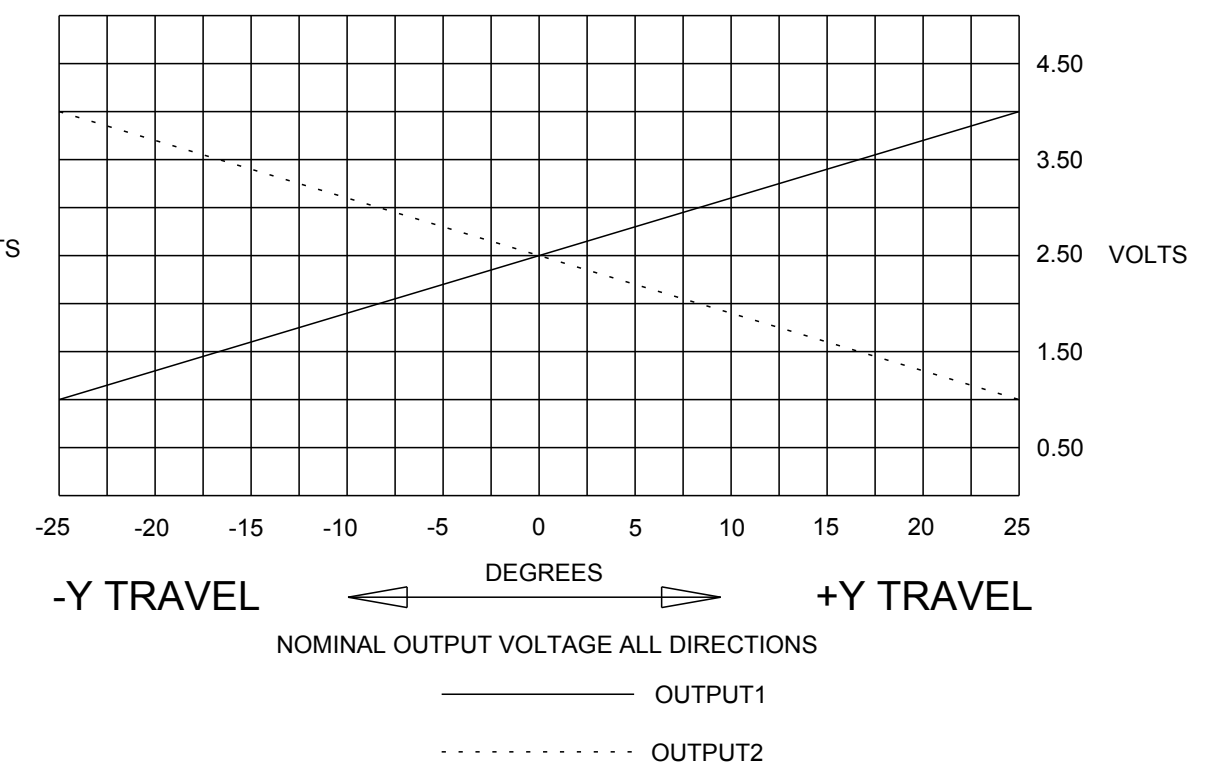

### OPTION GG

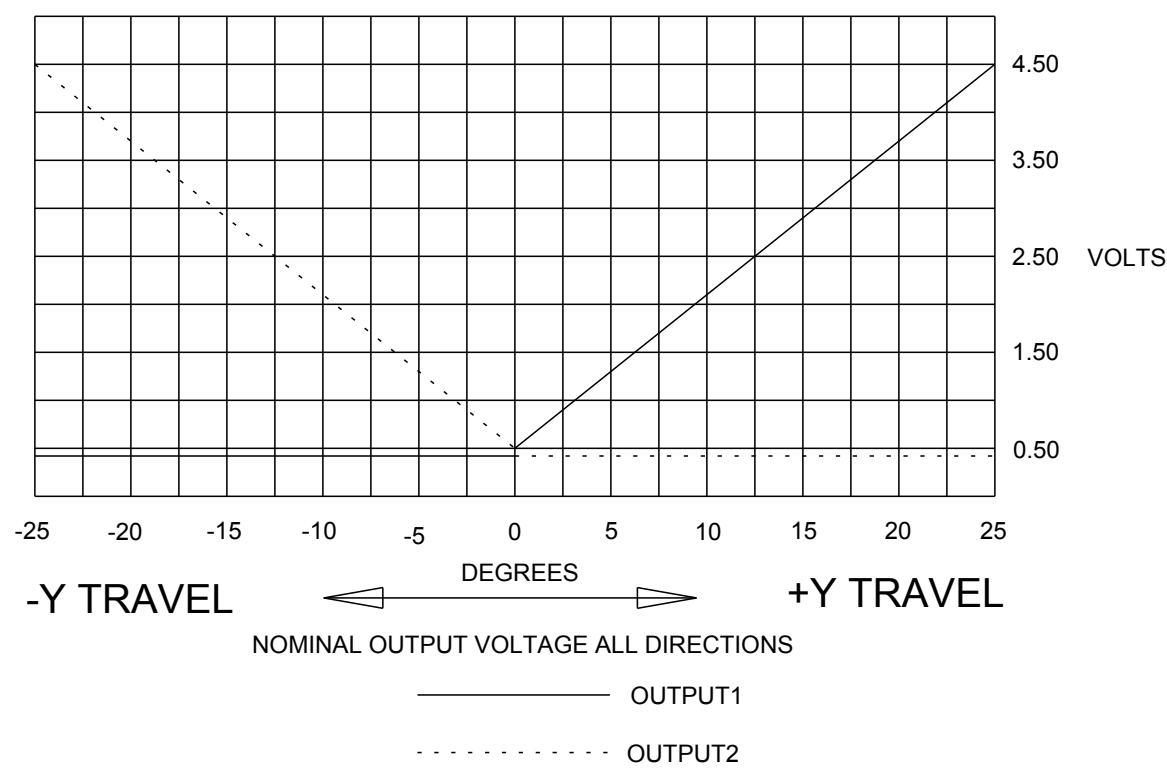

### OPTION HH








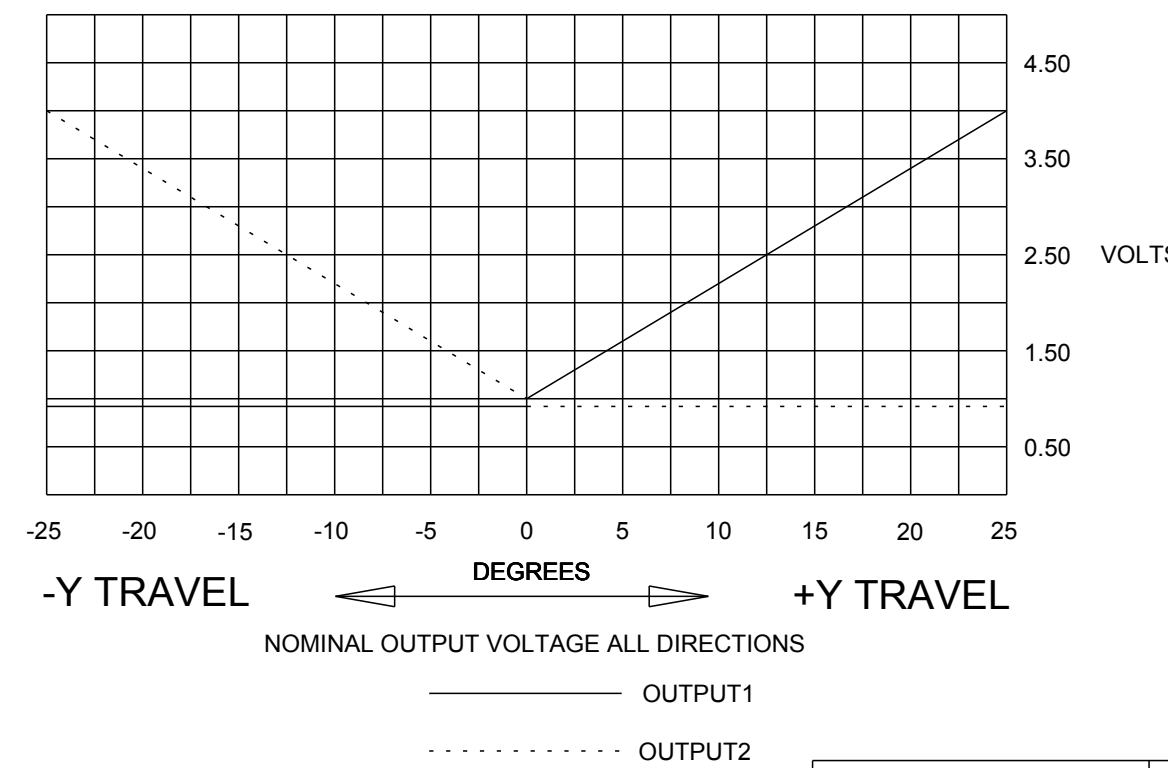


UNLESS OTHERWISE SPECIFIED  
 DIMENSIONS ARE IN INCHES.  
 TOLERANCES ARE AS LISTED.  
 MUST BE FREE FROM BURRS  
 AND SHARP EDGES

TOLERANCES  
 .XX ±.03  
 .XXX ±.010  
 ANGLES ±2°  
 DO NOT SCALE DRAWING

THIS DOCUMENT IS THE CONFIDENTIAL  
 PROPERTY OF OTTO ENGINEERING, INC..  
 IT IS NOT TO BE USED IN ANY WAY  
 DETRIMENTAL TO THE INTERESTS  
 OF OTTO ENGINEERING, INC.

|           |                        |                |                   |        |
|-----------|------------------------|----------------|-------------------|--------|
| DRWN. JLW | SIZE C                 | FSCM NO. 21649 | DRAWING NO. HTL2- | REV. G |
| CHKD. MRM |                        |                |                   |        |
| APPD. AH  |                        |                |                   |        |
| WT.       | THIRD ANGLE PROJECTION | Scale 1:1      | Sheet 2 OF 4      |        |

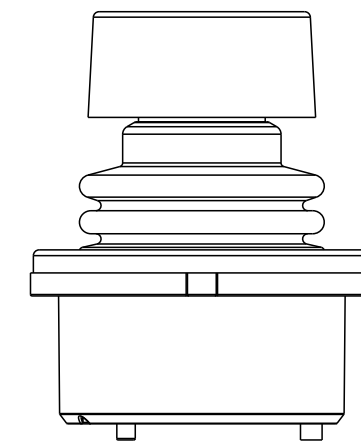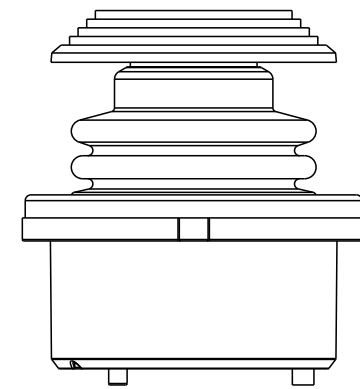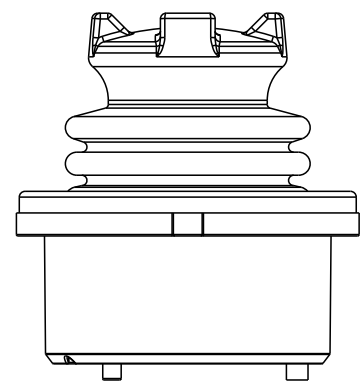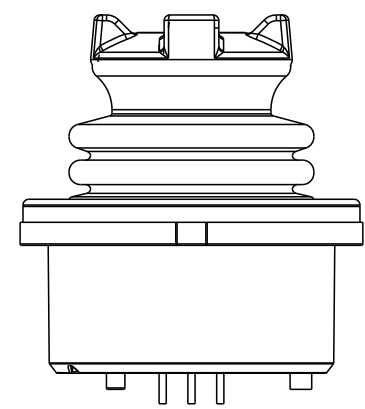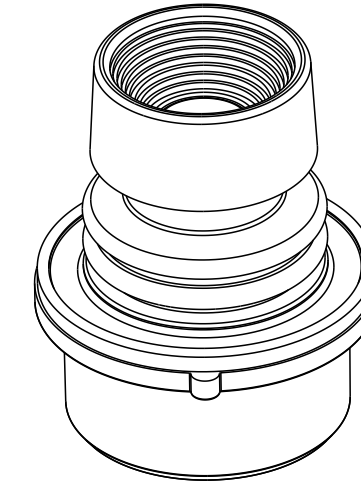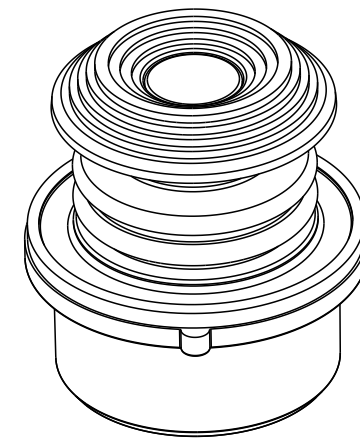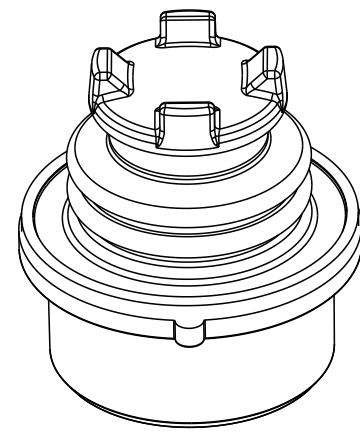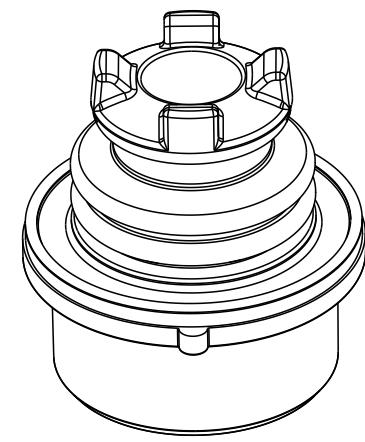

BUTTON STYLE 1  
(CASTLE)


BUTTON STYLE 2  
(EXTERNAL CASTLE BOOT)

BUTTON STYLE 3  
(SHORT DOUBLE STADIUM)


BUTTON STYLE 4  
(TALL CONCAVE STADIUM)

BUTTON STYLE CONFIGURATION


|  |            |                      |  |           |                           |           |              |      |
|--|------------|----------------------|--|-----------|---------------------------|-----------|--------------|------|
| UNLESS OTHERWISE SPECIFIED<br>DIMENSIONS ARE IN INCHES.<br>TOLERANCES ARE AS LISTED.<br>MUST BE FREE FROM BURRS<br>AND SHARP EDGES | TOLERANCES |                      | THIS DOCUMENT IS THE CONFIDENTIAL<br>PROPERTY OF OTTO ENGINEERING, INC..<br>IT IS NOT TO BE USED IN ANY WAY<br>DETRIMENTAL TO THE INTERESTS<br>OF OTTO ENGINEERING, INC. | DRWN. JLW | SIZE                      | FSCM NO   | DRAWING NO.  | REV. |
|  | .XX        | ±.03                 |  | CHKD. DCF | C                         | 21649     | HTL2-_____   | G    |
|  | .XXX       | ±.010                |  | APPD. AH  |                           |           |              |      |
|  | ANGLES ±2° | DO NOT SCALE DRAWING |  | WT.       | THIRD ANGLE<br>PROJECTION | Scale 1:1 | Sheet 3 OF 4 |      |

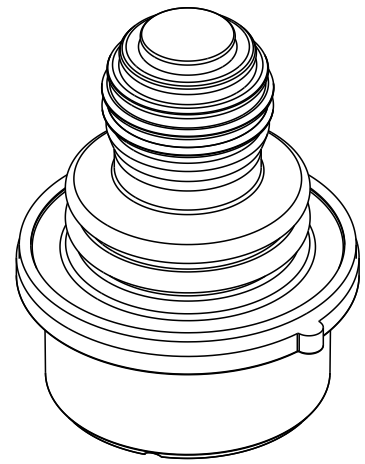




BUTTON STYLE 5  
(EXTERNAL BAT  
HANDLE BOOT)

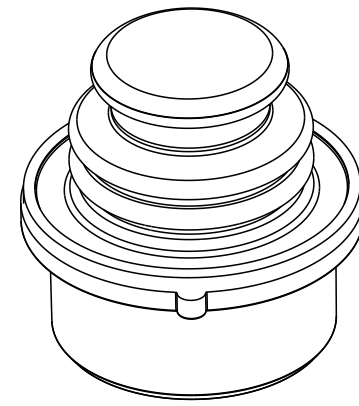

BUTTON STYLE 6  
(EXTERNAL SMOOTH BOOT)

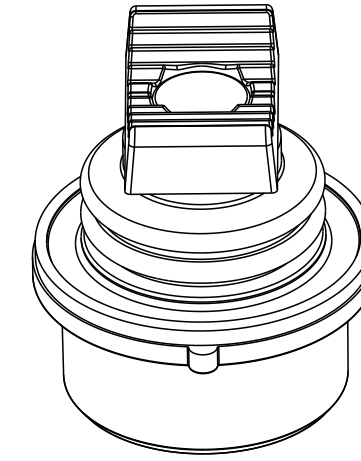

BUTTON STYLE 7  
(LONG CONCAVE Y AXIS BUTTON)

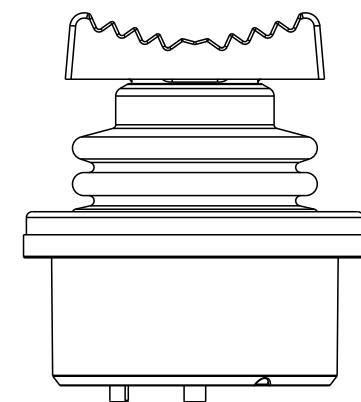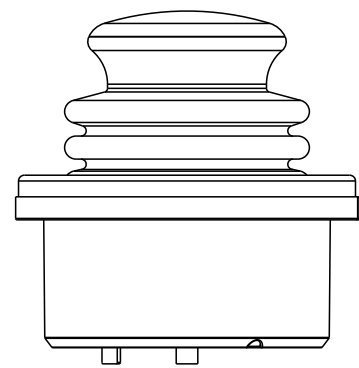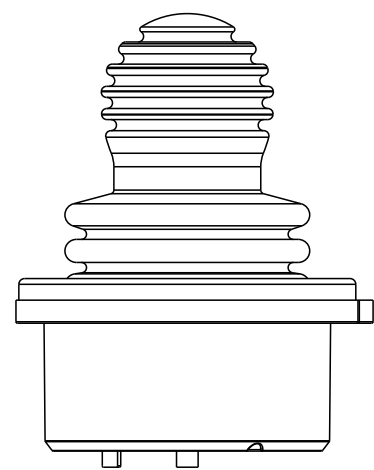

BUTTON STYLE CONFIGURATION

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES.  
TOLERANCES ARE AS LISTED.  
MUST BE FREE FROM BURRS  
AND SHARP EDGES

TOLERANCES  
.XX ±.03  
.XXX ±.010  
ANGLES ±2°  
DO NOT SCALE DRAWING

THIS DOCUMENT IS THE CONFIDENTIAL  
PROPERTY OF OTTO ENGINEERING, INC..  
IT IS NOT TO BE USED IN ANY WAY  
DETRIMENTAL TO THE INTERESTS  
OF OTTO ENGINEERING, INC..

DRWN. JLW  
CHKD. DCF  
APPD. AH  
WT.

SIZE  
C

FSCM NO  
21649

DRAWING NO.  
HTL2-\_\_\_\_\_

REV.  
G

THIRD ANGLE  
PROJECTION

Scale 1:1

Sheet 4 OF 4



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.