

## High-Loss, Thin, Elastomeric Microwave Absorber



### HIGH-LOSS ELASTOMERIC ABSORBER

Eccosorb BSR is a thin, flexible, high-loss, electrically non-conductive silicone absorber. It is designed for the frequency range from 6 GHz to mm wave. It has low outgassing properties and high temperature resistance.

### FEATURES AND BENEFITS

- High thermal stability
- Electrically non-conductive
- High magnetic loss

### MARKETS

- Commercial Telecom
- Security and Defense
- Automotive and Industrial Electronics

### SPECIFICATIONS

| TYPICAL PROPERTIES              | ECCOSORB BSR                                |
|---------------------------------|---------------------------------------------|
| Frequency Range (GHz)           | ≥ 6 GHz                                     |
| Max Service Temperature °C (°F) | 170 (338)                                   |
| Fire Retardancy                 | UL94 V-0                                    |
| Hardness (Shore A)              | > 70                                        |
| Elongation (%)                  | 50                                          |
| Tensile Strength (MPa)          | 5.0                                         |
| Volume Resistivity (ohm-cm)     | $2 \times 10^8$                             |
| Thermal Expansion per °C (°F)   | $63 \times 10^{-6}$ ( $35 \times 10^{-6}$ ) |
| Dielectric Strength (volts/mil) | >10                                         |
| Outgassing<br>(%TML) (%CVCN)*   | 0.47/0.28                                   |

*Data for design engineer guidance only. Observed performance varies in application.  
Engineers are reminded to test the material in application.*

\* Outgassing data per ASTM E595-07; criteria for acceptability is 1.00% TML and 0.10% CVCN.

### APPLICATIONS

- Eccosorb BSR is engineered to reduce or eliminate surface currents, cavity resonance, coupling, and generally dampen reflections. It will significantly improve the operation of microwave devices by lowering the Q of cavities.
- Eccosorb BSR is recommended for use in high reliability aerospace, military, and space applications, exhibiting excellent thermal cycling, shock and vibration absorption characteristics.
- Some other applications include power amplifiers, oscillators and down/up converters.


### AVAILABILITY

- Standard sheets are 305 x 305mm (12"x12").
- Standard thicknesses are 0.25mm (0.010"), 0.50mm (0.020"), 1.0mm (0.040"), 1.5mm (0.060") and 2.54mm (0.100").
- For most applications Eccosorb BSR can be supplied with a Pressure Sensitive Adhesive.
- Eccosorb BSR is available in other sizes, thicknesses and customer specified configurations upon request. This includes die cut and kiss cut parts to reduce installation labor by allowing quick assembly.

## INSTRUCTIONS FOR USE

- Eccosorb BSR is designed to function directly in front of a metallic surface.
- For applications where the service temperature exceeds 121°C (250°F), the material can be bonded to most substrates by using an RTV silicone based adhesive in conjunction with a suitable primer.
- Eccosorb BSR can be readily cut with a sharp knife and template. It is a very flexible material and conforms to contoured surfaces.

## Typical Attenuation Eccosorb BSR

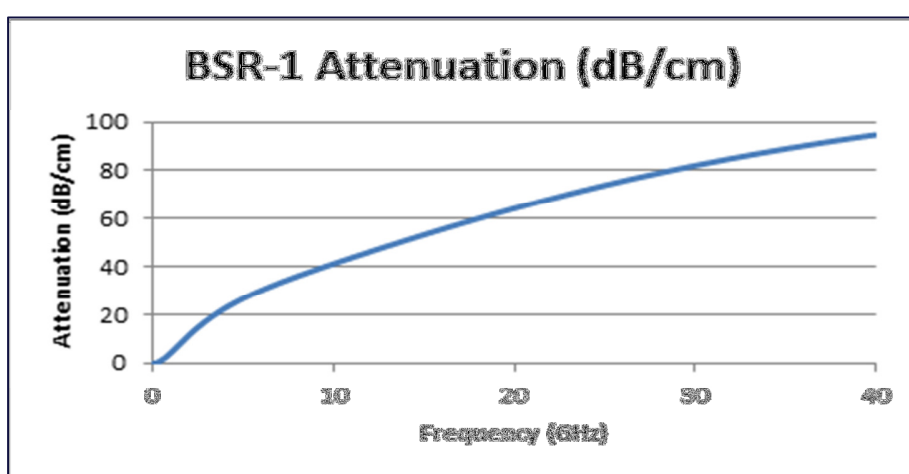

RFP-DS-BSR 093015

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user. Laird Technologies makes no warranties as to the fitness, merchantability, suitability or non-infringement of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies' Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2015 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trademarks or registered trademarks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.