


		DESIGNED FOR USE WITH RQ-58/U OR EQUIVALENT		REVISIONS																															
		CABLE ENTRY DIAMETER MINIMUM		REV	DESCRIPTION	DATE	APPROVED																												
				010	RELEASED	06/15/94	AD																												
		CONTACT .040 HOUSING .121 FERRULE .216																																	
<table><tr><td>ELECTRICAL</td><td>MECHANICAL</td><td>ENVIRONMENTAL</td></tr><tr><td>Nominal Impedance (Ohms) 50 Frequency Range (GHz) DC to 12.4 Volt Rating (VRMS MAX) @ Sea Level 335 VSWR 1.15 + .01 f(GHz) Insertion Loss (dB MAX) .06 √f(GHz) RF Leakage (dB MIN) -60 @ 2-3 GHz Corona, 70,000 Ft (VRMS MIN) 250 Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1,000 Contact Resistance (Milliohms MAX) Center Contact 3.0 Outer Contact 2.0 Cable to Housing .05 RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670 I.R.(Megohms MIN) 5,000</td><td>Interface Dimensions MIL-STD-348A, Fig. 310.1 Recommended Mating Torque 7 - 10 in-lbs Mating Characteristics: Insertion (MAX Lbs) N/A Withdrawal (MIN Oz) N/A Force to Engage and Disengage (In-Lbs MAX) 2.0 Center Contact Captivation Axial (Lbs) 6.0 Radial (In-Oz) N/A Cable Retention Axial Force (Lbs MIN) 40 Torque (In-Oz) N/A Weight (Grams) TBD</td><td>Temperature Rating -65°C to +165°C Vibration MIL-STD-202, Method 204, Condition D. Shock MIL-STD-202, Method 213, Condition I. Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp 85°C Moisture Resistance MIL-STD-202, Method 106 Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray .XXX = in XX.X = mm</td></tr></table>			ELECTRICAL	MECHANICAL	ENVIRONMENTAL	Nominal Impedance (Ohms) 50 Frequency Range (GHz) DC to 12.4 Volt Rating (VRMS MAX) @ Sea Level 335 VSWR 1.15 + .01 f(GHz) Insertion Loss (dB MAX) .06 √f(GHz) RF Leakage (dB MIN) -60 @ 2-3 GHz Corona, 70,000 Ft (VRMS MIN) 250 Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1,000 Contact Resistance (Milliohms MAX) Center Contact 3.0 Outer Contact 2.0 Cable to Housing .05 RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670 I.R.(Megohms MIN) 5,000	Interface Dimensions MIL-STD-348A, Fig. 310.1 Recommended Mating Torque 7 - 10 in-lbs Mating Characteristics: Insertion (MAX Lbs) N/A Withdrawal (MIN Oz) N/A Force to Engage and Disengage (In-Lbs MAX) 2.0 Center Contact Captivation Axial (Lbs) 6.0 Radial (In-Oz) N/A Cable Retention Axial Force (Lbs MIN) 40 Torque (In-Oz) N/A Weight (Grams) TBD	Temperature Rating -65°C to +165°C Vibration MIL-STD-202, Method 204, Condition D. Shock MIL-STD-202, Method 213, Condition I. Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp 85°C Moisture Resistance MIL-STD-202, Method 106 Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray .XXX = in XX.X = mm	<table><tr><td>HOUSING</td><td>STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303</td><td>GOLD PLATE PER MIL-G-45204</td></tr><tr><td>COUPLING NUT</td><td>STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303</td><td>PASSIVATE PER ASTM-A380</td></tr><tr><td>DIELECTRIC</td><td>TFE FLUOROCARBON PER ASTM-D-1457</td><td>N/A</td></tr><tr><td>CENTER CONTACT</td><td>BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H</td><td>GOLD PLATE PER MIL-G-45204</td></tr><tr><td>RETAINING RING</td><td>BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H</td><td>N/A</td></tr><tr><td>GASKET</td><td>SILICONE RUBBER PER ZZ-R-765</td><td>N/A</td></tr><tr><td>FERRULE</td><td>COPPER OR BRASS ALLOY ROCKWELL F65 MAXIMUM</td><td>GOLD PLATE PER MIL-G-45204</td></tr><tr><td>COMPONENT</td><td>MATERIAL</td><td>FINISH</td></tr></table>			HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204	COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER ASTM-A380	DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A	CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204	RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A	GASKET	SILICONE RUBBER PER ZZ-R-765	N/A	FERRULE	COPPER OR BRASS ALLOY ROCKWELL F65 MAXIMUM	GOLD PLATE PER MIL-G-45204	COMPONENT	MATERIAL	FINISH
ELECTRICAL	MECHANICAL	ENVIRONMENTAL																																	
Nominal Impedance (Ohms) 50 Frequency Range (GHz) DC to 12.4 Volt Rating (VRMS MAX) @ Sea Level 335 VSWR 1.15 + .01 f(GHz) Insertion Loss (dB MAX) .06 √f(GHz) RF Leakage (dB MIN) -60 @ 2-3 GHz Corona, 70,000 Ft (VRMS MIN) 250 Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level 1,000 Contact Resistance (Milliohms MAX) Center Contact 3.0 Outer Contact 2.0 Cable to Housing .05 RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) 670 I.R.(Megohms MIN) 5,000	Interface Dimensions MIL-STD-348A, Fig. 310.1 Recommended Mating Torque 7 - 10 in-lbs Mating Characteristics: Insertion (MAX Lbs) N/A Withdrawal (MIN Oz) N/A Force to Engage and Disengage (In-Lbs MAX) 2.0 Center Contact Captivation Axial (Lbs) 6.0 Radial (In-Oz) N/A Cable Retention Axial Force (Lbs MIN) 40 Torque (In-Oz) N/A Weight (Grams) TBD	Temperature Rating -65°C to +165°C Vibration MIL-STD-202, Method 204, Condition D. Shock MIL-STD-202, Method 213, Condition I. Thermal Shock MIL-STD-202, Method 107, Condition B, Except High Temp 85°C Moisture Resistance MIL-STD-202, Method 106 Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray .XXX = in XX.X = mm																																	
HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	GOLD PLATE PER MIL-G-45204																																	
COUPLING NUT	STAINLESS STEEL PER ASTM-A484 AND ASTM- A582, TYPE 303	PASSIVATE PER ASTM-A380																																	
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1457	N/A																																	
CENTER CONTACT	BERYLLIUM COPPER PER ASTM B 196, ALLOY C17300, CONDITION H	GOLD PLATE PER MIL-G-45204																																	
RETAINING RING	BERYLLIUM COPPER PER ASTM B 194, ALLOY C17200, CONDITION H	N/A																																	
GASKET	SILICONE RUBBER PER ZZ-R-765	N/A																																	
FERRULE	COPPER OR BRASS ALLOY ROCKWELL F65 MAXIMUM	GOLD PLATE PER MIL-G-45204																																	
COMPONENT	MATERIAL	FINISH																																	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON FRAC. DEC. ANGLES ± 1/64 ±.005 ± 1°		DRAWN BY <i>AD</i> DATE 06/15/94 CHECKED BY APPD BY		AMP Incorporated 140 Fourth Avenue Waltham, MA 02451-7599																															
These drawings and specifications are the property of Omni Spectra Incorporated and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		USE ASS'Y PROCEDURE 408-04969 NO. AP. (20-511)		TITLE OSM STRAIGHT CABLE PLUG SOLDER ATTACHMENT M39012/55-3009 CAT. A <table><tr><td>SIZE B</td><td>CODE IDENT NO. 26805</td><td>2031-8009-92</td><td>REV 010</td></tr></table>		SIZE B	CODE IDENT NO. 26805	2031-8009-92	REV 010																										
SIZE B	CODE IDENT NO. 26805	2031-8009-92	REV 010																																
SCALE 10 : 1		SHEET 1 OF 1																																	

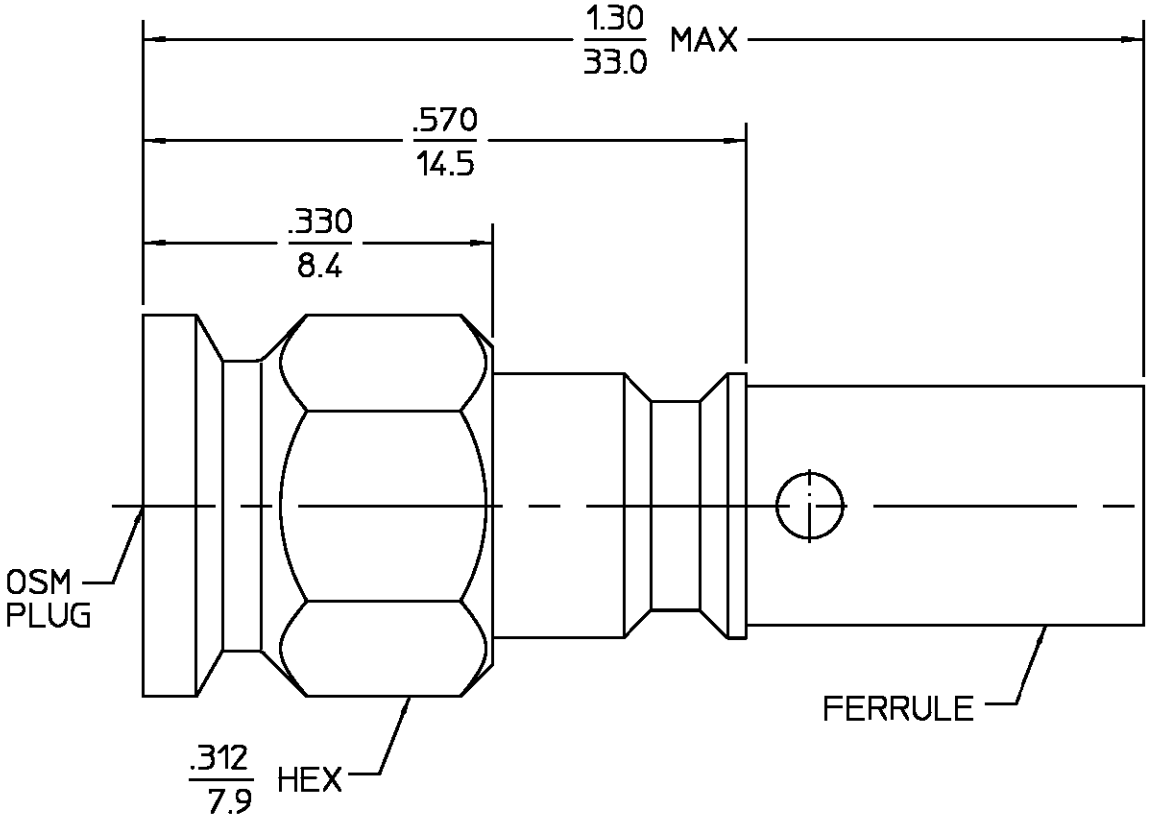

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.