

MICRO SWITCH
a Honeywell Division
REV. MFG. CODE 91989

SOLID STATE SENSOR



SS5 SERIES CHART 1

CATALOG LISTING

ISSUE **M** CATALOG LISTING **SS5 SERIES CHART**
PAGE 1 OF 5

PTC/CAD 3D
DRAWN WJC 5 JAN 98
CHECK SAV 19 JAN 98
CHECK DGD 18 JAN 06
CHECK

RELEASE NO. DR-4996 REPLACES --

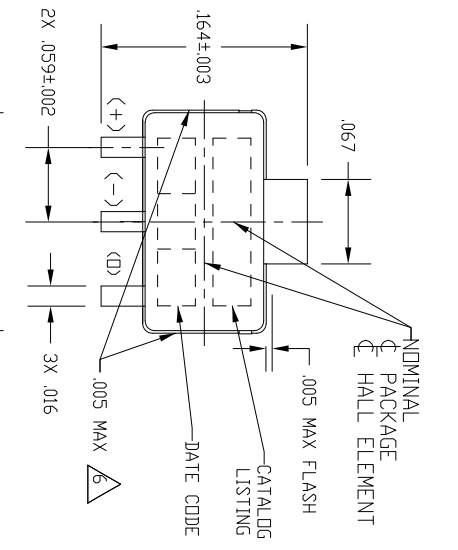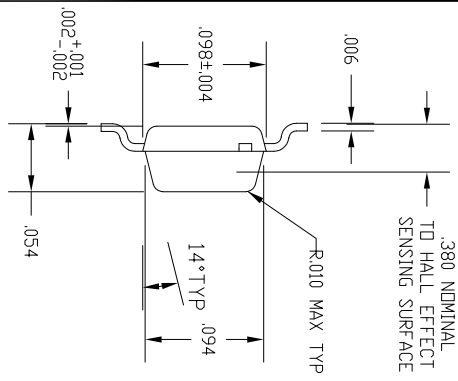

REV	DOCUMENT	CHANGED BY	CHECK
13	0024233	MCP 07SEF06	LG

ANSI Y14.5M-1982 APPLIES

NOTES
1 - SOLDERING INSTRUCTIONS: EXPOSURE TO HIGH TEMPERATURES SHOULD BE KEPT AT A MINIMUM MICRO SWITCH RECOMMENDS AN INFRARED REFLOW PROCESS WITH PEAK TEMPERATURES NOT EXCEEDING 245°C (473°F) FOR 10 SECONDS MAXIMUM. DO NOT WAVE SOLDER THIS PRODUCT AS THIS PROCESS MAY NEGATIVELY AFFECT THE SENSOR'S PERFORMANCE AND RELIABILITY. SUBJECTING THESE PRODUCTS TO WAVE SOLDERING WILL VOID MICRO SWITCH'S WARRANTY.
2 - ABSOLUTE MAXIMUM RATINGS ARE THE EXTREME LIMITS THE DEVICE WILL MOMENTARILY WITHSTAND WITHOUT DAMAGE TO THE DEVICE. ELECTRICAL AND MAGNETIC CHARACTERISTICS ARE NOT GUARANTEED IF THE SPECIFIED VOLTAGE AND/OR CURRENTS ARE EXCEEDED. NDR WILL THE DEVICE NECESSARILY OPERATE AT ABSOLUTE MAXIMUM RATING.
3 - THE MAGNETIC FLUX USED TO OPERATE THE SWITCH MUST BE IN THE DIRECTION AND LOCATION SHOWN. (THIS ASSUMES THE CONVENTION THAT THE DIRECTION OF THE EXTERNAL FLUX OF A MAGNET IS FROM THE NORTH TO THE SOUTH POLE OF THE MAGNET.)
4 - THE MAGNETIC FIELD STRENGTH (GAUSS) REQUIRED TO CAUSE THE SWITCH TO CHANGE STATE (OPERATE AND RELEASE) WILL BE AS SPECIFIED IN THE MAGNETIC CHARACTERISTICS. TO TEST THE SWITCH AGAINST THE SPECIFIED MAGNETIC CHARACTERISTICS, THE SWITCH MUST BE PLACED IN A UNIFORM MAGNETIC FIELD.
5 - A "T" SUFFIX ON ANY CATALOG LISTING DESIGNATES THE PRODUCT WILL BE SUPPLIED IN TAPE AND REEL FORM PER EIA STD 481. SS5 SERIES SHOULD IN TAPE AND REEL ONLY. SOME BASIC LISTINGS MAY NOT BE AVAILABLE.
6 - GATE VESAGE PERMITTED IN THESE AREAS. UNDERFLASH BREAKOUT LIMITED TO .007.
7 - THESE HALL EFFECT SENSORS MAY HAVE AN INITIAL OUTPUT IN EITHER THE ON OR OFF STATE IF POWERED UP WITH AN APPLIED MAGNETIC FIELD IN THE DIFFERENTIAL ZONE (APPLIED MAGNETIC FIELD > BPP AND < BOP). MICRO SWITCH RECOMMENDS THAT THE APPLICATION CIRCUIT DESIGNER ALLOW 10 MICROSECONDS AFTER SUPPLY VOLTAGE HAS REACHED 5 VOLTS FOR THE OUTPUT VOLTAGE TO STABILIZE.

CONVERSION TO METRIC DIMENSIONS			
DIMENSION IN INCHES	REFERENCE EQUIVALENT, MM	DIMENSION IN INCHES	REFERENCE EQUIVALENT, MM
.001	0.025	.095	2.413
.002	0.051	.098	2.489
.003	0.076	.157	3.988
.004	0.102	.164	4.166
.005	0.127	.173	4.394
.006	0.152	.177	4.496
.007	0.178	.181	4.597
.008	0.203	.197	5.004
.015	0.381	.217	5.512
.016	0.406	.230	5.842
.030	0.762	.314	7.976
.031	0.787	.315	8.001
.038	0.965	.472	11.989
.050	1.270	.480	12.192
.059	1.499	.512	13.005
.067	1.702	.724	18.390
.069	1.753	1.300	33.020
.078	1.981	1.970	50.038
.079	2.007	7.010	178.054
.094	2.388	10.000	254.000

THIRD ANGLE PROJECTION

DO NOT SCALE PRINT

SCALE NONE

UNLESS TOLERANCES SPECIFIED TOLERANCES ARE:

DNE PLACE (.00) +0.0 0.3

TWO PLACE (.000) +0.015

THREE PLACE (.0000) +0.005

ANGLES

WEIGHT

MICRO SWITCH
a Honeywell Division
FED. REG. CODE 91929

SOLID STATE SENSOR

SSS SERIES CHART 1

CATALOG LISTING



THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CATALOG LISTING
SSS SERIES CHART
PAGE 2 OF 5

ISSUE
14

PTC/CAD 3D
DRAWN
WJC 5 JAN 98
CHECK
SAV 19 JAN 98
CHECK
DGD 18 JAN 06
CHECK


REVISIONS
B REC'DWG
C 27 JAN 98
D 92729
E 92816
F 14 JAN 99
G 1 MAR 99
H 20747
I 20747
J 20814
K 20746
L 6 JAN 03
M 001451
N 18 JAN 06

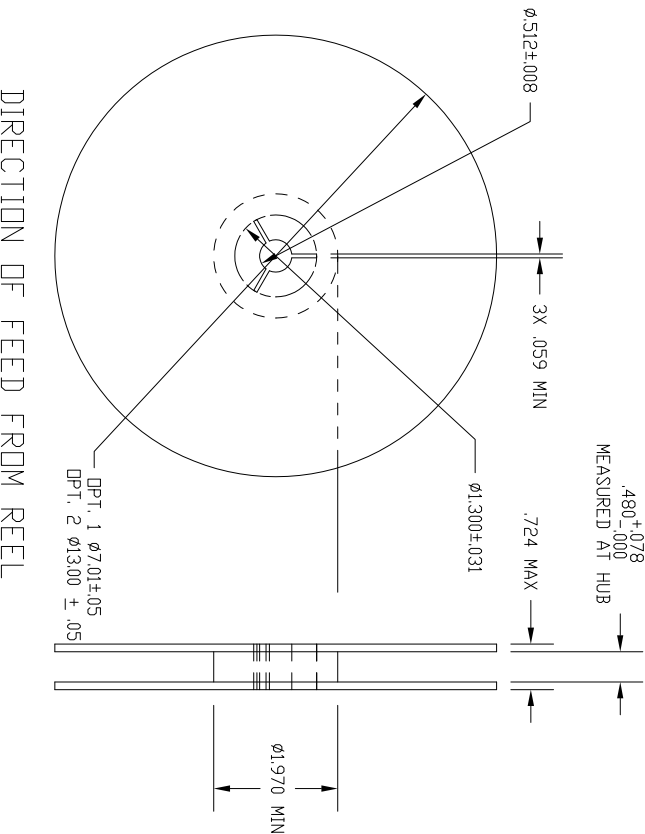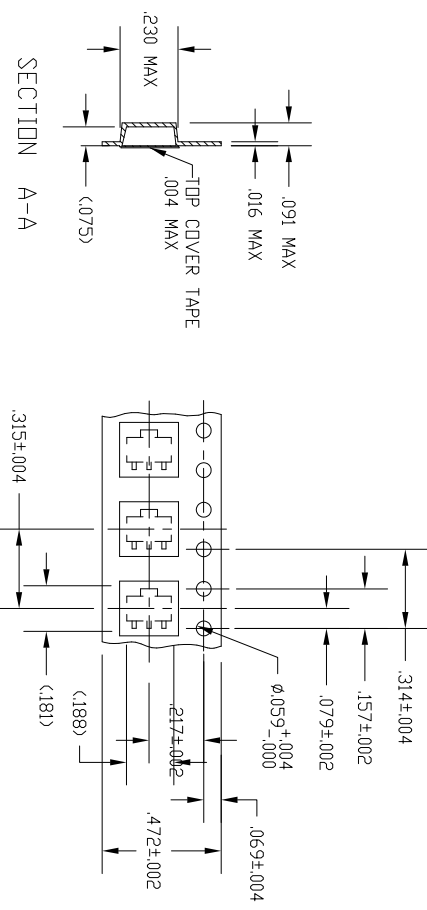

SSS CATALOG SYSTEM

PREFIX
BASIC CATALOG LISTING:
PACKAGE STYLE, MAGNETIC TYPE,
ELECTRICAL/MAGNETIC SPECS

CHARACTERS IN THESE
POSITIONS OF THE LISTING
ARE BRANDED ON THE PRODUCT

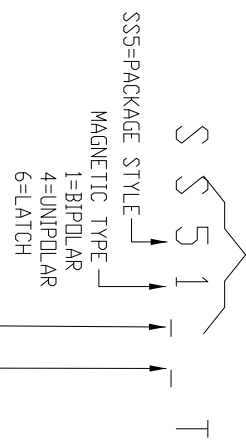

RELATIVE GAUSS OPERATING RANGE
(BLANK, 0-9, 9=HIGH GAUSS)
ELECTRICAL/MAGNETIC OPTIONS
(BLANK, A-K & U-Z)
A=STANDARD
B-K & U-Z=SPECIALS





THIRD ANGLE PROJECTION	
SCALE	NONE
DO NOT SCALE PRINT	
UNLESS TOLERANCES SPECIFIED	
TOLERANCES ARE:	
ONE PLACE	.00
TWO PLACE	+.00
THREE PLACE	+.000
ANGLES	±
WEIGHT	

ANSI Y14.5M-1982 APPLIES

CATALOG LISTING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

TABLE 1 - MAGNETIC SPECIFICATIONS

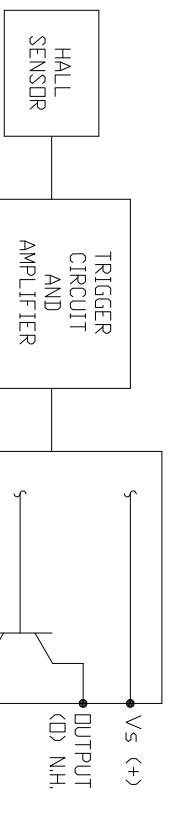

SS5XT ELECTRICAL SPECIFICATIONS

CHARACTERISTIC	TEST CONDITIONS	UNITS
VOLTAGE RANGE	VCC = 24V, -40°C < T < 150°C, B > MAX DP	4.5 TO 24 VOLTS
MAX I _{on}	VCC = 24V, V _{out} = 24V, -40°C < T < 150°C, B < MIN REL	100 mA
MAX I _{off}	VCC = 24V, V _{out} = 24V, -40°C < T < 150°C, B < MIN REL	11.3 mA
SINK CURRENT	VCC = 4.5V TO 24V, T = 25°C, B > MAX DP	20 mA
MAX V _{sat}	VCC = 4.5V TO 24V, T = 25°C, B > MAX DP	0.4 VOLTS
MAX LEAKAGE	VCC = 12V, R	10 μA
RISE TIME	VCC = 12V, R	1.5 μS
FALL TIME	10% TO 90%	1.5 μS
90% TO 10%	V _{ds} = 12V, R	Ω = 20pF

ABSOLUTE MAXIMUM RATINGS SS5XT (2) = 20pF

CHARACTERISTIC	TEST CONDITIONS	UNITS
VOLTAGE RANGE	-40°C TO +150°C	28 TO 30 VOLTS
MAX I _{on}	VCC = 30V, -40°C < T < 150°C, B > MAX DP	100 mA
MAX I _{off}	VCC = 30V, V _{out} = 30V, -40°C < T < 150°C, B < MIN REL	10.0 mA
SINK CURRENT	VCC = 38V, B > MAX DP	20 mA
MAX V _{sat}	VCC = 12V, R	0.4 VOLTS
MAX LEAKAGE	VCC = 12V, R	10 μA
RISE TIME	10% TO 90%	1.5 μS
FALL TIME	10% TO 90%	1.5 μS
90% TO 10%	V _{ds} = 12V, R	Ω = 20pF

SS5XXT ELECTRICAL SPECIFICATIONS

CHARACTERISTIC	TEST CONDITIONS	UNITS
VOLTAGE RANGE	-40°C TO +150°C	24 TO 25 VOLTS
MAX I _{on}	VCC = 30V, -40°C < T < 150°C, B > MAX DP	25 TO 26 mA
MAX I _{off}	VCC = 30V, V _{out} = 30V, -40°C < T < 150°C, B < MIN REL	26 TO 27 mA
SINK CURRENT	VCC = 38V, B > MAX DP	27 TO 28 mA
MAX V _{sat}	VCC = 12V, R	24 mA
MAX LEAKAGE	VCC = 12V, R	19 μA
RISE TIME	10% TO 90%	29 TO 30 μS
FALL TIME	10% TO 90%	15 μS
90% TO 10%	V _{ds} = 12V, R	Ω = 20pF


TABLE 2

SS5XX	OUTPUT CURRENT ABSOLUTE LIMITS	OUTPUT CURRENT SUPPLY VOLTAGE	OUTPUT CURRENT MAX. mA
-1 TO 24	50		
24 TO 25	37		
25 TO 26	33		
26 TO 27	28		
27 TO 28	24		
28 TO 29	19		
29 TO 30	15		



LISTING	-40°C	0°C	25°C	85°C	125°C	150°C
MIN OPERATE GAUSS						
SS51T	NS	NS	NS	NS	NS	NS
SS511AT	NS	NS	NS	NS	NS	NS
SS513AT	NS	NS	NS	NS	NS	NS
SS541AT	50	53	55	45	40	35
SS543AT	110	110	110	90	80	65
SS549AT	285	305	310	290	270	260
SS561AT	5	5	10	10	5	5
MAX OPERATE GAUSS	100	100	100	95	80	70
SS51T	145	145	140	150	200	250
SS511AT	70	65	60	60	65	70
SS513AT	140	140	140	140	140	140
SS541AT	135	117	115	120	123	125
SS543AT	215	190	180	180	190	200
SS549AT	435	400	390	400	410	420
SS561AT	110	90	85	85	100	110
MAX RELEASE GAUSS	200	185	180	180	180	185
SS51T	-145	-145	-140	-150	-200	-250
SS511AT	-70	-65	-60	-60	-65	-70
SS513AT	-140	-140	-140	-140	-140	-140
SS541AT	20	20	20	15	15	10
SS543AT	80	80	75	70	60	55
SS549AT	210	230	235	215	200	185
SS561AT	-110	-90	-85	-85	-100	-110
MAX RELEASE GAUSS	-200	-185	-180	-180	-180	-185
SS51T	NS	NS	NS	NS	NS	NS
SS511AT	NS	NS	NS	NS	NS	NS
SS513AT	NS	NS	NS	NS	NS	NS
SS541AT	120	99	95	105	115	120
SS543AT	190	165	155	165	180	195
SS549AT	360	325	315	325	340	345
SS561AT	-5	-5	-10	-10	-5	-5
MIN DIFF GAUSS	-100	-100	-100	-95	-80	-70
SS51T	40	50	50	60	60	NS
SS511AT	15	15	15	12	12	10
SS513AT	20	20	20	20	20	20
SS541AT	15	15	20	15	8	5
SS543AT	25	25	25	15	10	5
SS549AT	30	30	30	30	30	30
SS561AT	50	50	50	50	50	50
SS566AT	200	200	200	190	160	140

REV. NO.	DATE	BY	DESCRIPTION
1	1988	WJC	ISSUE
2	1988	WJC	ISSUE
3	1988	WJC	ISSUE
4	1988	WJC	ISSUE
5	1988	WJC	ISSUE
6	1988	WJC	ISSUE
7	1988	WJC	ISSUE
8	1988	WJC	ISSUE
9	1988	WJC	ISSUE
10	1988	WJC	ISSUE
11	1988	WJC	ISSUE
12	1988	WJC	ISSUE
13	1988	WJC	ISSUE
14	1988	WJC	ISSUE
15	1988	WJC	ISSUE
16	1988	WJC	ISSUE
17	1988	WJC	ISSUE
18	1988	WJC	ISSUE
19	1988	WJC	ISSUE
20	1988	WJC	ISSUE
21	1988	WJC	ISSUE
22	1988	WJC	ISSUE
23	1988	WJC	ISSUE
24	1988	WJC	ISSUE
25	1988	WJC	ISSUE
26	1988	WJC	ISSUE
27	1988	WJC	ISSUE
28	1988	WJC	ISSUE
29	1988	WJC	ISSUE
30	1988	WJC	ISSUE
31	1988	WJC	ISSUE
32	1988	WJC	ISSUE
33	1988	WJC	ISSUE
34	1988	WJC	ISSUE
35	1988	WJC	ISSUE
36	1988	WJC	ISSUE
37	1988	WJC	ISSUE
38	1988	WJC	ISSUE
39	1988	WJC	ISSUE
40	1988	WJC	ISSUE
41	1988	WJC	ISSUE
42	1988	WJC	ISSUE
43	1988	WJC	ISSUE
44	1988	WJC	ISSUE
45	1988	WJC	ISSUE
46	1988	WJC	ISSUE
47	1988	WJC	ISSUE
48	1988	WJC	ISSUE
49	1988	WJC	ISSUE
50	1988	WJC	ISSUE

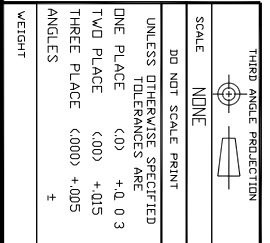

WEIGHT

ANGLES

±

ANSI Y14.5M-1982 APPLIES

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SOLID STATE SENSOR

SS5 SERIES CHART 1

CATALOG LISTING


THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CATALOG LISTING
SS5 SERIES CHART
PAGE 4 OF 5


ISSUE
14

REVISIONS
A. REV. Dwg. 27 JUN 98
B. REV. Dwg. 18 JAN 96
C. REV. Dwg. 18 JAN 96
D. REV. Dwg. 18 JAN 96
E. REV. Dwg. 18 JAN 96
F. REV. Dwg. 18 JAN 96
G. REV. Dwg. 18 JAN 96
H. REV. Dwg. 18 JAN 96


DRAWN: WJC 5 JAN 98
CHECK: SAV 19 JAN 98
CHECK: DGD 18 JAN 06
CHECK: []
RELEASE NO. DR-4996
REPLACES: -

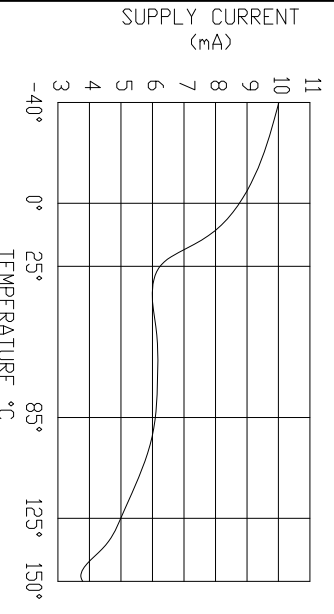


MAXIMUM SUPPLY CURRENT VS TEMPERATURE (OFF)

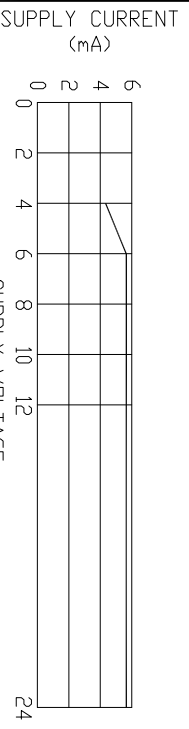


TYPICAL SUPPLY CURRENT (DEVICE OFF) AT 25°C

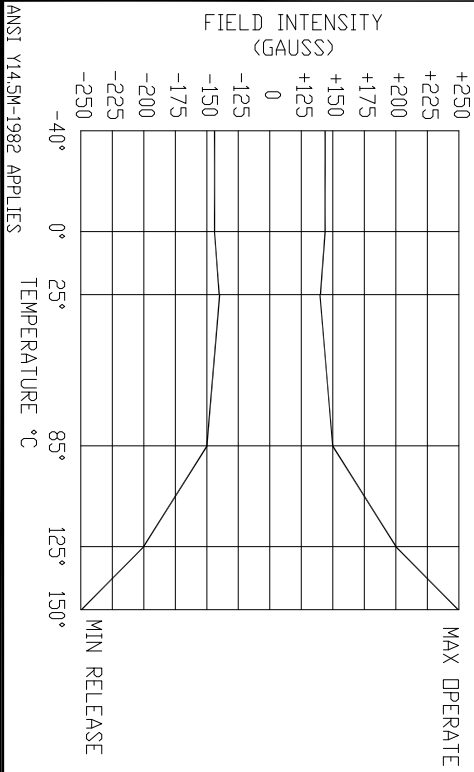

ANSI Y14.5M-1982 APPLIES

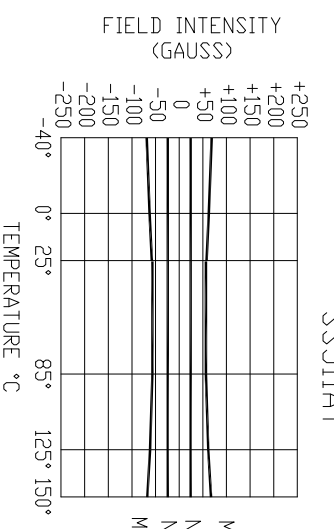

MAX OPERATE
NDM OPERATE
NDM RELEASE
MIN RELEASE

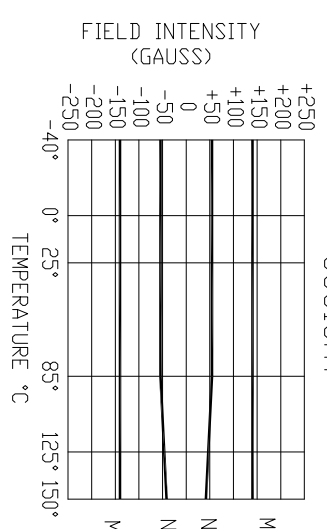

MAX OPERATE
NDM OPERATE
NDM RELEASE
MIN RELEASE



THIRD ANGLE PROJECTION
SCALE: NONE
DO NOT SCALE PRINT
UNLESS TOLERANCES SPECIFIED
TOLERANCES ARE:
ONE PLACE (.00) +0.03
TWO PLACE (.000) +0.015
THREE PLACE (.0000) +0.005
ANGLES ±
WEIGHT






WJC	5 JAN 98	CHECK	SAV	19 JAN 02	CHECK	DGD	18 JAN 06	CHECK	RELEASE NO.	DR-4996	REPLACES	-
-----	----------	-------	-----	-----------	-------	-----	-----------	-------	-------------	---------	----------	---

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SOLID STATE SENSOR

CATALOG LISTING
SS5 SERIES CHART 1

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

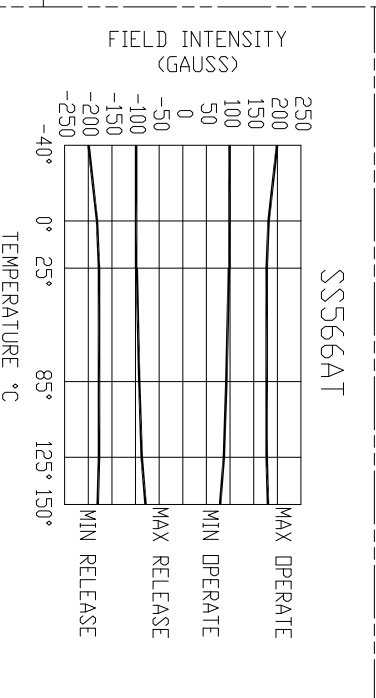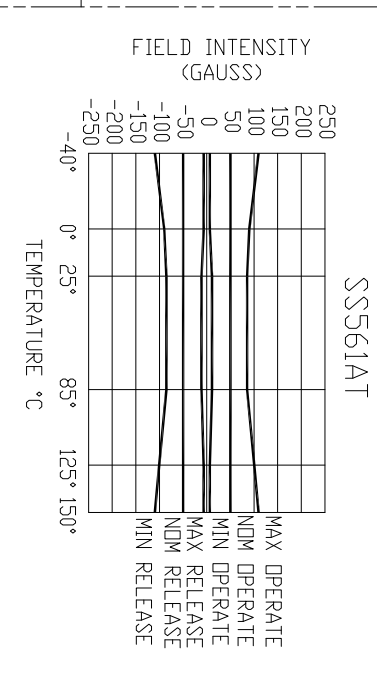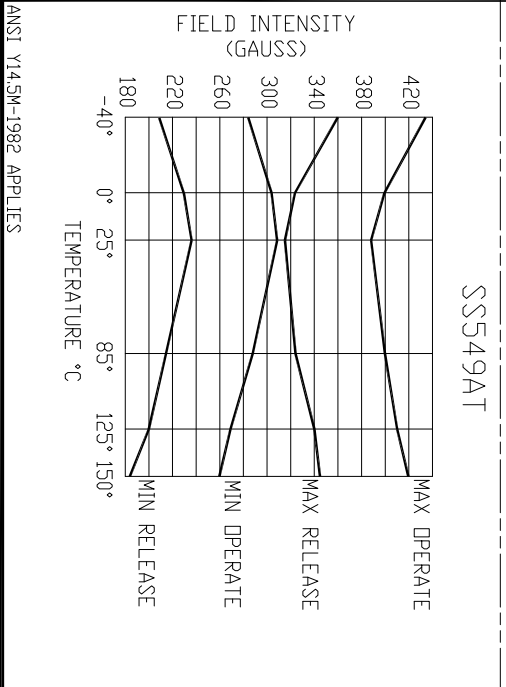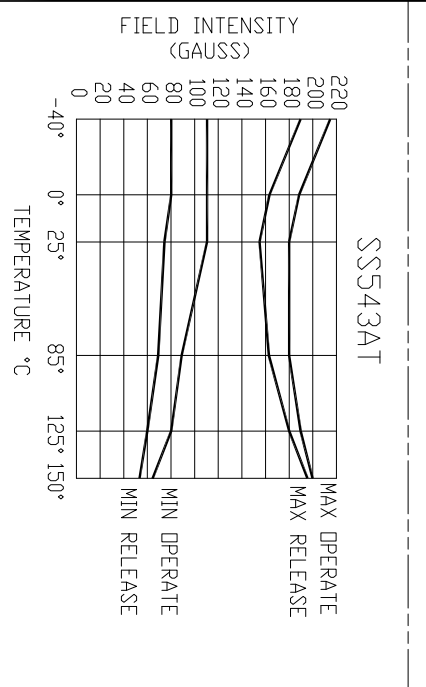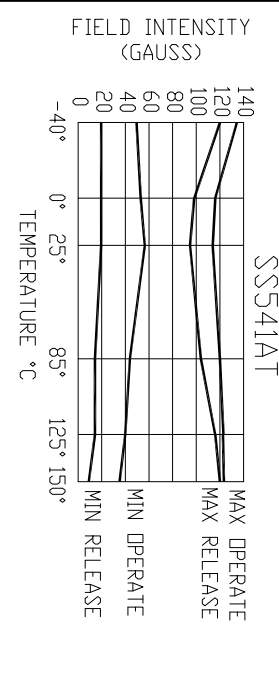

REV. NO.	DATE	BY	DESCRIPTION
A	27 JUN 98	WJC	REV. DWG
B	18 JAN 98	WJC	REV. DWG
C	1 MAY 98	WJC	REV. DWG
D	14 MAR 02	WJC	REV. DWG
E	20 SEP 05	WJC	REV. DWG
F	20/1/17	WJC	REV. DWG
G	20/6/17	WJC	REV. DWG
H	20/7/16	WJC	REV. DWG
I	20/11/07	WJC	REV. DWG
J	20/11/07	WJC	REV. DWG
K	20/11/07	WJC	REV. DWG
L	20/11/07	WJC	REV. DWG
M	20/11/07	WJC	REV. DWG
N	20/11/07	WJC	REV. DWG
O	20/11/07	WJC	REV. DWG
P	20/11/07	WJC	REV. DWG
Q	20/11/07	WJC	REV. DWG
R	20/11/07	WJC	REV. DWG
S	20/11/07	WJC	REV. DWG
T	20/11/07	WJC	REV. DWG
U	20/11/07	WJC	REV. DWG
V	20/11/07	WJC	REV. DWG
W	20/11/07	WJC	REV. DWG
X	20/11/07	WJC	REV. DWG
Y	20/11/07	WJC	REV. DWG
Z	20/11/07	WJC	REV. DWG

CAUTION
ELECTROSTATIC SENSITIVE DEVICE
DO NOT SCALE PRINT
SCALE: NONE
UNLESS TOLERANCES SPECIFIED
ONE PLACE (.00) +0.0 -0.3
TWO PLACE (.000) +0.015
THREE PLACE (.0000) +0.005
ANGLES
WEIGHT

THIRD ANGLE PROJECTION
DO NOT SCALE PRINT
SCALE: NONE
UNLESS TOLERANCES SPECIFIED
ONE PLACE (.00) +0.0 -0.3
TWO PLACE (.000) +0.015
THREE PLACE (.0000) +0.005
ANGLES
WEIGHT

ANSI Y14.5M-1982 APPLIES



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.