

# 2012 MLCC PRODUCT GUIDE





# Message to Customers

This Product Guide is the official TDK multilayer ceramic capacitor product line up for 2012. The purpose of this document is to communicate our MLCC products and services so that you will completely understand the full TDK product offering as well as all available services and resources. A table of contents is provided below to assist you in locating your material of interest. I would also like to point out an exhaustive listing of all new part numbers is provided at the end of the guide. This material is updated semi-annually and further supplemented by the contents on the web page, [www.tdk.com](http://www.tdk.com). I invite you to regularly reference this document and/or [tdk.com](http://tdk.com) for the most current product news, information and resources.

Respectfully,

*Steve Maloy*

Director of MLCC Product Marketing and Development  
[steve.maloy@us.tdk.com](mailto:steve.maloy@us.tdk.com) / 847.390.4377  
[www.tdk.com](http://www.tdk.com)




## SERIES

## FEATURES

## OFFERING

C



General Application

Mid Voltage

High Voltage

High Temperature

High Q

Flip Type

Open Mode

Soft Termination

Conductive Epoxy

CER



Controlled ESR

CEU



Serial Design

CGA



Automotive Application

CGJ



Extended Life

CKC


2-in-1 Array  
4-in-1 Array

CKD



Feed Through

CKG



Mega Cap

CLL



Ultra Low Inductance

- Wide range of case size and superior dimension precision
- Available in EIA class 1 and 2 dielectrics up to 50V
- Unique design allows for higher voltage in smaller case size
- Available in 100V, 250V, 450V, and 630V
- Advance design provides improved withstanding voltage
- Available rating up to 3000V
- Stable temperature characteristics up to 150°C
- Highly precise temperature performance ( $\pm 7.5\%$ ) up to 125°C
- Design with higher Q factor than standard capacitors
- Excellent attenuation and high self resonance frequency (SRF)
- Flipped geometry provides lower inductance than standard capacitor
- Special design allows for adequate high frequency current to IC
- Unique design allows for increase resistance to mechanical bending
- Improved performance in vibration and electrical stresses
- Improved bending resistance and temperature cycle performance
- Termination technology available for most case sizes including arrays
- AgPdCu termination for conductive glue mounting
- Improved mechanical/thermal strength when used with conductive glue
- Unique design allows for specified "controlled" ESR
- Same no-hassle mounting method as standard 2-terminal components
- ESR is controlled without affecting the ESL
- 2 series-connected capacitors in one body
- Improved bending resistance and temperature cycle performance
- Ultra high reliability design for automotive battery line applications
- Qualified to CDF AEC Q-200 automotive testing standard
- Manufactured using matured process for guaranteed performance
- Available in C0G, X7R and X8R temperature characteristics
- Extensive testing to ensure higher reliability and longer life
- Reliability tests based on MIL-STD requirements
- Guaranteed TC Bias and Hot IR performance
- Allows for reduction of PCB space and mounting time
- Unique electrode design reduces crosstalk
- Also available in soft termination for higher reliability performance
- Optimized for noise bypass with signal and power source circuits
- Can be used for meeting EMC requirements
- Ideal for use at higher frequencies due to low parasitic inductance
- Advance design for twice the capacitance on single footprint
- Improved vibration and thermal/mechanical stress performance
- Lower ESR and ESL than ALU and TA capacitor
- Unique internal structure allows cancelation of magnetic fields to reduce equivalent series inductance
- Eight sided terminal electrode design in one capacitor

- 01005 ~ 2220 / C0G, SL, X5R, X6S, X7R, X7S, Y5V
- 4V ~ 50V / up to 100  $\mu$ F
- 0402 ~ 2220 / C0G, X6S, X7R, X7S, X7T
- 100V ~ 630V / up to 15  $\mu$ F
- 1808 ~ 1812 / C0G, X7R, X7S
- 1000V ~ 3000V / up to 10 nF
- 0402 ~ 1210 / X8R
- 16V ~ 100V / up to 10  $\mu$ F
- 0201 / C0G
- 25V / up to 20 pF
- 0204 ~ 0612 / X5R, X6S, X7R, X7S
- 4V ~ 50V / up to 10  $\mu$ F
- 0805 ~ 2220 / X7R, X8R
- 16V ~ 630V / up to 22  $\mu$ F
- 0805 ~ 3025 / X7R, X7S, X7T
- 16V ~ 630V / up to 100  $\mu$ F
- 0402 ~ 1210 / C0G, X7R, X8R
- 25V ~ 100V / up to 10  $\mu$ F
- 0603 ~ 0805 / X5R
- 4V ~ 10V / up to 10  $\mu$ F
- 0603 ~ 0805 / X7R
- 50V / up to 100 nF
- 0402 ~ 2220 / C0G, X5R, X7R, X7S, X7T, X8R
- 6.3V ~ 630V / up to 47  $\mu$ F
- 0402 ~ 1206 / C0G, X7R
- 6.3V ~ 50V / up to 10  $\mu$ F
- CKCN27 ~ CKCA43 / C0G, X5R, X7R
- 6.3V ~ 50V / up to 2.2  $\mu$ F
- 0402 ~ 1206 / up to 125°C temperature range
- 6.3V ~ 50V / up to 22  $\mu$ F
- CKGxxK ~ CKGxxN / X5R, X7R, X7S, X7T
- 16V ~ 630V / up to 100  $\mu$ F
- 0603 ~ 0805 / X7R, X7S
- 4V ~ 10V / up to 4.7  $\mu$ F

# C SERIES | General Application



TDK C series offers high capacitance MLCC achieved through precision technologies by enabling the use of multiple thinner ceramic dielectric layers. TDK advanced manufacturing process offers MLCC with monolithic structure and superior mechanical strength as well as a high level of reliability. Composed of only ceramics and base metals, these capacitors provide extremely dependable performance, exhibiting virtually no degradation even when subjected to temperature extremes. Low stray capacitance ensures high conformity with nominal values, thereby simplifying the circuit design process. Owing to their low ESR and excellent frequency characteristics, these products are optimally suited for a variety of application.



L Body Length  
W Body Width  
T Body Height  
B Terminal Width

| Case Code   | L (mm) | W (mm) | T max (mm) |
|-------------|--------|--------|------------|
| C0402/01005 | 0.40   | 0.20   | 0.20       |
| C0603/0201  | 0.60   | 0.30   | 0.30       |
| C1005/0402  | 1.00   | 0.50   | 0.50       |
| C1608/0603  | 1.60   | 0.80   | 0.80       |
| C2012/0805  | 2.00   | 1.25   | 1.25       |
| C3216/1206  | 3.20   | 1.60   | 1.60       |
| C3225/1210  | 3.20   | 2.50   | 2.50       |
| C4532/1810  | 4.50   | 3.20   | 3.20       |
| C5750/2220  | 5.70   | 5.00   | 2.80       |

## Part Number Description




## Features:

- ❖ TDK's proprietary internal electrode structure
- ❖ Wide capacitance range up to 100 $\mu$ F
- ❖ Available voltage rating of 4V to 50V
- ❖ Superior mechanical strength and reliability
- ❖ Low ESR characteristic
- ❖ Easy mounting due to no polarity

## Applications:

- ❖ General electronic equipment
- ❖ Mobile communication equipment
- ❖ Power supply circuit
- ❖ Office automation equipment
- ❖ TV/LED displays
- ❖ Servers/PCs/Notebooks/Tablets
- ❖ Test and measurement equipment
- ❖ Hybrid ICs, etc.
- ❖ Decoupling
- ❖ Smoothing
- ❖ Charge pump

### Basic Design Construction Multi-layer Capacitor

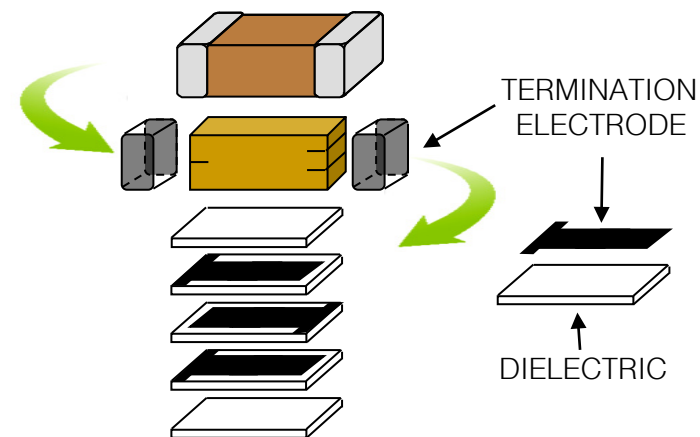

# C SERIES | General Application / C0G, SL

| Capacitance (pF) | Cap Code | C0402 01005 | C0603 0201 |          | C1005 0402 | C1608 0603 |
|------------------|----------|-------------|------------|----------|------------|------------|
|                  |          | 1C (16V)    | 1H (50V)   | 1E (25V) | 1H (50V)   | 1H (50V)   |
| 0.2              | 0R2      |             |            |          |            |            |
| 0.3              | 0R3      |             |            |          |            |            |
| 0.4              | 0R4      |             |            |          |            |            |
| 0.5              | 0R5      |             |            |          |            |            |
| 0.6              | 0R6      |             |            |          |            |            |
| 0.7              | 0R7      |             |            |          |            |            |
| 0.75             | R75      |             |            |          |            |            |
| 0.8              | 0R8      |             |            |          |            |            |
| 0.9              | 0R9      |             |            |          |            |            |
| 1.0              | 010      |             |            |          |            |            |
| 1.1              | 1R1      |             |            |          |            |            |
| 1.2              | 1R2      |             |            |          |            |            |
| 1.3              | 1R3      |             |            |          |            |            |
| 1.5              | 1R5      |             |            |          |            |            |
| 1.6              | 1R6      |             |            |          |            |            |
| 1.8              | 1R8      |             |            |          |            |            |
| 2.0              | 020      |             |            |          |            |            |
| 2.2              | 2R2      |             |            |          |            |            |
| 2.4              | 2R4      |             |            |          |            |            |
| 2.5              | 2R5      |             |            |          |            |            |
| 2.7              | 2R7      |             |            |          |            |            |
| 3.0              | 030      |             |            |          |            |            |
| 3.3              | 3R3      |             |            |          |            |            |
| 3.5              | 3R5      |             |            |          |            |            |
| 3.6              | 3R6      |             |            |          |            |            |
| 3.9              | 3R9      |             |            |          |            |            |
| 4.0              | 040      |             |            |          |            |            |
| 4.3              | 4R3      |             |            |          |            |            |
| 4.7              | 4R7      |             |            |          |            |            |
| 5.0              | 050      |             |            |          |            |            |
| 5.1              | 5R1      |             |            |          |            |            |
| 5.6              | 5R6      |             |            |          |            |            |
| 6.0              | 060      |             |            |          |            |            |
| 6.2              | 6R2      |             |            |          |            |            |
| 6.8              | 6R8      |             |            |          |            |            |
| 7.0              | 070      |             |            |          |            |            |
| 7.5              | 7R5      |             |            |          |            |            |
| 8.0              | 080      |             |            |          |            |            |
| 8.2              | 8R2      |             |            |          |            |            |
| 9.0              | 090      |             |            |          |            |            |
| 9.1              | 9R1      |             |            |          |            |            |
| 10               | 100      |             |            |          |            |            |
| 11               | 110      |             |            |          |            |            |
| 12               | 120      |             |            |          |            |            |
| 13               | 130      |             |            |          |            |            |
| 15               | 150      |             |            |          |            |            |
| 16               | 160      |             |            |          |            |            |
| 18               | 180      |             |            |          |            |            |
| 20               | 200      |             |            |          |            |            |

| Capacitance (pF) | Cap Code | C0402 01005 | C0603 0201 |          | C1005 0402 |          |          | C1608 0603 |          | C2012 0805 |          | C3216 1206 |
|------------------|----------|-------------|------------|----------|------------|----------|----------|------------|----------|------------|----------|------------|
|                  |          | 1C (16V)    | 1H (50V)   | 1E (25V) | 1H (50V)   | 1E (25V) | 1A (10V) | 1H (50V)   | 1E (25V) | 1H (50V)   | 1E (25V) | 1H (50V)   |
| 22               | 220      |             |            |          |            |          |          |            |          |            |          |            |
| 24               | 240      |             |            |          |            |          |          |            |          |            |          |            |
| 27               | 270      |             |            |          |            |          |          |            |          |            |          |            |
| 30               | 330      |             |            |          |            |          |          |            |          |            |          |            |
| 33               | 330      |             |            |          |            |          |          |            |          |            |          |            |
| 36               | 360      |             |            |          |            |          |          |            |          |            |          |            |
| 39               | 390      |             |            |          |            |          |          |            |          |            |          |            |
| 43               | 430      |             |            |          |            |          |          |            |          |            |          |            |
| 47               | 470      |             |            |          |            |          |          |            |          |            |          |            |
| 51               | 510      |             |            |          |            |          |          |            |          |            |          |            |
| 56               | 560      |             |            |          |            |          |          |            |          |            |          |            |
| 62               | 620      |             |            |          |            |          |          |            |          |            |          |            |
| 68               | 680      |             |            |          |            |          |          |            |          |            |          |            |
| 75               | 750      |             |            |          |            |          |          |            |          |            |          |            |
| 82               | 820      |             |            |          |            |          |          |            |          |            |          |            |
| 91               | 910      |             |            |          |            |          |          |            |          |            |          |            |
| 100              | 101      |             |            |          |            |          |          |            |          |            |          |            |
| 110              | 111      |             |            |          |            |          |          |            |          |            |          |            |
| 120              | 121      |             |            |          |            |          |          |            |          |            |          |            |
| 130              | 131      |             |            |          |            |          |          |            |          |            |          |            |
| 150              | 151      |             |            |          |            |          |          |            |          |            |          |            |
| 160              | 161      |             |            |          |            |          |          |            |          |            |          |            |
| 180              | 181      |             |            |          |            |          |          |            |          |            |          |            |
| 200              | 201      |             |            |          |            |          |          |            |          |            |          |            |
| 220              | 221      |             |            |          |            |          |          |            |          |            |          |            |
| 240              | 24       |             |            |          |            |          |          |            |          |            |          |            |
| 270              | 271      |             |            |          |            |          |          |            |          |            |          |            |
| 300              | 301      |             |            |          |            |          |          |            |          |            |          |            |
| 330              | 331      |             |            |          |            |          |          |            |          |            |          |            |
| 360              | 361      |             |            |          |            |          |          |            |          |            |          |            |
| 390              | 391      |             |            |          |            |          |          |            |          |            |          |            |
| 430              | 431      |             |            |          |            |          |          |            |          |            |          |            |
| 470              | 471      |             |            |          |            |          |          |            |          |            |          |            |
| 510              | 511      |             |            |          |            |          |          |            |          |            |          |            |
| 560              | 561      |             |            |          |            |          |          |            |          |            |          |            |
| 620              | 621      |             |            |          |            |          |          |            |          |            |          |            |
| 680              | 681      |             |            |          |            |          |          |            |          |            |          |            |
| 750              | 751      |             |            |          |            |          |          |            |          |            |          |            |
| 820              | 821      |             |            |          |            |          |          |            |          |            |          |            |
| 910              | 911      |             |            |          |            |          |          |            |          |            |          |            |
| 1,000            | 102      |             |            |          |            |          |          |            |          |            |          |            |
| 1,200            | 122      |             |            |          |            |          |          |            |          |            |          |            |
| 1,500            | 152      |             |            |          |            |          |          |            |          |            |          |            |
| 1,800            | 182      |             |            |          |            |          |          |            |          |            |          |            |
| 2,200            | 222      |             |            |          |            |          |          |            |          |            |          |            |
| 2,700            | 272      |             |            |          |            |          |          |            |          |            |          |            |
| 3,300            | 332      |             |            |          |            |          |          |            |          |            |          |            |
| 3,900            | 392      |             |            |          |            |          |          |            |          |            |          |            |
| 4,700            | 472      |             |            |          |            |          |          |            |          |            |          |            |

■ C0G ■ SL

# C SERIES | General Application / C0G, SL, X5R

5



| Capacitance (pF) | Cap Code | C1608 0603 |          |          | C2012 0805 |          |          | C3216 1206 |          |          | C3225 1210 | C4532 1812 |
|------------------|----------|------------|----------|----------|------------|----------|----------|------------|----------|----------|------------|------------|
|                  |          | 1H (50V)   | 1E (25V) | 1A (10V) | 1H (50V)   | 1E (25V) | 1A (10V) | 1H (50V)   | 1E (25V) | 1A (10V) | 1H (50V)   | 1H (50V)   |
| 5,600            | 562      |            |          |          |            |          |          |            |          |          |            |            |
| 6,800            | 682      |            |          |          |            |          |          |            |          |          |            |            |
| 8,200            | 822      |            |          |          |            |          |          |            |          |          |            |            |
| 10,000           | 103      |            |          |          |            |          |          |            |          |          |            |            |
| 15,000           | 153      |            |          |          |            |          |          |            |          |          |            |            |
| 22,000           | 223      |            |          |          |            |          |          |            |          |          |            |            |
| 33,000           | 333      |            |          |          |            |          |          |            |          |          |            |            |
| 47,000           | 473      |            |          |          |            |          |          |            |          |          |            |            |
| 68,000           | 683      |            |          |          |            |          |          |            |          |          |            |            |
| 100,000          | 104      |            |          |          |            |          |          |            |          |          |            |            |
| 150,000          | 154      |            |          |          |            |          |          |            |          |          |            |            |
| 220,000          | 224      |            |          |          |            |          |          |            |          |          |            |            |

| Capacitance<br>(pF) | Cap<br>Code | C0402<br>01005 |             |              |            | C0603<br>0201 |             |             |             |              |            | C1005<br>0402 |             |             |             |             |              |            |  |
|---------------------|-------------|----------------|-------------|--------------|------------|---------------|-------------|-------------|-------------|--------------|------------|---------------|-------------|-------------|-------------|-------------|--------------|------------|--|
|                     |             | 1C<br>(16V)    | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) | 1H<br>(50V)   | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) | 1H<br>(50V)   | 1V<br>(35V) | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) |  |
| 100                 | 101         | 1              | 1           |              |            | 1             | 1           |             |             |              |            |               |             |             |             |             |              |            |  |
| 150                 | 151         | 1              | 1           |              |            | 1             | 1           |             |             |              |            | 1             |             |             |             |             |              |            |  |
| 220                 | 221         | 1              | 1           |              |            | 1             | 1           |             |             |              |            | 1             |             |             |             |             |              |            |  |
| 330                 | 331         | 1              | 1           |              |            | 1             | 1           |             |             |              |            | 1             |             |             |             |             |              |            |  |
| 470                 | 471         | 1              | 1           |              |            | 1             | 1           |             |             |              |            | 1             |             |             |             |             |              |            |  |
| 1,000               | 102         | 1              | 1           | 1            |            | 1             | 1           |             |             |              |            | 1             |             |             |             |             |              |            |  |
| 1,500               | 152         |                | 1           | 1            |            |               | 1           |             |             |              |            |               |             |             |             |             |              |            |  |
| 2,200               | 222         |                | 1           | 1            |            |               | 1           | 1           |             |              |            |               |             |             |             |             |              |            |  |
| 3,300               | 332         |                |             | 1            |            |               | 1           |             | 1           |              |            |               |             |             |             |             |              |            |  |
| 4,700               | 472         |                |             | 1            |            |               | 1           |             | 1           |              |            | 1             |             |             |             |             |              |            |  |
| 6,800               | 682         |                |             | 1            |            |               |             | 1           |             | 1            |            | 1             |             |             |             |             |              |            |  |
| 10,000              | 103         |                |             | 1            |            |               |             |             | 1           | 1            |            |               |             | 1           |             |             |              |            |  |
| 15,000              | 153         |                |             |              |            |               |             |             |             | 1            |            |               |             | 1           |             |             |              |            |  |
| 22,000              | 223         |                |             |              |            |               |             |             |             |              |            |               |             | 1           |             |             |              |            |  |
| 33,000              | 333         |                |             |              |            |               |             |             |             |              |            |               |             | 1           | 1           | 1           |              |            |  |
| 47,000              | 473         |                |             |              |            |               |             |             |             |              |            | 1             |             | 1           | 1           | 1           |              |            |  |
| 68,000              | 683         |                |             |              |            |               |             |             |             |              |            | 1             |             | 1           | 1           | 1           |              |            |  |
| 100,000             | 104         |                |             | 1            | 1          |               |             | 1           | 1           | 1            |            |               | 1           |             | 1           | 1           | 1            |            |  |
| 150,000             | 154         |                |             |              |            |               |             | 1           | 1           |              |            | 1             | 1           |             | 1           | 1           |              |            |  |
| 220,000             | 224         |                |             |              |            |               |             | 1           | 1           |              |            |               |             | 1           | 1           | 1           | 1            |            |  |
| 330,000             | 334         |                |             |              |            |               |             |             |             | 1            |            |               |             | 1           | 1           | 1           | 1            |            |  |
| 470,000             | 474         |                |             |              |            |               |             |             |             | 1            |            |               |             | 1           | 1           | 1           | 1            |            |  |
| 680,000             | 684         |                |             |              |            |               |             |             |             |              |            |               |             | 1           | 1           | 1           |              |            |  |
| 1,000,000           | 105         |                |             |              |            |               |             |             |             |              | 1          |               |             |             | 1           | 1           | 1            |            |  |
| 1,500,000           | 155         |                |             |              |            |               |             |             |             |              |            |               |             |             | 1           | 1           |              |            |  |
| 2,200,000           | 225         |                |             |              |            |               |             |             |             |              |            |               |             |             |             | 1           | 1            |            |  |
| 3,300,000           | 335         |                |             |              |            |               |             |             |             |              |            |               |             |             |             | 1           | 1            | 1          |  |
| 4,700,000           | 475         |                |             |              |            |               |             |             |             |              |            |               |             |             |             | 1           | 1            | 1          |  |

 C0G  SL  X5R

# C SERIES | General Application / X5R

| Capacitance<br>(pF) | Cap<br>Code | C1608<br>0603 |             |             |             |             |              |            | C2012<br>0805 |             |             |             |              |            | C3216<br>1206 |             |             |             |             |              |            |
|---------------------|-------------|---------------|-------------|-------------|-------------|-------------|--------------|------------|---------------|-------------|-------------|-------------|--------------|------------|---------------|-------------|-------------|-------------|-------------|--------------|------------|
|                     |             | 1H<br>(50V)   | 1V<br>(35V) | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) | 1H<br>(50V)   | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) | 1H<br>(50V)   | 1V<br>(35V) | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) |
| 100,000             | 104         | 100           |             | 100         |             |             |              |            |               |             |             |             |              |            |               |             |             |             |             |              |            |
| 150,000             | 154         | 150           |             | 150         |             |             |              |            |               |             |             |             |              |            |               |             |             |             |             |              |            |
| 220,000             | 224         |               |             | 220         | 220         | 220         |              |            |               |             |             |             |              |            |               |             |             |             |             |              |            |
| 330,000             | 334         |               |             | 330         | 330         | 330         |              |            |               |             |             |             |              |            |               |             |             |             |             |              |            |
| 470,000             | 474         |               |             | 470         | 470         | 470         |              |            |               |             |             |             |              |            |               |             |             |             |             |              |            |
| 680,000             | 684         |               |             | 680         | 680         | 680         |              |            |               |             |             |             |              |            |               |             |             |             |             |              |            |
| 1,000,000           | 105         | 100           |             | 100         |             |             | 100          |            | 100           | 100         | 100         | 100         |              |            | 100           |             |             |             |             |              |            |
| 1,500,000           | 155         |               | 150         | 150         | 150         | 150         |              |            |               | 150         | 150         | 150         | 150          |            |               |             |             |             |             |              |            |
| 2,200,000           | 225         |               | 220         | 220         | 220         | 220         |              |            | 220           | 220         | 220         | 220         | 220          |            |               |             | 220         | 220         | 220         |              |            |
| 3,300,000           | 335         |               |             | 330         | 330         | 330         |              |            |               | 330         | 330         | 330         | 330          |            | 330           |             | 330         | 330         | 330         |              |            |
| 4,700,000           | 475         |               |             | 470         | 470         | 470         |              |            | 470           | 470         | 470         | 470         | 470          |            | 470           |             | 470         | 470         | 470         |              |            |
| 6,800,000           | 685         |               |             |             |             |             |              |            |               |             |             |             |              |            |               |             |             |             |             |              |            |
| 10,000,000          | 106         |               |             |             |             | 100         |              | 100        |               |             |             | 100         | 100          |            | 100           |             | 100         | 100         | 100         | 100          |            |
| 15,000,000          | 156         |               |             |             |             |             |              |            |               |             |             |             | 150          |            |               |             |             |             |             |              |            |
| 22,000,000          | 226         |               |             |             |             |             | 220          | 220        |               |             | 220         | 220         | 220          |            |               | 220         | 220         | 220         | 220         | 220          |            |
| 33,000,000          | 336         |               |             |             |             |             |              |            |               |             |             |             |              |            |               |             |             |             |             |              |            |
| 47,000,000          | 476         |               |             |             |             |             |              |            |               |             |             |             |              |            |               |             |             |             |             |              |            |
| 100,000,000         | 107         |               |             |             |             |             |              |            |               |             |             |             |              |            |               |             |             |             |             |              | 100        |

| Capacitance (pF) | Cap Code | C3225 1210 |          |          |          |           | C4532 1812 |          |          |           | C5750 2220 |          |          |          |           |
|------------------|----------|------------|----------|----------|----------|-----------|------------|----------|----------|-----------|------------|----------|----------|----------|-----------|
|                  |          | 1H (50V)   | 1E (25V) | 1C (16V) | 1A (10V) | 0J (6.3V) | 1E (25V)   | 1C (16V) | 1A (10V) | 0J (6.3V) | 1H (50V)   | 1E (25V) | 1C (16V) | 1A (10V) | 0J (6.3V) |
| 4,700,000        | 475      |            |          |          |          |           |            |          |          |           |            |          |          |          |           |
| 10,000,000       | 106      |            |          |          |          |           |            |          |          |           |            |          |          |          |           |
| 15,000,000       | 156      |            |          |          |          |           |            |          |          |           |            |          |          |          |           |
| 22,000,000       | 226      |            |          |          |          |           |            |          |          |           |            |          |          |          |           |
| 33,000,000       | 336      |            |          |          |          |           |            |          |          |           |            |          |          |          |           |
| 47,000,000       | 476      |            |          |          |          |           |            |          |          |           |            |          |          |          |           |
| 68,000,000       | 686      |            |          |          |          |           |            |          |          |           |            |          |          |          |           |
| 100,000,000      | 107      |            |          |          |          |           |            |          |          |           |            |          |          |          |           |

 X5R

# C SERIES | General Application / X6S

| Capacitance<br>(pF) | Cap<br>Code | C0603<br>0201 |            | C1005<br>0402 |             |             |             |             |              |            | C1608<br>0603 |             |             |             |             |              |            |
|---------------------|-------------|---------------|------------|---------------|-------------|-------------|-------------|-------------|--------------|------------|---------------|-------------|-------------|-------------|-------------|--------------|------------|
|                     |             | 0J<br>(6.3V)  | 0G<br>(4V) | 1H<br>(50V)   | 1V<br>(35V) | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) | 1H<br>(50V)   | 1V<br>(35V) | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) |
| 10,000              | 103         |               |            |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 22,000              | 223         |               |            |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 47,000              | 473         |               |            |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 100,000             | 104         |               |            |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 220,000             | 224         |               |            |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 470,000             | 474         |               |            |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 1,000,000           | 105         |               |            |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 2,200,000           | 225         |               |            |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 4,700,000           | 475         |               |            |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 10,000,000          | 106         |               |            |               |             |             |             |             |              |            |               |             |             |             |             |              |            |

| Capacitance<br>(pF) | Cap<br>Code | C2012<br>0805 |             |             |             |             |              |            | C3216<br>1206 |             |             |             |             |              |            | C3225<br>1210 |              |            |
|---------------------|-------------|---------------|-------------|-------------|-------------|-------------|--------------|------------|---------------|-------------|-------------|-------------|-------------|--------------|------------|---------------|--------------|------------|
|                     |             | 1H<br>(50V)   | 1V<br>(35V) | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) | 1H<br>(50V)   | 1V<br>(35V) | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) | 1H<br>(50V)   | 0J<br>(6.3V) | 0G<br>(4V) |
| 100,000             | 104         |               |             |             |             |             |              |            |               |             |             |             |             |              |            |               |              |            |
| 220,000             | 224         |               |             |             |             |             |              |            |               |             |             |             |             |              |            |               |              |            |
| 470,000             | 474         |               |             |             |             |             |              |            |               |             |             |             |             |              |            |               |              |            |
| 1,000,000           | 105         |               |             |             |             |             |              |            |               |             |             |             |             |              |            |               |              |            |
| 2,200,000           | 225         |               |             |             |             |             |              |            |               |             |             |             |             |              |            |               |              |            |
| 4,700,000           | 475         |               |             |             |             |             |              |            |               |             |             |             |             |              |            |               |              |            |
| 10,000,000          | 106         |               |             |             |             |             |              |            |               |             |             |             |             |              |            |               |              |            |

X6S

# C SERIES | General Application / X7R, X7S

| Capacitance<br>(pF) | Cap<br>Code | C0402<br>01005 | C0603<br>0201 |             |             |             |              | C1005<br>0402 |             |             |             |             |              |            | C1608<br>0603 |             |             |             |             |              |            |
|---------------------|-------------|----------------|---------------|-------------|-------------|-------------|--------------|---------------|-------------|-------------|-------------|-------------|--------------|------------|---------------|-------------|-------------|-------------|-------------|--------------|------------|
|                     |             | 1A<br>(10V)    | 1H<br>(50V)   | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 1H<br>(50V)   | 1V<br>(35V) | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) | 1H<br>(50V)   | 1V<br>(35V) | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) |
| 100                 | 101         | ■              | ■             | ■           | ■           |             |              |               |             |             |             |             |              |            | ■             |             |             |             |             |              |            |
| 150                 | 151         | ■              |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 220                 | 221         | ■              | ■             | ■           | ■           |             |              | ■             |             |             |             |             |              |            | ■             |             |             |             |             |              |            |
| 330                 | 331         | ■              |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 470                 | 471         | ■              | ■             |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 680                 | 681         | ■              |               |             | ■           |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 1,000               | 102         |                |               |             |             |             |              |               |             | ■           | ■           |             |              |            |               |             |             |             |             |              |            |
| 1,500               | 152         |                |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 2,200               | 222         |                |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 3,300               | 332         |                |               | ■           | ■           |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 4,700               | 472         |                |               |             | ■           |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 6,800               | 682         |                |               |             |             | ■           |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 10,000              | 103         |                |               |             |             |             | ■            |               | ■           |             | ■           |             |              |            |               |             | ■           | ■           |             |              |            |
| 15,000              | 153         |                |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 22,000              | 223         |                |               |             |             |             |              |               | ■           |             |             |             |              |            |               |             |             |             |             |              |            |
| 33,000              | 333         |                |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 47,000              | 473         |                |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 68,000              | 683         |                |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 100,000             | 104         |                |               |             |             |             |              |               | ■           |             |             |             |              |            |               |             |             |             |             |              |            |
| 150,000             | 154         |                |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 220,000             | 224         |                |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 330,000             | 334         |                |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 470,000             | 474         |                |               |             |             |             |              |               |             |             |             |             | ■            | ■          |               |             |             |             | ■           |              |            |
| 680,000             | 684         |                |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              |            |
| 1,000,000           | 105         |                |               |             |             |             |              |               |             |             |             |             |              | ■          |               |             |             |             |             | ■            |            |
| 2,200,000           | 225         |                |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             | ■            |            |
| 4,700,000           | 475         |                |               |             |             |             |              |               |             |             |             |             |              |            |               |             |             |             |             |              | ■          |

■ X7R ■ X7S

| Capacitance (pF) | Cap Code | C2012 0805 |          |          |          |          |           |         | C3216 1206 |          |          |          |          |           |         | C3225 1210 |          |          |          |
|------------------|----------|------------|----------|----------|----------|----------|-----------|---------|------------|----------|----------|----------|----------|-----------|---------|------------|----------|----------|----------|
|                  |          | 1H (50V)   | 1V (35V) | 1E (25V) | 1C (16V) | 1A (10V) | 0J (6.3V) | 0G (4V) | 1H (50V)   | 1V (35V) | 1E (25V) | 1C (16V) | 1A (10V) | 0J (6.3V) | 0G (4V) | 1H (50V)   | 1E (25V) | 1C (16V) | 1A (10V) |
| 1,000            | 102      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 2,200            | 222      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 4,700            | 472      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 10,000           | 103      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 22,000           | 223      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 47,000           | 473      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 100,000          | 104      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 150,000          | 154      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 220,000          | 224      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 330,000          | 334      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 470,000          | 474      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 680,000          | 684      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 1,000,000        | 105      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 1,500,000        | 155      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 2,200,000        | 225      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 3,300,000        | 335      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 4,700,000        | 475      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 6,800,000        | 685      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 10,000,000       | 106      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 15,000,000       | 156      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 22,000,000       | 226      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |
| 47,000,000       | 476      |            |          |          |          |          |           |         |            |          |          |          |          |           |         |            |          |          |          |

| Capacitance (pF) | Cap Code | C4532 1218 |          |          | C5750 2220 |          |          |
|------------------|----------|------------|----------|----------|------------|----------|----------|
|                  |          | 1H (50V)   | 1E (25V) | 1C (16V) | 1H (50V)   | 1E (25V) | 1C (16V) |
| 1,000,000        | 105      |            |          |          |            |          |          |
| 1,500,000        | 155      |            |          |          |            |          |          |
| 2,200,000        | 225      |            |          |          |            |          |          |
| 3,300,000        | 335      |            |          |          |            |          |          |
| 4,700,000        | 475      |            |          |          |            |          |          |
| 6,800,000        | 685      |            |          |          |            |          |          |
| 10,000,000       | 106      |            |          |          |            |          |          |
| 15,000,000       | 156      |            |          |          |            |          |          |
| 22,000,000       | 226      |            |          |          |            |          |          |
| 33,000,000       | 336      |            |          |          |            |          |          |
| 47,000,000       | 476      |            |          |          |            |          |          |

X7R
 X7S

# C SERIES | General Application / Y5V

| Capacitance (pF) | Cap Code | C0603 0201 | C1005 0402 |          |          |          |           | C1608 0603 |          |          |          |           | C2012 0805 |          |          |          |           | C3216 1206 |          |          |          |           |
|------------------|----------|------------|------------|----------|----------|----------|-----------|------------|----------|----------|----------|-----------|------------|----------|----------|----------|-----------|------------|----------|----------|----------|-----------|
|                  |          | 1C (16V)   | 1H (50V)   | 1E (25V) | 1C (16V) | 1A (10V) | 0J (6.3V) | 1H (50V)   | 1E (25V) | 1C (16V) | 1A (10V) | 0J (6.3V) | 1H (50V)   | 1E (25V) | 1C (16V) | 1A (10V) | 0J (6.3V) | 1H (50V)   | 1E (25V) | 1C (16V) | 1A (10V) | 0J (6.3V) |
| 10,000           | 103      |            |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |
| 100,000          | 104      |            |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |
| 220,000          | 224      |            |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |
| 470,000          | 474      |            |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |
| 1,000,000        | 105      |            |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |
| 2,200,000        | 225      |            |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |
| 4,700,000        | 475      |            |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |
| 10,000,000       | 106      |            |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |
| 22,000,000       | 226      |            |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |
| 47,000,000       | 476      |            |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |            |          |          |          |           |

| Capacitance (pF) | Cap Code | C3225 1210 |          |          |          |           | C4532 1812 |          |          |          | C5750 2220 |          |          |          |
|------------------|----------|------------|----------|----------|----------|-----------|------------|----------|----------|----------|------------|----------|----------|----------|
|                  |          | 1H (50V)   | 1E (25V) | 1C (16V) | 1A (10V) | 0J (6.3V) | 1H (50V)   | 1E (25V) | 1C (16V) | 1A (10V) | 1H (50V)   | 1E (25V) | 1C (16V) | 1A (10V) |
| 4,700,000        | 475      |            |          |          |          |           |            |          |          |          |            |          |          |          |
| 10,000,000       | 106      |            |          |          |          |           |            |          |          |          |            |          |          |          |
| 22,000,000       | 226      |            |          |          |          |           |            |          |          |          |            |          |          |          |
| 47,000,000       | 476      |            |          |          |          |           |            |          |          |          |            |          |          |          |
| 100,000,000      | 107      |            |          |          |          |           |            |          |          |          |            |          |          |          |

 Y5V

# C SERIES | Mid Voltage Capacitor



With a rated voltage ranging from 100V to 630V, TDK's mid voltage multilayer ceramic chip capacitors (MLCC) use ceramic dielectric thin-layer and advanced multi-layering technologies to improve capacitance to the industry's highest levels in the mid-voltage range.

These products feature Class I & Class II temperature characteristics (operating temperature range: -55°C and up to 125°C), making them ideal for use in electric flash circuits in digital camera, higher voltage switching power supply smoothing circuits needed for industrial equipment, power factor correction, various lighting application, and general circuits that require higher voltages than traditional sub 100V rated MLCC's.



L Body Length  
W Body Width  
T Body Height  
B Terminal Width

| Case Code  | L<br>(mm) | W<br>(mm) | T max<br>(mm) |
|------------|-----------|-----------|---------------|
| C1005/0402 | 1.00      | 0.50      | 0.50          |
| C1608/0603 | 1.60      | 0.80      | 0.80          |
| C2012/0805 | 2.00      | 1.25      | 1.25          |
| C3216/1206 | 3.20      | 1.60      | 1.60          |
| C3225/1210 | 3.20      | 2.50      | 2.30          |
| C4532/1810 | 4.50      | 3.20      | 3.20          |
| C5750/2220 | 5.70      | 5.00      | 2.50          |

## Part Number Description



## Features:

- ❖ Advanced dielectric materials
- ❖ Wide capacitance range up to 22uF
- ❖ Higher voltage rating in smaller case size
- ❖ Voltage rating of 100V, 250V, 450V, and 630V
- ❖ High mechanical strength
- ❖ Excellent DC bias properties

## Applications:

- ❖ Snubber in power supply
- ❖ Ringer cap in telephone set and modem
- ❖ Electric flash circuits in digital still camera
- ❖ Power factor correction
- ❖ Input/output filter in power supply
- ❖ Driver circuit in plasma display
- ❖ Noise bypass
- ❖ Lighting application

# C SERIES | Mid Voltage / C0G

| Capacitance<br>(pF) | Cap<br>Code | C1608<br>0603 |              | C2012<br>0805 |              | C3216<br>1206 |              |              | C3225<br>1210 |              |              | C4532<br>1812 |              |              |
|---------------------|-------------|---------------|--------------|---------------|--------------|---------------|--------------|--------------|---------------|--------------|--------------|---------------|--------------|--------------|
|                     |             | 2E<br>(250V)  | 2A<br>(100V) | 2E<br>(250V)  | 2A<br>(100V) | 2J<br>(630V)  | 2E<br>(250V) | 2A<br>(100V) | 2J<br>(630V)  | 2E<br>(250V) | 2A<br>(100V) | 2J<br>(630V)  | 2E<br>(250V) | 2A<br>(100V) |
| 100                 | 101         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 120                 | 121         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 150                 | 151         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 180                 | 181         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 220                 | 221         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 270                 | 271         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 330                 | 331         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 390                 | 391         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 470                 | 471         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 560                 | 561         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 680                 | 681         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 820                 | 821         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 1,000               | 102         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 1,200               | 122         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 1,500               | 152         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 1,800               | 182         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 2,200               | 222         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 2,700               | 272         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 3,300               | 332         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 3,900               | 392         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 4,700               | 472         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 5,600               | 562         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 6,800               | 682         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 8,200               | 822         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 10,000              | 103         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 15,000              | 153         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 22,000              | 223         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 33,000              | 333         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 47,000              | 473         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 68,000              | 683         |               |              |               |              |               |              |              |               |              |              |               |              |              |
| 100,000             | 104         |               |              |               |              |               |              |              |               |              |              |               |              |              |

 C0G

| Capacitance<br>(pF) | Cap<br>Code | C1005<br>0402 | C1608<br>0603 | C2012<br>0805 |              |              | C3216<br>1206 |              |              |              |  |
|---------------------|-------------|---------------|---------------|---------------|--------------|--------------|---------------|--------------|--------------|--------------|--|
|                     |             | 2A<br>(100V)  | 2A<br>(100V)  | 2W<br>(450V)  | 2E<br>(250V) | 2A<br>(100V) | 2J<br>(630V)  | 2W<br>(450V) | 2E<br>(250V) | 2A<br>(100V) |  |
| 1,000               | 102         | ■             | ■             |               | ■            | ■            | ■             |              |              |              |  |
| 1,500               | 152         | ■             | ■             |               | ■            | ■            |               |              |              |              |  |
| 2,200               | 222         | ■             | ■             |               | ■            | ■            |               |              |              |              |  |
| 3,300               | 332         | ■             | ■             |               | ■            | ■            |               |              |              |              |  |
| 4,700               | 472         | ■             | ■             |               | ■            | ■            |               |              |              |              |  |
| 6,800               | 682         | ■             | ■             |               | ■            | ■            |               |              |              |              |  |
| 10,000              | 103         | ■             | ■             | ■             | ■            | ■            | ■             |              |              |              |  |
| 15,000              | 153         |               | ■             | ■             | ■            | ■            | ■             |              | ■            |              |  |
| 22,000              | 223         |               | ■             | ■             | ■            | ■            |               |              | ■            |              |  |
| 33,000              | 333         |               | ■             | ■             | ■            | ■            | ■             | ■            | ■            | ■            |  |
| 47,000              | 473         |               | ■             | ■             | ■            | ■            |               | ■            | ■            | ■            |  |
| 68,000              | 683         |               | ■             |               | ■            | ■            |               | ■            | ■            | ■            |  |
| 100,000             | 104         |               | ■             |               | ■            | ■            |               | ■            | ■            | ■            |  |
| 150,000             | 154         |               |               |               |              | ■            |               |              | ■            | ■            |  |
| 220,000             | 224         |               |               |               |              | ■            |               |              | ■            | ■            |  |
| 330,000             | 334         |               |               |               |              | ■            |               |              |              | ■            |  |
| 470,000             | 474         |               |               |               |              | ■            |               |              |              | ■            |  |
| 1,000,000           | 105         |               |               |               |              | ■            |               |              |              | ■            |  |
| 2,200,000           | 225         |               |               |               |              |              |               |              |              | ■            |  |

■ X7R   ■ X7S   ■ X7T

# C SERIES | Mid Voltage / X7R, X7S, X7T, X6S

| Capacitance (pF) | Cap Code | C3225 1210 |           |           |           | C4532 1812 |           |           |           | C5750 2220 |           |           |           |
|------------------|----------|------------|-----------|-----------|-----------|------------|-----------|-----------|-----------|------------|-----------|-----------|-----------|
|                  |          | 2J (630V)  | 2W (450V) | 2E (250V) | 2A (100V) | 2J (630V)  | 2W (450V) | 2E (250V) | 2A (100V) | 2J (630V)  | 2W (450V) | 2E (250V) | 2A (100V) |
| 47,000           | 473      |            |           |           |           |            |           |           |           |            |           |           |           |
| 68,000           | 683      |            |           |           |           |            |           |           |           |            |           |           |           |
| 100,000          | 104      |            |           |           |           |            |           |           |           |            |           |           |           |
| 150,000          | 154      |            |           |           |           |            |           |           |           |            |           |           |           |
| 220,000          | 224      |            |           |           |           |            |           |           |           |            |           |           |           |
| 330,000          | 334      |            |           |           |           |            |           |           |           |            |           |           |           |
| 470,000          | 474      |            |           |           |           |            |           |           |           |            |           |           |           |
| 680,000          | 684      |            |           |           |           |            |           |           |           |            |           |           |           |
| 1,000,000        | 105      |            |           |           |           |            |           |           |           |            |           |           |           |
| 1,500,000        | 155      |            |           |           |           |            |           |           |           |            |           |           |           |
| 2,200,000        | 225      |            |           |           |           |            |           |           |           |            |           |           |           |
| 3,300,000        | 335      |            |           |           |           |            |           |           |           |            |           |           |           |
| 4,700,000        | 475      |            |           |           |           |            |           |           |           |            |           |           |           |
| 10,000,000       | 106      |            |           |           |           |            |           |           |           |            |           |           |           |
| 15,000,000       | 156      |            |           |           |           |            |           |           |           |            |           |           |           |


X6S

X7R

X7S

X7T

# C SERIES | High Voltage Capacitor

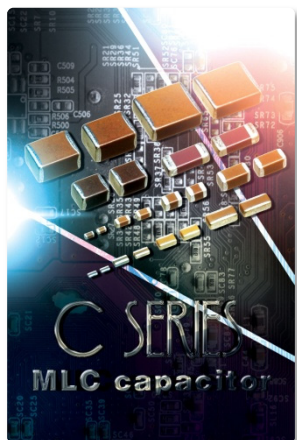

With rated voltage range of 1000V to 3000V, TDK's High Voltage C Series multilayer ceramic chip capacitors (MLCC) use advance ceramic dielectric thin-layer and multi-layering technologies to offer capacitance to the industry's highest levels in the high-voltage range and improved withstanding voltage characteristics.

These products feature C0G and X7R temperature characteristics (operating temperature range: -55°C to 125°C), making them ideal for use in higher temperature circuit requirements. TDK High Voltage C series is available in 1206 to 2220 case size. Additionally, TDK High Voltage MLCC's feature substantial AC and DC breakdown voltage capabilities to ensure excellent reliability in the higher voltage applications.



L Body Length

W Body Width

T Body Height

B Terminal Width

| Case Code  | Dielectric | L<br>(mm) | W<br>(mm) | T max<br>(mm) |
|------------|------------|-----------|-----------|---------------|
| C3216/1206 | X7S        | 3.20      | 1.60      | 1.30          |
| C3225/1210 | X7S        | 3.20      | 2.50      | 2.50          |
| C4520/1808 | C0G        | 4.50      | 2.00      | 2.00          |
|            | X7R        | 4.50      | 2.00      | 1.30          |
| C4532/1810 | C0G        | 4.50      | 3.20      | 2.50          |
|            | X7R        | 4.50      | 3.20      | 2.00          |
| C5750/2220 | X7S        | 5.70      | 5.00      | 2.50          |

## Part Number Description



## Features:

- ❖ Up to 3000V rated voltage
- ❖ Wide case size offering 1206 to 2220
- ❖ Advanced design provides improved withstanding voltage characteristics
- ❖ TDK's proprietary internal electrode structure
- ❖ Low ESR at high frequency
- ❖ Low dielectric constant
- ❖ Complies with ISO-8802-3 required for LAN
- ❖ Suitable for 100 Base-T corresponding LAN applications

## Applications:

- ❖ Inverter circuits with a liquid crystal backlight
- ❖ LAN products
- ❖ High voltage coupling
- ❖ Lighting Ballast
- ❖ Higher power DC-DC /AC-DC converter
- ❖ Ethernet Switch
- ❖ Switched mode power supply
- ❖ General high voltage circuits

# C SERIES | High Voltage / C0G, X7R, X7S

| Capacitance<br>(pF) | Cap<br>Code | C4520<br>1808 | C4532<br>1812 |
|---------------------|-------------|---------------|---------------|
|                     |             | 3F<br>(3KV)   | 3F<br>(3KV)   |
| 10                  | 100         |               |               |
| 12                  | 120         |               |               |
| 15                  | 150         |               |               |
| 18                  | 180         |               |               |
| 22                  | 220         |               |               |
| 27                  | 270         |               |               |
| 33                  | 330         |               |               |
| 39                  | 390         |               |               |
| 47                  | 470         |               |               |
| 56                  | 560         |               |               |
| 68                  | 680         |               |               |
| 82                  | 820         |               |               |
| 100                 | 101         |               |               |
| 120                 | 121         |               |               |
| 150                 | 151         |               |               |
| 180                 | 181         |               |               |
| 220                 | 221         |               |               |
| 270                 | 271         |               |               |
| 330                 | 331         |               |               |

| Capacitance<br>(pF) | Cap<br>Code | C3216<br>1206 |             | C3225<br>1210 |             | C4520<br>1808 |             | C4532<br>1812 |             | C5750<br>2220 |             |
|---------------------|-------------|---------------|-------------|---------------|-------------|---------------|-------------|---------------|-------------|---------------|-------------|
|                     |             | 3D<br>(2KV)   | 3A<br>(1KV) | 3D<br>(2KV)   | 3A<br>(1KV) | 3D<br>(2KV)   | 3A<br>(1KV) | 3D<br>(2KV)   | 3A<br>(1KV) | 3D<br>(2KV)   | 3A<br>(1KV) |
| 100                 | 101         |               |             |               |             |               |             |               |             |               |             |
| 220                 | 121         |               |             |               |             |               |             |               |             |               |             |
| 470                 | 471         |               |             |               |             |               |             |               |             |               |             |
| 1,000               | 102         |               |             |               |             |               |             |               |             |               |             |
| 2,200               | 222         |               |             |               |             |               |             |               |             |               |             |
| 4,700               | 472         |               |             |               |             |               |             |               |             |               |             |
| 10,000              | 103         |               |             |               |             |               |             |               |             |               |             |
| 22,000              | 223         |               |             |               |             |               |             |               |             |               |             |
| 47,000              | 473         |               |             |               |             |               |             |               |             |               |             |

 X7R    X7S    C0G

# C SERIES | High Temperature Capacitor



TDK X8R High Temperature Series features stable temperature characteristics and higher reliability performance up to 150°C. This series is designed to meet the needs of automotive applications and/or applications which require operating conditions beyond 125°C of X7R temperature characteristics.

Temperature characteristics of capacitance for this series is stable ( $\pm 15\%$ ) even at the higher temperature ( $\sim 150^\circ\text{C}$ ). Temperature characteristics of capacitance shows highly precise performance (capacitance change of  $\pm 7.5\%$ ) up to 125°C. With precise temperature characteristics, these capacitor are ideal for various high temperature applications such as solar panel inverters, measurement instruments used in high temperature environments as well as smart meter/smart grid application where extreme temperatures are common.



L Body Length  
W Body Width  
T Body Height  
B Terminal Width

| Case Code  | L (mm) | W (mm) | T max (mm) |
|------------|--------|--------|------------|
| C1005/0402 | 1.00   | 0.50   | 0.50       |
| C1608/0603 | 1.60   | 0.80   | 0.80       |
| C2012/0805 | 2.00   | 1.25   | 1.25       |
| C3216/1206 | 3.20   | 1.60   | 1.60       |
| C3225/1210 | 3.20   | 2.50   | 2.50       |

## Part Number Description



## Features:

- ❖ No polarity
- ❖ Stable temperature characteristics (15%) up to 150°C
- ❖ Highly precise temperature characteristics ( $\pm 7.5\%$ ) up to 125°C

## Applications:

- ❖ Lighting application
- ❖ Measurement instruments used at high temperature environments
- ❖ Smart Meter/Smart Grid
- ❖ LCD/LED backlighting display
- ❖ Industrial application
- ❖ Solar panel micro-inverter

### Temperature Characteristic Curve (X7R vs. X8R)



- Temperature characteristics of capacitance is stable ( $\pm 15\%$ ) even at the higher temperature ( $\sim 150^\circ\text{C}$ )
- Temperature characteristics of capacitance shows highly precise performance (capacitance change of  $\pm 7.5\%$ ) up to 125°C

# C SERIES | High Temperature / X8R

| Capacitance<br>(pF) | Cap<br>Code | C1005<br>0402 |             |             | C1608<br>0603 |             |             |             | C2012<br>0805 |             |             |             | C3216<br>1206 |             |             |             | C3225<br>1210 |             |
|---------------------|-------------|---------------|-------------|-------------|---------------|-------------|-------------|-------------|---------------|-------------|-------------|-------------|---------------|-------------|-------------|-------------|---------------|-------------|
|                     |             | 1H<br>(50V)   | 1E<br>(25V) | 1C<br>(16V) | 2A<br>(100V)  | 1H<br>(50V) | 1E<br>(25V) | 1C<br>(16V) | 2A<br>(100V)  | 1H<br>(50V) | 1E<br>(25V) | 1C<br>(16V) | 2A<br>(100V)  | 1H<br>(50V) | 1E<br>(25V) | 1C<br>(16V) | 1E<br>(25V)   | 1C<br>(16V) |
| 150                 | 151         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 220                 | 221         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 330                 | 331         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 470                 | 471         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 680                 | 681         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 1,000               | 102         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 1,500               | 152         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 2,200               | 222         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 3,300               | 332         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 4,700               | 472         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 6,800               | 682         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 10,000              | 103         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 15,000              | 153         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 22,000              | 223         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 33,000              | 333         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 47,000              | 473         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 68,000              | 683         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 100,000             | 104         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 150,000             | 154         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 220,000             | 224         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 330,000             | 334         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 470,000             | 474         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 680,000             | 684         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 1,000,000           | 105         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 1,500,000           | 155         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 2,200,000           | 225         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 3,300,000           | 335         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 4,700,000           | 475         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 6,800,000           | 685         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |
| 10,000,000          | 106         |               |             |             |               |             |             |             |               |             |             |             |               |             |             |             |               |             |

 X8R

# C SERIES | High Q / F&G Tol. Capacitor



TDK High Q multilayer ceramic chip capacitors (MLCCs) are offered in ultra small metric 0603 (EIA0201) body size. This is offered in C0G temperature characteristics (operating temperature range: -55°C to 125°C), making them ideal for use in higher temperature circuit requirements. C0G is a highly stable material offering temperature stability, low loss, and excellent frequency and voltage performance. This material class also offers excellent attenuation and high self resonant frequency.

High Q series are offered in capacitance tolerance as tight as  $\pm 0.05\text{pF}$  and as wide as  $\pm 5\%$  for higher capacitance value. This series is an excellent solution for mobile multimedia and wireless applications as well as in applications such as but not limited to Bluetooth, GPS, satellite TV and radios.



|   |                |
|---|----------------|
| L | Body Length    |
| W | Body Width     |
| T | Body Height    |
| B | Terminal Width |

| Case Code  | L (mm) | W (mm) | T (mm) |
|------------|--------|--------|--------|
| C0603/0201 | 0.60   | 0.30   | 0.30   |
| C1005/0402 | 1.00   | 0.50   | 0.50   |
| C1608/0603 | 1.60   | 0.80   | 0.80   |

## Part Number Description



## Features:

- ❖ Higher Q (lower loss) than standard capacitors
- ❖ Available in standard and tight tolerance
- ❖ Same C0G(Class I) BME material
- ❖ Compact case sizes (as small as 0.6 x 0.3 mm)

## Applications:

- ❖ PA module
- ❖ Wireless communications/mobile phones
- ❖ Filter networks/matching networks
- ❖ DC blocking
- ❖ High frequency circuits



A 0603 size (0.6 mm x 0.3 mm) multilayer ceramic chip capacitor is smaller than a strawberry seed.

# C SERIES | High Q/Tight Tolerance / C0G

| Capacitance (pF) | Cap Code | C0603/0201<br>1E (25V) |              |              |              |              |          |          |
|------------------|----------|------------------------|--------------|--------------|--------------|--------------|----------|----------|
|                  |          | W<br>±0.05pF           | B<br>±0.10pF | E<br>±0.20pF | C<br>±0.25pF | D<br>±0.50pF | G<br>±2% | J<br>±5% |
| 0.2              | 0R2      |                        |              |              |              |              |          |          |
| 0.3              | 0R3      |                        |              |              |              |              |          |          |
| 0.4              | 0R4      |                        |              |              |              |              |          |          |
| 0.5              | 0R5      |                        |              |              |              |              |          |          |
| 0.6              | 0R6      |                        |              |              |              |              |          |          |
| 0.7              | 0R7      |                        |              |              |              |              |          |          |
| 0.8              | 0R8      |                        |              |              |              |              |          |          |
| 0.9              | 0R9      |                        |              |              |              |              |          |          |
| 1.0              | 010      |                        |              |              |              |              |          |          |
| 1.1              | 1R1      |                        |              |              |              |              |          |          |
| 1.2              | 1R2      |                        |              |              |              |              |          |          |
| 1.3              | 1R3      |                        |              |              |              |              |          |          |
| 1.5              | 1R5      |                        |              |              |              |              |          |          |
| 1.6              | 1R6      |                        |              |              |              |              |          |          |
| 1.8              | 1R8      |                        |              |              |              |              |          |          |
| 2.0              | 020      |                        |              |              |              |              |          |          |
| 2.2              | 2R2      |                        |              |              |              |              |          |          |
| 2.4              | 2R4      |                        |              |              |              |              |          |          |
| 2.7              | 2R7      |                        |              |              |              |              |          |          |
| 3.0              | 030      |                        |              |              |              |              |          |          |
| 3.3              | 3R3      |                        |              |              |              |              |          |          |
| 3.6              | 3R6      |                        |              |              |              |              |          |          |
| 3.9              | 3R9      |                        |              |              |              |              |          |          |
| 4.0              | 040      |                        |              |              |              |              |          |          |
| 4.3              | 4R3      |                        |              |              |              |              |          |          |
| 4.7              | 4R7      |                        |              |              |              |              |          |          |
| 5.0              | 050      |                        |              |              |              |              |          |          |
| 5.1              | 5R1      |                        |              |              |              |              |          |          |
| 5.6              | 5R6      |                        |              |              |              |              |          |          |
| 6.0              | 060      |                        |              |              |              |              |          |          |
| 6.2              | 6R2      |                        |              |              |              |              |          |          |
| 6.8              | 6R8      |                        |              |              |              |              |          |          |
| 7.0              | 070      |                        |              |              |              |              |          |          |
| 7.5              | 7R5      |                        |              |              |              |              |          |          |
| 8.0              | 080      |                        |              |              |              |              |          |          |
| 8.2              | 8R2      |                        |              |              |              |              |          |          |
| 9.0              | 090      |                        |              |              |              |              |          |          |
| 9.1              | 9R1      |                        |              |              |              |              |          |          |
| 10               | 100      |                        |              |              |              |              |          |          |
| 11               | 110      |                        |              |              |              |              |          |          |
| 12               | 120      |                        |              |              |              |              |          |          |
| 13               | 130      |                        |              |              |              |              |          |          |
| 15               | 150      |                        |              |              |              |              |          |          |
| 16               | 160      |                        |              |              |              |              |          |          |
| 18               | 180      |                        |              |              |              |              |          |          |
| 20               | 200      |                        |              |              |              |              |          |          |

 C0G

| Capacitance (pF) | Cap Code | C1005/0402<br>1H (50V) |          | C1608/0603 |          |           |          |
|------------------|----------|------------------------|----------|------------|----------|-----------|----------|
|                  |          | 1H (50V)               |          | 1H (50V)   |          | 2A (100V) |          |
|                  |          | F<br>±1%               | G<br>±2% | F<br>±1%   | G<br>±2% | F<br>±1%  | G<br>±2% |
| 15               | 150      |                        |          |            |          |           |          |
| 22               | 220      |                        |          |            |          |           |          |
| 33               | 330      |                        |          |            |          |           |          |
| 47               | 470      |                        |          |            |          |           |          |
| 68               | 680      |                        |          |            |          |           |          |
| 100              | 101      |                        |          |            |          |           |          |
| 150              | 151      |                        |          |            |          |           |          |
| 220              | 221      |                        |          |            |          |           |          |
| 330              | 331      |                        |          |            |          |           |          |
| 470              | 471      |                        |          |            |          |           |          |
| 680              | 681      |                        |          |            |          |           |          |
| 1,000            | 102      |                        |          |            |          |           |          |

# C SERIES | Flip Type Capacitor



TDK Flip Type capacitor offers industry standard case sizes in “flip” geometry construction. By rotating the orientation of the capacitor 90°, the current path through the unit is shortened and effectively lowers the parasitic inductance value. The flip geometry requires the termination to be applied along the length instead of the width of the MLCC. Reduced ESL is necessary for noise decoupling in high speed applications.

For decoupling capacitors, the parasitic inductance generated by the capacitor needs to be small so that the resonant frequency is higher. The parasitic inductance will add noise voltage spikes to the power line voltage. Because of the unique design of the Flip Type capacitor, the parasitic inductance is lower than the traditional multilayer ceramic capacitor. Therefore, the Flip Type MLCC is very effective for high speed decoupling applications.

|   |                |
|---|----------------|
| L | Body Length    |
| W | Body Width     |
| T | Body Height    |
| B | Terminal Width |

| Case Code    | L (mm) | W (mm) | T max (mm) |
|--------------|--------|--------|------------|
| C0510 (0204) | 0.52   | 1.00   | 0.30       |
| C0816 (0306) | 0.80   | 1.60   | 0.50       |
| C1220 (0508) | 1.25   | 2.00   | 0.85       |
| C1632 (0612) | 1.60   | 3.20   | 1.30       |

## Part Number Description



## Features:

- ❖ Flipped geometry provides low inductance (less than 400 pH)
- ❖ Allows adequate high frequency current to IC
- ❖ Provides stabilization of power line voltage
- ❖ High frequency noise suppression

## Applications:

- ❖ Decoupling CPU/GPU power line
- ❖ High speed digital IC power supply decoupling
- ❖ PC, cell phones, camcorders, etc.
- ❖ Smart phone
- ❖ Networking system

### Design Construction of Flip Type Capacitor



➤ For Flip Type Capacitor, ESL is lowered by reversing the terminal electrode length and width to make the current path short and wide.





| Capacitance<br>(pF) | Cap<br>Code | C0510<br>0204 | C0816<br>0306 |             |              |            | C1220<br>0508 |             |             |             |              | C1632<br>0612 |             |             |             |  |              |            |
|---------------------|-------------|---------------|---------------|-------------|--------------|------------|---------------|-------------|-------------|-------------|--------------|---------------|-------------|-------------|-------------|--|--------------|------------|
|                     |             | 0G<br>(4V)    | 1C<br>(16V)   | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) | 1H<br>(50V)   | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 1H<br>(50V)   | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) |  | 0J<br>(6.3V) | 0G<br>(4V) |
| 10,000              | 103         |               |               |             |              |            |               |             |             |             |              |               |             |             |             |  |              |            |
| 22,000              | 223         |               |               |             |              |            |               |             |             |             |              |               |             |             |             |  |              |            |
| 47,000              | 473         |               |               |             |              |            |               |             |             |             |              |               |             |             |             |  |              |            |
| 100,000             | 104         |               |               |             |              |            |               |             |             |             |              |               |             |             |             |  |              |            |
| 220,000             | 224         |               |               |             |              |            |               |             |             |             |              |               |             |             |             |  |              |            |
| 470,000             | 474         |               |               |             |              |            |               |             |             |             |              |               |             |             |             |  |              |            |
| 1,000,000           | 105         |               |               |             |              |            |               |             |             |             |              |               |             |             |             |  |              |            |
| 2,200,000           | 225         |               |               |             |              |            |               |             |             |             |              |               |             |             |             |  |              |            |
| 4,700,000           | 475         |               |               |             |              |            |               |             |             |             |              |               |             |             |             |  |              |            |
| 10,000,000          | 106         |               |               |             |              |            |               |             |             |             |              |               |             |             |             |  |              |            |

■ X5R 
 ■ X6S 
 ■ X7R 
 ■ X7S

## Additional Product Application Information

- Decoupling of high speed integrated circuit
- Smoothing of switching power supply

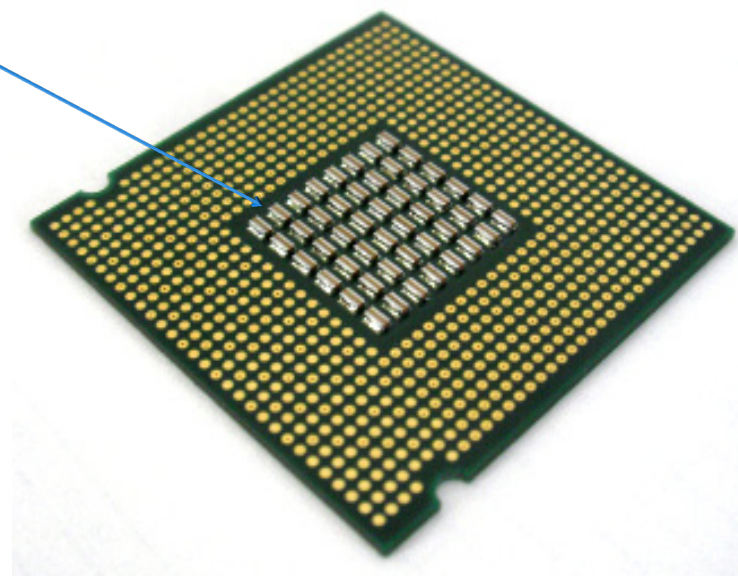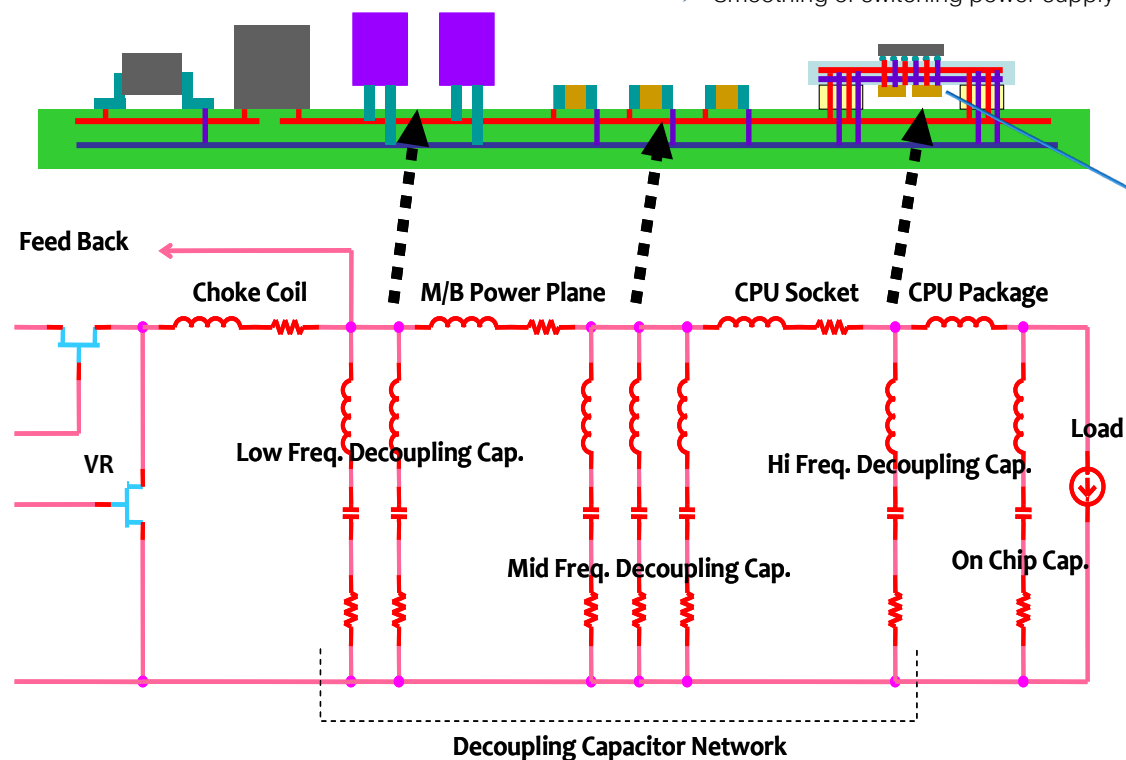

# C SERIES | Open Mode Capacitor



TDK Open Mode Series MLCC is designed to avoid a short circuit when excessive board flex stress causes the ceramic component to crack. By utilizing a unique internal electrode design, the counter electrode avoids the board flex's typical crack path.

Composed of only ceramics and metals, Open Mode Series provides extremely dependable performance, exhibiting virtually no degradation, even when subjected to temperature extremes (X7R and X8R temperature ranges are available). TDK Open Mode MLCCs are available in case sizes 0805, 1206, 1210, 1812, and 2220.



L Body Length  
W Body Width  
T Body Height  
B Terminal Width

| Case Code  | L (mm) | W (mm) | T max (mm) |
|------------|--------|--------|------------|
| C2012/0805 | 2.00   | 1.25   | 1.25       |
| C3216/1206 | 3.20   | 1.60   | 1.60       |
| C3225/1210 | 3.20   | 2.50   | 2.50       |
| C4532/1810 | 4.50   | 3.20   | 2.30       |
| C5750/2220 | 5.70   | 5.00   | 2.80       |

## Part Number Description



## Features:

- ❖ Increase resistance to mechanical bending, temperature cycle, vibration, and electrical stresses
- ❖ Wider distance between the end of the opposite electrode and the termination
- ❖ Reduces the risk of short circuit failures
- ❖ X7R and X8R temperature ranges

## Applications:

- ❖ High reliability and other high stress applications
- ❖ Battery line circuit with high board flex stress
- ❖ DC-DC converter

### Design Construction of Open Mode Capacitor



➤ Open Mode capacitor is designed with wider gap between the terminal and the internal electrodes to help reduce the risk of short circuit in the event of capacitor cracking due to mechanical stress such as board bending.

| Capacitance (pF) | Cap Code | C2012 0805 |           |          | C3216 1206 |           |           |          |
|------------------|----------|------------|-----------|----------|------------|-----------|-----------|----------|
|                  |          | 2E (250V)  | 2A (100V) | 1H (50V) | 2J (630V)  | 2E (250V) | 2A (100V) | 1C (16V) |
| 1,000            | 102      |            |           |          |            |           |           |          |
| 1,500            | 152      |            |           |          |            |           |           |          |
| 2,200            | 222      |            |           |          |            |           |           |          |
| 3,300            | 332      |            |           |          |            |           |           |          |
| 4,700            | 472      |            |           |          |            |           |           |          |
| 6,800            | 682      |            |           |          |            |           |           |          |
| 10,000           | 103      |            |           |          |            |           |           |          |
| 15,000           | 153      |            |           |          |            |           |           |          |
| 22,000           | 223      |            |           |          |            |           |           |          |
| 33,000           | 333      |            |           |          |            |           |           |          |
| 47,000           | 473      |            |           |          |            |           |           |          |
| 68,000           | 683      |            |           |          |            |           |           |          |
| 100,000          | 104      |            |           |          |            |           |           |          |
| 150,000          | 154      |            |           |          |            |           |           |          |
| 1,000,000        | 105      |            |           |          |            |           |           |          |
| 4,700,000        | 475      |            |           |          |            |           |           |          |

| Capacitance (pF) | Cap Code | C3225 1210 |           |           |          |          |          | C4532 1812 |           |           |          |          |          | C3225 1210 |           |           |          |          |          |
|------------------|----------|------------|-----------|-----------|----------|----------|----------|------------|-----------|-----------|----------|----------|----------|------------|-----------|-----------|----------|----------|----------|
|                  |          | 2J (630V)  | 2E (250V) | 2A (100V) | 1H (50V) | 1E (25V) | 1C (16V) | 2J (630V)  | 2E (250V) | 2A (100V) | 1H (50V) | 1E (25V) | 1C (16V) | 2J (630V)  | 2E (250V) | 2A (100V) | 1H (50V) | 1E (25V) | 1C (16V) |
| 47,000           | 473      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 68,000           | 683      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 100,000          | 104      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 150,000          | 154      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 220,000          | 224      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 330,000          | 334      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 470,000          | 474      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 680,000          | 684      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 1,000,000        | 105      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 1,500,000        | 155      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 2,200,000        | 225      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 3,300,000        | 335      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 4,700,000        | 475      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 6,800,000        | 685      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 10,000,000       | 106      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 15,000,000       | 156      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |
| 22,000,000       | 226      |            |           |           |          |          |          |            |           |           |          |          |          |            |           |           |          |          |          |

 X7R  X8R

# C SERIES | Soft Termination Capacitor



TDK Soft Termination Series is designed for use in applications where significant board flex may occur. Safety/critical automotive applications such as ABS, ESP, airbag, and battery line applications are common examples.

Conventional termination materials used in standard MLCCs are inflexible; therefore vibration, shock, or thermal expansion and contraction have the potential to crack or shear the solder joint between the component and the circuit board. Automotive applications, which are exposed to shock, vibration and extreme temperature swings, can result in higher failure rates in the field with conventional capacitors. TDK's new soft termination provides high resistance to mechanical and thermal stress to ensure the component can meet the requirements of automotive OEMs. Other application such as measurement instruments used in environment with frequent temperature swings can benefit as well.



|   |                |
|---|----------------|
| L | Body Length    |
| W | Body Width     |
| T | Body Height    |
| B | Terminal Width |

| Case Code    | L (mm) | W (mm) | T max (mm) |
|--------------|--------|--------|------------|
| C2012 (0805) | 2.10   | 1.25   | 1.25       |
| C3216 (1206) | 3.30   | 1.60   | 1.60       |
| C3225 (1210) | 3.20   | 2.50   | 2.50       |
| C4532 (1812) | 4.50   | 3.20   | 2.50       |
| C5750 (2220) | 5.70   | 5.00   | 2.50       |
| C7563 (3025) | 7.50   | 6.30   | 2.70       |

## Part Number Description



## Features:

- ❖ Improved board bending resistance, drop impact resistance, thermal shock resistance, and heat cycle properties
- ❖ Conductive resin absorb external stress to protect solder joint parts and capacitor body
- ❖ RoHS, WEE, and REACH compliant

## Applications:

- ❖ Switching power supply
- ❖ Telecom base station
- ❖ Electronic circuits mounted on alumina substrate
- ❖ SMT application which requires bending robustness in which solder joint reliability is problematic

### Standard Termination



### Soft Termination



➤ A resin electrode layer between the copper base and the nickel plating of the terminal electrode absorbs bending stress from the board and suppresses the forming of solder cracks. Conductive resin is made of epoxy mixed with a filler of conductive particles.

# C SERIES | Soft Termination / X7R, X7S, X7T

| Capacitance<br>(pF) | Cap<br>Code | C2012<br>0805                                                                     |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   | C3216<br>1206                                                                     |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
|---------------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                     |             | 2W<br>(450V)                                                                      | 2E<br>(250V)                                                                      | 2A<br>(100V)                                                                      | 1H<br>(50V)                                                                       | 1V<br>(35V)                                                                       | 1C<br>(16V)                                                                       | 2J<br>(630V)                                                                      | 2W<br>(450V)                                                                      | 2E<br>(250V)                                                                       | 2A<br>(100V)                                                                        | 1H<br>(50V)                                                                         | 1V<br>(35V)                                                                         | 1E<br>(25V)                                                                         |
| 10,000              | 103         |  |  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |  |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 22,000              | 223         |  |  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |  |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 47,000              | 473         |  |  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |  |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 100,000             | 104         |                                                                                   |  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |  |  |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 220,000             | 224         |                                                                                   |                                                                                   |  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |  |                                                                                     |                                                                                     |                                                                                     |                                                                                     |
| 470,000             | 474         |                                                                                   |                                                                                   |  |  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |  |  |                                                                                     |                                                                                     |
| 1,000,000           | 105         |                                                                                   |                                                                                   |  |  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |  |  |                                                                                     |                                                                                     |
| 2,200,000           | 225         |                                                                                   |                                                                                   |                                                                                   |                                                                                   |  |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |  |                                                                                     |                                                                                     |
| 4,700,000           | 475         |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |  |                                                                                   |                                                                                   |                                                                                    |                                                                                     |  |  |                                                                                     |
| 10,000,000          | 106         |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |                                                                                     |  |

| Capacitance (pF) | Cap Code | C3225 1210                                                                        |                                                                                   |                                                                                   |                                                                                   |                                                                                   | C4532 1812                                                                        |                                                                                   |                                                                                   | C5750 2220                                                                         |                                                                                     |                                                                                     |           | C7563 3025                                                                          |                                                                                     |
|------------------|----------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-----------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                  |          | 2J (630V)                                                                         | 2W (450V)                                                                         | 2E (250V)                                                                         | 2A (100V)                                                                         | 1H (50V)                                                                          | 2J (630V)                                                                         | 2W (450V)                                                                         | 2E (250V)                                                                         | 2J (630V)                                                                          | 2W (450V)                                                                           | 2E (250V)                                                                           | 2A (100V) | 1H (50V)                                                                            | 1C (16V)                                                                            |
| 47,000           | 473      |  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |           |                                                                                     |                                                                                     |
| 100,000          | 104      |  |                                                                                   |  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |           |                                                                                     |                                                                                     |
| 220,000          | 224      |                                                                                   |  |  |                                                                                   |                                                                                   |  |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |           |                                                                                     |                                                                                     |
| 470,000          | 474      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |  |  |  |                                                                                     |                                                                                     |           |                                                                                     |                                                                                     |
| 1,000,000        | 105      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |  |                                                                                    |  |  |           |                                                                                     |                                                                                     |
| 2,200,000        | 225      |                                                                                   |                                                                                   |                                                                                   |  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |  |           |                                                                                     |                                                                                     |
| 4,700,000        | 475      |                                                                                   |                                                                                   |                                                                                   |  |  |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |           |                                                                                     |                                                                                     |
| 10,000,000       | 106      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |  |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |           |  |                                                                                     |
| 22,000,000       | 226      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |           |  |                                                                                     |
| 100,000,000      | 107      |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |                                                                                     |           |                                                                                     |  |

 X7R    X7S    X7T

# C SERIES | Conductive Epoxy



TDK's Conductive Epoxy Series is a conductive glue-mounted device rather than solder-mounted. In high-temperature environments, the connectivity reliability is focused on the solder fillet because there are thermal expansion coefficient differences between the substrate, MLCC, and solder fillet. A conductive glue-mounted device allows for more "flexibility" during periods of expansion and contraction because the thermal expansion differences have been reduced by using a non-solder attachment.

Conductive glue is a common method of mounting components in applications that demand reliability at high temperatures, particularly in automotive environments. It's also used in applications that cannot be subjected to the heat of the solder paste mounting process, such as LCD panels, organic EL and LED displays, and CCD devices, which are particularly sensitive to high temperatures.



| Case Code  | L (mm) | W (mm) | T (mm) |
|------------|--------|--------|--------|
| C1005/0402 | 1.00   | 0.50   | 0.50   |
| C1608/0603 | 1.60   | 0.80   | 0.80   |
| C2012/0805 | 2.00   | 1.25   | 1.25   |
| C3216/1206 | 3.20   | 1.60   | 1.60   |
| C3225/1210 | 3.20   | 2.50   | 2.50   |

## Part Number Description




## Features:

- ❖ AgPdCu termination for conductive glue mounting
- ❖ Reduce risk of silver migration
- ❖ Improved mechanical/thermal strength when use with conductive glue
- ❖ AEC Q-200 compliant
- ❖ RoHS, WEE, and REACH compliant


## Applications:

- ❖ Transmission control
- ❖ Engine sensor module
- ❖ Automotive power train
- ❖ Anti-Lock Breaking System
- ❖ Application requiring conductive glue mounting method

### Standard Termination

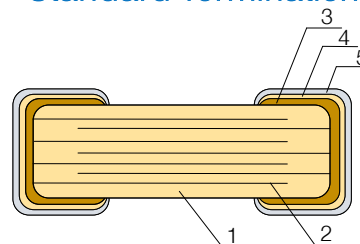

### AgPdCu Termination

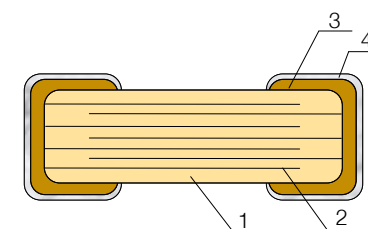

| No. | NAME               | MATERIAL           |                    |
|-----|--------------------|--------------------|--------------------|
|     |                    | Class 1            | Class 2            |
| (1) | Ceramic Dielectric | CaZrO <sub>3</sub> | BaTiO <sub>3</sub> |
| (2) | Internal Electrode | Nickel (Ni)        |                    |
| (3) | Termination        | Copper (Cu)        |                    |
| (4) |                    | Nickel (Ni)        |                    |
| (5) |                    | Tin (Sn)           |                    |

| No. | NAME               | MATERIAL           |                    |
|-----|--------------------|--------------------|--------------------|
|     |                    | Class 1            | Class 2            |
| (1) | Ceramic Dielectric | CaZrO <sub>3</sub> | BaTiO <sub>3</sub> |
| (2) | Internal Electrode | Nickel (Ni)        |                    |
| (3) | Termination        | Copper (Cu)        |                    |
| (4) |                    | AgPdCu             |                    |

# C SERIES | Conductive Epoxy / C0G, X7R, X8R

| Capacitance<br>(pF) | Cap<br>Code | C1005<br>0402 |             | C1608<br>0603 |  |             |  |             | C2012<br>0805 |             | C3216<br>1206 | C3225<br>1210 |
|---------------------|-------------|---------------|-------------|---------------|--|-------------|--|-------------|---------------|-------------|---------------|---------------|
|                     |             | 1H<br>(50V)   | 1E<br>(25V) | 2A<br>(100V)  |  | 1H<br>(50V) |  | 1E<br>(25V) | 1H<br>(50V)   | 1E<br>(25V) | 1E<br>(25V)   | 1H<br>(50V)   |
| 10                  | 100         |               |             |               |  |             |  |             |               |             |               |               |
| 100                 | 101         |               |             |               |  |             |  |             |               |             |               |               |
| 220                 | 221         |               |             |               |  |             |  |             |               |             |               |               |
| 470                 | 471         |               |             |               |  |             |  |             |               |             |               |               |
| 1,000               | 102         |               |             |               |  |             |  |             |               |             |               |               |
| 2,200               | 222         |               |             |               |  |             |  |             |               |             |               |               |
| 4,700               | 472         |               |             |               |  |             |  |             |               |             |               |               |
| 10,000              | 103         |               |             |               |  |             |  |             |               |             |               |               |
| 22,000              | 223         |               |             |               |  |             |  |             |               |             |               |               |
| 47,000              | 473         |               |             |               |  |             |  |             |               |             |               |               |
| 100,000             | 104         |               |             |               |  |             |  |             |               |             |               |               |
| 1,000,000           | 105         |               |             |               |  |             |  |             |               |             |               |               |
| 10,000,000          | 106         |               |             |               |  |             |  |             |               |             |               |               |

C0G

X7R

X8R

# CGA SERIES | Automotive Grade



TDK CGA series multilayer ceramic chip capacitors (MLCCs) are qualified to automotive industry's Q200 testing standard. CGA parts are manufactured using TDK's most advanced and stable manufacturing process.

Parts are subjected to increased inspections to offer a higher level of life and reliability. The CGA family is available in general voltages up to 50V, mid voltage up to 630V, and high temperature up to 150C. TDK CGA series is an excellent choice for automotive applications as well as any application that requires a higher level of reliability. CGA is also used in tough environment applications such as product that may sit outdoors for the duration of the product life. This includes but is not limited to smart meter, smart grid, base station, etc.

|                                                                                  |           |        |        |            |
|----------------------------------------------------------------------------------|-----------|--------|--------|------------|
|                                                                                  | Case Code | L (mm) | W (mm) | T max (mm) |
|                                                                                  | CGA2/0402 | 1.00   | 0.50   | 0.50       |
| <div>L Body Length<br/>W Body Width<br/>T Body Height<br/>B Terminal Width</div> | CGA3/0603 | 1.60   | 0.80   | 0.80       |
|                                                                                  | CGA4/0805 | 2.00   | 1.25   | 1.25       |
|                                                                                  | CGA5/1206 | 3.20   | 1.60   | 1.60       |
|                                                                                  | CGA6/1210 | 3.20   | 2.50   | 2.50       |
|                                                                                  | CGA8/1812 | 4.50   | 3.20   | 3.20       |
|                                                                                  | CGA9/2220 | 5.70   | 5.00   | 2.50       |

## Part Number Description



## Features:

- ❖ Qualified to Automotive Q-200
- ❖ Product is manufactured using mature processes
- ❖ Available with rated voltage from 4V – 630V
- ❖ Available in temperature rating up to 150C (X8R)
- ❖ Soft termination available for larger case size


## Applications:

- ❖ Automotive engine control units and sensor modules
- ❖ Automotive battery line smoothing
- ❖ Smart Meter/Smart Grid/Solar Inverters
- ❖ Applications requiring higher reliability
- ❖ Switching power supply smoothing

DC-DC Converters for Hybrid Electric Vehicles



PFC Output Filters

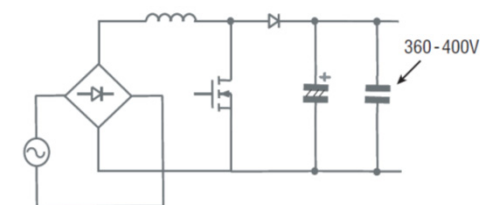

| Capacitance<br>(pF) | Cap<br>Code | CGA2<br>0402 | CGA3<br>0603 |
|---------------------|-------------|--------------|--------------|
|                     |             | 1H<br>(50V)  | 1H<br>(50V)  |
| 1.0                 | 010         |              |              |
| 1.5                 | 1R5         |              |              |
| 2.0                 | 020         |              |              |
| 2.2                 | 2R2         |              |              |
| 3.0                 | 030         |              |              |
| 4.0                 | 040         |              |              |
| 4.7                 | 4R7         |              |              |
| 5.0                 | 050         |              |              |
| 6.0                 | 060         |              |              |
| 6.8                 | 6R8         |              |              |
| 7.0                 | 070         |              |              |
| 8.0                 | 080         |              |              |
| 9.0                 | 090         |              |              |
| 10                  | 100         |              |              |
| 12                  | 120         |              |              |
| 15                  | 150         |              |              |
| 18                  | 180         |              |              |
| 22                  | 220         |              |              |
| 27                  | 270         |              |              |
| 33                  | 330         |              |              |
| 39                  | 390         |              |              |
| 47                  | 470         |              |              |
| 56                  | 560         |              |              |
| 68                  | 680         |              |              |
| 82                  | 820         |              |              |
| 100                 | 101         |              |              |
| 120                 | 121         |              |              |
| 150                 | 151         |              |              |
| 180                 | 181         |              |              |
| 220                 | 221         |              |              |
| 270                 | 271         |              |              |
| 330                 | 331         |              |              |
| 470                 | 471         |              |              |
| 560                 | 561         |              |              |
| 680                 | 681         |              |              |
| 820                 | 821         |              |              |
| 1,000               | 102         |              |              |
| 1,200               | 122         |              |              |
| 1,500               | 152         |              |              |
| 1,800               | 182         |              |              |
| 2,200               | 222         |              |              |
| 2,700               | 272         |              |              |
| 3,300               | 332         |              |              |
| 3,900               | 392         |              |              |
| 4,700               | 472         |              |              |
| 5,600               | 562         |              |              |
| 6,800               | 682         |              |              |
| 8,200               | 822         |              |              |
| 10,000              | 103         |              |              |

| Capacitance<br>(pF) | Cap<br>Code | CGA4<br>0805 | CGA5<br>1206 | CGA6<br>1210 | CGA8<br>1812 |
|---------------------|-------------|--------------|--------------|--------------|--------------|
|                     |             | 1H<br>(50V)  | 1H<br>(50V)  | 1H<br>(50V)  | 1H<br>(50V)  |
| 100                 | 101         |              |              |              |              |
| 1,000               | 102         |              |              |              |              |
| 2,200               | 222         |              |              |              |              |
| 2,700               | 272         |              |              |              |              |
| 3,300               | 332         |              |              |              |              |
| 3,900               | 392         |              |              |              |              |
| 4,700               | 472         |              |              |              |              |
| 5,600               | 562         |              |              |              |              |
| 6,800               | 682         |              |              |              |              |
| 8,200               | 822         |              |              |              |              |
| 10,000              | 103         |              |              |              |              |
| 15,000              | 153         |              |              |              |              |
| 22,000              | 223         |              |              |              |              |
| 33,000              | 333         |              |              |              |              |
| 47,000              | 473         |              |              |              |              |
| 68,000              | 683         |              |              |              |              |
| 100,000             | 104         |              |              |              |              |
| 150,000             | 154         |              |              |              |              |
| 220,000             | 224         |              |              |              |              |

| Capacitance<br>(pF) | Cap<br>Code | CGA2<br>0402                                                                      | CGA3<br>0603                                                                      |                                                                                   |                                                                                   |                                                                                   | CGA4<br>0805                                                                      |                                                                                   |                                                                                   | CGA5<br>1206                                                                       |                                                                                     |
|---------------------|-------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
|                     |             | 1H<br>(50V)                                                                       | 1H<br>(50V)                                                                       | 1C<br>(16V)                                                                       | 1A<br>(10V)                                                                       | 0J<br>(6.3V)                                                                      | 1H<br>(50V)                                                                       | 1C<br>(16V)                                                                       | 1A<br>(10V)                                                                       | 1H<br>(50V)                                                                        | 1V<br>(35V)                                                                         |
| 220,000             | 224         |  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
| 1,000,000           | 105         |                                                                                   |  |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
| 2,200,000           | 225         |                                                                                   |                                                                                   |  |                                                                                   |                                                                                   |  |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
| 3,300,000           | 335         |                                                                                   |                                                                                   |                                                                                   |  |                                                                                   |  |                                                                                   |                                                                                   |                                                                                    |                                                                                     |
| 4,700,000           | 475         |                                                                                   |                                                                                   |                                                                                   |                                                                                   |  |  |                                                                                   |                                                                                   |  |                                                                                     |
| 10,000,000          | 106         |                                                                                   |                                                                                   |                                                                                   |                                                                                   |                                                                                   |  |  |  |  |  |

 X5R

| Capacitance (pF) | Cap Code | CGA2 0402 |          |          |          |          | CGA3 0603 |          |          |          |           |
|------------------|----------|-----------|----------|----------|----------|----------|-----------|----------|----------|----------|-----------|
|                  |          | 1H (50V)  | 1V (35V) | 1E (25V) | 1C (16V) | 1A (10V) | 1H (50V)  | 1V (35V) | 1E (25V) | 1C (16V) | 0J (6.3V) |
| 220              | 221      |           |          |          |          |          |           |          |          |          |           |
| 330              | 331      |           |          |          |          |          |           |          |          |          |           |
| 470              | 471      |           |          |          |          |          |           |          |          |          |           |
| 680              | 681      |           |          |          |          |          |           |          |          |          |           |
| 1,000            | 102      |           |          |          |          |          |           |          |          |          |           |
| 1,500            | 152      |           |          |          |          |          |           |          |          |          |           |
| 2,200            | 222      |           |          |          |          |          |           |          |          |          |           |
| 3,300            | 332      |           |          |          |          |          |           |          |          |          |           |
| 4,700            | 472      |           |          |          |          |          |           |          |          |          |           |
| 6,800            | 682      |           |          |          |          |          |           |          |          |          |           |
| 10,000           | 103      |           |          |          |          |          |           |          |          |          |           |
| 15,000           | 153      |           |          |          |          |          |           |          |          |          |           |
| 22,000           | 223      |           |          |          |          |          |           |          |          |          |           |
| 33,000           | 333      |           |          |          |          |          |           |          |          |          |           |
| 47,000           | 473      |           |          |          |          |          |           |          |          |          |           |
| 68,000           | 683      |           |          |          |          |          |           |          |          |          |           |
| 100,000          | 104      |           |          |          |          |          |           |          |          |          |           |
| 150,000          | 154      |           |          |          |          |          |           |          |          |          |           |
| 220,000          | 224      |           |          |          |          |          |           |          |          |          |           |
| 330,000          | 334      |           |          |          |          |          |           |          |          |          |           |
| 470,000          | 474      |           |          |          |          |          |           |          |          |          |           |
| 680,000          | 684      |           |          |          |          |          |           |          |          |          |           |
| 1,000,000        | 105      |           |          |          |          |          |           |          |          |          |           |
| 1,500,000        | 155      |           |          |          |          |          |           |          |          |          |           |
| 2,200,000        | 225      |           |          |          |          |          |           |          |          |          |           |

| Capacitance (pF) | Cap Code | CGA4 0803 |          |          |          |           | CGA5 1206 |          |          |          |           | CGA6 1210 |          |          | CGA8 1812 |          |          | CGA9 2220 |          |          |
|------------------|----------|-----------|----------|----------|----------|-----------|-----------|----------|----------|----------|-----------|-----------|----------|----------|-----------|----------|----------|-----------|----------|----------|
|                  |          | 1H (50V)  | 1V (35V) | 1E (25V) | 1C (16V) | 0J (6.3V) | 1H (50V)  | 1V (35V) | 1E (25V) | 1C (16V) | 0J (6.3V) | 1H (50V)  | 1E (25V) | 1C (16V) | 1H (50V)  | 1E (25V) | 1C (16V) | 1H (50V)  | 1E (25V) | 1C (16V) |
| 100,000          | 104      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 150,000          | 154      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 220,000          | 224      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 330,000          | 334      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 470,000          | 474      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 680,000          | 684      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 1,000,000        | 105      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 1,500,000        | 155      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 2,200,000        | 225      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 3,300,000        | 335      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 4,700,000        | 475      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 6,800,000        | 685      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 10,000,000       | 106      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 15,000,000       | 156      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 22,000,000       | 226      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 33,000,000       | 336      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |
| 47,000,000       | 476      |           |          |          |          |           |           |          |          |          |           |           |          |          |           |          |          |           |          |          |

■ X7R ■ X7S

| Capacitance<br>(pF) | Cap<br>Code | CGA2<br>0402 |             | CGA3<br>0603 |             |             | CGA4<br>0805 |             |             | CGA5<br>1206 |             |             | CGA6<br>1210 |
|---------------------|-------------|--------------|-------------|--------------|-------------|-------------|--------------|-------------|-------------|--------------|-------------|-------------|--------------|
|                     |             | 1H<br>(50V)  | 1E<br>(25V) | 2A<br>(100V) | 1H<br>(50V) | 1E<br>(25V) | 2A<br>(100V) | 1H<br>(50V) | 1E<br>(25V) | 2A<br>(100V) | 1H<br>(50V) | 1E<br>(25V) | 1E<br>(25V)  |
| 150                 | 151         |              |             |              |             |             |              |             |             |              |             |             |              |
| 220                 | 221         |              |             |              |             |             |              |             |             |              |             |             |              |
| 330                 | 331         |              |             |              |             |             |              |             |             |              |             |             |              |
| 470                 | 471         |              |             |              |             |             |              |             |             |              |             |             |              |
| 680                 | 681         |              |             |              |             |             |              |             |             |              |             |             |              |
| 1,000               | 102         |              |             |              |             |             |              |             |             |              |             |             |              |
| 1,500               | 152         |              |             |              |             |             |              |             |             |              |             |             |              |
| 2,200               | 222         |              |             |              |             |             |              |             |             |              |             |             |              |
| 3,300               | 332         |              |             |              |             |             |              |             |             |              |             |             |              |
| 4,700               | 472         |              |             |              |             |             |              |             |             |              |             |             |              |
| 6,800               | 682         |              |             |              |             |             |              |             |             |              |             |             |              |
| 10,000              | 103         |              |             |              |             |             |              |             |             |              |             |             |              |
| 15,000              | 153         |              |             |              |             |             |              |             |             |              |             |             |              |
| 22,000              | 223         |              |             |              |             |             |              |             |             |              |             |             |              |
| 33,000              | 333         |              |             |              |             |             |              |             |             |              |             |             |              |
| 47,000              | 473         |              |             |              |             |             |              |             |             |              |             |             |              |
| 68,000              | 683         |              |             |              |             |             |              |             |             |              |             |             |              |
| 100,000             | 104         |              |             |              |             |             |              |             |             |              |             |             |              |
| 150,000             | 154         |              |             |              |             |             |              |             |             |              |             |             |              |
| 220,000             | 224         |              |             |              |             |             |              |             |             |              |             |             |              |
| 330,000             | 334         |              |             |              |             |             |              |             |             |              |             |             |              |
| 470,000             | 474         |              |             |              |             |             |              |             |             |              |             |             |              |
| 680,000             | 684         |              |             |              |             |             |              |             |             |              |             |             |              |
| 1,000,000           | 105         |              |             |              |             |             |              |             |             |              |             |             |              |
| 1,500,000           | 155         |              |             |              |             |             |              |             |             |              |             |             |              |
| 2,200,000           | 225         |              |             |              |             |             |              |             |             |              |             |             |              |
| 3,300,000           | 335         |              |             |              |             |             |              |             |             |              |             |             |              |

 X8R

# CGA SERIES | Mid Voltage / C0G

| Capacitance<br>(pF) | Cap<br>Code | CGA3<br>0603 |              | CGA4<br>0805 |              | CGA5<br>1206 |              |              | CGA6<br>1210 |              |              | CGA8<br>1812 |              |              |
|---------------------|-------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
|                     |             | 2E<br>(250V) | 2A<br>(100V) | 2E<br>(250V) | 2A<br>(100V) | 2J<br>(630V) | 2E<br>(250V) | 2A<br>(100V) | 2J<br>(630V) | 2E<br>(250V) | 2A<br>(100V) | 2J<br>(630V) | 2E<br>(250V) | 2A<br>(100V) |
| 100                 | 101         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 120                 | 121         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 150                 | 151         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 180                 | 181         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 220                 | 221         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 270                 | 271         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 330                 | 331         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 390                 | 391         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 470                 | 471         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 560                 | 561         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 680                 | 681         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 820                 | 821         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 1,000               | 102         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 1,200               | 122         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 1,500               | 152         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 1,800               | 182         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 2,200               | 222         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 2,700               | 272         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 3,300               | 332         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 3,900               | 392         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 4,700               | 472         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 5,600               | 562         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 6,800               | 682         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 8,200               | 822         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 10,000              | 103         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 15,000              | 153         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 22,000              | 223         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 33,000              | 333         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 47,000              | 473         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 68,000              | 683         |              |              |              |              |              |              |              |              |              |              |              |              |              |
| 100,000             | 104         |              |              |              |              |              |              |              |              |              |              |              |              |              |

 C0G

# CGA SERIES | Mid Voltage / X7R, X7S, X7T

| Capacitance (pF) | Cap Code | CGA2 0402 | CGA3 0603 | CGA4 0805 |           |           | CGA5 1206 |           |           |           |
|------------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
|                  |          | 2A (100V) | 2A (100V) | 2W (450V) | 2E (250V) | 2A (100V) | 2J (630V) | 2W (450V) | 2E (250V) | 2A (100V) |
| 1,000            | 102      |           |           |           |           |           |           |           |           |           |
| 1,500            | 152      |           |           |           |           |           |           |           |           |           |
| 2,200            | 222      |           |           |           |           |           |           |           |           |           |
| 3,300            | 332      |           |           |           |           |           |           |           |           |           |
| 4,700            | 472      |           |           |           |           |           |           |           |           |           |
| 6,800            | 682      |           |           |           |           |           |           |           |           |           |
| 10,000           | 103      |           |           |           |           |           |           |           |           |           |
| 15,000           | 153      |           |           |           |           |           |           |           |           |           |
| 22,000           | 223      |           |           |           |           |           |           |           |           |           |
| 33,000           | 333      |           |           |           |           |           |           |           |           |           |
| 47,000           | 473      |           |           |           |           |           |           |           |           |           |
| 68,000           | 683      |           |           |           |           |           |           |           |           |           |
| 100,000          | 104      |           |           |           |           |           |           |           |           |           |
| 150,000          | 154      |           |           |           |           |           |           |           |           |           |
| 220,000          | 224      |           |           |           |           |           |           |           |           |           |
| 330,000          | 334      |           |           |           |           |           |           |           |           |           |
| 470,000          | 474      |           |           |           |           |           |           |           |           |           |
| 1,000,000        | 105      |           |           |           |           |           |           |           |           |           |
| 2,200,000        | 225      |           |           |           |           |           |           |           |           |           |

| Capacitance (pF) | Cap Code | CGA6 1210 |           |           |           | CGA8 1812 |           |           |           | CGA9 2220 |           |           |           |
|------------------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
|                  |          | 2J (630V) | 2W (450V) | 2E (250V) | 2A (100V) | 2J (630V) | 2W (450V) | 2E (250V) | 2A (100V) | 2J (630V) | 2W (450V) | 2E (250V) | 2A (100V) |
| 47,000           | 473      |           |           |           |           |           |           |           |           |           |           |           |           |
| 68,000           | 683      |           |           |           |           |           |           |           |           |           |           |           |           |
| 100,000          | 104      |           |           |           |           |           |           |           |           |           |           |           |           |
| 150,000          | 154      |           |           |           |           |           |           |           |           |           |           |           |           |
| 220,000          | 224      |           |           |           |           |           |           |           |           |           |           |           |           |
| 330,000          | 334      |           |           |           |           |           |           |           |           |           |           |           |           |
| 470,000          | 474      |           |           |           |           |           |           |           |           |           |           |           |           |
| 680,000          | 684      |           |           |           |           |           |           |           |           |           |           |           |           |
| 1,000,000        | 105      |           |           |           |           |           |           |           |           |           |           |           |           |
| 1,500,000        | 155      |           |           |           |           |           |           |           |           |           |           |           |           |
| 2,200,000        | 225      |           |           |           |           |           |           |           |           |           |           |           |           |
| 3,300,000        | 335      |           |           |           |           |           |           |           |           |           |           |           |           |
| 4,700,000        | 475      |           |           |           |           |           |           |           |           |           |           |           |           |
| 10,000,000       | 106      |           |           |           |           |           |           |           |           |           |           |           |           |
| 15,000,000       | 156      |           |           |           |           |           |           |           |           |           |           |           |           |

 X7R
  X7S
  X7T

| Capacitance<br>(pF) | Cap<br>Code | CGA4<br>0805 |              |              |             |             |             | CGA5<br>1206 |              |              |              |             |             |             |
|---------------------|-------------|--------------|--------------|--------------|-------------|-------------|-------------|--------------|--------------|--------------|--------------|-------------|-------------|-------------|
|                     |             | 2W<br>(450V) | 2E<br>(250V) | 2A<br>(100V) | 1H<br>(50V) | 1V<br>(35V) | 1C<br>(16V) | 2J<br>(630V) | 2W<br>(450V) | 2E<br>(250V) | 2A<br>(100V) | 1H<br>(50V) | 1V<br>(35V) | 1E<br>(25V) |
| 10,000              | 103         |              |              |              |             |             |             |              |              |              |              |             |             |             |
| 22,000              | 223         |              |              |              |             |             |             |              |              |              |              |             |             |             |
| 47,000              | 473         |              |              |              |             |             |             |              |              |              |              |             |             |             |
| 100,000             | 104         |              |              |              |             |             |             |              |              |              |              |             |             |             |
| 220,000             | 224         |              |              |              |             |             |             |              |              |              |              |             |             |             |
| 470,000             | 474         |              |              |              |             |             |             |              |              |              |              |             |             |             |
| 1,000,000           | 105         |              |              |              |             |             |             |              |              |              |              |             |             |             |
| 2,200,000           | 225         |              |              |              |             |             |             |              |              |              |              |             |             |             |
| 4,700,000           | 475         |              |              |              |             |             |             |              |              |              |              |             |             |             |
| 10,000,000          | 106         |              |              |              |             |             |             |              |              |              |              |             |             |             |

| Capacitance (pF) | Cap Code | CGA6 1210 |           |           |           |          | CGA8 1812 |           |           | CGA9 2220 |           |           |           |
|------------------|----------|-----------|-----------|-----------|-----------|----------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
|                  |          | 2J (630V) | 2W (450V) | 2E (250V) | 2A (100V) | 1H (50V) | 2J (630V) | 2W (450V) | 2E (250V) | 2J (630V) | 2W (450V) | 2E (250V) | 2A (100V) |
| 47,000           | 473      |           |           |           |           |          |           |           |           |           |           |           |           |
| 100,000          | 104      |           |           |           |           |          |           |           |           |           |           |           |           |
| 220,000          | 224      |           |           |           |           |          |           |           |           |           |           |           |           |
| 470,000          | 474      |           |           |           |           |          |           |           |           |           |           |           |           |
| 1,000,000        | 105      |           |           |           |           |          |           |           |           |           |           |           |           |
| 2,200,000        | 225      |           |           |           |           |          |           |           |           |           |           |           |           |
| 4,700,000        | 475      |           |           |           |           |          |           |           |           |           |           |           |           |
| 10,000,000       | 106      |           |           |           |           |          |           |           |           |           |           |           |           |
| 22,000,000       | 226      |           |           |           |           |          |           |           |           |           |           |           |           |
| 100,000,000      | 107      |           |           |           |           |          |           |           |           |           |           |           |           |

X7R   X7S   X7T

# CGJ SERIES | Extended Life MLCC



TDK's CGJ Series MLCC provides an extended life MLCC that meets electrical, mechanical, and environmental performance standards from multiple industry specifications. The enhanced reliability design allows its use in higher reliability applications in which maximum field life and the highest quality standards are required, as well as for applications demanding performance levels beyond typical commercial grade and automotive grade performance.

In addition to our highest quality MLCC's, the customer will also receive a Certificate of Analysis with each lot (which includes electrical characterization data and estimated product life) and anti-counterfeit packaging. Additionally, RFID (radio frequency identification) tags are available as an option. The Certificate of Analysis and Product Authentication are available on-line at TDK.com.



| Case Code   | L (mm) | W (mm) | T (mm) |
|-------------|--------|--------|--------|
| CGJ2 / 0402 | 1.00   | 0.50   | 0.50   |
| CGJ3 / 0603 | 1.60   | 0.80   | 0.80   |
|             | 2.00   | 1.25   | 0.60   |
| CGJ4 / 0805 | 2.00   | 1.25   | 0.85   |
|             | 2.00   | 1.25   | 1.25   |
|             | 3.20   | 1.60   | 0.60   |
| CGJ5 / 1206 | 3.20   | 1.60   | 0.85   |
|             | 3.20   | 1.60   | 1.15   |
|             | 3.20   | 1.60   | 1.60   |

L Body Length  
 W Body Width  
 T Body Height  
 B Terminal Width

## Part Number Description



## Features:

- ❖ Extensive testing to ensure higher reliability and longer life
- ❖ Reliability tests based on MIL-STD requirements
- ❖ Guaranteed TC Bias and Hot IR performance
- ❖ Certificate of Compliance documentation is provided for each CGJ lot. Consumers of CGJ products can view each lot specific CoA on the TDK website
- ❖ UHF (Ultra High Frequency) RFID tag to allow integration with customer RFID programs such as inventory management
- ❖ Tamper proof seal to assist in the identification of authentic TDK CGJ products. The condition of the seal also indicates if the product has been tampered with in the supply chain
- ❖ CGJ customer priority backed by TDK factory support (3/3/7)

## Applications:

- ❖ Smart Meter
- ❖ Smart Grid
- ❖ Industrial Application
- ❖ Telecom Base Station
- ❖ LED Lighting
- ❖ Solar Micro-inverters
- ❖ Charging station
- ❖ Military Communication Equipment
- ❖ Class 1 & 2 Medical Equipment
- ❖ Applications that require extended life performance

| Capacitance (pF) | Cap Code | CGJ2<br>C1005/CC0402 |             |             | CGJ3<br>C1608/CC0603 |             |             |             |              | CGJ4<br>C2012/CC0805 |             |             |             |              | CGJ5<br>C3216/CC1206 |             |             |             |              |
|------------------|----------|----------------------|-------------|-------------|----------------------|-------------|-------------|-------------|--------------|----------------------|-------------|-------------|-------------|--------------|----------------------|-------------|-------------|-------------|--------------|
|                  |          | 1H<br>(50V)          | 1E<br>(25V) | 1C<br>(16V) | 1H<br>(50V)          | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 1H<br>(50V)          | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 1H<br>(50V)          | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) |
| 100              | 101      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 120              | 121      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 150              | 151      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 180              | 181      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 220              | 221      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 270              | 271      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 330              | 331      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 390              | 391      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 470              | 471      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 560              | 561      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 680              | 680      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 820              | 821      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 1,000            | 102      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 1,200            | 122      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 1,500            | 152      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 1,800            | 182      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 2,200            | 222      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 2,700            | 272      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 3,300            | 332      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 3,900            | 392      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 4,700            | 472      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 5,600            | 562      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 6,800            | 682      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 8,200            | 822      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 10,000           | 103      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 15,000           | 153      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 22,000           | 223      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 33,000           | 333      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 47,000           | 473      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 68,000           | 683      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 100,000          | 104      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 150,000          | 154      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 220,000          | 224      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 330,000          | 334      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 470,000          | 474      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 680,000          | 684      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 1,000,000        | 105      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 1,500,000        | 155      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 2,200,000        | 225      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 3,300,000        | 335      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 4,700,000        | 475      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 6,800,000        | 685      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |
| 10,000,000       | 106      |                      |             |             |                      |             |             |             |              |                      |             |             |             |              |                      |             |             |             |              |


 C0G
  X7R

# CKG SERIES | Mega Capacitor



TDK Mega Cap utilizes an alloy 42 lead frame connected to the ends of MLCCs in single or double stacked (piled) configuration. The lead frame absorbs external stresses which allow a more robust performance. Effectively the lead frame allows external stresses beyond the typical allowable range for a traditional MLCC.

Mega Caps are excellent choices for high board flex applications as well as physically large boards that are highly susceptible to flexure. Other flex solutions are designed to resist short circuit but still cause the capacitor to fail intermittently or completely but the Mega Cap has a greater degree of flexure resistance without capacitor failure. Compared to electrolytic capacitors, Mega Cap offers lower ESL, ESR, and improved frequency response and since Mega Cap is an MLCC, they have no polarity. Other advantages include higher capacitance with higher voltage rating due to stacking the capacitors in parallel configuration.

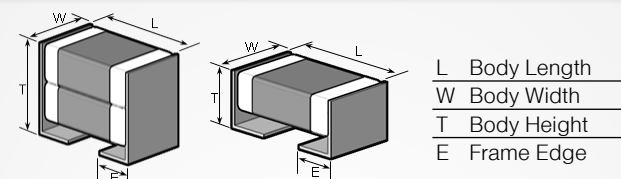

| Case Code       | L (mm) | W (mm) | T (mm) |
|-----------------|--------|--------|--------|
| CKG32K (Single) | 3.50   | 2.60   | 3.35   |
| CKG45K (Single) | 5.00   | 3.50   | 2.90   |
| CKG57K (Single) | 6.00   | 5.00   | 3.35   |
| CKG45N (Double) | 5.00   | 3.50   | 5.00   |
| CKG57N (Double) | 6.00   | 5.00   | 5.00   |

## Part Number Description




## Features:

- ❖ Twice the capacitance on single capacitor foot print
- ❖ Lower ESR and ESL than Al caps
- ❖ Capable of absorbing thermal and mechanical stress
- ❖ Improved heat generation by ripple current
- ❖ Improved vibration performance

## Applications:

- ❖ Smoothing circuits
- ❖ DC/DC converters
- ❖ HID/Automotive applications
- ❖ Temperature variable applications
- ❖ Piezoelectric-effect countermeasure

## Design Concept & Construction of Mega Capacitor

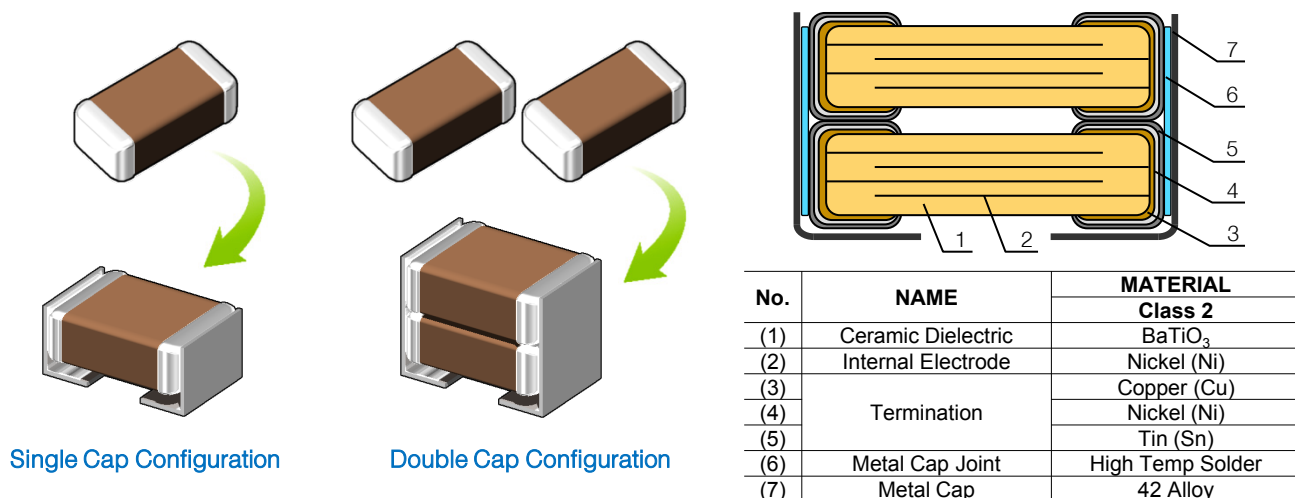

| Capacitance<br>(pF) | Cap<br>Code | CKG32K (Single)<br>1210/C3225 |              |              |              |             |             | CKG45K (Single)<br>1812/C4532 |              |              |              |             |             |             | CKG57K (Single)<br>2220/C5750 |              |              |              |             |             |             |
|---------------------|-------------|-------------------------------|--------------|--------------|--------------|-------------|-------------|-------------------------------|--------------|--------------|--------------|-------------|-------------|-------------|-------------------------------|--------------|--------------|--------------|-------------|-------------|-------------|
|                     |             | 2J<br>(630V)                  | 2W<br>(450V) | 2E<br>(250V) | 2A<br>(100V) | 1H<br>(50V) | 1E<br>(25V) | 2J<br>(630V)                  | 2W<br>(450V) | 2E<br>(250V) | 2A<br>(100V) | 1H<br>(50V) | 1E<br>(25V) | 1C<br>(16V) | 2J<br>(630V)                  | 2W<br>(450V) | 2E<br>(250V) | 2A<br>(100V) | 1H<br>(50V) | 1E<br>(25V) | 1C<br>(16V) |
| 47,000              | 473         |                               |              |              |              |             |             |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 100,000             | 104         |                               |              |              |              |             |             |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 150,000             | 154         |                               |              |              |              |             |             |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 220,000             | 224         |                               |              |              |              |             |             |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 330,000             | 334         |                               |              |              |              |             |             |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 470,000             | 474         |                               |              |              |              |             |             |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 1,000,000           | 105         |                               |              |              |              |             |             |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 2,200,000           | 225         |                               |              |              |              |             |             |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 3,300,000           | 335         |                               |              |              |              |             |             |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 4,700,000           | 475         |                               |              |              |              |             |             |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 10,000,000          | 106         |                               |              |              |              |             |             |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 22,000,000          | 226         |                               |              |              |              |             |             |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 47,000,000          | 476         |                               |              |              |              |             |             |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |

| Capacitance (pF) | Cap Code | CKG45N (Double)<br>1812/C4532 |              |              |              |             |             |             | CKG57N (Double)<br>2220/C5750 |              |              |              |             |             |             |
|------------------|----------|-------------------------------|--------------|--------------|--------------|-------------|-------------|-------------|-------------------------------|--------------|--------------|--------------|-------------|-------------|-------------|
|                  |          | 2J<br>(630V)                  | 2W<br>(450V) | 2E<br>(250V) | 2A<br>(100V) | 1H<br>(50V) | 1E<br>(25V) | 1C<br>(16V) | 2J<br>(630V)                  | 2W<br>(450V) | 2E<br>(250V) | 2A<br>(100V) | 1H<br>(50V) | 1E<br>(25V) | 1C<br>(16V) |
| 220,000          | 224      |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 470,000          | 474      |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 1,000,000        | 105      |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 2,200,000        | 225      |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 3,300,000        | 335      |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 4,700,000        | 475      |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 6,800,000        | 685      |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 10,000,000       | 106      |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 22,000,000       | 226      |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 33,800,000       | 336      |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 47,000,000       | 476      |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |
| 100,000,000      | 107      |                               |              |              |              |             |             |             |                               |              |              |              |             |             |             |


 X7R 
  X7S 
  X7T 
  X5R

# CKC SERIES | Array Capacitor




TDK CKC Series Array Capacitor offers multiple multilayer ceramic chip capacitors (MLCCs) in a single compact package. TDK's unique design offers lower cross talk which truly function as separate individual capacitors in a single package. Arrays are offered in 2-in-1 and 4-in-1 package styles.

Capacitor arrays are mainly used to reduce board space and component count as well as reducing placement time and warehouse/storage space. Capacitor arrays are also commonly used for noise decoupling. Today's higher density circuits, increased feature designs, and smaller product sizes force designers to find ways to reduce component count simply due to the fact of no available board space. TDK's Array caps offer to fix this problem with our advance layering technique and innovative multilayer capacitor design. Capacitor arrays also allow decoupling capacitors to be placed closer to high speed ICs/ASICs which reduces trace inductance.

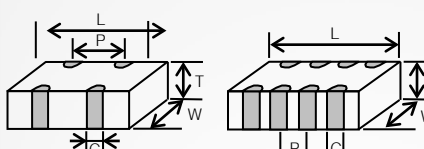

| Case Code | L (mm) | W (mm) | T (mm) | C (mm) | P (mm) |
|-----------|--------|--------|--------|--------|--------|
| CKCM25    | 1.37   | 1.00   | 0.60   | 0.36   | 0.66   |
|           | 1.37   | 1.00   | 0.80   | 0.36   | 0.66   |
| CKCL22    | 2.00   | 1.25   | 0.85   | 0.45   | 1.00   |
| CKCL44    | 2.00   | 1.25   | 0.85   | 0.25   | 1.00   |
| CKCA43    | 3.20   | 1.60   | 1.00   | 0.40   | 1.10   |

## Part Number Description

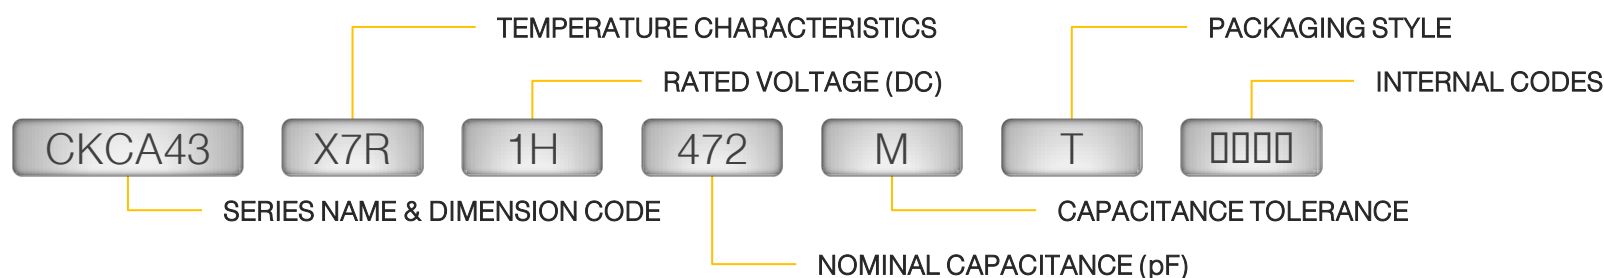

## Features:


- ❖ Available as 2-in-1 and 4-in-1 package
- ❖ Reduced PCB space and mounting time
- ❖ Unique electrode construction reduces crosstalk
- ❖ 2-in-1 design also available in soft termination

## Applications:

- ❖ Around interface cable in PC
- ❖ CPU bus line
- ❖ Cellular phone interface

### Array Capacitor Design Concept

➤ Array Capacitor combines multiple capacitor into a single chip. They are effective in reducing placement time and cost.

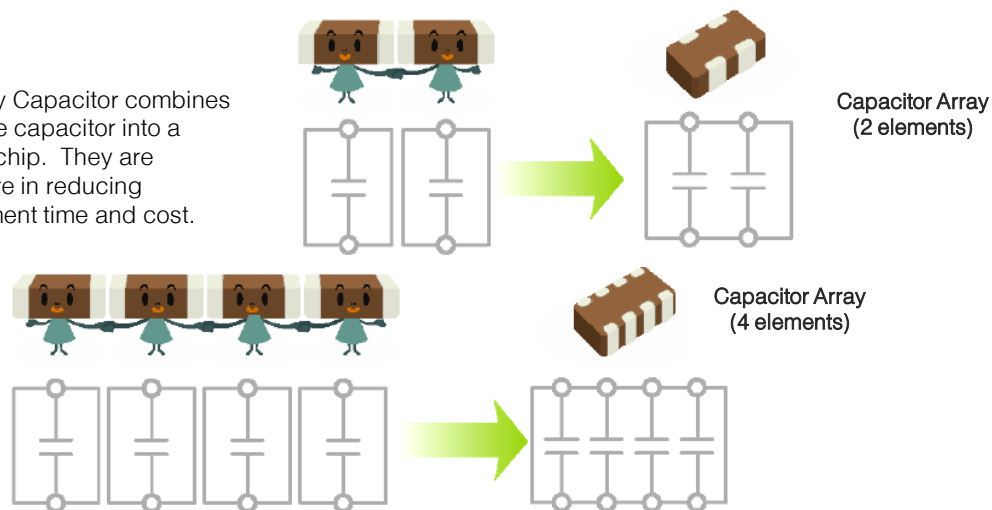

| Capacitance (pF) | Cap Code | CKCM25 (2-in-1)<br>0504/C1410 |             |             |             |              | CKCL22 (2-in-1)<br>0805/C2012 |             |             |             |              |
|------------------|----------|-------------------------------|-------------|-------------|-------------|--------------|-------------------------------|-------------|-------------|-------------|--------------|
|                  |          | 1H<br>(50V)                   | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 1H<br>(50V)                   | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) |
| 10               | 100      |                               |             |             |             |              |                               |             |             |             |              |
| 15               | 150      |                               |             |             |             |              |                               |             |             |             |              |
| 22               | 220      |                               |             |             |             |              |                               |             |             |             |              |
| 33               | 330      |                               |             |             |             |              |                               |             |             |             |              |
| 47               | 470      |                               |             |             |             |              |                               |             |             |             |              |
| 68               | 680      |                               |             |             |             |              |                               |             |             |             |              |
| 100              | 101      |                               |             |             |             |              |                               |             |             |             |              |
| 150              | 151      |                               |             |             |             |              |                               |             |             |             |              |
| 220              | 221      |                               |             |             |             |              |                               |             |             |             |              |
| 330              | 331      |                               |             |             |             |              |                               |             |             |             |              |
| 470              | 471      |                               |             |             |             |              |                               |             |             |             |              |
| 1,000            | 102      |                               |             |             |             |              |                               |             |             |             |              |
| 2,200            | 222      |                               |             |             |             |              |                               |             |             |             |              |
| 4,700            | 472      |                               |             |             |             |              |                               |             |             |             |              |
| 10,000           | 103      |                               |             |             |             |              |                               |             |             |             |              |
| 22,000           | 223      |                               |             |             |             |              |                               |             |             |             |              |
| 47,000           | 473      |                               |             |             |             |              |                               |             |             |             |              |
| 100,000          | 104      |                               |             |             |             |              |                               |             |             |             |              |
| 220,000          | 224      |                               |             |             |             |              |                               |             |             |             |              |
| 470,000          | 474      |                               |             |             |             |              |                               |             |             |             |              |
| 1,000,000        | 105      |                               |             |             |             |              |                               |             |             |             |              |
| 2,200,000        | 225      |                               |             |             |             |              |                               |             |             |             |              |

| Capacitance (pF) | Cap Code | CKCL44 (4-in-1)<br>0805/C2012 |             |             |             |              | CKCA43<br>1206/C3216 |             |             |              |
|------------------|----------|-------------------------------|-------------|-------------|-------------|--------------|----------------------|-------------|-------------|--------------|
|                  |          | 1H<br>(50V)                   | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 1H<br>(50V)          | 1E<br>(25V) | 1C<br>(16V) | 0J<br>(6.3V) |
| 10               | 100      |                               |             |             |             |              |                      |             |             |              |
| 15               | 150      |                               |             |             |             |              |                      |             |             |              |
| 22               | 220      |                               |             |             |             |              |                      |             |             |              |
| 33               | 330      |                               |             |             |             |              |                      |             |             |              |
| 47               | 470      |                               |             |             |             |              |                      |             |             |              |
| 68               | 680      |                               |             |             |             |              |                      |             |             |              |
| 100              | 101      |                               |             |             |             |              |                      |             |             |              |
| 150              | 151      |                               |             |             |             |              |                      |             |             |              |
| 220              | 221      |                               |             |             |             |              |                      |             |             |              |
| 330              | 331      |                               |             |             |             |              |                      |             |             |              |
| 470              | 471      |                               |             |             |             |              |                      |             |             |              |
| 680              | 681      |                               |             |             |             |              |                      |             |             |              |
| 1,000            | 102      |                               |             |             |             |              |                      |             |             |              |
| 2,200            | 222      |                               |             |             |             |              |                      |             |             |              |
| 4,700            | 472      |                               |             |             |             |              |                      |             |             |              |
| 10,000           | 103      |                               |             |             |             |              |                      |             |             |              |
| 22,000           | 223      |                               |             |             |             |              |                      |             |             |              |
| 47,000           | 473      |                               |             |             |             |              |                      |             |             |              |
| 100,000          | 104      |                               |             |             |             |              |                      |             |             |              |
| 1,000,000        | 105      |                               |             |             |             |              |                      |             |             |              |

 C0G
  X7R
  X5R

# CER SERIES | Controlled ESR



TDK's CER multilayer ceramic chip capacitor series offers the unique additional function of controlling the ESR (equivalent series resistance) value as desired without affecting ESL (equivalent series inductance). This function enables control of voltage change, which can occur between the power source and the CPU, by controlling the impedance of the capacitors located around the CPU.

The relatively low ESR value of standard MLCCs can be too low in cases where the MLCC has replaced a Tantalum capacitors. Designer can avoid the additional resistor typically used to solve this problem by utilizing CER Series capacitors. This can contribute to cost saving due to less cost during production. The mounting method of the CER Series is the same as products with two terminals, which makes replacement of existing products with CER chip capacitor very easy.



|   |                  |
|---|------------------|
| L | Body Length      |
| W | Body Width       |
| T | Body Height      |
| B | Terminal Width   |
| P | Terminal Spacing |

| Case Code | L (mm) | W (mm) | T (mm) | B (mm) | P (mm) |
|-----------|--------|--------|--------|--------|--------|
| CERB      | 1.60   | 0.80   | 0.80   | 0.10   | 0.20   |
| CERD      | 2.00   | 1.25   | 0.85   | 0.30   | 0.20   |

## Part Number Description




## Features:

- ❖ Design allows for ESR to be controlled using unique internal structure without affecting ESL
- ❖ Control of voltage variations eliminates effects on the stability of current signals and impact on other circuits
- ❖ Same mounting method as 2-terminal components
- ❖ Flatness of impedance characteristics is enhanced through additional resistance components, reducing the number of components by 50%


## Applications:

- ❖ DC to DC converter input/output smoothing
- ❖ Voltage regulator
- ❖ IC power supply circuit decoupling

### MLCC Design ESR Comparison



### Equivalent Circuit





| Capacitance (pF) | Cap Code | CERB<br>0603/C1608 |               |              | CERD<br>0805/C2012 |              |               |               |               |
|------------------|----------|--------------------|---------------|--------------|--------------------|--------------|---------------|---------------|---------------|
|                  |          | 0G (4V)            |               |              | 0G (4V)            |              |               |               |               |
|                  |          | 2C<br>(200mΩ)      | 2M<br>(650mΩ) | 3U<br>(1.2Ω) | 1C<br>(20mΩ)       | 1J<br>(50mΩ) | 2A<br>(100mΩ) | 2C<br>(200mΩ) | 2J<br>(500mΩ) |
| 1,000,000        | 105      |                    |               |              |                    |              |               |               |               |
| 10,000,000       | 106      |                    |               |              |                    |              |               |               |               |
| 22,000,000       | 226      |                    |               |              |                    |              |               |               |               |

X5R


## Additional Product Application Information

➤ Excessively low ESR with traditional MLCC may negatively affect decoupling at the CPU level which is powered by high current and low voltage. Several capacitors with different self-resonant frequency are used at power circuit of CPU to make impedance lower at wide band and to control voltage fluctuation toward high frequency current. However, excessively lower ESR of MLCC may cause sharp impedance peak by parallel resonance between MLCCs, high frequency current which corresponds to the frequency will change PS voltage and cause malfunction. CPU decoupling MLCC with appropriate ESR will obtain flat impedance and control CPU voltage fluctuation.

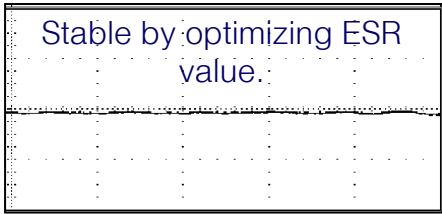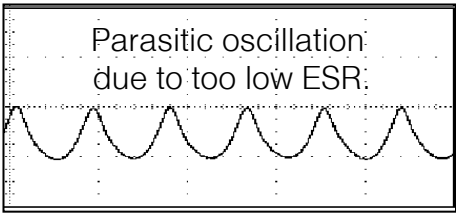

➤ Optimal ESR Value selection can prevent parasitic oscillation and secure phase margin

➤ CERB (0603) series capacitor has maximum resistance of 1200mΩ and the CERD (0805) series capacitor has maximum resistance of 500mΩ, ideal for using as decoupling capacitors.

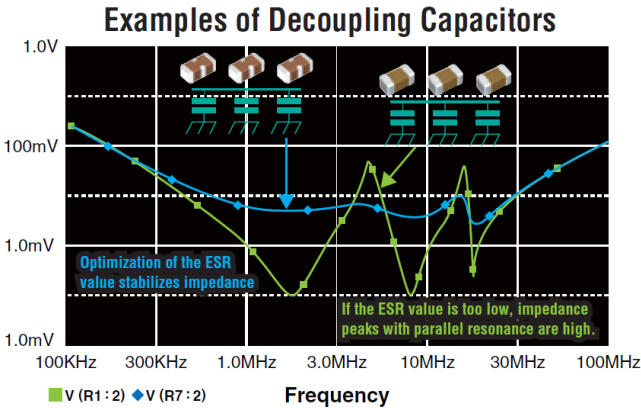

# CEU SERIES | Serial Design




Automotive design often employs two distinct capacitors in a series on the PCB for power supply and battery line to protect the circuit from a short in case of cracking of the MLCC. In conjunction with our existing soft electrode technology, TDK offers 2 capacitors in single body construction in our CEU product line for ultra high reliability. Serial construction of inner electrode prevents sudden insulation breakdown after flex crack formation and soft termination technology allows for better absorption of external stress and protects the ceramic body. The combination of these technologies yield improved voltage and ESD performance over standard designs and decrease risk of short circuit failures and low IR due to mechanical flex cracks. Soft termination also allow for better performance with thermal expansion and contraction.



L Body Length  
W Body Width  
T Body Height  
B Terminal Width

| Case Code     | L (mm) | W (mm) | T (mm) | Life Test Conditions |
|---------------|--------|--------|--------|----------------------|
| CEU3E2 (0603) | 1.60   | 0.80   | 0.80   | WV x 2               |
| CEU4J2 (0805) | 2.10   | 1.25   | 1.25   | WV x 2               |

## Part Number Description

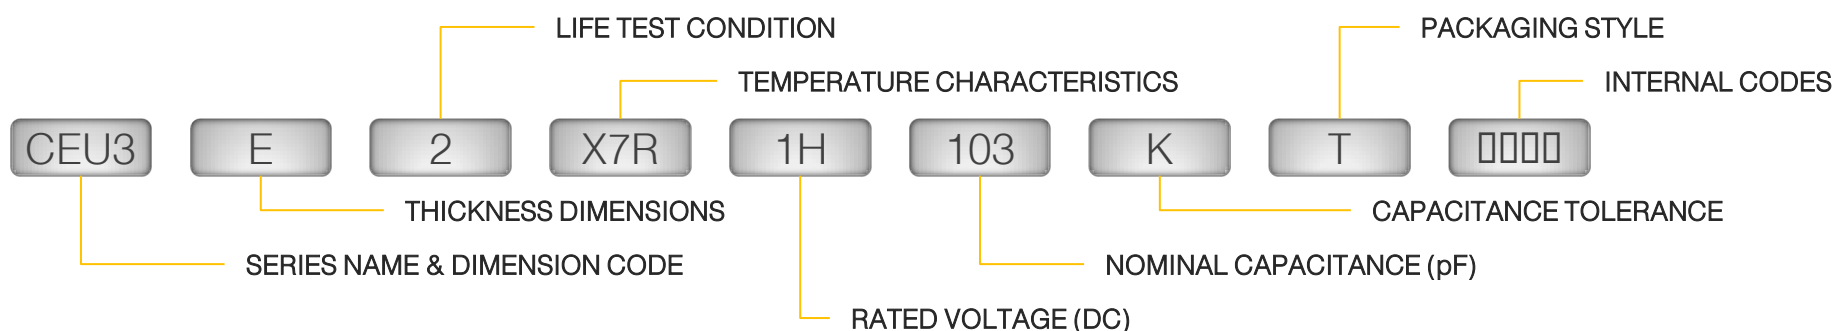

## Features:

- ❖ Improved bending resistance (Board Flex Resistance)
- ❖ Improved temperature cycle performance
- ❖ Allow space reduction on PCB
- ❖ Ultra high reliability
- ❖ RoHS, WEE, and REACH compliant

## Applications:

- ❖ Power supply without protective circuit
- ❖ Automotive battery line

### Ultra High Reliability Features!



➤ Serial construction of inner electrode prevents sudden insulation breakdown after flex crack formation.

➤ Conductive resin electrode layer absorbs external stress and protects ceramic body.

| Capacitance<br>(pF) | Cap<br>Code | CEU3<br>0603/C1608 |             | CEU4<br>0805/C2012 |             |
|---------------------|-------------|--------------------|-------------|--------------------|-------------|
|                     |             | 2A<br>(100V)       | 1H<br>(50V) | 2A<br>(100V)       | 1H<br>(50V) |
| 1,000               | 102         |                    |             |                    |             |
| 1,500               | 152         |                    |             |                    |             |
| 2,200               | 222         |                    |             |                    |             |
| 3,300               | 332         |                    |             |                    |             |
| 4,700               | 472         |                    |             |                    |             |
| 6,800               | 682         |                    |             |                    |             |
| 10,000              | 103         |                    |             |                    |             |
| 15,000              | 153         |                    |             |                    |             |
| 22,000              | 223         |                    |             |                    |             |
| 33,000              | 333         |                    |             |                    |             |
| 47,000              | 473         |                    |             |                    |             |
| 68,000              | 683         |                    |             |                    |             |
| 100,000             | 104         |                    |             |                    |             |

 X7R

# CKD SERIES | Feed Thru Capacitor



TDK Feed Through CKD series capacitors feature 3-terminal design with even lower ESL than Flip Type capacitors. Feed through design consists of 3-terminal construction where the 3rd terminal acts as a ground. Unique internal design allows for low parallel inductance and offer excellent noise reduction capability for high speed digital IC decoupling.

CKD Series are offered in a variety of case size with operating temperature range of -25°C to +85°C and -55°C to +125°C. A wide range of capacitance with rated voltage from 4V to 50V are available.



|   |                    |
|---|--------------------|
| L | Body Length        |
| W | Body Width         |
| T | Body Height        |
| B | Terminal Width     |
| C | GND Terminal Width |

| Case Code | L (mm) | W (mm) | T (mm) | B (mm) | C (mm) |
|-----------|--------|--------|--------|--------|--------|
| CKD710JB  | 1.00   | 0.50   | 0.30   | 0.17   | 0.30   |
| CKD61BJB  | 1.60   | 0.80   | 0.60   | 0.15   | 0.80   |
| CKD610JB  | 1.60   | 0.80   | 0.80   | 0.10   | 0.40   |
| CKD510JB  | 2.00   | 1.25   | 0.85   | 0.30   | 0.40   |
| CKD110JB  | 3.20   | 1.25   | 0.85   | 0.40   | 0.95   |
| CKD310JB  | 3.20   | 1.60   | 1.30   | 0.40   | 0.95   |
| CKD31C10  | 3.20   | 1.60   | 1.30   | 0.40   | 1.20   |

## Part Number Description



## Features:

- ❖ Ultra low inductance (less than 200 pH)
- ❖ Feed-through structure provides low ESL and high capacitance for noise elimination over a broad frequency band
- ❖ Optimized for use as noise bypass capacitor for signal and power source circuits
- ❖ Aids in EMC compliance

## Applications:

- ❖ IC power supply circuit decoupling
- ❖ High impedance/high current circuits
- ❖ DC to DC converter input/output smoothing



➤ Low ESL Feed Through type CKD series are constructed with 3 terminals and alternating ground and conductive layers.




➤ When a pass-through structure is used, the smaller the distance between the capacitor and the ground, the lower the ESL. This helps reduce noise from the circuit.

# CKD SERIES | Feed Thru Capacitor

| Capacitance (pF) | Cap Code | CKD710JB<br>0402/C1005 |             |              |            | CKD610JB<br>0603/C1608 |              | CKD61BJB<br>0603/C1608 |              | CKD510JB<br>0805/C2012 |             |             |             |              | CKD110JB<br>1205/C3212 |             | CKD310JB<br>1206/C3216 |              | CKD31C10<br>1206/C3216 |             |
|------------------|----------|------------------------|-------------|--------------|------------|------------------------|--------------|------------------------|--------------|------------------------|-------------|-------------|-------------|--------------|------------------------|-------------|------------------------|--------------|------------------------|-------------|
|                  |          | 1C<br>(16V)            | 1A<br>(10V) | 0J<br>(6.3V) | 0G<br>(4V) | 1A<br>(10V)            | 0J<br>(6.3V) | 1A<br>(10V)            | 0J<br>(6.3V) | 1H<br>(50V)            | 1E<br>(25V) | 1C<br>(16V) | 1A<br>(10V) | 0J<br>(6.3V) | 1H<br>(50V)            | 1E<br>(25V) | 1C<br>(16V)            | 0J<br>(6.3V) | 1H<br>(50V)            | 1E<br>(25V) |
| 22               | 220      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 47               | 470      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 100              | 101      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 220              | 221      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 470              | 471      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 1,000            | 102      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 2,200            | 222      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 4,700            | 472      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 10,000           | 103      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 15,000           | 153      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 22,000           | 223      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 47,000           | 473      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 100,000          | 104      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 220,000          | 224      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 470,000          | 474      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 1,000,000        | 105      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 2,200,000        | 225      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 4,700,000        | 475      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 10,000,000       | 106      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |
| 22,000,000       | 226      |                        |             |              |            |                        |              |                        |              |                        |             |             |             |              |                        |             |                        |              |                        |             |

■ -25°C to +125°C ■ -25°C to +85°C


## Attenuation Characteristics

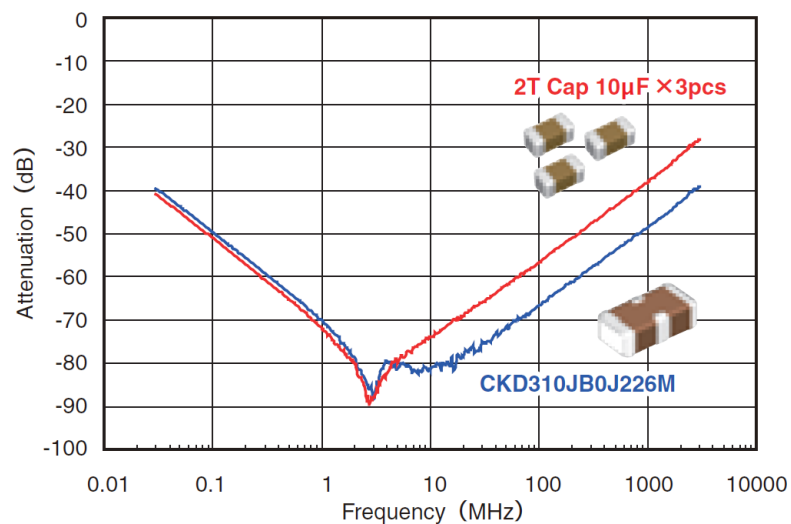

➤ It is possible to reduce the number of components with CKD Series capacitor because one CKD part has similar or better attenuation characteristics as three standard 2-terminal capacitors.

## Target Application

➤ In high-frequency application, the equivalent series resistance (ESR) and equivalent series Inductance (ESL) of a capacitor's internal electrodes and terminal electrodes become apparent. ESL acts as a hindrance, reflecting the signal current. Feed Thru Capacitor allow for better filtering and decoupling due to low ESL and ESR.

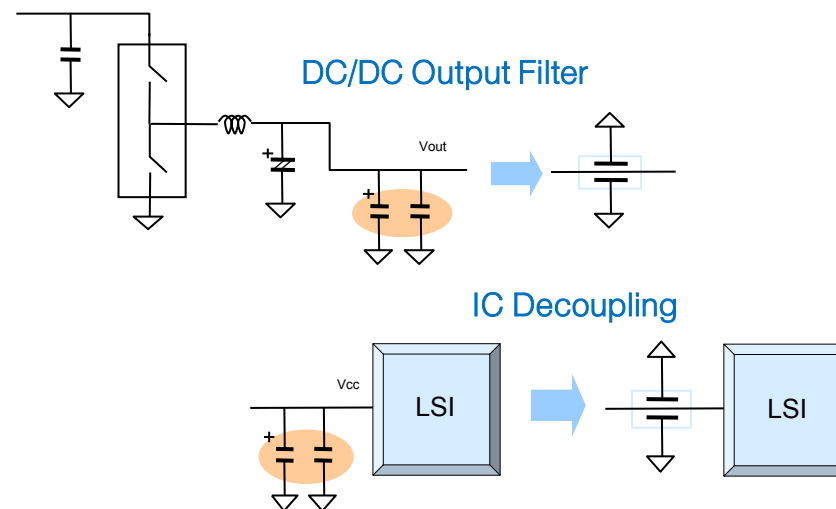

# CLL SERIES | Ultra Low Inductance



TDK's CLL multilayer ceramic capacitor series features ultra low inductance (less than 150 pH) and unique internal design. Ultra Low inductance are achieved with unique 8-terminal design. These terminals are connected in an alternating configuration which results in the cancelation of mutual inductance by alternating the flow of current so that the magnetic fields cancel each other out allowing for ultra low inductance along with reduced parasitic losses.

CLL Ultra Low Inductance series are available in two case sizes with operating temperature range of -55°C to +125°C and capacitance of up to 4.7μF. With voltage rating of 4V to 10V DC, CLL series are suitable for high speed IC decoupling as well as CPU power line decoupling. These capacitors are also effective for input/output smoothing in DC to DC converter.



|   |                  |
|---|------------------|
| L | Body Length      |
| W | Body Width       |
| T | Body Height      |
| C | Terminal Width   |
| P | Terminal Spacing |

| Case Code     | L (mm) | W (mm) | T (mm) | B (mm) | P (mm) |
|---------------|--------|--------|--------|--------|--------|
| CLLC1A (0603) | 1.60   | 0.80   | 0.50   | 0.40   | 0.25   |
| CLLE1A (0805) | 2.00   | 1.25   | 0.50   | 0.50   | 0.25   |
|               | 2.00   | 1.25   | 0.85   | 0.50   | 0.25   |

## Part Number Description



## Features:

- ❖ Unique internal structure that cancels magnetic fields to reduce inductance
- ❖ Compact and lightweight
- ❖ Contains no lead and supports lead-free soldering

## Applications:

- ❖ Decoupling CPU power line
- ❖ High speed digital IC decoupling
- ❖ High impedance/high current circuits
- ❖ DC to DC converter input/output smoothing
- ❖ Power Supply

### Unique Design of ULI Capacitor



➤ Ultra-low ESL is created by alternating the flow of current so the magnetic fields cancel out. Effective for miniaturization and achieving high capacitance.

| Capacitance (pF) | Cap Code | CLLC1A<br>0603/C1608 |            | CLLE1A<br>0805/C2012 |              |             |
|------------------|----------|----------------------|------------|----------------------|--------------|-------------|
|                  |          | 0J<br>(6.3V)         | 0G<br>(4V) | 1A<br>(10V)          | 0J<br>(6.3V) | 0G<br>(04V) |
| 100,000          | 104      |                      |            |                      |              |             |
| 150,000          | 154      |                      |            |                      |              |             |
| 220,000          | 224      |                      |            |                      |              |             |
| 330,000          | 334      |                      |            |                      |              |             |
| 470,000          | 474      |                      |            |                      |              |             |
| 680,000          | 684      |                      |            |                      |              |             |
| 1,000,000        | 105      |                      |            |                      |              |             |
| 1,500,000        | 155      |                      |            |                      |              |             |
| 2,200,000        | 225      |                      |            |                      |              |             |
| 4,700,000        | 475      |                      |            |                      |              |             |

■ X7R ■ X7S

## Composition of Circuit Impedance & Target Application



## PART NUMBER CONVERSION

This is a TDK service that assists customers in converting their existing Bill of Materials (BOM) from non-TDK to TDK part numbers. TDK has the tools and expertise to return a part number conversion request in a very short time. Some key points are:

- Quick turn-around
- Allows for downsizing and value added once converted to TDK PN
- Datasheet is provided with all available TDK PN conversion upon request
- FIT data can be provided immediately for evaluation
- MLCC alternatives to Tantalum capacitors can also be provided

## VALUE ADDED ANALYSIS

This is a TDK a service that assists customers in staying abreast of leading edge MLCCs and for TDK to offer the best component choice MLCC for pricing and delivery. "Value Added" is beneficial because it gives the following advantages to the customer:

- Downsizing / Shrinking board space
- Improved in-circuit performance capabilities
- Replacing older technologies
- Simplifying inventory control
- Improved pricing and delivery

## TANTALUM CAP REPLACEMENT

TDK offers engineering design support to assist in replacing your existing electrolytic and film capacitors with MLCCs. In order to offer best recommendations, we need to have some working knowledge of your design and circuit applications. The more you can share, the better we can offer the most cost beneficial solution options. Some information that is needed include:

- Typical and max rail voltage
- Circuit application/function
- Module function
- Design concerns/constraints
- Performance concerns/constraints
- Mechanical concerns/constraints

## TECHNICAL SUPPORT

TDK has a local MLCC manufacturing plant located in Peachtree City, Georgia, which can provide engineering and technical services.

In addition to sampling, qualification testing/reporting and problem resolution, TDK can provide component failure analysis as well. All TDK/GA failure analysis target a 3/3/7 reply policy where an initial response is given within 3 hours, the initial failure mode within 3 days, and a final report within 7 days.

TDK's MLCC boast a 0.56 ppb in market defect rate. Having manufacturing in Georgia also allows us to quickly assist you with documentation for environmental compliance such as REACH, RoHS, WEEE and others.



The TDK Technical Center, located at the TDK Georgia factory, launched in 1Q of 2012 with analysis and technical capabilities to support TDK's Multi-Layer Ceramic Capacitor products. The TTC is capable of performing electrical / mechanical evaluation and reliability testing in compliance to AEC-Q200 and MIL STD requirements. Future activities from the TTC will offer enhanced marketing tools such as teardown analysis and product demonstration as well as support request for new product development base on market demand.

## Capabilities

### ➤ Advanced Set Analysis

TDK's Technical Center has the unique ability to analyze circuits, BOM's, and applications to recommend, test, and replace electrolytic and tantalum capacitors with MLCC capacitors via circuit identification, simulation, and verification.

### ➤ Custom Testing

Our Technical Center test engineers are able to conduct and expedite a variety of electrical and mechanical tests according to your custom test standards.

- Customer Specific Testing Standards (electrical, mechanical, etc.)
- Component Characterization
- Electrical parameter characterization

### ➤ Reliability Engineering

TDK Technical Center is also heavily involved with TDK reliability engineering. We conduct a variety of testing according to strict industry, MIL-STD, and AEC-Q200 standards, some of these include: operating life test, biased humidity, destructive physical analysis, HALT testing, HAST testing, temperature cycle, burn-in, enhanced inspection, etc.

- Life Testing
- New Product Development Initiation

### ➤ Dedicated Customer Support


TDK Technical Center exhibits exceptional customer support via dedicated failure analysis services.

- Advanced Failure Analysis for High Reliability
- AEC-Q200 Approval Testing and Report


Film/TA Capacitor Replacement Analysis



New Product Demonstration




Advanced Field Failure Analysis




AEC Q200 PPAP Qualification Report



Design Tools Characteristic Measurements



Teardown Analysis & BOM optimization



## EXCELLENT

## GOOD

## POOR

### Ceramic Capacitor

- Operating Temperature (150°C)
- Frequency Characteristics
- Ripple Current Capability
- ESR (10mΩ) / ESL (1~2nH)
- Biased Humidity (500hr)
- Reliability / Operating Life (8,000hr)
- Breakdown Voltage

- No Polarity
- Leakage Current
- Temperature Characteristics (at high frequency)
- Working Voltage (4V~3KV)
- 90% Surface Mount
- Price

- Failure Mode (Short)
- Capacitance Range (up to 100μF)
- DC Bias
- Board Flex Robustness (for large case sizes)

### Film Capacitor

- Working Voltage (35~50kV)
- DC Bias
- Temperature Characteristics
- Self Healing

- Frequency Characteristics
- Ripple Current Capacity
- ESR (40~100mΩ)
- ESL (2~3nH)
- No Polarity
- Leakage Current
- Failure Mode (Open)

- Operating Temperature (105°C)
- Reliability
- Operating Life (WV)
- Biased Humidity (WV)
- Capacitance Range (up to 100μF)
- 8% SMT

### Tantalum Capacitor

- DC Bias
- Capacitance Range (Up to 1,000μF)

- Operating Temperature (125°C)
- Frequency Characteristics
- Ripple Current Capability
- ESR (200~500mΩ) / ESL (2~6nH)
- Biased Humidity (No Voltage; 500hr)
- Reliability / Operating Life (2,000hr)
- 90% Surface Mount

- Failure Mode (Short)
- Leakage Current
- Polarity
- Working Voltage (2.5~50V)
- Price (high due to tantalum shortage)

### Aluminum Capacitor

- Price (low)
- Capacitance Range (up to 1F)
- DC Bias

- Failure Mode (Open)
- Operating Life (1,000hr)
- Biased Humidity (No Voltage; 500hr)
- Reliability
- Working Voltage (4~500V)

- Operating Temperature (105°C)
- Frequency Characteristics
- Ripple Current Capability
- ESR (1000mΩ) / ESL (4~10nH)
- Polarity
- Leakage Current
- 10% Surface Mount

## Electrolytic Capacitor Replacement Overview:

- ❖ Select electrolytic capacitors can be replaced with MLCC without sacrificing quality or performance
- ❖ TDK can work with our customers to study the electrolytic capacitors used in their designs
- ❖ The primary focus is on decoupling and smoothing capacitors for noise suppression
- ❖ Other circuit applications such as bulk capacitance are also studied if applicable
- ❖ By measuring initial performance, TDK can recommend alternative MLCC's

## Electrolytic Capacitor Replacement Benefits:

- ❖ Worldwide shortage of Ta caps has generated interest by many companies
- ❖ MLCC's offer a technological advantage as well as a more robust design
- ❖ In some cases, electrolytic cap replacement can result in reduced component count
- ❖ Use of MLCC's will reduce space usage on PCB and cost of components & lower cost of assembly
- ❖ Lower inherent ESR & increased reliability

Determine the maximum working line voltage (use the chart below as a guide)

Step  
1

| Working Voltage | Rated Voltage | Voltage Code |
|-----------------|---------------|--------------|
| 3 ~ 5V          | 6.3V          | 0J           |
| 8 ~ 9V          | 10V           | 1A           |
| 12 ~ 15V        | 16V           | 1C           |
| 18 ~ 20V        | 25V           | 1E           |

\* MLCC's do not have voltage de-rating rule so you can use up to the full rated voltage

Determine the circuit's function and replace at the minimum acceptable cap value

Step  
2

| Application                     | Capacitance Guidepost              |       |
|---------------------------------|------------------------------------|-------|
| For Decoupling/<br>Smoothing    | Ta Cap, Aluminum Electrolytic Caps | ~20%  |
|                                 | Organic Semiconductor              | ~50%  |
| For Time Constance/<br>Coupling | Ta Cap, Aluminum Electrolytic Caps | ~100% |
|                                 | Organic Semiconductor              | ~100% |

\*Based on circuit function, MLCC cap value may not need to be a 100% replacement

Step 3 Base on application, identify the suggested MLCC replacement part number by referencing your current TA/ALU capacitance and current working voltage (WV)

| Smoothing/By-Passing: ≤ 100kHz                      |                           | WV ≤ 6.3V | WV ≤ 10V       | WV ≤ 16V       | WV ≤ 25V        | WV ≤ 35V       | WV ≤ 50V       | WV ≤ 100V       | WV ≤ 250V       |                |
|-----------------------------------------------------|---------------------------|-----------|----------------|----------------|-----------------|----------------|----------------|-----------------|-----------------|----------------|
| ALUMINUM<br>ELECTROLYTIC/<br>TANTALUM<br>CAPACITORS | CAPACITANCE OF TA/ALU CAP | 0.1μF     | C0603X5R0J473K | C1005X7R1A473K | C1005X7R1C473K  | C1005X7R1E473K | C1005X7R1V473K | C1005X7R1H473K  | C1608X7S2A473K  | C2012X7T2E473K |
|                                                     |                           | 0.22μF    | C1005X5R0J104K | C1005X7R1A104K | C1005X7R1C104K  | C1005X7R1E104K | C1005X7R1V104K | C1005X7R1H104K  | C1608X7S2A104K  | C2012X7T2E104K |
|                                                     |                           | 0.47μF    | C1005X5R0J224K | C1005X7R1A224K | C1005X7R1C224K  | C1005X6S1E224K | C1608X6S1V224K | C1608X7R1H224K  | C2012X7S2A224K  | C3216X7T2E224K |
|                                                     |                           | 1.0μF     | C1005X6S0J474K | C1005X5R1A474K | C1608X7R1C474K  | C1608X7R1E474K | C1608X7R1V474K | C1608X7R1H474K  | C2012X7S2A474K  | C4532X7R2E474K |
|                                                     |                           | 2.2μF     | C1005X6S0J105K | C1005X5R1A105K | C1608X7R1C105K  | C1608X7R1E105K | C1608X7R1V105K | C1608X6S1H105K  | C2012X7S2A105K  | C4532X7T2E105K |
|                                                     |                           | 4.7μF     | C1005X5R0J225K | C1005X5R1A225K | C1608X6S1C225K  | C2012X7R1E225K | C2012X7R1V225K | C2012X7R1H225K  | C3216X7S2A225K  | C5750X7T2E225K |
|                                                     |                           | 10μF      | C1005X5R0J475K | C1608X6S1A475K | C2012X7R1C475K  | C2012X7R1E475K | C2012X7R1V475K | C2012X6S1H475K  | C3225X7S2A475K  | -              |
|                                                     |                           | 22μF      | C1608X5R0J106K | C1608X5R1A106K | C2012X6S1C106K  | C3216X7R1E106K | C3216X7R1V106M | C3225X7S1H106K  | C5750X7S2A106M  | -              |
|                                                     |                           | 47μF      | C2012X6S0J226K | C2012X6S1A226K | C2012X5R1C226K  | C3216X5R1E226M | C3216X5R1V226M | CKG57NX7S1H226M | CKG57NX7S2A226M | -              |
|                                                     |                           | 100μF     | C2012X5R0J476M | C3216X6S1A476M | C3216X5R1C476M  | C3216X5R1E476M | -              | -               | -               | -              |
|                                                     |                           | 220μF     | C3216X5R0J107M | C3216X5R1A107M | CKG57NX7S1C107M | -              | -              | -               | -               | -              |

| Coupling/Time Constant: ≤ 100kHz                    |                           | WV ≤ 6.3V | WV ≤ 10V       | WV ≤ 16V       | WV ≤ 25V        | WV ≤ 35V       | WV ≤ 50V       | WV ≤ 100V       | WV ≤ 250V       |                |
|-----------------------------------------------------|---------------------------|-----------|----------------|----------------|-----------------|----------------|----------------|-----------------|-----------------|----------------|
| ALUMINUM<br>ELECTROLYTIC/<br>TANTALUM<br>CAPACITORS | CAPACITANCE OF TA/ALU CAP | 0.1μF     | C1005X5R0J104K | C1005X7R1A104K | C1005X7R1C104K  | C1005X7R1E104K | C1005X7R1V104K | C1005X7R1H104K  | C1608X7S2A104K  | C2012X7T2E104K |
|                                                     |                           | 0.22μF    | C1005X5R0J224K | C1005X7R1A224K | C1005X7R1C224K  | C1005X6S1E224K | C1608X6S1V224K | C1608X7R1H224K  | C2012X7S2A224K  | C3216X7T2E224K |
|                                                     |                           | 0.47μF    | C1005X6S0J474K | C1005X5R1A474K | C1608X7R1C474K  | C1608X7R1E474K | C1608X7R1V474K | C1608X7R1H474K  | C2012X7S2A474K  | C4532X7R2E474K |
|                                                     |                           | 1.0μF     | C1005X6S0J105K | C1005X5R1A105K | C1608X7R1C105K  | C1608X7R1E105K | C1608X7R1V105K | C1608X6S1H105K  | C2012X7S2A105K  | C4532X7T2E105K |
|                                                     |                           | 2.2μF     | C1005X5R0J225K | C1005X5R1A225K | C1608X6S1C225K  | C2012X7R1E225K | C2012X7R1V225K | C2012X7R1H225K  | C3216X7S2A225K  | C5750X7T2E225K |
|                                                     |                           | 4.7μF     | C1005X5R0J475K | C1608X6S1A475K | C2012X7R1C475K  | C2012X7R1E475K | C2012X7R1V475K | C2012X6S1H475K  | C3225X7S2A475K  | -              |
|                                                     |                           | 10μF      | C1608X5R0J106K | C1608X5R1A106K | C2012X6S1C106K  | C3216X7R1E106K | C3216X7R1V106M | C3225X7S1H106K  | C5750X7S2A106M  | -              |
|                                                     |                           | 22μF      | C2012X6S0J226K | C2012X6S1A226K | C2012X5R1C226K  | C3216X5R1E226M | C3216X5R1V226M | CKG57NX7S1H226M | CKG57NX7S2A226M | -              |
|                                                     |                           | 47μF      | C2012X5R0J476M | C3216X6S1A476M | C3216X5R1C476M  | C3216X5R1E476M | -              | -               | -               | -              |
|                                                     |                           | 100μF     | C3216X5R0J107M | C3216X5R1A107M | CKG57NX7S1C107M | -              | -              | -               | -               | -              |

# E-SERIES REFERENCE GUIDE

## What is E-Series?

- ❖ The E-Series is an EIA-5101 standard used by the industry to determine steps for capacitor and resistor values
- ❖ The E-Series is a geometric progression obtained by using a numeric base value

## Example:

- ❖ E-3 has 3 numbers and it's base value is  $3\sqrt[3]{10} = 2.2$
- ❖ The E-3 series capacitance steps are taken from the base values as follows: 2.2<sup>0</sup>, 2.2<sup>1</sup>, and 2.2<sup>2</sup>
- ❖ Therefore, an E-3 series offering would include the following values: 100pF; 220pF; 470pF; 1,000pF; 2,200pF; 4,700, etc.

| E-Series | Capacitance Steps |     |     |     |     |     |     |     |     |     |     |     |
|----------|-------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| E-1      | 1.0               |     |     |     |     |     |     |     |     |     |     |     |
| E-3      | 1.0               |     |     |     | 2.2 |     |     |     | 4.7 |     |     |     |
| E-6      | 1.0               |     | 1.5 |     | 2.2 |     | 3.3 |     | 4.7 |     | 6.8 |     |
| E-12     | 1.0               | 1.2 | 1.5 | 1.8 | 2.2 | 2.7 | 3.3 | 3.9 | 4.7 | 5.6 | 6.8 | 8.2 |

\* TDK offers C0G as E-12, X7R/X5R as E-6, X7S/X6S as E-3 and Y5V as E-1

| Cap Code | E-Series |   |   |    | pF   | nF      | μF         |
|----------|----------|---|---|----|------|---------|------------|
|          | 1        | 3 | 6 | 12 |      |         |            |
| R12      |          |   |   | ※  | 0.12 | 0.00012 | 0.00000012 |
| R15      |          |   | ※ | ※  | 0.15 | 0.00015 | 0.00000015 |
| R18      |          |   |   | ※  | 0.18 | 0.00018 | 0.00000018 |
| R22      |          | ※ | ※ | ※  | 0.22 | 0.00022 | 0.00000022 |
| R27      |          |   |   | ※  | 0.27 | 0.00027 | 0.00000027 |
| R33      |          |   | ※ | ※  | 0.33 | 0.00033 | 0.00000033 |
| R39      |          |   |   | ※  | 0.39 | 0.00039 | 0.00000039 |
| R47      |          | ※ | ※ | ※  | 0.47 | 0.00047 | 0.00000047 |
| R56      |          |   |   | ※  | 0.56 | 0.00056 | 0.00000056 |
| R68      |          |   | ※ | ※  | 0.68 | 0.00068 | 0.00000068 |
| R82      |          |   |   | ※  | 0.82 | 0.00082 | 0.00000082 |
| 010      | ※        | ※ | ※ | ※  | 1    | 0.001   | 0.000001   |
| 1R2      |          |   |   | ※  | 1.2  | 0.0012  | 0.0000012  |
| 1R5      |          |   | ※ | ※  | 1.5  | 0.0015  | 0.0000015  |
| 1R8      |          |   |   | ※  | 1.8  | 0.0018  | 0.0000018  |
| 2R2      |          | ※ | ※ | ※  | 2.2  | 0.0022  | 0.0000022  |
| 2R7      |          |   |   | ※  | 2.7  | 0.0027  | 0.0000027  |
| 3R3      |          |   | ※ | ※  | 3.3  | 0.0033  | 0.0000033  |
| 3R9      |          |   |   | ※  | 3.9  | 0.0039  | 0.0000039  |
| 4R7      |          | ※ | ※ | ※  | 4.7  | 0.0047  | 0.0000047  |
| 5R6      |          |   |   | ※  | 5.6  | 0.0056  | 0.0000056  |
| 6R8      |          |   | ※ | ※  | 6.8  | 0.0068  | 0.0000068  |
| 8R2      |          |   |   | ※  | 8.2  | 0.0082  | 0.0000082  |
| 100      | ※        | ※ | ※ | ※  | 10   | 0.010   | 0.000010   |
| 120      |          |   |   | ※  | 12   | 0.012   | 0.000012   |
| 150      |          |   | ※ | ※  | 15   | 0.015   | 0.000015   |
| 180      |          |   |   | ※  | 18   | 0.018   | 0.000018   |
| 220      |          | ※ | ※ | ※  | 22   | 0.022   | 0.000022   |
| 270      |          |   |   | ※  | 27   | 0.027   | 0.000027   |
| 330      |          |   | ※ | ※  | 33   | 0.033   | 0.000033   |
| 390      |          |   |   | ※  | 39   | 0.039   | 0.000039   |
| 470      |          | ※ | ※ | ※  | 47   | 0.047   | 0.000047   |
| 560      |          |   |   | ※  | 56   | 0.056   | 0.000056   |
| 680      |          |   | ※ | ※  | 68   | 0.068   | 0.000068   |
| 820      |          |   |   | ※  | 82   | 0.082   | 0.000082   |
| 101      | ※        | ※ | ※ | ※  | 100  | 0.10    | 0.00010    |

| Cap Code | E-Series |   |   |    | pF      | nF   | μF      |
|----------|----------|---|---|----|---------|------|---------|
|          | 1        | 3 | 6 | 12 |         |      |         |
| 121      |          |   |   | ※  | 120     | 0.12 | 0.00012 |
| 151      |          |   | ※ | ※  | 150     | 0.15 | 0.00015 |
| 181      |          |   |   | ※  | 180     | 0.18 | 0.00018 |
| 221      |          | ※ | ※ | ※  | 220     | 0.22 | 0.00022 |
| 271      |          |   |   | ※  | 270     | 0.27 | 0.00027 |
| 331      |          |   | ※ | ※  | 330     | 0.33 | 0.00033 |
| 391      |          |   |   | ※  | 390     | 0.39 | 0.00039 |
| 471      |          | ※ | ※ | ※  | 470     | 0.47 | 0.00047 |
| 561      |          |   |   | ※  | 560     | 0.56 | 0.00056 |
| 681      |          |   | ※ | ※  | 680     | 0.68 | 0.00068 |
| 821      |          |   |   | ※  | 820     | 0.82 | 0.00082 |
| 102      | ※        | ※ | ※ | ※  | 1,000   | 1    | 0.0010  |
| 122      |          |   |   | ※  | 1,200   | 1.2  | 0.0012  |
| 152      |          |   | ※ | ※  | 1,500   | 1.5  | 0.0015  |
| 182      |          |   |   | ※  | 1,800   | 1.8  | 0.0018  |
| 222      |          | ※ | ※ | ※  | 2,200   | 2.2  | 0.0022  |
| 272      |          |   |   | ※  | 2,700   | 2.7  | 0.0027  |
| 332      |          |   | ※ | ※  | 3,300   | 3.3  | 0.0033  |
| 392      |          |   |   | ※  | 3,900   | 3.9  | 0.0039  |
| 472      |          | ※ | ※ | ※  | 4,700   | 4.7  | 0.0047  |
| 562      |          |   |   | ※  | 5,600   | 5.6  | 0.0056  |
| 682      |          |   | ※ | ※  | 6,800   | 6.8  | 0.0068  |
| 822      |          |   |   | ※  | 8,200   | 8.2  | 0.0082  |
| 103      | ※        | ※ | ※ | ※  | 10,000  | 10   | 0.010   |
| 123      |          |   |   | ※  | 12,000  | 12   | 0.012   |
| 153      |          |   | ※ | ※  | 15,000  | 15   | 0.015   |
| 183      |          |   |   | ※  | 18,000  | 18   | 0.018   |
| 223      |          | ※ | ※ | ※  | 22,000  | 22   | 0.022   |
| 273      |          |   |   | ※  | 27,000  | 27   | 0.027   |
| 333      |          |   | ※ | ※  | 33,000  | 33   | 0.033   |
| 393      |          |   |   | ※  | 39,000  | 39   | 0.039   |
| 473      |          | ※ | ※ | ※  | 47,000  | 47   | 0.047   |
| 563      |          |   |   | ※  | 56,000  | 56   | 0.056   |
| 683      |          |   | ※ | ※  | 68,000  | 68   | 0.068   |
| 823      |          |   |   | ※  | 82,000  | 82   | 0.082   |
| 104      | ※        | ※ | ※ | ※  | 100,000 | 100  | 0.10    |

| Cap Code | E-Series |   |   |    | pF          | nF      | μF   |
|----------|----------|---|---|----|-------------|---------|------|
|          | 1        | 3 | 6 | 12 |             |         |      |
| 124      |          |   |   | ※  | 120,000     | 120     | 0.12 |
| 154      |          |   | ※ | ※  | 150,000     | 150     | 0.15 |
| 184      |          |   |   | ※  | 180,000     | 180     | 0.18 |
| 224      |          | ※ | ※ | ※  | 220,000     | 220     | 0.22 |
| 274      |          |   |   | ※  | 270,000     | 270     | 0.27 |
| 334      |          |   | ※ | ※  | 330,000     | 330     | 0.33 |
| 394      |          |   |   | ※  | 390,000     | 390     | 0.39 |
| 474      |          | ※ | ※ | ※  | 470,000     | 470     | 0.47 |
| 564      |          |   |   | ※  | 560,000     | 560     | 0.56 |
| 684      |          |   | ※ | ※  | 680,000     | 680     | 0.68 |
| 824      |          |   |   | ※  | 820,000     | 820     | 0.82 |
| 105      | ※        | ※ | ※ | ※  | 1,000,000   | 1,000   | 1    |
| 125      |          |   |   | ※  | 1,200,000   | 1,200   | 1.2  |
| 155      |          |   | ※ | ※  | 1,500,000   | 1,500   | 1.5  |
| 185      |          |   |   | ※  | 1,800,000   | 1,800   | 1.8  |
| 225      |          | ※ | ※ | ※  | 2,200,000   | 2,200   | 2.2  |
| 275      |          |   |   | ※  | 2,700,000   | 2,700   | 2.7  |
| 335      |          |   | ※ | ※  | 3,300,000   | 3,300   | 3.3  |
| 395      |          |   |   | ※  | 3,900,000   | 3,900   | 3.9  |
| 475      |          | ※ | ※ | ※  | 4,700,000   | 4,700   | 4.7  |
| 565      |          |   |   | ※  | 5,600,000   | 5,600   | 5.6  |
| 685      |          |   | ※ | ※  | 6,800,000   | 6,800   | 6.8  |
| 825      |          |   |   | ※  | 8,200,000   | 8,200   | 8.2  |
| 106      | ※        | ※ | ※ | ※  | 10,000,000  | 10,000  | 10   |
| 126      |          |   |   | ※  | 12,000,000  | 12,000  | 12   |
| 156      |          |   | ※ | ※  | 15,000,000  | 15,000  | 15   |
| 186      |          |   |   | ※  | 18,000,000  | 18,000  | 18   |
| 226      |          | ※ | ※ | ※  | 22,000,000  | 22,000  | 22   |
| 276      |          |   |   | ※  | 27,000,000  | 27,000  | 27   |
| 336      |          |   | ※ | ※  | 33,000,000  | 33,000  | 33   |
| 396      |          |   |   | ※  | 39,000,000  | 39,000  | 39   |
| 476      |          | ※ | ※ | ※  | 47,000,000  | 47,000  | 47   |
| 566      |          |   |   | ※  | 56,000,000  | 56,000  | 56   |
| 686      |          |   | ※ | ※  | 68,000,000  | 68,000  | 68   |
| 826      |          |   |   | ※  | 82,000,000  | 82,000  | 82   |
| 107      | ※        | ※ | ※ | ※  | 100,000,000 | 100,000 | 100  |

## Available Application Notes

## Synopsis/Summary

|                                                           |                                                                                                                                                                                                             |
|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| FAQ Electrical, ESD Application Note.                     | Electrostatic discharge facts and product selection considerations and recommendations                                                                                                                      |
| FAQ Electrical, ESR Modeling                              | ESR Equivalent Series Resistance facts and measurement instructions                                                                                                                                         |
| FAQ Electrical, ESR Performance with Temperature          | ESR performance with a focus on the effects of temperature, includes both external and internal effects                                                                                                     |
| FAQ Electrical, High Capacitance Measurement              | Measurement Tips for High Capacitance MLCC's                                                                                                                                                                |
| FAQ Electrical, How should I measure capacitors?          | Fundamentals for measuring capacitance, dissipation factor, quality factor, and insulation resistance                                                                                                       |
| FAQ Electrical, How should I measure SRF?                 | Fundamentals and meter settings for measuring self-resonance frequency (SRF) for low capacitance capacitors                                                                                                 |
| FAQ Electrical, HP4291 RF Impedance Analyzer              | Measurement instructions, accuracy, calibration of the HP4291 RF/Impedance Analyzer                                                                                                                         |
| FAQ Electrical, MLCC Ripple Current                       | Power dissipation capability matching and Ripple Current fundamentals                                                                                                                                       |
| FAQ Electrical, Singing Capacitors (Piezoelectric Effect) | Certain MLCCs sometimes exhibit a phenomena described as "singing" and is actually a piezoelectric effect consisting of a vibration or low audible hum. This FAQ will discuss some aspects of this behavior |
| FAQ Mechanical, SMT Rework, Solder Conditions             | Tips and tricks for MLCC rework methods                                                                                                                                                                     |
| FAQ Mechanical, Terminal Adhesion                         | Q&A regarding soldering and adhesion of MLCC to PCB                                                                                                                                                         |
| FAQ Mechanical, Tombstoning                               | Model of Chip Cap Tombstoning                                                                                                                                                                               |
| FAQ Other, Buyer Beware (Counterfeit)                     | Frequently asked questions regarding the increasing trend of counterfeit electronic components.                                                                                                             |
| FAQ Other, Environmental                                  | Information regarding the constituents of a MLCC and company environmental position                                                                                                                         |
| FAQ Other, MLCC Qualification Guide                       | Commonly asked questions concerning family approvals and the associated test batteries for MLCCs                                                                                                            |
| FAQ Other, Qualification Statement (Q200 Compliance)      | Statement regarding TDK MLCC qualification compliance to EIA 198 and CDF-AEC-Q200 standards as well as "automotive" vs. "non-automotive" grades.                                                            |
| FAQ Other, Sn Whisker                                     | Guide to manufacturing techniques to reduce the risk of tin whisker formation                                                                                                                               |
| FAQ Other, TDK MLCC FIT Calculations                      | Frequently asked questions regarding TDK's Failure in Time calculations and Mean Time To Failure / Mean Time Between Failure for capacitors                                                                 |
| FAQ Other, TDK MLCC Test Standards                        | TDK test methods for performance of MLCC defined                                                                                                                                                            |
| FAQ Other, TDK PPAP                                       | PPAP fundamentals                                                                                                                                                                                           |
| FAQ Other, TDK Standard vs Unique/AUTO Grade MLCCs        | Frequently asked questions regarding the difference between TDK's standard grade and unique grade MLCCs                                                                                                     |
| FAQ Other, Value Added                                    | Q&A for performing Value Added analysis to reduce board space and cut cost while keeping performance capabilities                                                                                           |
| FAQ, Understanding the E-Series                           | Explanations of E-Series                                                                                                                                                                                    |
| FAQ, What is the Cap of this Cap?                         | Fundamentals regarding capacitor aging and its effect on capacitance                                                                                                                                        |
| FAQ, Common Cracking Modes                                | Introduction to various cracking modes commonly exhibited by MLCCs                                                                                                                                          |
| FAQ, Open Mode Capacitor and the 1210 rule                | Frequently asked questions regarding TDK's inner electrode design which reduce the risk of electrical short in the event of a board flex crack                                                              |
| FAQ, TDK's Modeling Tools (SEATS and CCV)                 | Comparison for two of TDK's modeling tools                                                                                                                                                                  |

\* Please contact your TDK Sales Representation for more information on how to obtain these application notes

## Components Characteristics Viewer



TDK's Components Characteristic Viewer (CCV) tool provides you with a simple online procedure for checking the basic, frequency, DC-Bias and temperature characteristics of TDK electronic parts. You can use it as a tool for selecting TDK electronic part. Both CCV and SEATs offer a wide array of data available that can be modeled either online, but SEATs must be downloaded for use as a desktop application program. CCV is a web-based tool that can be used with available access to the internet. This is one of the main differences between CCV and SEATs.

## Features

- ✓ 2-port parts can display a maximum of 27 kinds of frequency characteristics, and 4-port parts can display a maximum of 70 kinds.
- ✓ DC-Bias and temperature characteristics of inductors and capacitors can be displayed.
- ✓ It is possible to set an axis or change the reference impedance of the S parameter in the frequency characteristic. It is also possible to download data.
- ✓ Frequency characteristics can be overwritten, so it is easy to compare parts.
- ✓ Parts lists use a tree view display, to make it easy to search for or select parts.
- ✓ The tool is linked to electronic part catalog data in compliance with JEITA, so it can display more detailed data.
- ✓ Approximately 3300 parts are recorded at present (including ferrite beads, inductors, capacitors, 3-terminal filters, common mode filters and varistors).

➤ For more information, please visit <http://www.tdk.co.jp/ccv/index.asp>

## TDK Virtual Component Library (TVCL)

TDK Virtual Components Library is a collection of equivalent circuit models compatible with various circuit simulators available on TDK's official website. Circuit simulations using the actual characteristics of TDK's electronic components can easily be performed. TVCL features an extensive number of products (more than 3,000 products) and are compatible with major circuit simulators. Equivalent circuit models take into account component structures and material characteristics allow for detailed models of actual components characteristics.

| Compatible Simulators   | Available TDK Components |           |        |       |               |                |                    |               |           |
|-------------------------|--------------------------|-----------|--------|-------|---------------|----------------|--------------------|---------------|-----------|
|                         | MLCC                     | Inductors |        |       | Ferrite Beads | 3-Term Filters | Common Mode Filter | Pulse XFormer | Varistors |
|                         |                          | RF        | Signal | Power |               |                |                    |               |           |
| SPICE Net List          | ※                        | ※         | ※      | ※     | ※             | ※              | ※                  | ※             | -         |
| Agilent ADS             | ※                        | ※         | ※      | ※     | ※             | ※              | ※                  | ※             | ※         |
| Ansoft Designer®        | ※                        | ※         | ※      | ※     | ※             | ※              | ※                  | ※             | ※         |
| Ansoft NEXXIM®          | ※                        | ※         | ※      | ※     | ※             | ※              | ※                  | ※             | ※         |
| AWR Microwave Office    | ※                        | ※         | ※      | -     | ※             | -              | ※                  | -             | ※         |
| Cadence Allegro® PCB PI | ※                        | -         | -      | -     | ※             | -              | ※                  | -             | -         |
| Cadence Allegro® PCB SI | ※                        | -         | -      | -     | ※             | -              | ※                  | -             | -         |
| Suken CR-5000 Lightning | -                        | -         | -      | -     | -             | -              | ※                  | -             | -         |

## Comparison of Equivalent Circuit Models and Actual Measurements



➤ For more information, please visit <http://www.tdk.com/tvcl.php>

## Selection Assistant of TDK Components

SEAT stands for SElection Assistant of TDK components. SEAT makes it easy to simulate the characteristics of components including inductors, capacitors, common mode filters, and varistors. This not only reduces design and development time, but also provides substantial support when searching for optimal components for EMC and power supply use.

With SEAT, various kinds of impedance and S-parameters can be displayed. Impedance characteristics such as magnitude value, phase, admittance, inductance, capacitance,  $\tan\delta$ , and Q can be displayed. S-parameters such as magnitude value, phase, group delay time, Smith chart, and VSWR can be displayed. Mixed mode S-parameters, which are essential for analyzing balanced components, can also be handled. In addition, it is possible to display the temperature-resistance characteristics of NTC thermistors, and the voltage-current characteristics of chip varistors.

## Capabilities

- ✓ Pulse Response Simulation (Single Lines and Differential Lines)
  - This simulation can show the influence on waveforms when a component is used on a digital circuit.
- ✓ TDR Simulation
  - This simulation shows the characteristic impedance of components.
- ✓ NTC Thermistor Simulation
  - This simulation can show the output voltage when a NTC thermistor is installed on a circuit.
- ✓ Inductor's Characteristic Simulation
  - This simulation shows the DC bias characteristics, temperature characteristics, and temperature rise characteristics caused by current flow.
- ✓ Capacitor's Characteristic Simulation
  - This simulation shows the DC bias characteristics, temperature characteristics, and temperature rise characteristics caused by current flow.



## Features

- ✓ Over 4,000 Components are Included in the database including coils, capacitors, inductors, beads, three-terminal filters, common mode filters, varistors, NTC thermistors, baluns, etc...
- ✓ Display frequency characteristics including impedance and S Parameters (including mix mode)
- ✓ Display DC bias and temperature characteristics
- ✓ Pulse Response Simulation (Single end/differential transmission)
- ✓ TDR Simulation (Assessment of component characteristic impedance)
- ✓ Temperature increase simulation (Temperature increase from inductor direct current and capacitor ripple)
- ✓ User-Defined Filter
- ✓ Characteristic Impedance Calculator (Characteristic impedance can be calculated from circuit board dimensions (also compatible with coupled lines))
- ✓ Product search function
- ✓ Support automatic online updates (Only modified portions are downloaded from the Internet to update the software to the latest version)

➤ For more information, please visit <http://www.tdk.co.jp/ccv/index.asp>

## Supports Automatic Online Updates



| TDK Part Number<br>(Ordering Code) | Case<br>Size | T.C.<br>Code | Voltage<br>(DC) | Cap<br>(pF) | Cap<br>Tolerance |
|------------------------------------|--------------|--------------|-----------------|-------------|------------------|
| C0603X5R0G105M                     | 0201         | X5R          | 4               | 1,000,000   | +/-20%           |
| C0402X5R0G104K                     | 01005        | X5R          | 4               | 100,000     | +/-10%           |
| C0402X5R0G104M                     | 01005        | X5R          | 4               | 100,000     | +/-20%           |
| C2012X7R1C475K/SOFT                | 0805         | X7R          | 16              | 4,700,000   | +/-10%           |
| C2012X7R1V225K/SOFT                | 0805         | X7R          | 35              | 2,200,000   | +/-10%           |
| C2012X7R1H474K/SOFT                | 0805         | X7R          | 50              | 470,000     | +/-10%           |
| C2012X7R1H105K/SOFT                | 0805         | X7R          | 50              | 1,000,000   | +/-10%           |
| C2012X7S2A224K/SOFT                | 0805         | X7S          | 100             | 220,000     | +/-10%           |
| C2012X7S2A474K/SOFT                | 0805         | X7S          | 100             | 470,000     | +/-10%           |
| C2012X7S2A105K/SOFT                | 0805         | X7S          | 100             | 1,000,000   | +/-10%           |
| C2012X7R2E103K/SOFT                | 0805         | X7R          | 250             | 10,000      | +/-10%           |
| C2012X7R2E223K/SOFT                | 0805         | X7R          | 250             | 22,000      | +/-10%           |
| C2012X7T2E473K/SOFT                | 0805         | X7T          | 250             | 47,000      | +/-10%           |
| C2012X7T2E104K/SOFT                | 0805         | X7T          | 250             | 100,000     | +/-10%           |
| C2012X7T2W103K/SOFT                | 0805         | X7T          | 450             | 10,000      | +/-10%           |
| C2012X7T2W223K/SOFT                | 0805         | X7T          | 450             | 22,000      | +/-10%           |
| C2012X7T2W473K/SOFT                | 0805         | X7T          | 450             | 47,000      | +/-10%           |
| C3216X7R1E106K/SOFT                | 1206         | X7R          | 25              | 10,000,000  | +/-10%           |
| C3216X7R1V475K/SOFT                | 1206         | X7R          | 35              | 4,700,000   | +/-10%           |
| C3216X7R1H105K/SOFT                | 1206         | X7R          | 50              | 1,000,000   | +/-10%           |
| C3216X7R1H225K/SOFT                | 1206         | X7R          | 50              | 2,200,000   | +/-10%           |
| C3216X7R2A474K/SOFT                | 1206         | X7R          | 100             | 470,000     | +/-10%           |
| C3216X7R2A105K/SOFT                | 1206         | X7R          | 100             | 1,000,000   | +/-10%           |
| C3216X7S2A225K/SOFT                | 1206         | X7S          | 100             | 2,200,000   | +/-10%           |
| C3216X7R2E104K/SOFT                | 1206         | X7R          | 250             | 100,000     | +/-10%           |
| C3216X7T2E224K/SOFT                | 1206         | X7T          | 250             | 220,000     | +/-10%           |
| C3216X7T2W104K/SOFT                | 1206         | X7T          | 450             | 100,000     | +/-10%           |
| C3216X7R2J103K/SOFT                | 1206         | X7R          | 630             | 10,000      | +/-10%           |
| C3216X7R2J223K/SOFT                | 1206         | X7R          | 630             | 22,000      | +/-10%           |
| C3216X7T2J473K/SOFT                | 1206         | X7T          | 630             | 47,000      | +/-10%           |
| C3225X7S1H475K/SOFT                | 1210         | X7S          | 50              | 4,700,000   | +/-10%           |
| C3225X7S1H106K/SOFT                | 1210         | X7S          | 50              | 10,000,000  | +/-10%           |
| C3225X7R2A225K/SOFT                | 1210         | X7R          | 100             | 2,200,000   | +/-10%           |
| C3225X7S2A475K/SOFT                | 1210         | X7S          | 100             | 4,700,000   | +/-10%           |
| C3225X7R2E104K/SOFT                | 1210         | X7R          | 250             | 100,000     | +/-10%           |
| C3225X7R2E224K/SOFT                | 1210         | X7R          | 250             | 220,000     | +/-10%           |
| C3225X7T2W224K/SOFT                | 1210         | X7T          | 450             | 220,000     | +/-10%           |
| C3225X7R2J473K/SOFT                | 1210         | X7R          | 630             | 47,000      | +/-10%           |
| C3225X7T2J104K/SOFT                | 1210         | X7T          | 630             | 100,000     | +/-10%           |
| C4532X7R2E474K/SOFT                | 1812         | X7R          | 250             | 470,000     | +/-10%           |
| C4532X7T2E105K/SOFT                | 1812         | X7T          | 250             | 1,000,000   | +/-10%           |
| C4532X7T2W474K/SOFT                | 1812         | X7T          | 450             | 470,000     | +/-10%           |
| C4532X7T2J224K/SOFT                | 1812         | X7T          | 630             | 220,000     | +/-10%           |
| C5750X7S2A106K/SOFT                | 2220         | X7S          | 100             | 10,000,000  | +/-10%           |
| C5750X7R2E105K/SOFT                | 2220         | X7R          | 250             | 1,000,000   | +/-10%           |
| C5750X7T2E225K/SOFT                | 2220         | X7T          | 250             | 2,200,000   | +/-10%           |
| C5750X7T2W105K/SOFT                | 2220         | X7T          | 450             | 1,000,000   | +/-10%           |
| C5750X7T2J474K/SOFT                | 2220         | X7T          | 630             | 470,000     | +/-10%           |
| CGA4J3X7R1C475K/SOFT               | 0805         | X7R          | 16              | 4,700,000   | +/-10%           |
| CGA4J1X7R1V225K/SOFT               | 0805         | X7R          | 35              | 2,200,000   | +/-10%           |

| TDK Part Number<br>(Ordering Code) | Case<br>Size | T.C.<br>Code | Voltage<br>(DC) | Cap<br>(pF) | Cap<br>Tolerance |
|------------------------------------|--------------|--------------|-----------------|-------------|------------------|
| CGA4J3X7R1H474K/SOFT               | 0805         | X7R          | 50              | 470,000     | +/-10%           |
| CGA4J3X7R1H105K/SOFT               | 0805         | X7R          | 50              | 1,000,000   | +/-10%           |
| CGA4F3X7S2A224K/SOFT               | 0805         | X7S          | 100             | 220,000     | +/-10%           |
| CGA4J3X7S2A474K/SOFT               | 0805         | X7S          | 100             | 470,000     | +/-10%           |
| CGA4J3X7S2A105K/SOFT               | 0805         | X7S          | 100             | 1,000,000   | +/-10%           |
| CGA4J3X7R2E103K/SOFT               | 0805         | X7R          | 250             | 10,000      | +/-10%           |
| CGA4J3X7R2E223K/SOFT               | 0805         | X7R          | 250             | 22,000      | +/-10%           |
| CGA4J3X7T2E473K/SOFT               | 0805         | X7T          | 250             | 47,000      | +/-10%           |
| CGA4J3X7T2E104K/SOFT               | 0805         | X7T          | 250             | 100,000     | +/-10%           |
| CGA4F4X7T2W103K/SOFT               | 0805         | X7T          | 450             | 10,000      | +/-10%           |
| CGA4J4X7T2W223K/SOFT               | 0805         | X7T          | 450             | 22,000      | +/-10%           |
| CGA4J4X7T2W473K/SOFT               | 0805         | X7T          | 450             | 47,000      | +/-10%           |
| CGA5L1X7R1E106K/SOFT               | 1206         | X7R          | 25              | 10,000,000  | +/-10%           |
| CGA5L1X7R1V475K/SOFT               | 1206         | X7R          | 35              | 4,700,000   | +/-10%           |
| CGA5L3X7R1H105K/SOFT               | 1206         | X7R          | 50              | 1,000,000   | +/-10%           |
| CGA5L3X7R1H225K/SOFT               | 1206         | X7R          | 50              | 2,200,000   | +/-10%           |
| CGA5L2X7R2A474K/SOFT               | 1206         | X7R          | 100             | 470,000     | +/-10%           |
| CGA5L2X7R2A105K/SOFT               | 1206         | X7R          | 100             | 1,000,000   | +/-10%           |
| CGA5L3X7S2A225K/SOFT               | 1206         | X7S          | 100             | 2,200,000   | +/-10%           |
| CGA5L3X7R2E104K/SOFT               | 1206         | X7R          | 250             | 100,000     | +/-10%           |
| CGA5L3X7T2E224K/SOFT               | 1206         | X7T          | 250             | 220,000     | +/-10%           |
| CGA5L4X7T2W104K/SOFT               | 1206         | X7T          | 450             | 100,000     | +/-10%           |
| CGA5H4X7R2J103K/SOFT               | 1206         | X7R          | 630             | 10,000      | +/-10%           |
| CGA5K4X7R2J223K/SOFT               | 1206         | X7R          | 630             | 22,000      | +/-10%           |
| CGA5L1X7T2J473K/SOFT               | 1206         | X7T          | 630             | 47,000      | +/-10%           |
| CGA6N3X7S1H475K/SOFT               | 1210         | X7S          | 50              | 4,700,000   | +/-10%           |
| CGA6P3X7S1H106K/SOFT               | 1210         | X7S          | 50              | 10,000,000  | +/-10%           |
| CGA6N3X7R2A225K/SOFT               | 1210         | X7R          | 100             | 2,200,000   | +/-10%           |
| CGA6M3X7S2A475K/SOFT               | 1210         | X7S          | 100             | 4,700,000   | +/-10%           |
| CGA6M3X7R2E104K/SOFT               | 1210         | X7R          | 250             | 100,000     | +/-10%           |
| CGA6M3X7R2E224K/SOFT               | 1210         | X7R          | 250             | 220,000     | +/-10%           |
| CGA6M4X7T2W224K/SOFT               | 1210         | X7T          | 450             | 220,000     | +/-10%           |
| CGA6M4X7R2J473K/SOFT               | 1210         | X7R          | 630             | 47,000      | +/-10%           |
| CGA6L1X7T2J104K/SOFT               | 1210         | X7T          | 630             | 100,000     | +/-10%           |
| CGA8N3X7R2E474K/SOFT               | 1812         | X7R          | 250             | 470,000     | +/-10%           |
| CGA8P3X7T2E105K/SOFT               | 1812         | X7T          | 250             | 1,000,000   | +/-10%           |
| CGA8N4X7T2W474K/SOFT               | 1812         | X7T          | 450             | 470,000     | +/-10%           |
| CGA8M1X7T2J224K/SOFT               | 1812         | X7T          | 630             | 220,000     | +/-10%           |
| CGA9N3X7S2A106K/SOFT               | 2220         | X7S          | 100             | 10,000,000  | +/-10%           |
| CGA9N3X7R2E105K/SOFT               | 2220         | X7R          | 250             | 1,000,000   | +/-10%           |
| CGA9P3X7T2E225K/SOFT               | 2220         | X7T          | 250             | 2,200,000   | +/-10%           |
| CGA9P4X7T2W105K/SOFT               | 2220         | X7T          | 450             | 1,000,000   | +/-10%           |
| CGA9P1X7T2J474K/SOFT               | 2220         | X7T          | 630             | 470,000     | +/-10%           |
| C7563X7S1H226M/SOFT                | 3025         | X7S          | 50              | 22,000,000  | +/-20%           |
| C7563X7S1C107M/SOFT                | 3025         | X7S          | 16              | 100,000,000 | +/-20%           |
| C1632X7R1A225M                     | 0612         | X7R          | 10              | 2,200,000   | +/-20%           |
| C1005X8R1H682K                     | 0402         | X8R          | 50              | 6,800       | +/-10%           |
| C1005X8R1H103K                     | 0402         | X8R          | 50              | 10,000      | +/-10%           |
| C1005X8R1E153K                     | 0402         | X8R          | 25              | 15,000      | +/-10%           |
| C1005X8R1E223K                     | 0402         | X8R          | 25              | 22,000      | +/-10%           |

| TDK Part Number<br>(Ordering Code) | Case<br>Size | T.C.<br>Code | Voltage<br>(DC) | Cap<br>(pF) | Cap<br>Tolerance |
|------------------------------------|--------------|--------------|-----------------|-------------|------------------|
| C1005X8R1C333K                     | 0402         | X8R          | 16              | 33,000      | +/-10%           |
| C1005X8R1C473K                     | 0402         | X8R          | 16              | 47,000      | +/-10%           |
| C1608X8R1H683K                     | 0603         | X8R          | 50              | 68,000      | +/-10%           |
| C1608X8R1H104K                     | 0603         | X8R          | 50              | 100,000     | +/-10%           |
| C1608X8R1E154K                     | 0603         | X8R          | 25              | 150,000     | +/-10%           |
| C1608X8R1E224K                     | 0603         | X8R          | 25              | 220,000     | +/-10%           |
| C1608X8R1C334K                     | 0603         | X8R          | 16              | 330,000     | +/-10%           |
| C1608X8R1C474K                     | 0603         | X8R          | 16              | 470,000     | +/-10%           |
| C2012X8R1H154K                     | 0805         | X8R          | 50              | 150,000     | +/-10%           |
| C2012X8R1H224K                     | 0805         | X8R          | 50              | 220,000     | +/-10%           |
| C2012X8R1E474K                     | 0805         | X8R          | 25              | 470,000     | +/-10%           |
| C2012X8R1C684K                     | 0805         | X8R          | 16              | 680,000     | +/-10%           |
| C2012X8R1C105K                     | 0805         | X8R          | 16              | 1,000,000   | +/-10%           |
| C3216X8R1H684K                     | 1206         | X8R          | 50              | 680,000     | +/-10%           |
| C3216X8R1H105K                     | 1206         | X8R          | 50              | 1,000,000   | +/-10%           |
| C3216X8R1E155K                     | 1206         | X8R          | 25              | 1,500,000   | +/-10%           |
| C3216X8R1E225K                     | 1206         | X8R          | 25              | 2,200,000   | +/-10%           |
| C3216X8R1C335K                     | 1206         | X8R          | 16              | 3,300,000   | +/-10%           |
| C3216X8R1C475K                     | 1206         | X8R          | 16              | 4,700,000   | +/-10%           |
| C3225X8R1C685K                     | 1210         | X8R          | 16              | 6,800,000   | +/-10%           |
| C3225X8R1C106K                     | 1210         | X8R          | 16              | 10,000,000  | +/-10%           |
| C1005C0G1H100D/EPOXY               | 0402         | C0G          | 50              | 10          | +/-0.50pF        |
| C1005C0G1H101J/EPOXY               | 0402         | C0G          | 50              | 100         | +/-5%            |
| C1608C0G1H100D/EPOXY               | 0603         | C0G          | 50              | 10          | +/-0.50pF        |
| C1608C0G1H101J/EPOXY               | 0603         | C0G          | 50              | 100         | +/-5%            |
| C1608C0G1H102J/EPOXY               | 0603         | C0G          | 50              | 1,000       | +/-5%            |
| C1608C0G2A101J/EPOXY               | 0603         | C0G          | 100             | 100         | +/-5%            |
| C1608C0G2A221J/EPOXY               | 0603         | C0G          | 100             | 220         | +/-5%            |
| C1608C0G2A471J/EPOXY               | 0603         | C0G          | 100             | 470         | +/-5%            |
| C1608C0G2A102J/EPOXY               | 0603         | C0G          | 100             | 1,000       | +/-5%            |
| C1608X7R1H102K/EPOXY               | 0603         | X7R          | 50              | 1,000       | +/-10%           |
| C1608X7R1H222K/EPOXY               | 0603         | X7R          | 50              | 2,200       | +/-10%           |
| C1608X7R1H472K/EPOXY               | 0603         | X7R          | 50              | 4,700       | +/-10%           |
| C1608X7R1H103K/EPOXY               | 0603         | X7R          | 50              | 10,000      | +/-10%           |
| C1608X7R1H223K/EPOXY               | 0603         | X7R          | 50              | 22,000      | +/-10%           |
| C1608X7R1H473K/EPOXY               | 0603         | X7R          | 50              | 47,000      | +/-10%           |
| C1608X7R1H104K/EPOXY               | 0603         | X7R          | 50              | 100,000     | +/-10%           |
| C2012X7R1E105K/EPOXY               | 0805         | X7R          | 25              | 1,000,000   | +/-10%           |
| C3216X7R1E106M/EPOXY               | 1206         | X7R          | 25              | 10,000,000  | +/-20%           |
| C3225X7R1H105K/EPOXY               | 1210         | X7R          | 50              | 1,000,000   | +/-10%           |
| C1005X8R1H221K/EPOXY               | 0402         | X8R          | 50              | 220         | +/-10%           |
| C1005X8R1H471K/EPOXY               | 0402         | X8R          | 50              | 470         | +/-10%           |
| C1005X8R1H102K/EPOXY               | 0402         | X8R          | 50              | 1,000       | +/-10%           |
| C1005X8R1H222K/EPOXY               | 0402         | X8R          | 50              | 2,200       | +/-10%           |
| C1005X8R1H472K/EPOXY               | 0402         | X8R          | 50              | 4,700       | +/-10%           |
| C1005X8R1E103K/EPOXY               | 0402         | X8R          | 25              | 10,000      | +/-10%           |
| C1608X8R2A102K/EPOXY               | 0603         | X8R          | 100             | 1,000       | +/-10%           |
| C1608X8R2A222K/EPOXY               | 0603         | X8R          | 100             | 2,200       | +/-10%           |
| C1608X8R2A472K/EPOXY               | 0603         | X8R          | 100             | 4,700       | +/-10%           |
| C1608X8R2A103K/EPOXY               | 0603         | X8R          | 100             | 10,000      | +/-10%           |

| TDK Part Number<br>(Ordering Code) | Case<br>Size | T.C.<br>Code | Voltage<br>(DC) | Cap<br>(pF) | Cap<br>Tolerance |
|------------------------------------|--------------|--------------|-----------------|-------------|------------------|
| C1608X8R1H102K/EPOXY               | 0603         | X8R          | 50              | 1,000       | +/-10%           |
| C1608X8R1H103K/EPOXY               | 0603         | X8R          | 50              | 10,000      | +/-10%           |
| C1608X8R1H223K/EPOXY               | 0603         | X8R          | 50              | 22,000      | +/-10%           |
| C1608X8R1H473K/EPOXY               | 0603         | X8R          | 50              | 47,000      | +/-10%           |
| C1608X8R1E104K/EPOXY               | 0603         | X8R          | 25              | 100,000     | +/-10%           |
| C2012X8R1H104K/EPOXY               | 0805         | X8R          | 50              | 100,000     | +/-10%           |
| C3216X8R1E105K/EPOXY               | 1206         | X8R          | 25              | 1,000,000   | +/-10%           |

## SAN JOSE DISTRICT OFFICE

Serving USA - Northern CA, NV, WA, ID, OR, WY, UT, MT  
Serving CANADA - BC, AB, YT, NT, SK, MB  
1740 Technology Drive, Suite 510  
San Jose, CA 95110  
Phone: (408) 437-9585  
Fax: (408) 437-9591  
Contact: Chris Keller

## SAN DIEGO DISTRICT OFFICE

Serving USA - Southern CA  
9350 Waxie Way, Suite 520  
San Diego, CA 92122  
Phone: (858) 715-4200  
Fax: (858) 505-8725  
Contact: Mitch Oda (in San Diego), Marc Picard (in L.A. office)

## NEW JERSEY DISTRICT OFFICE

Serving USA - WV, PA, NY, NJ, DC, MD, DE, VA  
485-B Route 1 South, Suite 200  
Iselin, NJ 8830  
Phone: (908) 653-0910  
Contact: Tony Pepe, John Gibson

## NEW ENGLAND DISTRICT OFFICE

Serving USA - CT, MA  
Serving CANADA - NL, PE, NS, NB, QC, ON  
264 S. River Road, Suite 416  
Bedford, NH 3110  
Phone: (603) 622-0003  
Fax: (603) 622-1196  
Contact: Alan Killen, John Gibson

## LOS ANGELES SALES OFFICE

Serving USA - Southern CA, AZ  
11070 Valley View Street  
Cypress, CA 90630  
Phone: (714) 934-1212  
Fax: (714) 897-5894  
Contact: Mitch Oda (in San Diego), Marc Picard (in L.A. office)

## INDIANAPOLIS DISTRICT OFFICE

Serving USA - KY, IN, OH  
4015 W. Vincennes Road  
Indianapolis, IN 46268  
Phone: (317) 872-0370  
Fax: (317) 872-2978  
Contact: Mike White

## HUNTSVILLE DISTRICT OFFICE

Serving USA - AL, TN, MS  
4015 W. Vincennes Road  
Indianapolis, IN 46268  
Phone: (317) 872-0370  
Fax: (317) 872-2978  
Contact: Mike White

## GREENSBORO DISTRICT OFFICE

Serving USA - SC, NC, GA, FL, PR  
200 Centerport Drive, Suite 325  
Greensboro, NC 27409  
Phone: (336) 292-0012  
Fax: (336) 292-3831  
Contact: John Gibson

- R&D centers
- Production centers
- R&D and production centers

## DETROIT DISTRICT OFFICE

Serving USA - MI  
38701 Seven Mile Road, Suite 250  
Livonia, MI 48152  
Phone: (734) 462-1210  
Fax: (734) 462-1193  
Contact: Masa Yano

## DENVER SALES OFFICE

Serving USA - CO  
357 S. McCaslin Blvd., Suite 200  
Louisville, CO 80027  
Phone: (408) 467-5211  
Fax: (408) 437-9591  
Contact: Chris Keller

## DALLAS DISTRICT OFFICE

Serving USA - AR, OK, NM, TX, AK, LA and MEXICO  
511 E. Carpenter Freeway, Suite 690  
Irving, TX 75062  
Phone: (972) 506-9800  
Fax: (972) 869-3353  
Contact: Max Treptow

## CHICAGO DISTRICT OFFICE

Serving USA - ND, SD, IA, IL, WI, KS, MO, MN, NE  
475 Half Day Road, Suite 300  
Lincolnshire, IL 60056  
Phone: (847) 699-2299  
Fax: (847) 803-6296  
Contact: Mike Tumminaro



# TDK Sales Representative Offices

South Bridge, LLC  
Georgia, USA  
Email: [bobbil@southbridge.net](mailto:bobbil@southbridge.net)  
Website: [www.southbridge.net](http://www.southbridge.net)

South Bridge, LLC  
Mississippi, USA  
Email: [sherrill@southbridge.net](mailto:sherrill@southbridge.net)  
Website: [www.southbridge.net](http://www.southbridge.net)

South Bridge, LLC  
North Carolina, USA  
Email: [crystal@southbridge.net](mailto:crystal@southbridge.net)  
Website: [www.southbridge.net](http://www.southbridge.net)

South Bridge, LLC  
Florida, USA  
Email: [kim@southbridge.net](mailto:kim@southbridge.net)  
Website: [www.southbridge.net](http://www.southbridge.net)

South Bridge, LLC  
South Carolina, USA  
Email: [crystal@southbridge.net](mailto:crystal@southbridge.net)  
Website: [www.southbridge.net](http://www.southbridge.net)

South Bridge, LLC  
Western Tennessee, USA  
Email: [sherrill@southbridge.net](mailto:sherrill@southbridge.net)  
Website: [www.southbridge.net](http://www.southbridge.net)

South Bridge, LLC  
Eastern Tennessee, USA  
Email: [bobbil@southbridge.net](mailto:bobbil@southbridge.net)  
Website: [www.southbridge.net](http://www.southbridge.net)

South Bridge, LLC  
Alabama, USA  
Email: [sherrill@southbridge.net](mailto:sherrill@southbridge.net)  
Website: [www.southbridge.net](http://www.southbridge.net)

Seltec Sales Corporation  
Southern Illinois, USA  
Email: [christy\\_meyer@seltec-sales.com](mailto:christy_meyer@seltec-sales.com)  
Website: [www.seltecsales.com](http://www.seltecsales.com)

Seltec Sales Corporation  
Kansas, USA  
Email: [brian.young@seltec-sales.com](mailto:brian.young@seltec-sales.com)  
Website: [www.seltecsales.com](http://www.seltecsales.com)

Seltec Sales Corporation  
Missouri, USA  
Email: [christy\\_meyer@seltec-sales.com](mailto:christy_meyer@seltec-sales.com)  
Website: [www.seltecsales.com](http://www.seltecsales.com)

Seltec Sales Corporation  
Nebraska, USA  
Email: [brian.young@seltec-sales.com](mailto:brian.young@seltec-sales.com)  
Website: [www.seltecsales.com](http://www.seltecsales.com)

Quad State Sales and Marketing  
Oklahoma, USA  
Email: [kbrayman@quadstatesales.com](mailto:kbrayman@quadstatesales.com)  
Website: [www.quadstatesales.com](http://www.quadstatesales.com)

Quad State Sales and Marketing  
Louisiana, USA  
Email: [kbrayman@quadstatesales.com](mailto:kbrayman@quadstatesales.com)  
Website: [www.quadstatesales.com](http://www.quadstatesales.com)

Quad State Sales and Marketing  
Texas, USA  
Email: [kbrayman@quadstatesales.com](mailto:kbrayman@quadstatesales.com)  
Website: [www.quadstatesales.com](http://www.quadstatesales.com)

Quad State Sales and Marketing  
Arkansas, USA  
Email: [kbrayman@quadstatesales.com](mailto:kbrayman@quadstatesales.com)  
Website: [www.quadstatesales.com](http://www.quadstatesales.com)

Procyon Technical Sales  
New Mexico, USA  
Email: [lfisher@procyonsales.com](mailto:lfisher@procyonsales.com)  
Website: [www.procyonsales.com](http://www.procyonsales.com)

Procyon Technical Sales  
Southern Nevada, USA  
Email: [lfisher@procyonsales.com](mailto:lfisher@procyonsales.com)  
Website: [www.procyonsales.com](http://www.procyonsales.com)

Procyon Technical Sales  
Southern California, USA  
Email: [lfisher@procyonsales.com](mailto:lfisher@procyonsales.com)  
Website: [www.procyonsales.com](http://www.procyonsales.com)

Procyon Technical Sales  
Arizona, USA  
Email: [lfisher@procyonsales.com](mailto:lfisher@procyonsales.com)  
Website: [www.procyonsales.com](http://www.procyonsales.com)

Paragon Electronic Systems  
Vermont, USA  
Email: [sales@paragonelect.com](mailto:sales@paragonelect.com)  
Website: [www.paragonelect.com](http://www.paragonelect.com)

Paragon Electronic Systems  
Rhode Island, USA  
Email: [sales@paragonelect.com](mailto:sales@paragonelect.com)  
Website: [www.paragonelect.com](http://www.paragonelect.com)

Paragon Electronic Systems  
New Hampshire, USA  
Email: [sales@paragonelect.com](mailto:sales@paragonelect.com)  
Website: [www.paragonelect.com](http://www.paragonelect.com)

Paragon Electronic Systems  
Maine, USA  
Email: [sales@paragonelect.com](mailto:sales@paragonelect.com)  
Website: [www.paragonelect.com](http://www.paragonelect.com)

Paragon Electronic Systems  
Massachusetts, USA  
Email: [sales@paragonelect.com](mailto:sales@paragonelect.com)  
Website: [www.paragonelect.com](http://www.paragonelect.com)

Paragon Electronic Systems  
Connecticut, USA  
Email: [sales@paragonelect.com](mailto:sales@paragonelect.com)  
Website: [www.paragonelect.com](http://www.paragonelect.com)

Omega Electronic Sales, Inc.  
Southern New Jersey, USA  
Email: [office@omegasales.com](mailto:office@omegasales.com)  
Website: [www.omegasales.com](http://www.omegasales.com)

Omega Electronic Sales, Inc.  
Delaware, USA  
Email: [office@omegasales.com](mailto:office@omegasales.com)  
Website: [www.omegasales.com](http://www.omegasales.com)

Omega Electronic Sales, Inc.  
Eastern Pennsylvania, USA  
Email: [office@omegasales.com](mailto:office@omegasales.com)  
Website: [www.omegasales.com](http://www.omegasales.com)

Mel Foster Company  
North Dakota, USA  
Email: [kristine@melfoster.com](mailto:kristine@melfoster.com)  
Website: [www.melfoster.com](http://www.melfoster.com)

Mel Foster Company  
Iowa, USA  
Email: [sonia@melfoster.com](mailto:sonia@melfoster.com)  
Website: [www.melfoster.com](http://www.melfoster.com)

Mel Foster Company  
Minnesota, USA  
Email: [kristine@melfoster.com](mailto:kristine@melfoster.com)  
Website: [www.melfoster.com](http://www.melfoster.com)

Mel Foster Company  
South Dakota, USA  
Email: [kristine@melfoster.com](mailto:kristine@melfoster.com)  
Website: [www.melfoster.com](http://www.melfoster.com)

Mel Foster Company  
Northwest Wisconsin, USA  
Email: [kristine@melfoster.com](mailto:kristine@melfoster.com)  
Website: [www.melfoster.com](http://www.melfoster.com)

Luscombe Engineering Company  
Northern California, USA  
Email: [dbrown@lecsf.com](mailto:dbrown@lecsf.com)  
Website: [www.lecsf.com](http://www.lecsf.com)

Luscombe Engineering Company  
Northern Nevada, All products, USA  
Email: [dbrown@lecsf.com](mailto:dbrown@lecsf.com)  
Website: [www.lecsf.com](http://www.lecsf.com)

Innovatech Rocky Mountains  
Montana, USA  
Email: [ggoodenow@innovatechrm.com](mailto:ggoodenow@innovatechrm.com)  
Website: [www.innovatechrm.com](http://www.innovatechrm.com)

Innovatech Rocky Mountains  
Colorado, USA  
Email: [ggoodenow@innovatechrm.com](mailto:ggoodenow@innovatechrm.com)  
Website: [www.innovatechrm.com](http://www.innovatechrm.com)

Innovatech Rocky Mountains  
Wyoming, USA  
Email: [ggoodenow@innovatechrm.com](mailto:ggoodenow@innovatechrm.com)  
Website: [www.innovatechrm.com](http://www.innovatechrm.com)

Innovatech Rocky Mountains  
Utah, USA  
Email: [ggoodenow@innovatechrm.com](mailto:ggoodenow@innovatechrm.com)  
Website: [www.innovatechrm.com](http://www.innovatechrm.com)

HLC Ltd  
Northern Illinois, USA  
Email: [djohnson@hlcltd.com](mailto:djohnson@hlcltd.com)  
Website: [www.hlcltd.com](http://www.hlcltd.com)

HLC Ltd  
Southeast Wisconsin, USA  
Email: [djohnson@hlcltd.com](mailto:djohnson@hlcltd.com)  
Website: [www.hlcltd.com](http://www.hlcltd.com)

Fusion Sourcing Group  
Northern New Jersey, USA  
Email: [TDKsales@fusionsourcing.com](mailto:TDKsales@fusionsourcing.com)  
Website: [www.fusionsourcing.com](http://www.fusionsourcing.com)

Fusion Sourcing Group  
New York, USA  
Email: [TDKsales@fusionsourcing.com](mailto:TDKsales@fusionsourcing.com)  
Website: [www.fusionsourcing.com](http://www.fusionsourcing.com)

Enco Marketing  
Michigan, USA  
Email: [Brett.kauffman@encomarketing.com](mailto:Brett.kauffman@encomarketing.com)  
Website: [www.encomarketing.com](http://www.encomarketing.com)

Electro Reps Inc  
Ohio, USA  
Email: [eri@electro-reps.com](mailto:eri@electro-reps.com)  
Website: [www.electro-reps.com](http://www.electro-reps.com)

Electro Reps Inc  
Western Pennsylvania, USA  
Email: [eri@electro-reps.com](mailto:eri@electro-reps.com)  
Website: [www.electro-reps.com](http://www.electro-reps.com)

Electro Reps Inc  
Kentucky, USA  
Email: [eri@electro-reps.com](mailto:eri@electro-reps.com)  
Website: [www.electro-reps.com](http://www.electro-reps.com)

Electro Reps Inc  
Indiana, USA  
Email: [eri@electro-reps.com](mailto:eri@electro-reps.com)  
Website: [www.electro-reps.com](http://www.electro-reps.com)

Electro Reps Inc  
West Virginia, USA  
Email: [eri@electro-reps.com](mailto:eri@electro-reps.com)  
Website: [www.electro-reps.com](http://www.electro-reps.com)

ELCOM  
Washington, D.C., USA  
Email: [ESC@elcomsales.com](mailto:ESC@elcomsales.com)  
Website: [www.elcomsales.com](http://www.elcomsales.com)

ELCOM  
Virginia, USA  
Email: [ESC@elcomsales.com](mailto:ESC@elcomsales.com)  
Website: [www.elcomsales.com](http://www.elcomsales.com)

ELCOM  
Maryland, USA  
Email: [ESC@elcomsales.com](mailto:ESC@elcomsales.com)  
Website: [www.elcomsales.com](http://www.elcomsales.com)

Earl & Brown Co., Inc.  
Oregon, USA  
Email: [ichinn@earlbrownrep.com](mailto:ichinn@earlbrownrep.com)  
Website: [www.earlbrownrep.com](http://www.earlbrownrep.com)

Earl & Brown Co., Inc.  
Idaho, USA  
Email: [dpoulos@earlbrownrep.com](mailto:dpoulos@earlbrownrep.com)  
Website: [www.earlbrownrep.com](http://www.earlbrownrep.com)

Earl & Brown Co., Inc.  
Washington, USA  
Email: [dpoulos@earlbrownrep.com](mailto:dpoulos@earlbrownrep.com)  
Website: [www.earlbrownrep.com](http://www.earlbrownrep.com)

Pan American Technical Sales  
Mexico  
Email: [sales@panamsales.com](mailto:sales@panamsales.com)  
Website: [www.panamsales.com](http://www.panamsales.com)

Davetek Marketing Inc  
Yukon Territory, Canada  
Email: [salesinfo@davetek.com](mailto:salesinfo@davetek.com)  
Website: [www.davetek.com](http://www.davetek.com)

Davetek Marketing Inc  
Northwest Territory, Canada  
Email: [salesinfo@davetek.com](mailto:salesinfo@davetek.com)  
Website: [www.davetek.com](http://www.davetek.com)

Davetek Marketing Inc  
Manitoba, Canada  
Email: [salesinfo@davetek.com](mailto:salesinfo@davetek.com)  
Website: [www.davetek.com](http://www.davetek.com)

Davetek Marketing Inc  
Saskatchewan, Canada  
Email: [salesinfo@davetek.com](mailto:salesinfo@davetek.com)  
Website: [www.davetek.com](http://www.davetek.com)

Davetek Marketing Inc  
Alberta, Canada  
Email: [salesinfo@davetek.com](mailto:salesinfo@davetek.com)  
Website: [www.davetek.com](http://www.davetek.com)

Davetek Marketing Inc  
British Columbia, Canada  
Email: [salesinfo@davetek.com](mailto:salesinfo@davetek.com)  
Website: [www.davetek.com](http://www.davetek.com)

Cee-Jay Micro LTD  
Prince Edward Island, Canada  
Email: [hendrik@cjmico.com](mailto:hendrik@cjmico.com)  
Website: [www.cjmico.com](http://www.cjmico.com)

Cee-Jay Micro LTD  
Nova Scotia, Canada  
Email: [hendrik@cjmico.com](mailto:hendrik@cjmico.com)  
Website: [www.cjmico.com](http://www.cjmico.com)

Cee-Jay Micro LTD  
New Brunswick, Canada  
Email: [hendrik@cjmico.com](mailto:hendrik@cjmico.com)  
Website: [www.cjmico.com](http://www.cjmico.com)

Cee-Jay Micro LTD  
Quebec, Canada  
Email: [hendrik@cjmico.com](mailto:hendrik@cjmico.com)  
Website: [www.cjmico.com](http://www.cjmico.com)

Cee-Jay Micro LTD  
Ontario, Canada  
Email: [hendrik@cjmico.com](mailto:hendrik@cjmico.com)  
Website: [www.cjmico.com](http://www.cjmico.com)

South Bridge, LLC  
Puerto Rico, Puerto Rico  
Email: [fabian@southbridge.net](mailto:fabian@southbridge.net)  
Website: [www.southbridge.net](http://www.southbridge.net)



Power by creativity

Attach Business Card Here

## HELPFUL LINKS

---

- ❖ Main Web Page: [www.tdk.com](http://www.tdk.com)
  - ❖ Product Search: [www.tdk.com/s\\_char.php](http://www.tdk.com/s_char.php)
  - ❖ Technical Support Tools: [www.tdk.com/tst.php](http://www.tdk.com/tst.php)
  - ❖ FAQs Page: [www.tdk.com/tst\\_faq.php](http://www.tdk.com/tst_faq.php)
  - ❖ Capacitor Technical Notes: [www.tdk.com/cap\\_technotes.php](http://www.tdk.com/cap_technotes.php)
- 

### **TDK Corporation of America**

475 Half Day Road, Suite 300  
Lincolnshire, IL 60069



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.