

# SL3S1205\_15

UCODE 8/8m

Rev. 3.4 — 31 January 2020  
398434

Product data sheet  
COMPANY PUBLIC

## 1 General description

---

The UCODE 8 and UCODE 8m ICs are the latest NXP products of the UCODE family. UCODE 8/8m offers high performance and features for use in the most demanding RFID tagging applications.

Particularly well suited for inventory management applications, like e.g Retail and Fashion, with its great RF performance for any given form factor, UCODE 8/8m enables long read distance and fast inventory of dense RFID tag population. With its broadband design, it offers the possibility to manufacture true global RFID label with great performance over worldwide regulations.

The device also provides a Self Adjust Feature, a Product Status Flag for Electronic Article Surveillance (EAS) application, pre-serialized 96-bit EPC, Brand Identifier and the EPC Gen2v2 compliant Untraceable command.



## 2 Features and benefits

### 2.1 Key features

- Read sensitivity -23 dBm
- Write sensitivity -18 dBm
- Innovative functionality
  - Self Adjust
  - Memory Safeguard
  - Brand Identifier
  - Untraceable
  - Pre-serialization for 96-bit EPC
  - Integrated Product Status Flag (PSF)
- Compatible with single-slit antenna
- Up to 128-bit EPC
- 96-bit Unique Tag Identifier (TID) factory locked, including 48-bit unique serial number
- EPC Gen2v2

#### 2.1.1 Memory

- 128-bit/96-bit (UCODE 8/UCODE 8m) of EPC memory
- Supports pre-serialization for 96-bit EPC
- 96-bit Tag Identifier (TID) factory locked
- 48-bit unique serial number factory-encoded into TID
- 0-bit/32-bit (UCODE 8/UCODE 8m) User Memory
- 32-bit kill password to permanently disable the tag
- 32-bit access password
- Wide operating temperature range: -40 °C up to +85 °C
- Minimum 100k write cycle endurance

## 2.2 Supported features

- All mandatory commands of EPC global specification V.2.0.1 are implemented including:
  - Lock or permalock
  - Kill Command
- The following optional commands are implemented in conformance with the EPC specification:
  - Access
  - BlockWrite (2 words, 32-bit)
  - Untraceable
- Product Status Flag bit: enables the UHF RFID tag to be used as EAS (Electronic Article Surveillance) tag without the need for a back-end database.
- Self Adjust for automated tag performance optimization
- Memory Safeguard: enables countermeasures, like parity and margin checks as well as automated error correction, to ensure integrity of customer data.
- Brand Identifier: enables product authentication verification

All supported features of UCODE 8/8m can be activated using standard EPCglobal READ / WRITE / ACCESS / SELECT commands. No custom commands are needed to take advantage of all the features.

## 3 Applications

---

### 3.1 Target market

- Retail
  - Brick and mortar
  - e-commerce
  - omnichannel
- Supply chain management
- Shipping services
- Airline luggage tracking
- Laundry services

### 3.2 Applications

- High accurate and fast inventory management, enabling omnichannel retail processes
- Tracking along the supply chain from source to store
- High-speed store checkout process, bringing convenience to the customer
- Loss prevention
- Brand Protection
- After sales operations: Return and Warranty management

Outside the applications mentioned above, please contact NXP Semiconductors for support.

## 4 Ordering information

Table 1. Ordering information

| Type number     | Package |          |                                                                            |                |
|-----------------|---------|----------|----------------------------------------------------------------------------|----------------|
|                 | Name    | IC type  | Description                                                                | Version        |
| SL3S1205FUD/HA  | Wafer   | UCODE 8  | Die on sawn 8" 120 µm wafer 10 µm Polyimide spacer with Large Pads         | not applicable |
| SL3S1215FUD/HA  | Wafer   | UCODE 8m | Die on sawn 8" 120 µm wafer 10 µm Polyimide spacer with Large Pads         | not applicable |
| SL3S1205FUD2/HA | Wafer   | UCODE 8  | Die on sawn 12" 120 µm wafer 10 µm Polyimide spacer with Large Pads        | not applicable |
| SL3S1215FUD2/HA | Wafer   | UCODE 8m | Die on sawn 12" 120 µm wafer 10 µm Polyimide spacer with Large Pads        | not applicable |
| SL3S1205FUD2/KP | Wafer   | UCODE 8  | Die on sawn 12" 120 µm wafer no Polyimide spacer with Fast Cure (FC) Bumps | not applicable |
| SL3S1215FUD2/KP | Wafer   | UCODE 8m | Die on sawn 12" 120 µm wafer no Polyimide spacer with Fast Cure (FC) Bumps | not applicable |

## 5 Block diagram

The UCODE 8/8m IC consists of three major blocks:

- Analog Interface
- Digital Control
- EEPROM

The analog part provides stable supply voltage and demodulates data received from the reader which is then processed by the digital part. Further, the modulation transistor of the analog part transmits data back to the reader.

The digital section includes the state machines, processes the protocol and handles communication with the EEPROM, which contains the EPC and the user data.

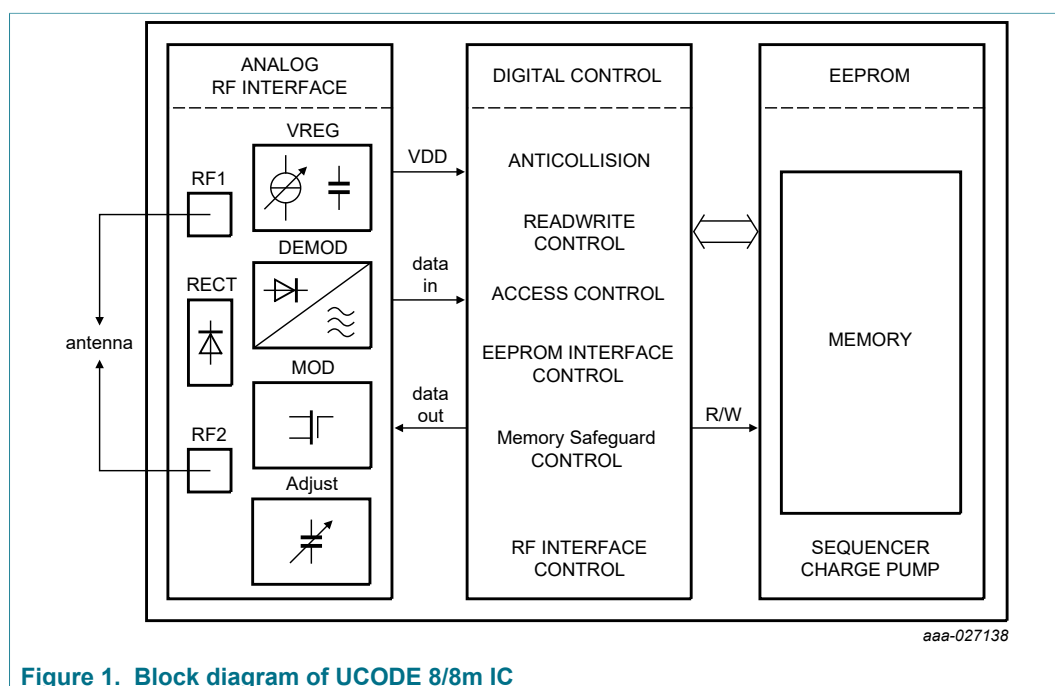


Figure 1. Block diagram of UCODE 8/8m IC

6 Pinning information

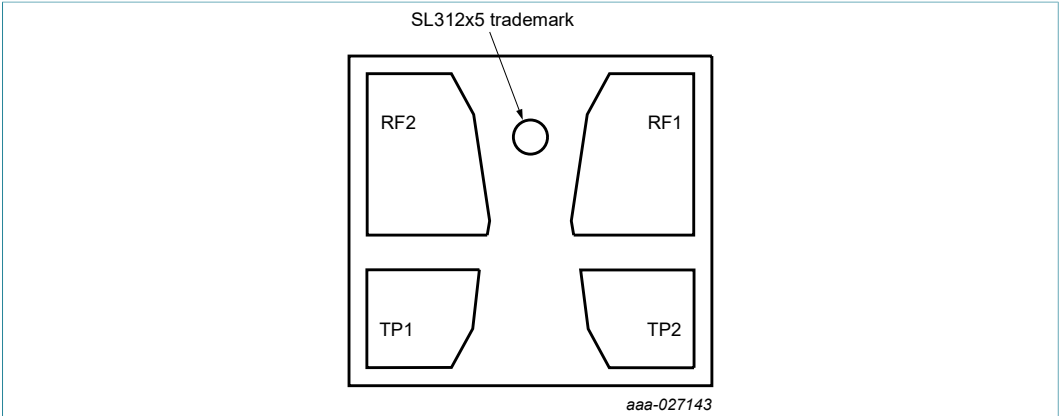


Figure 2. Pinning bare die, Large Pads

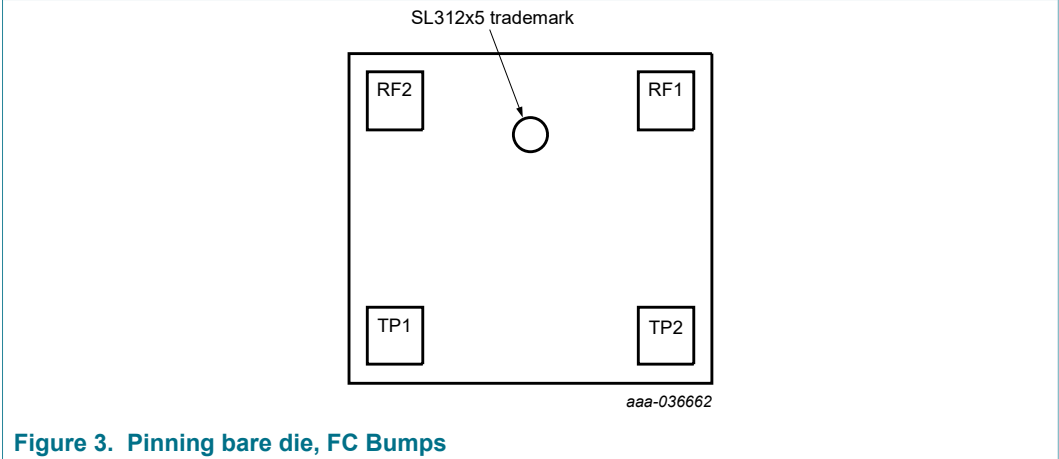



Figure 3. Pinning bare die, FC Bumps


6.1 Pin description


Table 2. Pin description bare die

| Symbol | Description         |
|--------|---------------------|
| TP1    | test pad 1          |
| RF1    | antenna connector 1 |
| TP2    | test pad 2          |
| RF2    | antenna connector 2 |

## 7 Wafer layout

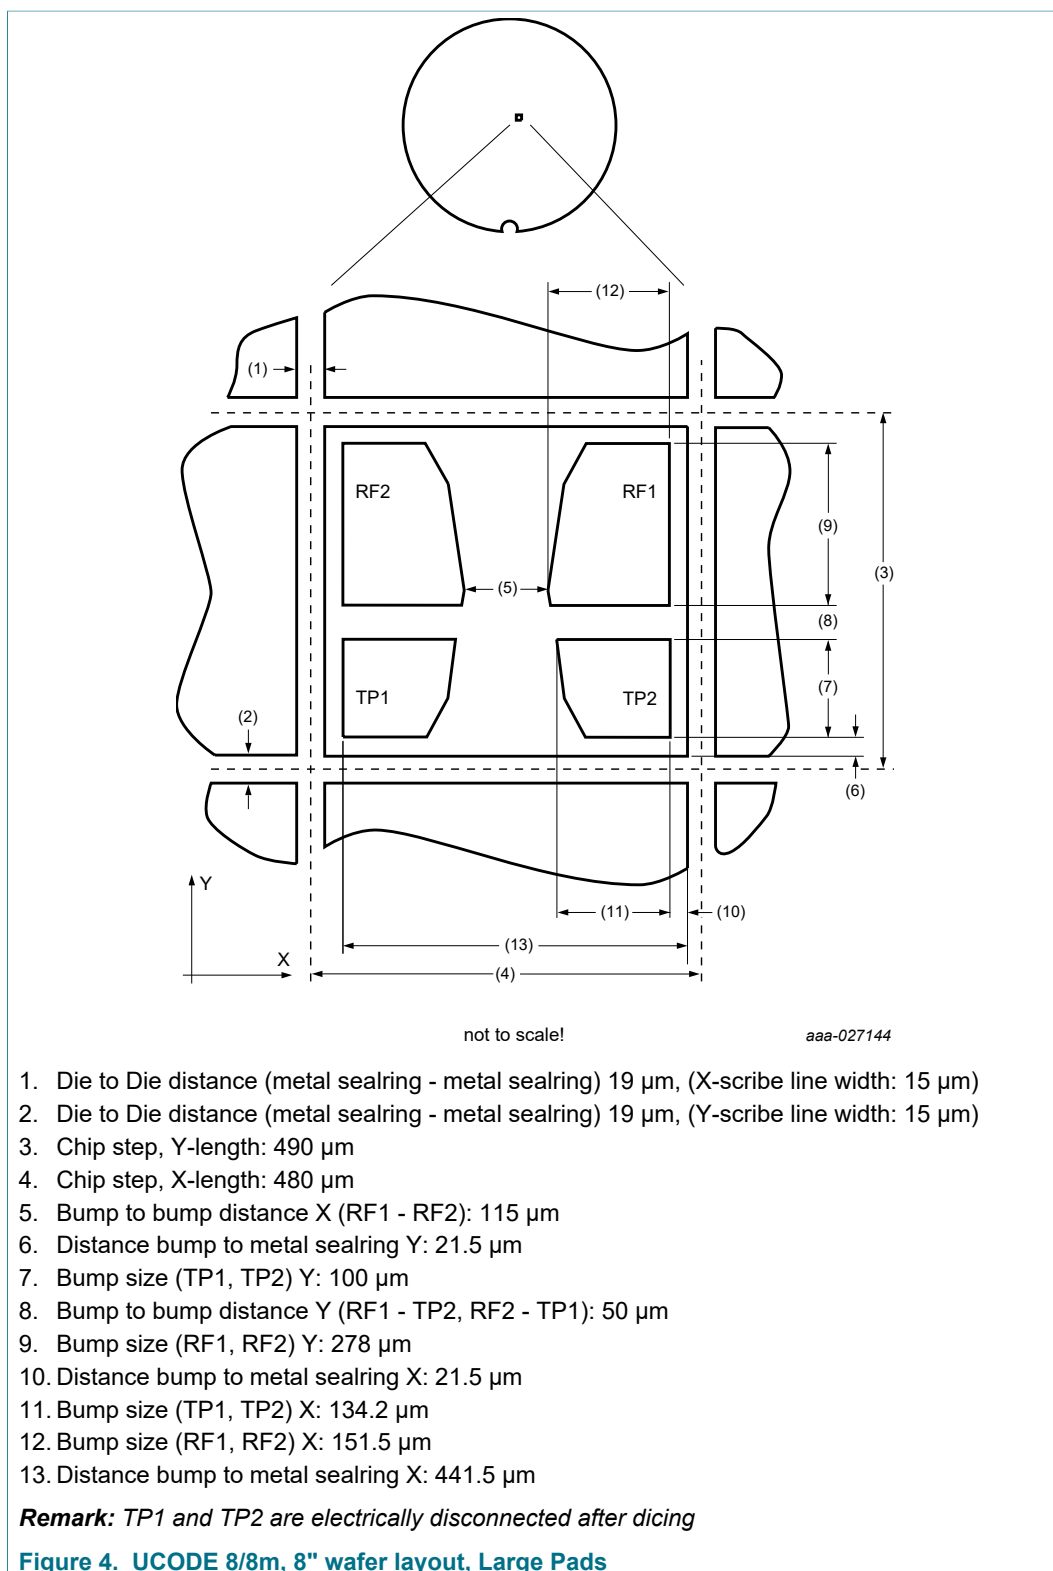

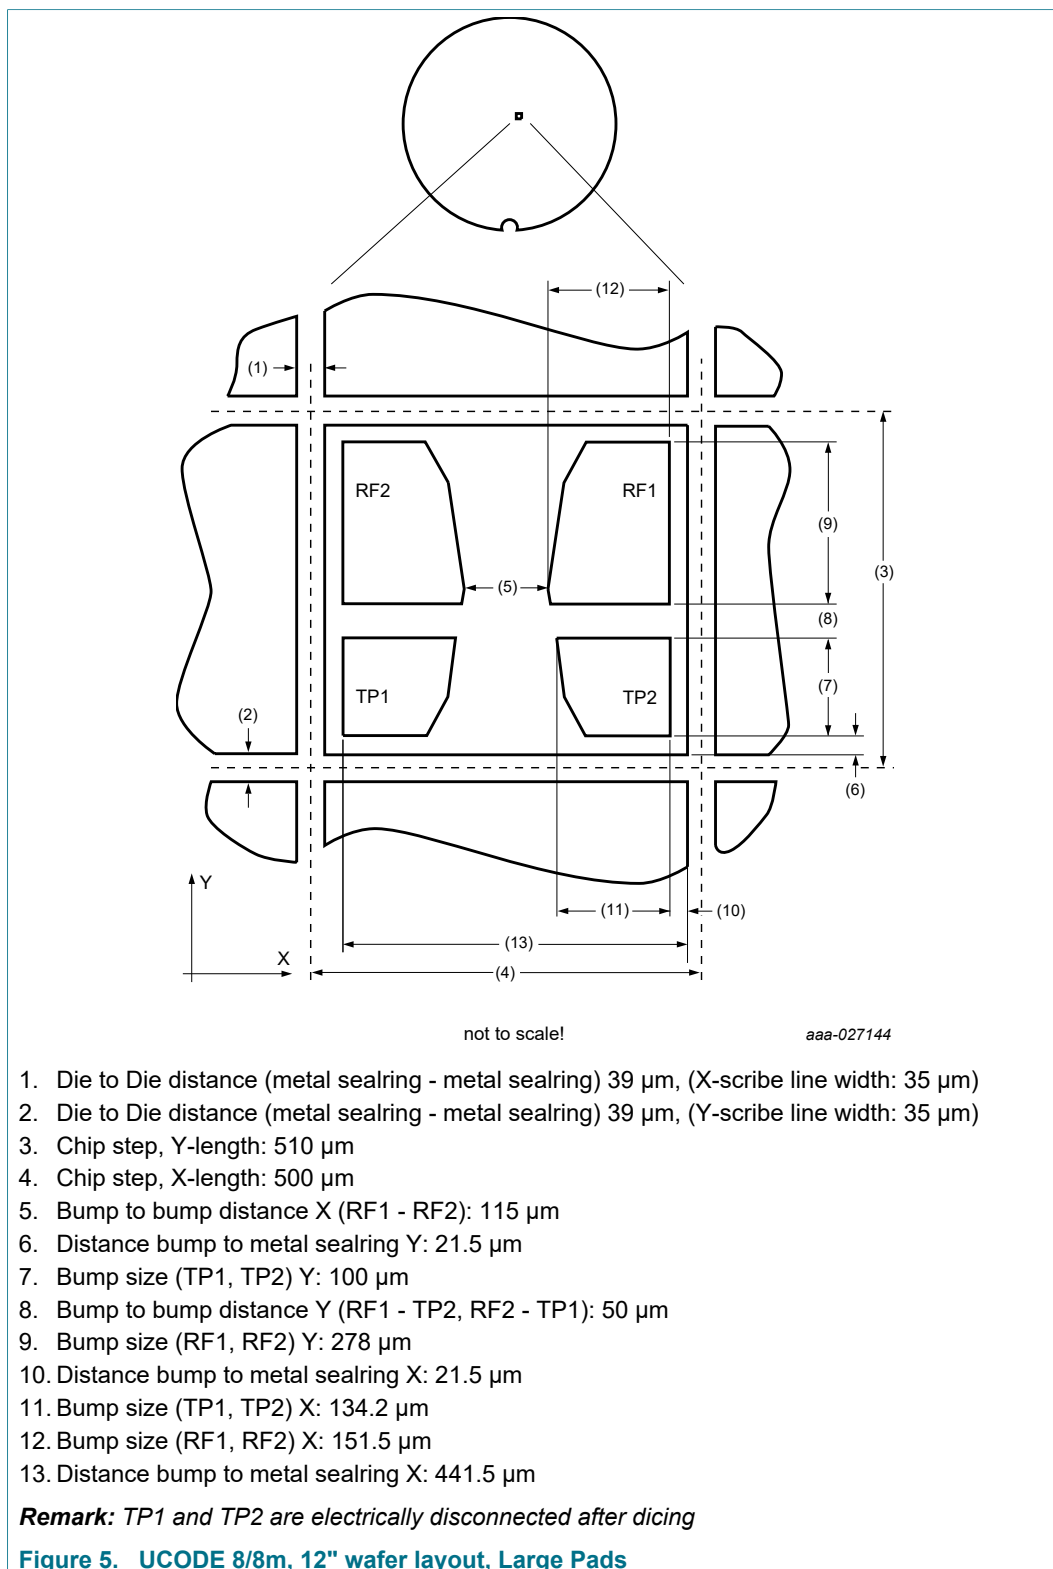

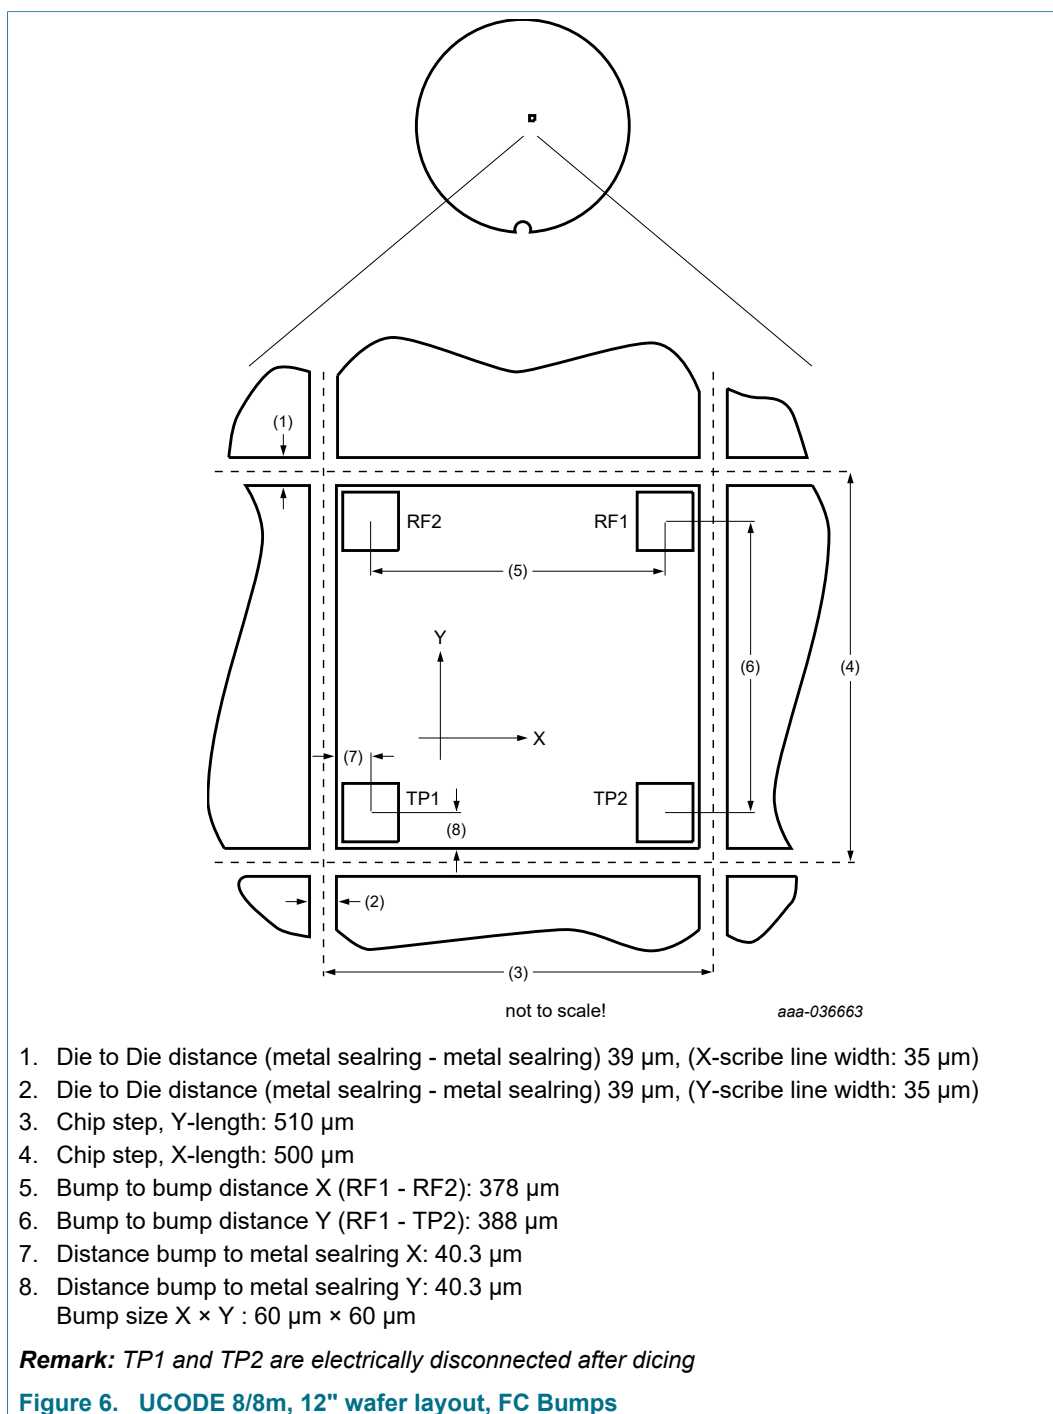

## 8 Mechanical specification

The UCODE 8 wafers are available in 120  $\mu\text{m}$  thickness. For Large Gold Pads the 120  $\mu\text{m}$  thick wafer is enhanced with 10  $\mu\text{m}$  Polyimide spacer resulting in less coupling between the antenna and the active circuit, leaving a larger process window for assembly.

Delivery options with Fast Cure (FC) come with higher and harder bumps to reduce the assembly capacitance which eliminates the need for the Polyimide spacer, hereby enabling faster curing of the glue.

### 8.1 Wafer specification

#### 8.1.1 8 inch Wafer with Large Pads

See ["Data sheet - Delivery type description – General specification for 8" wafer on UV-tape with electronic fail die marking, BU-S&C document number: 1093\\*\\*"](#)

**Table 3. 8 inch specification with Large Pads**

|                             |                                                           |
|-----------------------------|-----------------------------------------------------------|
| <b>Wafer</b>                |                                                           |
| Designation                 | each wafer is scribed with batch number and wafer number  |
| Diameter                    | 200 mm (8") unsawn- 205 mm typical sawn on foil           |
| Thickness                   | 120 $\mu\text{m} \pm 15 \mu\text{m}$                      |
| Number of pads              | 4                                                         |
| Pad location                | non-diagonal / placed in chip corners                     |
| Process                     | CMOS 0.14 $\mu\text{m}$                                   |
| Batch size                  | 25 wafers                                                 |
| Net printed dies per wafer  | 120794                                                    |
| <b>Wafer backside</b>       |                                                           |
| Material                    | Si                                                        |
| Treatment                   | ground and stress release                                 |
| Roughness                   | $R_a$ max. 0.5 $\mu\text{m}$ , $R_t$ max. 5 $\mu\text{m}$ |
| <b>Chip dimensions</b>      |                                                           |
| Die size excluding scribe   | 0.465 mm $\times$ 0.475 mm = 0.22 mm <sup>2</sup>         |
| Scribe line width:          | x-dimension = 15 $\mu\text{m}$                            |
|                             | y-dimension = 15 $\mu\text{m}$                            |
| <b>Passivation on front</b> |                                                           |
| Type                        | Sandwich structure                                        |
| Material                    | PE-Nitride (on top)                                       |
| Thickness                   | 1.75 $\mu\text{m}$ total thickness of passivation         |
| Polyimide spacer            | 10 $\mu\text{m} \pm 2 \mu\text{m}$                        |
| <b>Au pads</b>              |                                                           |

|                                            |                   |
|--------------------------------------------|-------------------|
| Pad material                               | > 99.9 % pure Au  |
| Pad hardness                               | 35 – 80 HV 0.005  |
| Pad shear strength                         | > 70 MPa          |
| Pad height                                 | 3 µm              |
| Pad height uniformity                      |                   |
| – within a die                             | max. 2 µm         |
| – within a wafer                           | max. 4 µm         |
| Pad flatness                               | max. 3 µm         |
| Pad size                                   |                   |
| – RF1, RF2 (max. details see wafer layout) | 151.5 µm × 278 µm |
| – TP1, TP2 (max. details see wafer layout) | 134.2 µm × 100 µm |
| Pad size variation                         | ± 5 µm            |

### 8.1.2 12 inch Wafer with Large Pads

See ["Data sheet - Delivery type description – General specification for 12" wafer on UV-tape with electronic fail die marking, BU-S&C document number: 1862\\*\\*"](#)

**Table 4. 12 inch specification with Large Pads**

|                             |                                                          |
|-----------------------------|----------------------------------------------------------|
| <b>Wafer</b>                |                                                          |
| Designation                 | each wafer is scribed with batch number and wafer number |
| Diameter                    | 300 mm (12") unsawn                                      |
| Thickness                   | 120 µm ± 15 µm                                           |
| Number of pads              | 4                                                        |
| Pad location                | non-diagonal / placed in chip corners                    |
| Process                     | CMOS 0.14 µm                                             |
| Batch size                  | 25 wafers                                                |
| Net printed dies per wafer  | 258934                                                   |
| <b>Wafer backside</b>       |                                                          |
| Material                    | Si                                                       |
| Treatment                   | ground and stress release                                |
| Roughness                   | R <sub>a</sub> max. 0.5 µm, R <sub>t</sub> max. 5 µm     |
| <b>Chip dimensions</b>      |                                                          |
| Die size excluding scribe   | 0.465 mm × 0.475 mm = 0.22 mm <sup>2</sup>               |
| Scribe line width:          | x-dimension = 35 µm                                      |
|                             | y-dimension = 35 µm                                      |
| <b>Passivation on front</b> |                                                          |
| Type                        | Sandwich structure                                       |
| Material                    | PE-Nitride (on top)                                      |

|                                            |                                                   |
|--------------------------------------------|---------------------------------------------------|
| Thickness                                  | 1.75 $\mu\text{m}$ total thickness of passivation |
| Polyimide spacer                           | 10 $\mu\text{m} \pm 2 \mu\text{m}$                |
| <b>Au pads</b>                             |                                                   |
| Pad material                               | > 99.9 % pure Au                                  |
| Pad hardness                               | 35 – 80 HV 0.005                                  |
| Pad shear strength                         | > 70 MPa                                          |
| Pad height                                 | 3 $\mu\text{m}$                                   |
| Pad height uniformity                      |                                                   |
| – within a die                             | max. 2 $\mu\text{m}$                              |
| – within a wafer                           | max. 4 $\mu\text{m}$                              |
| Pad flatness                               | max. 3 $\mu\text{m}$                              |
| Pad size                                   |                                                   |
| – RF1, RF2 (max. details see wafer layout) | 151.5 $\mu\text{m} \times 278 \mu\text{m}$        |
| – TP1, TP2 (max. details see wafer layout) | 134.2 $\mu\text{m} \times 100 \mu\text{m}$        |
| Pad size variation                         | $\pm 5 \mu\text{m}$                               |

### 8.1.3 12 inch Wafer with FC bumps

See ["Data sheet - Delivery type description – General specification for 12" wafer on UV-tape with electronic fail die marking, BU-S&C document number: 1862\\*\\*"](#)

**Table 5. 12 inch specification with Large Pads**

|                            |                                                           |
|----------------------------|-----------------------------------------------------------|
| <b>Wafer</b>               |                                                           |
| Designation                | each wafer is scribed with batch number and wafer number  |
| Diameter                   | 300 mm (12") unsawn                                       |
| Thickness                  | 120 $\mu\text{m} \pm 15 \mu\text{m}$                      |
| Number of pads             | 4                                                         |
| Pad location               | non-diagonal / placed in chip corners                     |
| Process                    | CMOS 0.14 $\mu\text{m}$                                   |
| Batch size                 | 25 wafers                                                 |
| Net printed dies per wafer | 258934                                                    |
| <b>Wafer backside</b>      |                                                           |
| Material                   | Si                                                        |
| Treatment                  | ground and stress release                                 |
| Roughness                  | $R_a$ max. 0.5 $\mu\text{m}$ , $R_t$ max. 5 $\mu\text{m}$ |
| <b>Chip dimensions</b>     |                                                           |
| Die size excluding scribe  | 0.465 mm $\times$ 0.475 mm = 0.22 mm <sup>2</sup>         |
| Scribe line width:         | x-dimension = 35 $\mu\text{m}$                            |
|                            | y-dimension = 35 $\mu\text{m}$                            |

|                        |                                                   |
|------------------------|---------------------------------------------------|
| Passivation on front   |                                                   |
| Type                   | Sandwich structure                                |
| Material               | PE-Nitride (on top)                               |
| Thickness              | 1.75 $\mu\text{m}$ total thickness of passivation |
| FC bumps               |                                                   |
| Bump material          | Cu, Ni, Au (21/2/0.5 $\mu\text{m}$ )              |
| Bump shear strength    | > 70MPa                                           |
| Bump height            | 23.5 $\mu\text{m}$                                |
| Bump height uniformity |                                                   |
| – within a die         | max. 2 $\mu\text{m}$                              |
| – within a wafer       | max. 4 $\mu\text{m}$                              |
| Bump size X $\times$ Y | 60 $\mu\text{m}$ $\times$ 60 $\mu\text{m}$        |
| Bump size variation    | $\pm$ 3 $\mu\text{m}$                             |

#### 8.1.4 Fail die identification

No ink dots are applied to the wafer.

Electronic wafer mapping (SECS II format) covers the electrical test results and additionally the results of mechanical/visual inspection.

See ["Data sheet - Delivery type description – General specification for 8" wafer on UV-tape with electronic fail die marking, BU-S&C document number: 1093\\*\\*"](#)

See ["Data sheet - Delivery type description – General specification for 12" wafer on UV-tape with electronic fail die marking, BU-S&C document number: 1862\\*\\*"](#)

#### 8.1.5 Map file distribution

See ["Data sheet - Delivery type description – General specification for 8" wafer on UV-tape with electronic fail die marking, BU-S&C document number: 1093\\*\\*"](#)

See ["Data sheet - Delivery type description – General specification for 12" wafer on UV-tape with electronic fail die marking, BU-S&C document number: 1862\\*\\*"](#)

## 9 Functional description

### 9.1 Air interface standards

The UCODE 8/8m fully supports all parts of the "EPC<sup>TM</sup> Radio-Frequency Identity Protocols Generation-2 UHF RFID, Specification for RFID Air Interface, Protocol for Communications at 860 MHz to 960 MHz, Version 2.0.1".

### 9.2 Power transfer

The interrogator provides an RF field that powers the tag, equipped with a UCODE 8/8m. The antenna transforms the impedance of free space to the chip input impedance in order to get the maximum power for the UCODE 8/8m on the tag.

The RF field, which is oscillating on the operating frequency provided by the interrogator, is rectified to provide a smoothed DC voltage to the analog and digital modules of the IC.

The antenna that is attached to the chip may use a DC connection between the two antenna pads. Therefore the UCODE 8/8m also enables loop antenna design.

### 9.3 Data transfer

#### 9.3.1 Interrogator to tag Link

An interrogator transmits information to the UCODE 8/8m by modulating an UHF RF signal. The UCODE 8/8m receives both information and operating energy from this RF signal. Tags are passive, meaning that they receive all of their operating energy from the interrogator's RF waveform.

An interrogator is using a fixed modulation and data rate for the duration of at least one inventory round. It communicates to the UCODE 8/8m by modulating an RF carrier.

For further details, refer to ["Interrogator-to-tag \(R=>T\) communications"](#)

#### 9.3.2 Tag to interrogator Link

Upon transmitting a valid command, an interrogator receives information from a UCODE 8/8m tag by transmitting an unmodulated RF carrier and listening for a backscattered reply. The UCODE 8/8m backscatters by switching the reflection coefficient of its antenna between two states in accordance with the data being sent. For further details, refer to ["Tag-to-Interrogator \(T=>R\) communications"](#)

The UCODE 8/8m communicates information by backscatter-modulating the amplitude and/or phase of the RF carrier. Interrogators shall be capable of demodulating either demodulation type.

The encoding format, selected in response to interrogator commands, is either FM0 baseband or Miller-modulated subcarrier.

## 9.4 Supported commands

The UCODE 8/8m supports all **mandatory** EPCglobal V2.0.1 commands including

- KILL command
- PERMALOCK or LOCK command

In addition the UCODE8/8m supports the following **optional** commands:

- ACCESS
- Block Write (32 bit) on even addresses
- Untraceable

## 9.5 UCODE 8/8m memory

The UCODE 8/8m memory is implemented according to EPCglobal V2.0.1:

**Table 6. UCODE 8 memory sections**

| Name                                                     | Size    | Bank |
|----------------------------------------------------------|---------|------|
| Reserved memory (32-bit Access and 32 bit Kill password) | 64 bit  | 00b  |
| EPC (excluding 16 bit CRC-16 and 16-bit PC)              | 128 bit | 01b  |
| UCODE 8 Configuration Word                               | 16 bit  | 01b  |
| TID (including permalocked unique 48-bit serial number)  | 96 bit  | 10b  |

**Table 7. UCODE 8m memory sections**

| Name                                                     | Size   | Bank |
|----------------------------------------------------------|--------|------|
| Reserved memory (32-bit Access and 32 bit Kill password) | 64 bit | 00b  |
| EPC (excluding 16 bit CRC-16 and 16-bit PC)              | 96 bit | 01b  |
| UCODE 8 Configuration Word                               | 16 bit | 01b  |
| TID (including permalocked unique 48-bit serial number)  | 96 bit | 10b  |
| User Memory                                              | 32 bit | 11b  |

The logical address of all memory banks begins at zero (00h).

In addition to the four memory banks, one configuration word to handle the UCODE 8/8m specific features is available at EPC bank 01 address bit-200h. The configuration word is described in detail in [Section 9.6.1](#)

The TID complies to the GS1 EPC Tag Data Standard. See "[EPC Tag Data Standard, Release 1.10](#)"

### 9.5.1 UCODE 8/8m overall memory map

Table 8. UCODE 8 overall memory map

| Bank                   | Address    | Type     | Content                                              | Initial             | Remark                          |
|------------------------|------------|----------|------------------------------------------------------|---------------------|---------------------------------|
| Bank 00                | 00h to 1Fh | reserved | Kill password                                        | all 00h             | unlocked memory                 |
|                        | 20h to 3Fh | reserved | Access password                                      | all 00h             | unlocked memory                 |
| Bank 01<br>EPC         | 00h to 0Fh | EPC      | CRC-16: refer to <a href="#">"EPC Global Gen2v2"</a> |                     | memory mapped<br>calculated CRC |
|                        | 10h to 14h | EPC      | EPC length                                           | 00110b              | unlocked memory                 |
|                        | 15h        | EPC      | UMI                                                  | 0b                  | hardwired to 0                  |
|                        | 16h        | EPC      | XPC indicator                                        | 0b                  | hardwired to 0                  |
|                        | 17h to 1Fh | EPC      | numbering system indicator                           | 00h                 | unlocked memory                 |
|                        | 20h to 9Fh | EPC      | EPC                                                  | [1]                 | unlocked memory                 |
| Bank 01<br>Config Word | 200h       | EPC      | EPC check                                            | 0b                  | indicator bit                   |
|                        | 201h       | EPC      | EPC correction                                       | 0b                  | indicator bit                   |
|                        | 202h       | EPC      | EPC NOK                                              | 0b                  | indicator bit                   |
|                        | 203h       | EPC      | EPC+TID                                              | 0b                  | action bit <sup>[2]</sup>       |
|                        | 204h       | EPC      | Brand Identifier                                     | 0b                  | action bit <sup>[2]</sup>       |
|                        | 205h       | EPC      | Self Adjust Cap 1                                    | 0b                  | indicator bit                   |
|                        | 206h       | EPC      | Self Adjust Cap 0                                    | 0b                  | indicator bit                   |
|                        | 207h       | EPC      | Self Adjust disable                                  | 0b                  | permanent bit <sup>[3]</sup>    |
|                        | 208h       | EPC      | RFU                                                  | 0b                  | locked memory                   |
|                        | 209h       | EPC      | max. backscatter strength                            | 1b                  | permanent bit <sup>[3]</sup>    |
|                        | 20Ah       | EPC      | RFU                                                  | 0b                  | locked memory                   |
|                        | 20Bh       | EPC      | RFU                                                  | 0b                  | locked memory                   |
|                        | 20Ch       | EPC      | RFU                                                  | 0b                  | locked memory                   |
|                        | 20Dh       | EPC      | RFU                                                  | 0b                  | locked memory                   |
|                        | 20Eh       | EPC      | RFU                                                  | 0b                  | locked memory                   |
|                        | 20Fh       | EPC      | PSF flag                                             | 0b                  | permanent bit <sup>[3]</sup>    |
| Bank 10<br>TID         | 00h to 07h | TID      | allocation class identifier                          | 1110 0010b          | locked memory                   |
|                        | 08h to 13h | TID      | tag mask designer identifier                         | 1000 0000 0110b     | locked memory                   |
|                        | 14h        | TID      | config word indicator                                | 1b <sup>[4]</sup>   | locked memory                   |
|                        | 15h to 1Fh | TID      | tag model number                                     | TMNR <sup>[5]</sup> | locked memory                   |
|                        | 20h to 2Fh | TID      | XTID header                                          | 2000h               | locked memory                   |
|                        | 30h to 5Fh | TID      | serial number                                        | SNR                 | locked memory                   |

[1] HEX E280 6894 0000 nnnn nnnn nnnn 0000 0000 where n are the nibbles of the SNR from the TID

[2] Action bits: meant to trigger a feature upon a SELECT command on the related bit ref feature control mechanism, see [Section 9.6.1](#)

[3] Permanent bit: permanently stored bits in the memory; Read/Writeable according to EPC bank lock status, see [Section 9.6.1](#)

[4] Indicates the existence of a Configuration Word at the end of the EPC number

[5] See [Figure 7](#)

Table 9. UCODE 8m overall memory map

| Bank                   | Address    | Type     | Content                                              | Initial             | Remark                          |
|------------------------|------------|----------|------------------------------------------------------|---------------------|---------------------------------|
| Bank 00                | 00h to 1Fh | reserved | Kill password                                        | all 00h             | unlocked memory                 |
|                        | 20h to 3Fh | reserved | Access password                                      | all 00h             | unlocked memory                 |
| Bank 01<br>EPC         | 00h to 0Fh | EPC      | CRC-16: refer to <a href="#">"EPC Global Gen2v2"</a> |                     | memory mapped<br>calculated CRC |
|                        | 10h to 14h | EPC      | EPC length                                           | 00110b              | unlocked memory                 |
|                        | 15h        | EPC      | UMI                                                  | 1b                  | hardwired to 1                  |
|                        | 16h        | EPC      | XPC indicator                                        | 0b                  | hardwired to 0                  |
|                        | 17h to 1Fh | EPC      | numbering system indicator                           | 00h                 | unlocked memory                 |
|                        | 20h to 7Fh | EPC      | EPC                                                  | [1]                 | unlocked memory                 |
| Bank 01<br>Config Word | 200h       | EPC      | EPC check                                            | 0b                  | indicator bit                   |
|                        | 201h       | EPC      | EPC correction                                       | 0b                  | indicator bit                   |
|                        | 202h       | EPC      | EPC NOK                                              | 0b                  | indicator bit                   |
|                        | 203h       | EPC      | EPC+TID                                              | 0b                  | action bit <sup>[2]</sup>       |
|                        | 204h       | EPC      | Brand Identifier                                     | 0b                  | action bit <sup>[2]</sup>       |
|                        | 205h       | EPC      | Self Adjust Cap 1                                    | 0b                  | indicator bit                   |
|                        | 206h       | EPC      | Self Adjust Cap 0                                    | 0b                  | indicator bit                   |
|                        | 207h       | EPC      | Self Adjust disable                                  | 0b                  | permanent bit <sup>[3]</sup>    |
|                        | 208h       | EPC      | RFU                                                  | 0b                  | locked memory                   |
|                        | 209h       | EPC      | max. backscatter strength                            | 1b                  | permanent bit <sup>[3]</sup>    |
|                        | 20Ah       | EPC      | RFU                                                  | 0b                  | locked memory                   |
|                        | 20Bh       | EPC      | RFU                                                  | 0b                  | locked memory                   |
|                        | 20Ch       | EPC      | User Memory check                                    | 0b                  | indicator bit                   |
|                        | 20Dh       | EPC      | User Memory correction                               | 0b                  | indicator bit                   |
|                        | 20Eh       | EPC      | User Memory NOK                                      | 0b                  | indicator bit                   |
|                        | 20Fh       | EPC      | PSF flag                                             | 0b                  | permanent bit <sup>[3]</sup>    |
| Bank 10<br>TID         | 00h to 07h | TID      | allocation class identifier                          | 1110 0010b          | locked memory                   |
|                        | 08h to 13h | TID      | tag mask designer identifier                         | 1000 0000 0110b     | locked memory                   |
|                        | 14h        | TID      | config word indicator                                | 1b <sup>[4]</sup>   | locked memory                   |
|                        | 15h to 1Fh | TID      | tag model number                                     | TMNR <sup>[5]</sup> | locked memory                   |
|                        | 20h to 2Fh | TID      | XTID header                                          | 2000h               | locked memory                   |
|                        | 30h to 5Fh | TID      | serial number                                        | SNR                 | locked memory                   |
| Bank 11<br>User Memory | 00h to 1Fh | UM       | User Memory                                          | all 00h             | unlocked memory                 |

[1] HEX E280 6994 0000 nnnn nnnn nnnn where n are the nibbles of the SNR from the TID

[2] Action bits: meant to trigger a feature upon a SELECT command on the related bit ref feature control mechanism, see [Section 9.6.1](#)[3] Permanent bit: permanently stored bits in the memory; Read/Writeable according to EPC bank lock status, see [Section 9.6.1](#)

[4] Indicates the existence of a Configuration Word at the end of the EPC number

[5] See [Figure 7](#)

9.5.2 UCODE 8/8m TID memory details

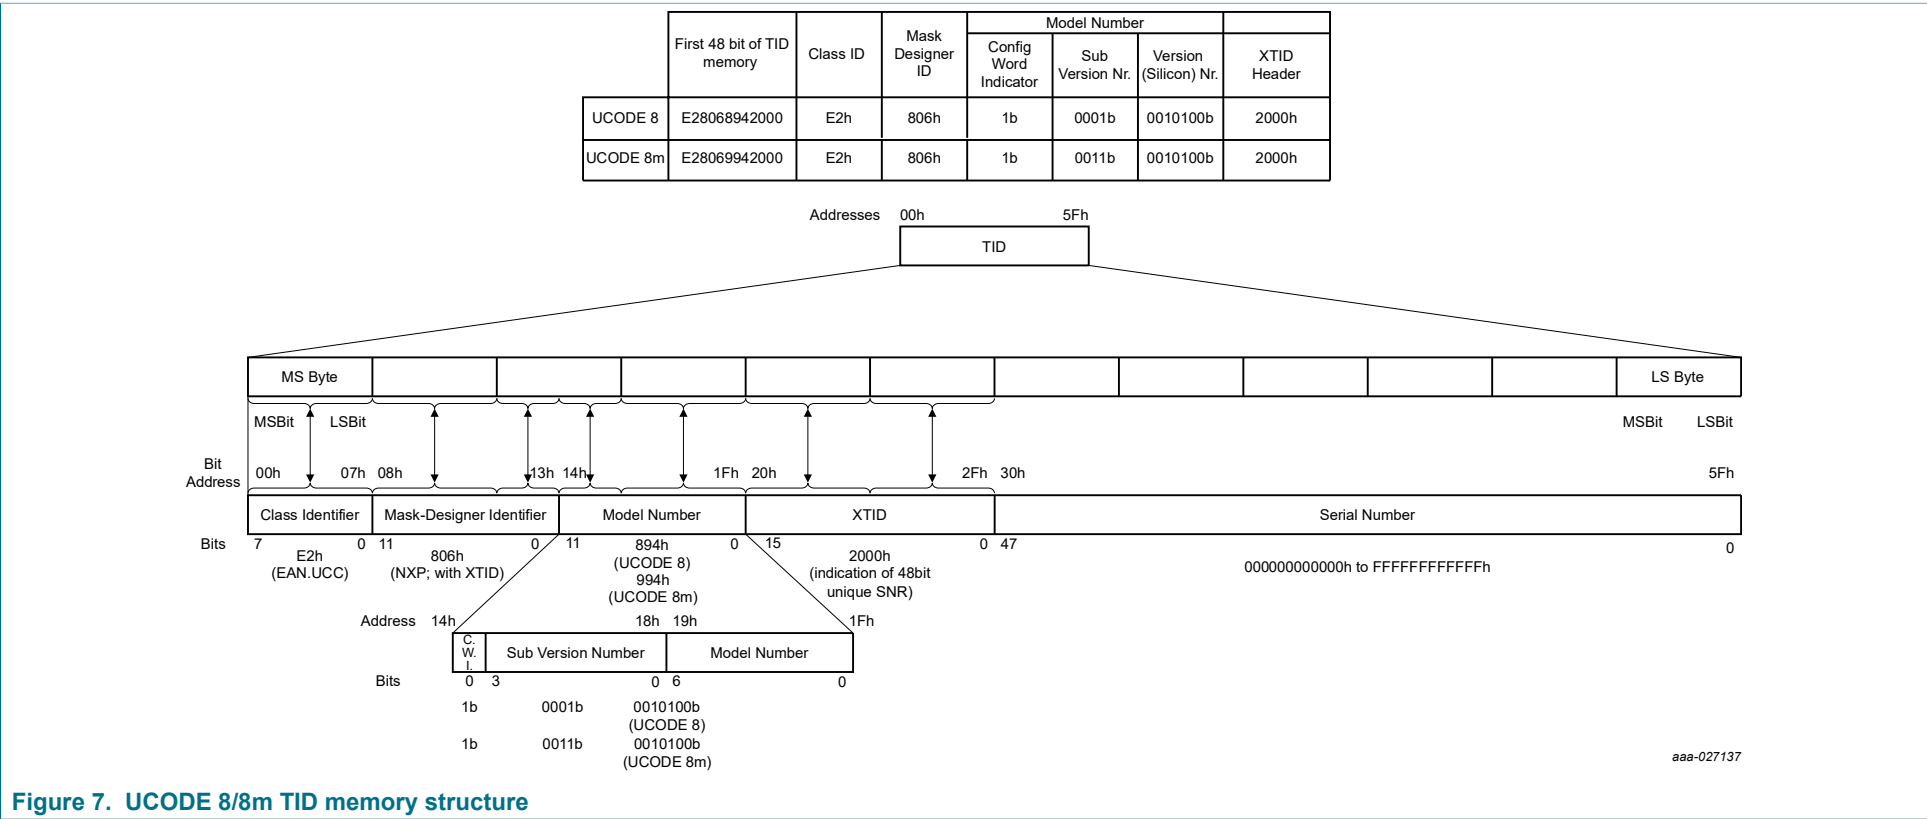


Figure 7. UCODE 8/8m TID memory structure

## 9.6 Supported features

The UCODE 8/8m is equipped with a number of additional features. They are implemented in such a way that standard EPCglobal READ / WRITE / ACCESS / SELECT commands can be used to operate these features.

The Configuration Word, as mentioned in the memory map, describes the additional features at address 200h of the EPC memory.

Bit 14h of the TID indicates the existence of a Configuration Word. This flag enables the selection of configuration word enhanced transponders in mixed tag populations.

### 9.6.1 UCODE 8/8m features control mechanism

The different features of the UCODE 8/8m can be activated / de-activated by addressing or changing the content of the corresponding bit in the configuration word at address 200h in the EPC memory bank (see [Table 10](#)). The de-activation of the action bit features will only happen after chip reset.

Table 10. Configuration word UCODE 8/8m

| Indicator bit |          |         | Action bit |                  | Indicator bit     |                   | Permanent bit       |
|---------------|----------|---------|------------|------------------|-------------------|-------------------|---------------------|
| EPC Check     | EPC Corr | EPC NOK | EPC+TID    | Brand Identifier | Self Adjust Cap 1 | Self Adjust Cap 0 | Self Adjust disable |
| 0             | 1        | 2       | 3          | 4                | 5                 | 6                 | 7                   |

Table 11. Configuration word UCODE 8/8m ... continued

| Locked memory | Permanent bit            | Locked memory |     | Indicator bit     |                  |                 | Permanent bit |
|---------------|--------------------------|---------------|-----|-------------------|------------------|-----------------|---------------|
| RFU           | max.backscatter strength | RFU           | RFU | User Memory Check | User Memory Corr | User Memory NOK | PSF bit       |
| 8             | 9                        | 10            | 11  | 12                | 13               | 14              | 15            |

The configuration word contains 3 different type of bits:

- **Action bits:** meant to trigger a feature upon a SELECT command on the related bit:  
EPC+TID  
Brand Identifier
- **Permanent bits:** permanently stored bits in the memory  
Self Adjust disable  
Max. Backscatter Strength  
PSF Alarm bit
- **Indicator bits:** cannot be changed by command  
EPC Check/Corr/NOK  
User Memory Check/Corr/NOK  
Self Adjust Cap0/Cap1

The activation or the de-activation of the feature behind the permanent bits happens only when attempting to write a "1" value to the related bit (value toggling) - writing "0" value has no effect. If the feature is activated, the related bit will be read with a "1" value and, if

de-activated, with a "0" value. The permanent bits can only be toggled by using standard EPC WRITE (not a BlockWrite) if the EPC bank is unlocked or within the SECURED state if the EPC is locked. If the EPC is permalocked, they cannot be changed.

Action bits will trigger a certain action only if the pointer of the SELECT command exactly matches the action-bit address (i.e. 203h or 204h), if the length=1 and if mask=1b (no multiple triggers of actions possible within one single SELECT command).

If the truncate bit in the SELECT command is set to "1", the SELECT will be ignored. A SELECT on action bits will not change the digital state of the chip.

The action bits can be triggered regardless if the EPC memory is unlocked, locked or permalocked.

## 9.6.2 Memory Safeguard

### 9.6.2.1 Description

The Memory Safeguard of UCODE 8/8m consist of three different countermeasures which ensure integrity of the stored data:

#### **ECC (Error correction code):**

The implemented ECC is applied on the EPC- and User-Memory. With this feature, a single bit failure in the memory is detected and corrected automatically. In case of 2 bit fail, an indication is given.

##### **EPC Memory:**

The config word bit 200h (EPC check) indicates, if the EPC check is active ("1"). In case a single bit was corrected this will be indicated by the bit 201h (EPC Corr). Should a 2-bit failure occur bit 202h (EPC NOK) will be activated ("1"). In this case, no error correction will be applied and the EPC memory content readout will provide the actual content.

##### **User Memory:**

The config word bit 20Ch (User Memory check) indicates if the User Memory check is active ("1"). In case a single bit was corrected this will be indicated by the bit 20Dh (User Memory Corr). Should a 2-bit failure occur, bit 20Eh (User Memory NOK) will be activated ("1"). In this case, no error correction will be applied and the User Memory content readout will provide the actual content.

This feature will be activated in case a Lock operation is applied on the according memory bank. If there is a password lock and a change of the memory content in the secured state, the ECC will be not re-calculated and the feature is disabled. To re-enable the ECC functionality also in this condition, an unlock and re-lock is required.

#### **Parity check:**

A parity check on the TID is implemented to offer the possibility to identify a change in the TID. The parity bit (Even parity) will be calculated and locked in the manufacturing process. For a check, the TID content needs to be read out and parity checked.

#### **Margin Check**

The implemented margin check is acting on the EPC-, Reserved- and User-Memory. During performing a Lock operation on the targeted memory bank the IC checks for sufficient programming margin of the memory cell and only responds after a successful check. In case of insufficient margin an error code will be responded and the Lock not completed. A re-check on already locked memory banks requires an unlock and re-lock command.

### 9.6.3 Self Adjust

#### 9.6.3.1 Description

The UCODE 8/8m has an automatic mechanism implemented which adjusts the chip sensitivity to a maximum in the operated environment. This adjustment will be performed at startup and selects between three different input capacitance values. The feature is enabled by default, but can also be deactivated by the config word bit 207h (Self Adjust disable). In case of deactivation, the center capacitance is used.

The indicator bits 205h (Self Adjust Cap 1) and 206h (Self Adjust Cap 0) give information which capacitor is active ("1"). The startup is performed with the lowest value which is center capacitance minus Cap 0 (60 fF) and is then adjusted up to center capacitance plus Cap 1 (100 fF).

### 9.6.4 Brand Identifier

#### 9.6.4.1 Description

This new feature allows brand owners to implement a product originality check option for their products. The customer dedicated unique 16-bit brand identifier is programmed during manufacturing process by NXP and therefore unalterable stored in the memory.

A SELECT command on bit 204h (Brand identifier) in the configuration word triggers the UCODE8/8m to respond in the inventory round with PC + EPC + Brand Identifier + CRC. In order to prevent manipulation, the Brand Identifier is scrambled with the RN16 and not sent in plain. The implemented scrambling is performed by bitwise XOR operation of the 16-bit Brand Identifier and the RN16. At the reader, the Brand identifier can be descrambled and the originality check completed.

The PC value is adjusted accordingly for UCODE 8/8m. A SELECT on the Brand Identifier bit always gives a Tag matching.

The usage of this feature requires an update on the reader firmware with the Brand Identifier check routine.

Default value of the UCODE 8/8m Brand Identifier is "AAAAh". Customer-specific Brand Identifiers can be requested by a dedicated product ordering code. For details, contact your NXP sales representative.

The Brand Identifier feature cannot be used in combination with the EPC+TID feature.

9.6.5 EPC+TID

9.6.5.1 Description

This feature enables the read out the EPC+TID memory content in a faster way compared to a standard readout sequence.

A SELECT on the config word bit 203h (EPC+TID) will trigger the UCODE 8/8m to reply with the EPC+TID after receiving the ACK command during the inventory round.

In case only the TID should be replied by this feature, the EPC length in the PC needs to be set to "0".

9.6.6 Product Status Flag (PSF)

9.6.6.1 Description

The PSF bit can be used for easy EAS (Electronic Article Surveillance) implementations or as general-purpose check flag.

In order to detect tags with activated PSF, a SELECT command on bit 20Fh (PSF Bit) in the configuration word is required. In the following inventory round, only PSF enabled chips reply their EPC number.

9.6.7 Backscatter strength reduction

The UCODE 8/8m features two levels of backscatter strengths. Per default, maximum backscatter is enabled in order to enable maximum read rates. A deactivation of this feature can be done by clearing bit 209h (max. backscatter strength) in the configuration word, which reduces the backscatter strength if needed.

9.6.8 Pre-serialization of the 96-bit EPC

9.6.8.1 Description

UCODE 8/8m are delivered with a pre-serialized content of the 96-bit EPC, which is the initial EPC length settings of UCODE 8/8m.

The EPC content is identical to the TID content except of the 16-bit XTID content which is set to 16-bit 0's.

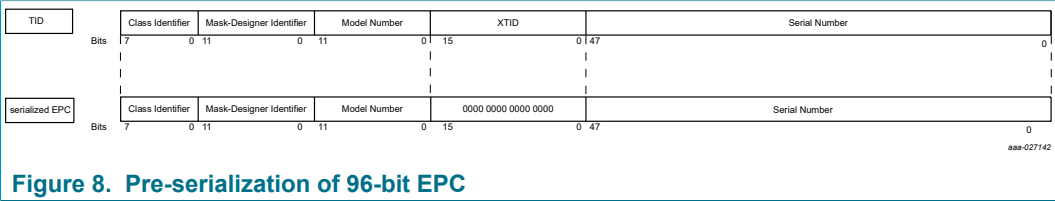


Figure 8. Pre-serialization of 96-bit EPC

## 9.6.9 Single-slit antenna solution

### 9.6.9.1 Description

In UCODE 8/8m, the test pads TP1 and TP2 are electrically disconnected and therefore can be safely short-circuited to the RF pads (RF1, RF2) (see figure below).

Single-slit antenna enables easier assembly and antenna design. In addition to the standard antenna assembly, the related increased input capacitance (see [Table 16](#)) can be used for optimization for different antenna design.

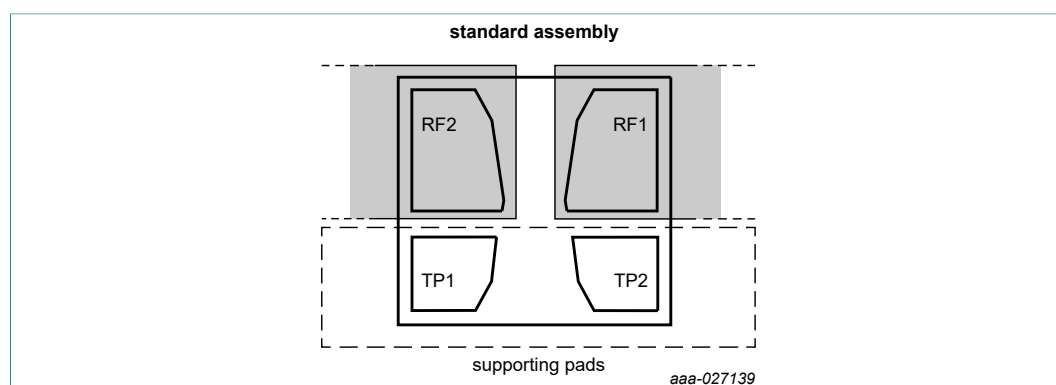


Figure 9. Standard antenna design versus single-slit antenna

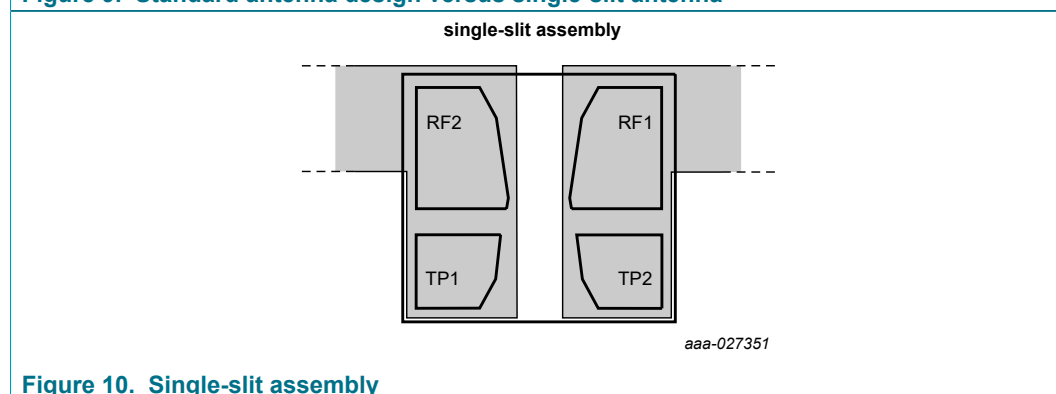


Figure 10. Single-slit assembly

## 9.6.10 Large Pads

### 9.6.10.1 Description

The large gold pads introduced in UCODE 8/8m enable more robust and reliable assembly. The new pad design allows not only more freedom in the placement accuracy (see ["Rotation tolerant pad design"](#)). It also brings advantages in high-speed assembly due to the dual axis glue spacer (see ["Dual axis glue spacer"](#)).

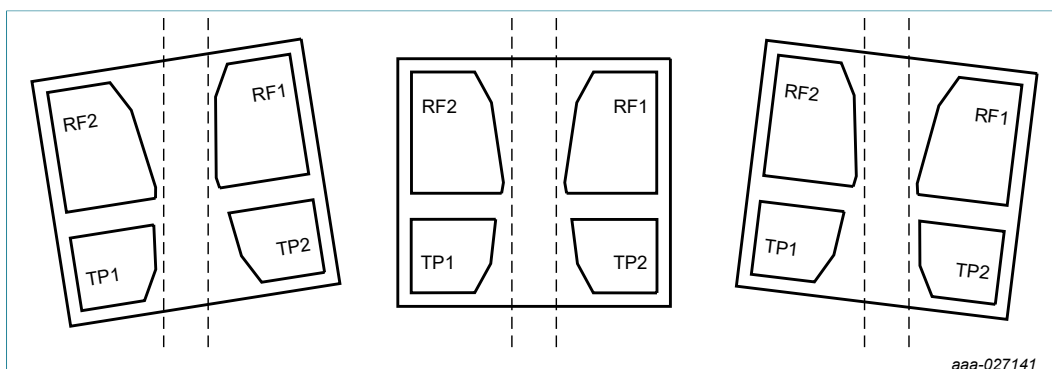


Figure 11. Rotation tolerant pad design

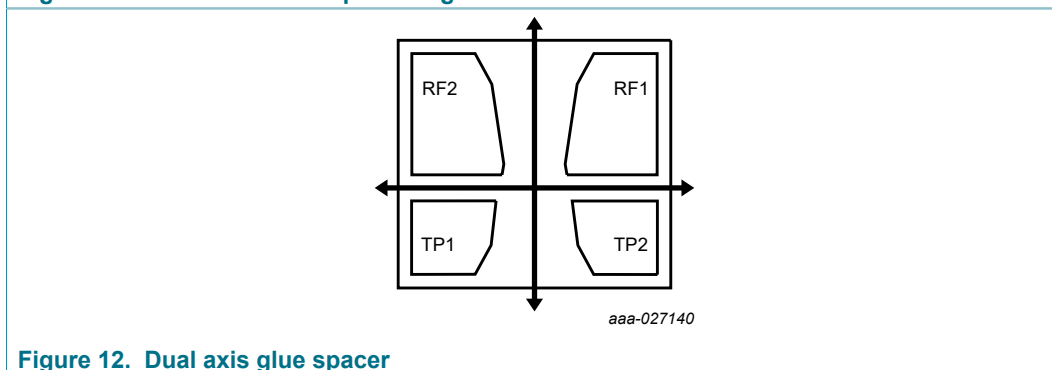


Figure 12. Dual axis glue spacer

### 9.6.11 FC Bumps

#### 9.6.11.1 Description

Delivery options with FC come with higher and harder bumps and no Polyimide spacer. Due to elimination of the PI spacer a better heat transfer between thermode, IC, antenna and glue can be achieved. As a result faster curing of the glue is enabled.

The bump structure (see [Table 12](#)) is required to decrease the spread of the assembly capacitance.

**Table 12. FC Bump structure**

|             | Material | typ. height       |
|-------------|----------|-------------------|
| Bump top    | Gold     | 0.5 $\mu\text{m}$ |
| Bump center | Nickel   | 2 $\mu\text{m}$   |
| Bump bottom | Copper   | 21 $\mu\text{m}$  |

### 9.6.12 Custom commands

The Untraceable function allows the UCODE 8/8m to hide the complete or parts of the EPC, TID and/or user memory. In addition, the read range can be completely or temporarily reduced. This command can only be executed from the secured state. Memory parts which are set untraceable are acting as non-existing in the Open state.

**EPC-field:** Specifies the number of words of the EPC memory which the UCODE 8/8m back scatters. A change of this field therefore also changes the L bit in the Protocol Control (PC) word.

**TID-field:** Hide some ("01") hides the TID memory from address 20h (included) onwards.

**Range-field:** In case of activated range toggling, the read range reduction toggles from the actual value to the second (e.g. when actual state is normal it toggles to reduced). In case of power loss the chip reverts to its prior state.

UCODE 8/8m does not support the U bit and therefore ignores this value.

**Table 13. Untraceable command**

|             | Command                | RFU | U                 | EPC                                                                                                   | TID                                                               | User                      | Range                                                         | RN     | CRC    |
|-------------|------------------------|-----|-------------------|-------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|---------------------------|---------------------------------------------------------------|--------|--------|
| No. of bits | 16                     | 2   | 1                 | 6                                                                                                     | 2                                                                 | 1                         | 2                                                             | 16     | 16     |
| Description | 1110 0010<br>0000 0000 | 00  | do<br>not<br>care | MSB:"0": show<br>memory above<br>EPC<br>"1": hide memory<br>above<br>EPC<br>5 LSBs: new EPC<br>length | "00": hide none<br>"01": hide some<br>"10": hide all<br>"11": RFU | "0":<br>view<br>"1": hide | "00": normal<br>"01": toggle<br>"10":<br>reduced<br>"11": RFU | handle | CRC-16 |

**Table 14. Untraceable command-response table**

| Starting State                    | Condition  | Response                     | Next State |
|-----------------------------------|------------|------------------------------|------------|
| ready                             | all        | -                            | ready      |
| arbitrate, reply,<br>acknowledged | all        | -                            | arbitrate  |
| open                              | all        | -                            | open       |
| secured                           | executable | backscatter header when done | secured    |
| killed                            | all        | -                            | killed     |

In case of access to the memory that is set to untraceable, the error condition "memory overrun" is returned.

For further details, refer to ["EPC Global Gen2v2"](#)

## 10 Limiting values

**Table 15. Limiting values**

*In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to RFN.* <sup>[1] [2]</sup>

| Symbol               | Parameter                       | Conditions                             |                               | Min | Max  | Unit |
|----------------------|---------------------------------|----------------------------------------|-------------------------------|-----|------|------|
| Bare die limitations |                                 |                                        |                               |     |      |      |
| T <sub>stg</sub>     | storage temperature             |                                        |                               | -55 | +125 | °C   |
| T <sub>amb</sub>     | ambient temperature             |                                        |                               | -40 | +85  | °C   |
| V <sub>ESD</sub>     | electrostatic discharge voltage | Human body model                       | <sup>[3]</sup> <sup>[4]</sup> | -   | ± 2  | kV   |
| Pad limitations      |                                 |                                        |                               |     |      |      |
| P <sub>i</sub>       | input power                     | maximum power dissipation, RF1/RF2 pad |                               | -   | 100  | mW   |

- [1] Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any conditions other than those described in the Operating Conditions and Electrical Characteristics section of this specification is not implied.
- [2] This product includes circuitry specifically designed for the protection of its internal devices from the damaging effects of excessive static charge. Nonetheless, it is suggested that conventional precautions be taken to avoid applying greater than the rated maxima.
- [3] For ESD measurement, the die chip has been mounted into a CDIP20 package.
- [4] HBM: ANSI/ESDA/JEDEC JS-001

### CAUTION



This device is sensitive to ElectroStatic Discharge (ESD). Observe precautions for handling electrostatic sensitive devices. Such precautions are described in the *ANSI/ESD S20.20*, *IEC/ST 61340-5*, *JESD625-A* or equivalent standards.

## 11 Characteristics

### 11.1 UCODE 8/8m bare die characteristics

Table 16. UCODE 8/8m RF interface characteristics (RF1, RF2)

| Symbol       | Parameter                                                                                                        | Conditions              |              | Min | Typ     | Max | Unit     |
|--------------|------------------------------------------------------------------------------------------------------------------|-------------------------|--------------|-----|---------|-----|----------|
| $f_i$        | input frequency                                                                                                  |                         |              | 840 | -       | 960 | MHz      |
| $P_{I(min)}$ | minimum input power                                                                                              | READ sensitivity        | [1] [2] [3]  | -   | - 22.9  | -   | dBm      |
|              |                                                                                                                  | reduced operating range | [4]          | -   | + 1     | -   | dBm      |
| $P_{I(min)}$ | minimum input power                                                                                              | WRITE sensitivity       | [4]          | -   | -17.8   | -   | dBm      |
| $t_{16bit}$  | encoding speed                                                                                                   | 16-bit                  | [5]          | -   | 0.7     | -   | ms       |
|              |                                                                                                                  | 32-bit (block write)    | [5]          | -   | 1.2     | -   | ms       |
| $C_i$        | chip input capacitance, Large Pads                                                                               | parallel                | [2] [6] [7]  | -   | 0.69    | -   | pF       |
| $Z$          | chip impedance, Large Pads                                                                                       | 866 MHz                 | [2] [6] [7]  | -   | 15-j265 | -   | $\Omega$ |
|              |                                                                                                                  | 915 MHz                 | [2] [6] [7]  | -   | 14-j252 | -   | $\Omega$ |
|              |                                                                                                                  | 953 MHz                 | [2] [6] [7]  | -   | 13-j242 | -   | $\Omega$ |
| $Z$          | typical assembled impedance, Large Pads (see <a href="#">Figure 9</a> )                                          | 915 MHz                 | [8] [9] [7]  | -   | 19-j234 | -   | $\Omega$ |
| $Z$          | typical assembled impedance in case of single-slit antenna assembly, Large Pads (see <a href="#">Figure 10</a> ) | 915 MHz                 | [8] [10] [7] | -   | 13-j191 | -   | $\Omega$ |
| $C_i$        | chip input capacitance, FC Bumps                                                                                 | parallel                | [2] [6] [7]  | -   | 0.635   | -   | pF       |
| $Z$          | chip impedance, FC Bumps                                                                                         | 866 MHz                 | [2] [6] [7]  | -   | 17-j288 | -   | $\Omega$ |
|              |                                                                                                                  | 915 MHz                 | [2] [6] [7]  | -   | 15-j274 | -   | $\Omega$ |
|              |                                                                                                                  | 953 MHz                 | [2] [6] [7]  | -   | 14-j263 | -   | $\Omega$ |
| $Z$          | typical assembled impedance in case of single-slit antenna assembly, FC Bumps                                    | 915 MHz                 | [8] [10] [7] | -   | 15-j203 | -   | $\Omega$ |

[1] Power to process a QUERY command

[2] Measured with a 50  $\Omega$  source impedance directly on the chip

[3] Results in approximately -23 dBm tag sensitivity with a 2.15 dBi gain antenna

[4] Tag sensitivity on a 2.15 dBi gain antenna

[5] When the memory content is "0000...".

[6] At minimum operating power

[7] at center capacitor of Self Adjust

[8] The antenna shall be matched to this impedance

[9] Assuming 50ff additional assembly capacitance

[10] Assuming 220ff additional assembly+test pad capacitance

Table 17. UCODE 8/8m memory characteristics

| Symbol                 | Parameter       | Conditions                                |  | Min  | Typ | Max | Unit  |
|------------------------|-----------------|-------------------------------------------|--|------|-----|-----|-------|
| EEPROM characteristics |                 |                                           |  |      |     |     |       |
| $t_{ret}$              | retention time  | $T_{amb} \leq 55\text{ }^{\circ}\text{C}$ |  | 20   | -   | -   | year  |
| $N_{endu(W)}$          | write endurance |                                           |  | 100k | -   | -   | cycle |

## 12 Packing information

---

### 12.1 Wafer

See ["Data sheet - Delivery type description – General specification for 8" wafer on UV-tape with electronic fail die marking, BU-S&C document number: 1093\\*\\*"](#)

See ["Data sheet - Delivery type description – General specification for 12" wafer on UV-tape with electronic fail die marking, BU-S&C document number: 1862\\*\\*"](#)

## 13 Abbreviations

Table 18. Abbreviations

| Acronym | Description                                                                                 |
|---------|---------------------------------------------------------------------------------------------|
| CRC     | Cyclic Redundancy Check                                                                     |
| CW      | Continuous Wave                                                                             |
| DSB-ASK | Double Side Band-Amplitude Shift Keying                                                     |
| DC      | Direct Current                                                                              |
| EAS     | Electronic Article Surveillance                                                             |
| EEPROM  | Electrically Erasable Programmable Read Only Memory                                         |
| EPC     | Electronic Product Code (containing Header, Domain Manager, Object Class and Serial Number) |
| FM0     | Bi phase space modulation                                                                   |
| G2      | Generation 2                                                                                |
| IC      | Integrated Circuit                                                                          |
| PIE     | Pulse Interval Encoding                                                                     |
| PSF     | Product Status Flag                                                                         |
| RF      | Radio Frequency                                                                             |
| UHF     | Ultra High Frequency                                                                        |
| SECS    | Semi Equipment Communication Standard                                                       |
| TID     | Tag IDentifier                                                                              |

## 14 References

1. EPCglobal: EPC Radio-Frequency Identity Protocols Class-1 Generation-2 UHF RFID Protocol for Communications at 860 MHz – 960 MHz, Version 2.0.1 (April 2015)
2. EPCglobal: EPC Tag Data Standard, Release 1.10 (March 2017)
3. Data sheet - Delivery type description – General specification for 8" wafer on UV-tape with electronic fail die marking, BU-S&C document number: 1093\*\*
4. Data sheet - Delivery type description – General specification for 12" wafer on UV-tape with electronic fail die marking, BU-S&C document number: 1862\*\*<sup>1</sup>

---

<sup>1</sup> \*\* ... document version number

## 15 Revision history

Table 19. Revision history

| Document ID        | Release date                                                                                                                                                                                                                                                                                                                                                                                                                    | Data sheet status      | Change notice | Supersedes         |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|---------------|--------------------|
| SL3S1205_15 v. 3.4 | 20200131                                                                                                                                                                                                                                                                                                                                                                                                                        | Product data sheet     | -             | SL3S1205_15 v. 3.3 |
| Modifications:     | <ul style="list-style-type: none"> <li>• Introduction of 12 inch FC Bumps</li> </ul>                                                                                                                                                                                                                                                                                                                                            |                        |               |                    |
| SL3S1205_15 v. 3.3 | 20191028                                                                                                                                                                                                                                                                                                                                                                                                                        | Product data sheet     | -             | SL3S1205_15 v. 3.2 |
| Modifications:     | <ul style="list-style-type: none"> <li>• <a href="#">Section 8.1.2 "12 inch Wafer with Large Pads"</a>: number of PGDW changed into 258934</li> </ul>                                                                                                                                                                                                                                                                           |                        |               |                    |
| SL3S1205_15 v. 3.2 | 20181119                                                                                                                                                                                                                                                                                                                                                                                                                        | Product data sheet     | -             | SL3S1205_15 v. 3.1 |
| Modifications:     | <ul style="list-style-type: none"> <li>• Introduction of 12 inch wafer delivery</li> <li>• <a href="#">Figure 4 "UCODE 8/8m, 8" wafer layout, Large Pads"</a> updated</li> <li>• Editorial changes in <a href="#">Table 8 "UCODE 8 overall memory map"</a></li> <li>• Editorial changes in <a href="#">Table 9 "UCODE 8m overall memory map"</a></li> <li>• <a href="#">Section 9.6.4 "Brand Identifier"</a> updated</li> </ul> |                        |               |                    |
| SL3S1205_15 v. 3.1 | 20170630                                                                                                                                                                                                                                                                                                                                                                                                                        | Product data sheet     | -             | SL3S1205_15 v. 3.0 |
| Modifications:     | <ul style="list-style-type: none"> <li>• Wording: "Auto Adjust" replaced with "Self Adjust"</li> </ul>                                                                                                                                                                                                                                                                                                                          |                        |               |                    |
| SL3S1205_15 v. 3.0 | 20170703                                                                                                                                                                                                                                                                                                                                                                                                                        | Product data sheet     | -             | 398420             |
| 398420             | 20170531                                                                                                                                                                                                                                                                                                                                                                                                                        | Preliminary data sheet | -             | 398410             |
| 398410             | 20160919                                                                                                                                                                                                                                                                                                                                                                                                                        | Objective data sheet   | -             | -                  |

## 16 Legal information

### 16.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition                                                                            |
|-----------------------------------|-------------------------------|---------------------------------------------------------------------------------------|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 16.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### 16.3 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors. In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without

notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications. In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own

risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

**Security** — While NXP Semiconductors has implemented advanced security features, all products may be subject to unidentified vulnerabilities. Customers are responsible for the design and operation of their applications and products to reduce the effect of these vulnerabilities on customer's applications and products, and NXP Semiconductors accepts no liability for any vulnerability that is discovered. Customers should implement appropriate design and operating safeguards to minimize the risks associated with their applications and products.

## 16.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

**UCODE** — is a trademark of NXP B.V.

## Tables

|          |                                             |    |          |                                          |    |
|----------|---------------------------------------------|----|----------|------------------------------------------|----|
| Tab. 1.  | Ordering information .....                  | 5  | Tab. 11. | Configuration word UCODE 8/8m ...        |    |
| Tab. 2.  | Pin description bare die .....              | 7  |          | continued .....                          | 20 |
| Tab. 3.  | 8 inch specification with Large Pads .....  | 11 | Tab. 12. | FC Bump structure .....                  | 27 |
| Tab. 4.  | 12 inch specification with Large Pads ..... | 12 | Tab. 13. | Untraceable command .....                | 28 |
| Tab. 5.  | 12 inch specification with Large Pads ..... | 13 | Tab. 14. | Untraceable command-response table ..... | 28 |
| Tab. 6.  | UCODE 8 memory sections .....               | 16 | Tab. 15. | Limiting values .....                    | 29 |
| Tab. 7.  | UCODE 8m memory sections .....              | 16 | Tab. 16. | UCODE 8/8m RF interface characteristics  |    |
| Tab. 8.  | UCODE 8 overall memory map .....            | 17 |          | (RF1, RF2) .....                         | 30 |
| Tab. 9.  | UCODE 8m overall memory map .....           | 18 | Tab. 17. | UCODE 8/8m memory characteristics .....  | 30 |
| Tab. 10. | Configuration word UCODE 8/8m .....         | 20 | Tab. 18. | Abbreviations .....                      | 32 |
|          |                                             |    | Tab. 19. | Revision history .....                   | 34 |

Figures

|         |                                                |    |          |                                                          |    |
|---------|------------------------------------------------|----|----------|----------------------------------------------------------|----|
| Fig. 1. | Block diagram of UCODE 8/8m IC .....           | 6  | Fig. 8.  | Pre-serialization of 96-bit EPC .....                    | 24 |
| Fig. 2. | Pinning bare die, Large Pads .....             | 7  | Fig. 9.  | Standard antenna design versus single-slit antenna ..... | 25 |
| Fig. 3. | Pinning bare die, FC Bumps .....               | 7  | Fig. 10. | Single-slit assembly .....                               | 25 |
| Fig. 4. | UCODE 8/8m, 8" wafer layout, Large Pads .....  | 8  | Fig. 11. | Rotation tolerant pad design .....                       | 26 |
| Fig. 5. | UCODE 8/8m, 12" wafer layout, Large Pads ..... | 9  | Fig. 12. | Dual axis glue spacer .....                              | 26 |
| Fig. 6. | UCODE 8/8m, 12" wafer layout, FC Bumps ....    | 10 |          |                                                          |    |
| Fig. 7. | UCODE 8/8m TID memory structure .....          | 19 |          |                                                          |    |

## Contents

|           |                                             |           |           |                                           |           |
|-----------|---------------------------------------------|-----------|-----------|-------------------------------------------|-----------|
| <b>1</b>  | <b>General description .....</b>            | <b>1</b>  | <b>11</b> | <b>Characteristics .....</b>              | <b>30</b> |
| <b>2</b>  | <b>Features and benefits .....</b>          | <b>2</b>  | 11.1      | UCODE 8/8m bare die characteristics ..... | 30        |
| 2.1       | Key features .....                          | 2         | <b>12</b> | <b>Packing information .....</b>          | <b>31</b> |
| 2.1.1     | Memory .....                                | 2         | 12.1      | Wafer .....                               | 31        |
| 2.2       | Supported features .....                    | 3         | <b>13</b> | <b>Abbreviations .....</b>                | <b>32</b> |
| <b>3</b>  | <b>Applications .....</b>                   | <b>4</b>  | <b>14</b> | <b>References .....</b>                   | <b>33</b> |
| 3.1       | Target market .....                         | 4         | <b>15</b> | <b>Revision history .....</b>             | <b>34</b> |
| 3.2       | Applications .....                          | 4         | <b>16</b> | <b>Legal information .....</b>            | <b>35</b> |
| <b>4</b>  | <b>Ordering information .....</b>           | <b>5</b>  |           |                                           |           |
| <b>5</b>  | <b>Block diagram .....</b>                  | <b>6</b>  |           |                                           |           |
| <b>6</b>  | <b>Pinning information .....</b>            | <b>7</b>  |           |                                           |           |
| 6.1       | Pin description .....                       | 7         |           |                                           |           |
| <b>7</b>  | <b>Wafer layout .....</b>                   | <b>8</b>  |           |                                           |           |
| <b>8</b>  | <b>Mechanical specification .....</b>       | <b>11</b> |           |                                           |           |
| 8.1       | Wafer specification .....                   | 11        |           |                                           |           |
| 8.1.1     | 8 inch Wafer with Large Pads .....          | 11        |           |                                           |           |
| 8.1.2     | 12 inch Wafer with Large Pads .....         | 12        |           |                                           |           |
| 8.1.3     | 12 inch Wafer with FC bumps .....           | 13        |           |                                           |           |
| 8.1.4     | Fail die identification .....               | 14        |           |                                           |           |
| 8.1.5     | Map file distribution .....                 | 14        |           |                                           |           |
| <b>9</b>  | <b>Functional description .....</b>         | <b>15</b> |           |                                           |           |
| 9.1       | Air interface standards .....               | 15        |           |                                           |           |
| 9.2       | Power transfer .....                        | 15        |           |                                           |           |
| 9.3       | Data transfer .....                         | 15        |           |                                           |           |
| 9.3.1     | Interrogator to tag Link .....              | 15        |           |                                           |           |
| 9.3.2     | Tag to interrogator Link .....              | 15        |           |                                           |           |
| 9.4       | Supported commands .....                    | 16        |           |                                           |           |
| 9.5       | UCODE 8/8m memory .....                     | 16        |           |                                           |           |
| 9.5.1     | UCODE 8/8m overall memory map .....         | 17        |           |                                           |           |
| 9.5.2     | UCODE 8/8m TID memory details .....         | 19        |           |                                           |           |
| 9.6       | Supported features .....                    | 20        |           |                                           |           |
| 9.6.1     | UCODE 8/8m features control mechanism ..... | 20        |           |                                           |           |
| 9.6.2     | Memory Safeguard .....                      | 22        |           |                                           |           |
| 9.6.2.1   | Description .....                           | 22        |           |                                           |           |
| 9.6.3     | Self Adjust .....                           | 23        |           |                                           |           |
| 9.6.3.1   | Description .....                           | 23        |           |                                           |           |
| 9.6.4     | Brand Identifier .....                      | 23        |           |                                           |           |
| 9.6.4.1   | Description .....                           | 23        |           |                                           |           |
| 9.6.5     | EPC+TID .....                               | 24        |           |                                           |           |
| 9.6.5.1   | Description .....                           | 24        |           |                                           |           |
| 9.6.6     | Product Status Flag (PSF) .....             | 24        |           |                                           |           |
| 9.6.6.1   | Description .....                           | 24        |           |                                           |           |
| 9.6.7     | Backscatter strength reduction .....        | 24        |           |                                           |           |
| 9.6.8     | Pre-serialization of the 96-bit EPC .....   | 24        |           |                                           |           |
| 9.6.8.1   | Description .....                           | 24        |           |                                           |           |
| 9.6.9     | Single-slit antenna solution .....          | 25        |           |                                           |           |
| 9.6.9.1   | Description .....                           | 25        |           |                                           |           |
| 9.6.10    | Large Pads .....                            | 26        |           |                                           |           |
| 9.6.10.1  | Description .....                           | 26        |           |                                           |           |
| 9.6.11    | FC Bumps .....                              | 27        |           |                                           |           |
| 9.6.11.1  | Description .....                           | 27        |           |                                           |           |
| 9.6.12    | Custom commands .....                       | 28        |           |                                           |           |
| <b>10</b> | <b>Limiting values .....</b>                | <b>29</b> |           |                                           |           |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2020.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 31 January 2020

Document number: 398434



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.