

Description

The μPD4464 is a high-speed 8,192-word by 8-bit static RAM fabricated with advanced silicon-gate technology. Full CMOS storage cells with six transistors make the μPD4464 a very low-power device that requires no clock or refreshing to operate.

Two chip enable pins are provided for battery backup application, and an output enable pin is included for easy interface. Data retention is guaranteed at a power supply voltage as low as 2 volts.

The μPD4464 is available in standard 28-pin plastic DIP or miniflat packaging.

Features


- ☐ Operating temperature range: -40 to 85 °C
- ☐ Single +5-volt power supply
- ☐ Fully static operation — no clock or refreshing required
- ☐ TTL-compatible inputs and outputs
- ☐ Common I/O using three-state output
- ☐ One output enable pin and two chip enable pins for easy application
- ☐ Data retention voltage: 2 V minimum
- ☐ Standard 28-pin plastic DIP or miniflat packaging

Ordering Information

Part Number	Access Time (max)	Active Current (max)	Standby Current (max)	Package
μPD4464C-12	120 ns	40 mA	10 μA	28-pin plastic DIP
C-15	150 ns	40 mA		
C-20	200 ns	35 mA		
μPD4464C-12L	120 ns	40 mA	1 μA (at T _A = 60 °C)	28-pin plastic DIP
C-15L	150 ns	40 mA		
C-20L	200 ns	35 mA		
μPD4464G-12	120 ns	40 mA	10 μA	28-pin plastic miniflat
G-15	150 ns	40 mA		
G-20	200 ns	35 mA		
μPD4464G-12L	120 ns	40 mA	1 μA (at T _A = 60 °C)	28-pin plastic miniflat
G-15L	150 ns	40 mA		
G-20L	200 ns	35 mA		

Pin Configuration

28-Pin Plastic DIP or Miniflat

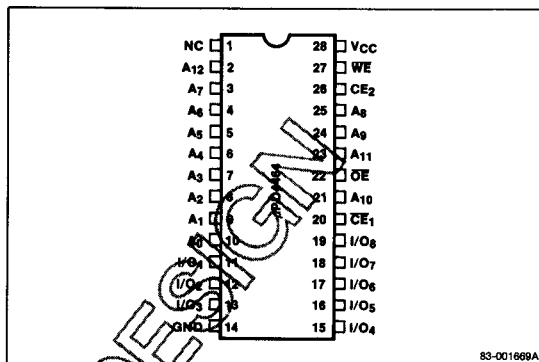

Pin Identification

Symbol	Function
A ₀ -A ₁₂	Address inputs
I/O ₁ -I/O ₈	Data inputs/outputs
CE ₁	Chip enable (active low)
CE ₂	Chip enable (active high)
OE	Output enable
WE	Write enable
GND	Ground
V _{CC}	+5-volt power supply
NC	No connection

Absolute Maximum Ratings


Power supply voltage, V _{CC} (Note 1)	-0.5 to +7.0 V
Input voltage, V _{IN} (Note 1)	-0.5 to V _{CC} + 0.5 V
Output voltage, V _{OUT} (Note 1)	-0.5 to V _{CC} + 0.5 V
Operating temperature, T _{OPR}	-40 to 85 °C
Storage temperature, T _{STG}	-55 to 125 °C
Power dissipation, P _D	1.0 W

Notes:

(1) -3.0 V minimum (pulse width = 50 ns maximum)

Comment: Exposure to Absolute Maximum Ratings for extended periods may affect device reliability; exceeding the ratings could cause permanent damage. The device should be operated within the limits specified under DC and AC Characteristics.

Block Diagram

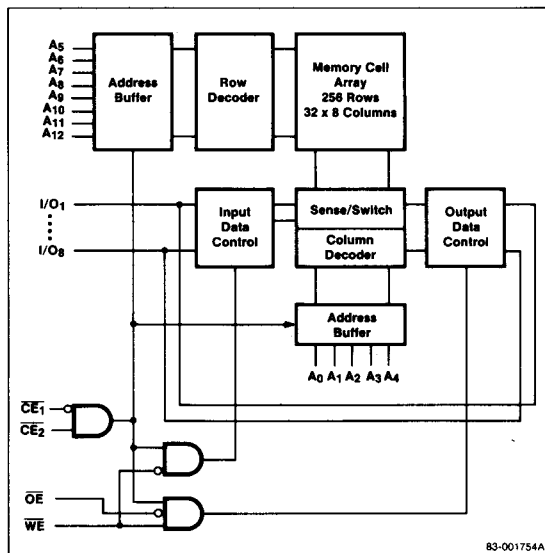

Recommended DC Operating Conditions

$T_A = -40$ to 85°C

Parameter	Symbol	Limits			Unit
		Min	Typ	Max	
Supply voltage	V_{CC}	4.5	5.0	5.5	V
Input voltage, low (Note 1)	V_{IL}	-0.3		0.8	V
Input voltage, high	V_{IH}	2.2		$V_{CC} + 0.5$	V

Notes:

(1) -3.0 V minimum (pulse width = 50 ns maximum)

Capacitance

$T_A = 25^\circ\text{C}$; $f = 1.0$ MHz

Parameter	Symbol	Limits			Unit	Test Conditions
		Min	Typ	Max		
Input capacitance	C_{IN}			6	pF	$V_{IN} = 0$ V
I/O capacitance	$C_{I/O}$			8	pF	$V_{I/O} = 0$ V

DC Characteristics

$T_A = -40$ to 85°C ; $V_{CC} = +5.0$ V $\pm 10\%$

Parameter	Symbol	Limits			Unit	Test Conditions
		Min	Typ	Max		
Input leakage current	I_{LI}			1	μA	$V_{IN} = 0$ V to V_{CC}
I/O leakage current	I_{LO}			1	μA	$V_{I/O} = 0$ V to V_{CC} ; $\overline{CE}_1 = V_{IH}$ or $CE_2 = V_{IH}$ or $\overline{OE} = V_{IH}$ or $\overline{WE} = V_{IL}$
Operating supply current	I_{CCA1}			40 (Note 1)	mA	$\overline{CE} = V_{IL}$; $CE_2 = V_{IH}$; $I_{I/O} = 0$ (min cycle)
	I_{CCA2}		5	10	mA	$\overline{CE} = V_{IL}$; $CE_2 = V_{IH}$; $I_{I/O} = 0$ (dc current)
Standby supply current	I_{CCS1}		0.004	10 (Note 2)	μA	$\overline{CE} \geq V_{CC} - 0.2$ V; $CE_2 \geq V_{CC} - 0.2$ V
	I_{CCS2}		0.004	10 (Note 2)	μA	$CE_2 \leq 0.2$ V
Output voltage, low	V_{OL}			0.4	V	$I_{OL} = 2.1$ mA
Output voltage, high	V_{OH}	2.4			V	$I_{OH} = -1.0$ mA

Notes:

(1) μPD4464-20/-20L: 35 mA max

(2) μPD4464-12L/-15L/-20L: 1.0 μA max (-40 to 60°C)
0.2 μA max (-40 to 25°C)

Truth Table

$\overline{CE}_1$	CE_2	$\overline{OE}$	$\overline{WE}$	Mode	I/O	I_{CC}
H	X	X	X	Not selected	High-Z	Standby
X	L	X	X	Not selected	High-Z	Standby
L	H	H	H	D_{OUT} disabled	High-Z	Active
L	H	L	H	Read	D_{OUT}	Active
L	H	X	L	Write	D_{IN}	Active

Notes:

(1) X = don't care

AC Characteristics

T_A = -40 to 85°C; V_{CC} = +5.0 V ±10%


Parameter	Symbol	Limits						Unit	Test Conditions (Note 1)	
		μPD4464-12		μPD4464-15		μPD4464-20				
		Min	Max	Min	Max	Min	Max			
Read Cycle										
Read cycle time	t _{RC}	120		150		200		ns		
Address access time	t _{AA}		120		150		200	ns		
$\overline{CE}_1$ access time	t _{CO1}		120		150		200	ns		
CE ₂ access time	t _{CO2}		120		150		200	ns		
Output enable to output valid	t _{OE}		60		75		100	ns		
Output hold from address change	t _{OH}	10		10		10		ns		
Chip enable ($\overline{CE}_1$) to output in low-Z	t _{LZ1}	10		10		100		ns		
Chip enable (CE ₂) to output in low-Z	t _{LZ2}	10		10		10		ns		
Output enable to output in low-Z	t _{OLZ}	5		5		5		ns		
Chip enable ($\overline{CE}_1$) to output in high-Z	t _{HZ1}		40		75		100	ns		
Chip enable (CE ₂) to output in high-Z	t _{HZ2}		40		75		100	ns		
Output enable to output in high-Z	t _{OHZ}		40		60		80	ns		
Write Cycle										
Write cycle time	t _{WC}	120		150		200		ns		
Chip enable ($\overline{CE}_1$) to end of write	t _{CW1}	85		130		180		ns		
Chip enable (CE ₂) to end of write	t _{CW2}	85		130		180		ns		
Address valid to end of write	t _{AW}	85		130		180		ns		
Address setup time	t _{AS}	0		0		0		ns		
Write pulse width	t _{WP}	70		100		140		ns		
Write recovery time	t _{WR}	5		5		5		ns		
Data valid to end of write	t _{DW}	50		70		80		ns		
Data hold time	t _{DH}	5		5		5		ns		
Write enable to output in high-Z	t _{WHZ}		40		75		100	ns		
Output active from end of write	t _{OW}	5		10		10		ns		

Notes:


- (1) Input pulse levels = 0.8 V to 2.4 V; input pulse rise and fall times = 5 ns; timing reference levels = 1.5 V; output load = 1 TTL gate and C_L = 100 pF.

Timing Waveforms


Read Cycle No. 1 (Address Access)

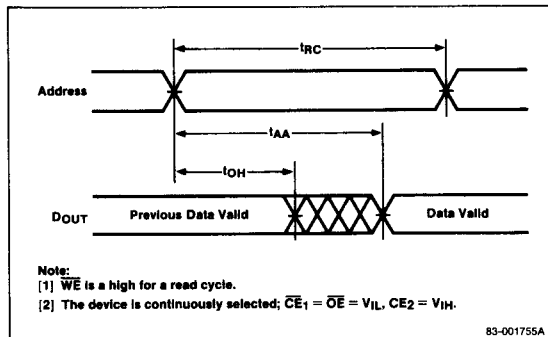

Read Cycle No. 2 (Chip Enable Access)

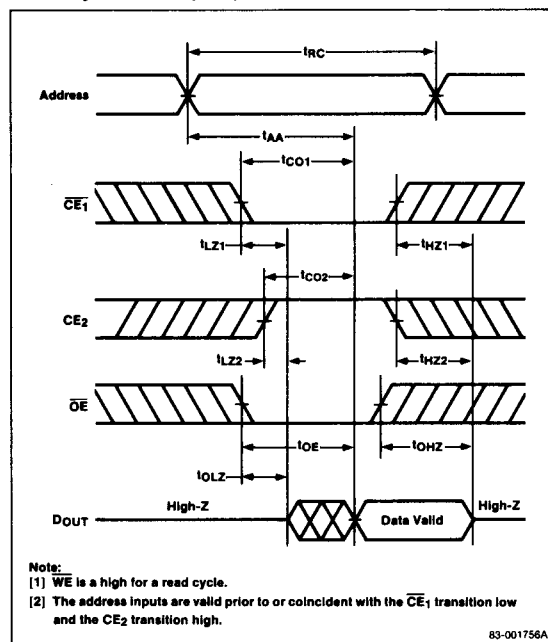


Write Cycle No. 1 ($\overline{WE}$ -Controlled)

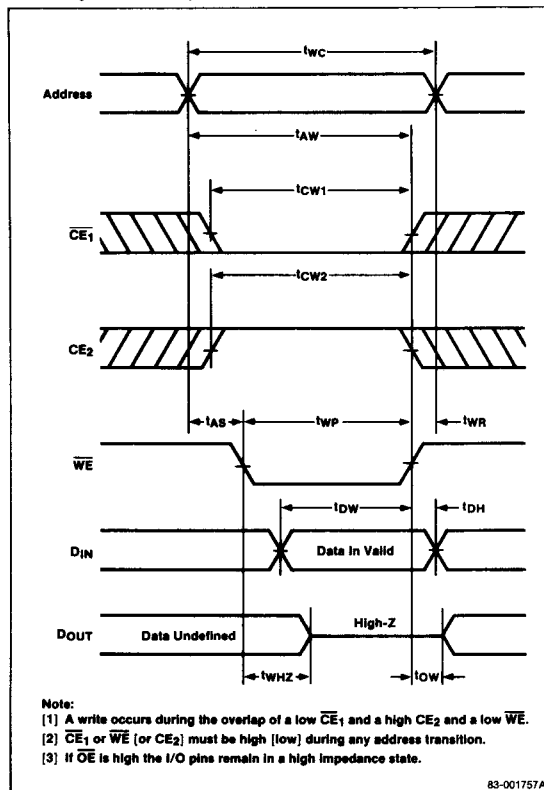


Timing Waveforms (cont)

Write Cycle No. 2 ($\overline{CE}_1$ -Controlled)

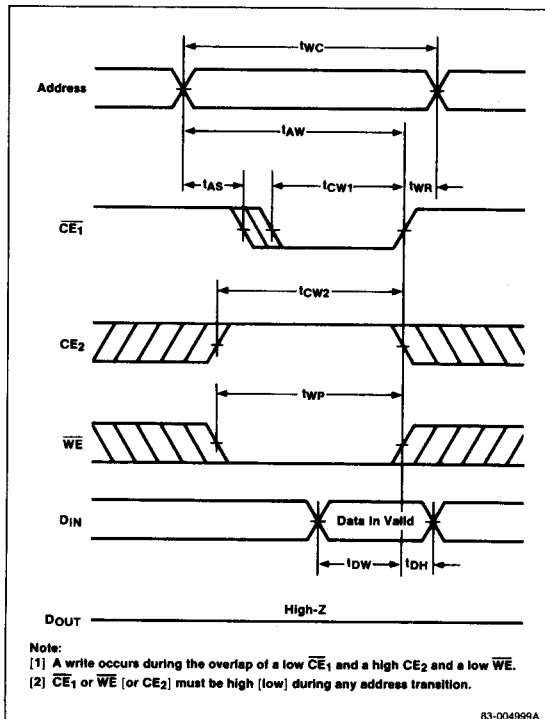

Write Cycle No. 3 ($\overline{CE}_2$ -Controlled)

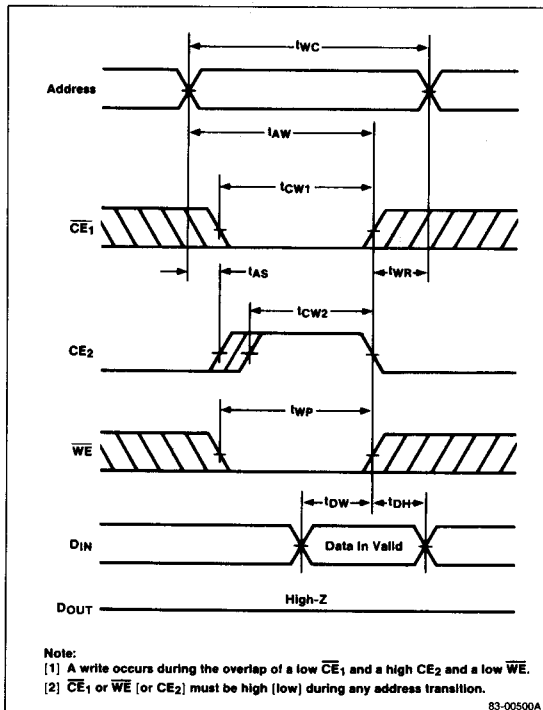

Low V_{CC} Data Retention Characteristics


T_A = -40 to 85°C

Parameter	Symbol	Limits			Unit	Test Conditions
		Min	Typ	Max		
Data retention supply voltage	V _{CCDR1}	2.0		5.5	V	$\overline{CE}_1 \geq V_{CC} - 0.2 \text{ V};$ $CE_2 \geq V_{CC} - 0.2 \text{ V}$
	V _{CCDR2}	2.0		5.5	V	$CE_2 \leq 0.2 \text{ V}$
Data retention supply current	I _{CCDR1}	0.003	10		μA	V _{CC} = 3.0 V; $\overline{CE}_1 \geq V_{CC} - 0.2 \text{ V};$ $CE_2 \geq V_{CC} - 0.2 \text{ V}$ or $CE_2 \leq 0.2 \text{ V}$
	I _{CCDR2}	0.003	10		μA	V _{CC} = 3.0 V; $CE_2 \leq 0.2 \text{ V}$
Chip deselect to data retention time	t _{CDR}	0			ns	
Operation recovery time	t _R		t _{RC}		ns	


Notes:

- (1) μPD4464-12L/-15L/-20L: 1.0 μA max (-40 to 60°C)
0.2 μA max (-40 to 25°C)

Data Retention ($\overline{CE}_1$ -Controlled)

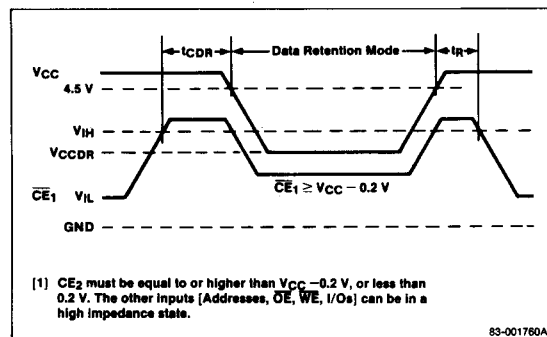

Data Retention (CE₂-Controlled)

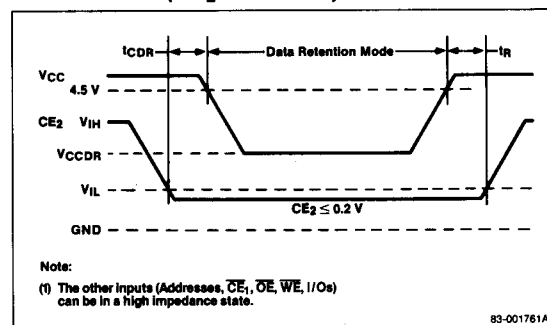



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.