

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

5033763410

Status:


Active

Overview:

slimstack_mm016_pitch

Description:

0.40mm (.016") Pitch Board-to-Board SlimStack™ Plug, SMT, Dual Row, Right Angle, with Solder Tabs and Plastic Pegs, 34 Circuits

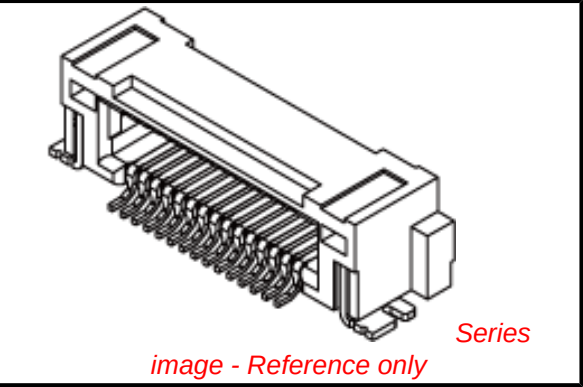

Documents:	
3D Model	Product Specification PS-54552-023 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

General	
Product Family	PCB Headers
Series	503376
Application	Board-to-Board
Overview	slimstack_mm016_pitch
Product Name	SlimStack™
Physical	
Breakaway	No
Circuits (Loaded)	34
Color - Resin	Black
Durability (mating cycles max)	30
Glow-Wire Compliant	No
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Number of Rows	2
Orientation	Right Angle
PCB Locator	Yes
PCB Retention	Yes
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface (in)	0.016 In
Pitch - Mating Interface (mm)	0.40 mm
Temperature Range - Operating	-40°C to +85°C
Termination Interface: Style	Surface Mount
Electrical	
Current - Maximum per Contact	0.3A
Voltage - Maximum	30V AC (RMS)/DC
Material Info	
Reference - Drawing Numbers	
Packaging Specification	SPK-503376-001
Product Specification	PS-54552-023, RPS-54552-011
Sales Drawing	SD-503376-001, SD-503376-002

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.






Search Parts in this Series

503376Series

Mates With

54552 PCB Receptacle

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

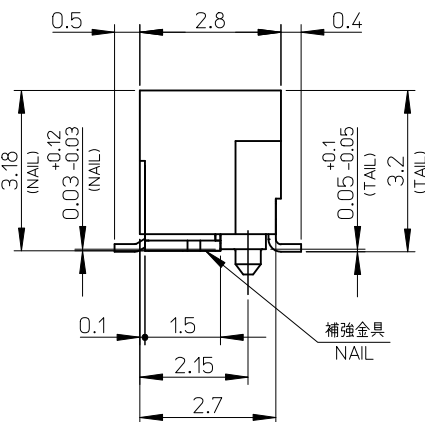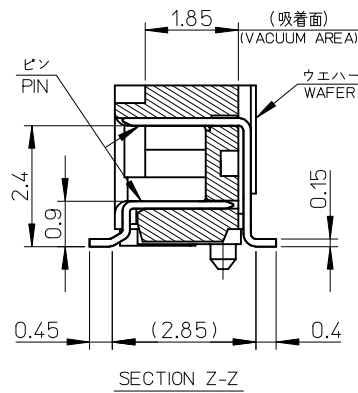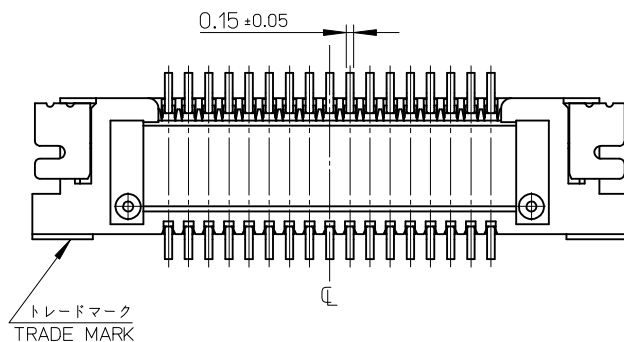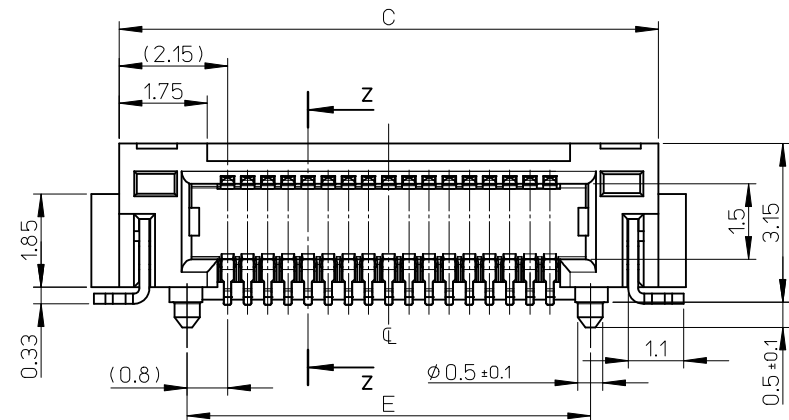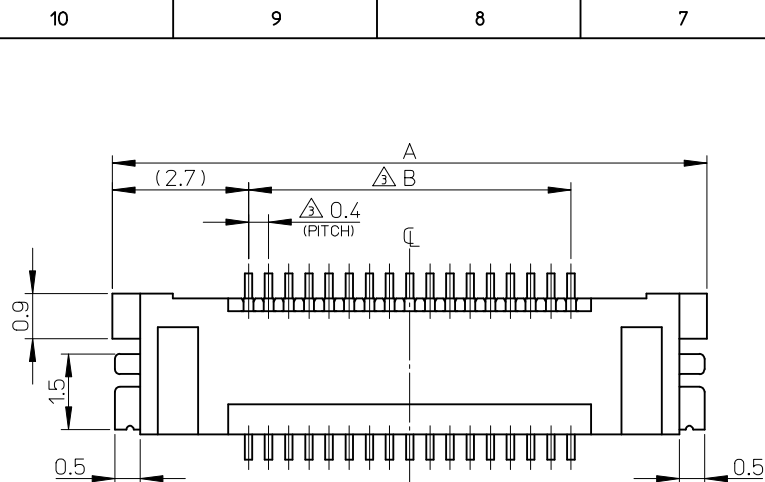


注記 NOTES

1. 使用材料 MATERIAL
ウエハー: 液晶ポリマー ガラス充填 UL94V-0 黒色
WAFER: LIQUID CRYSTAL POLYMER, GLASS FILLED, UL94V-0, COLOR BLACK
ピン: リン青銅
PIN: PHOSPHOR BRONZE
補強金具: リン青銅
FITTING NAIL: PHOSPHOR BRONZE
2. メッキ仕様 PLATING
ピン PIN
コンタクト部: 部分金めっき (0.25 μm 以上)
テール部: 部分金めっき
下地: ニッケルめっき (1.5 μm 以上)
CONTACT AREA: SEPARATED GOLD PLATING (0.25 MICROMETER MINIMUM)
SOLDER TAIL AREA: SEPARATED GOLD PLATING
UNDERPLATE: NICKEL OVERALL (1.5 MICROMETER MINIMUM)
補強金具 FITTING NAIL
錫めっき (1.0 μm 以上)
下地: ニッケルめっき (1.0 μm 以上)
TIN PLATING (1.0 MICROMETER MINIMUM)
UNDERPLATE: NICKEL OVERALL (1.0 MICROMETER MINIMUM)
- △ テール部に適用。
APPLY TO THE TAIL AREA.
4. 嵌合相手: 54552 シリーズ
MATE WITH: 54552 SERIES.
5. テール平坦度は、0.08 以下
テール及び金具の平坦度は、0.1 以下
TAIL COPLANARITY TO BE 0.08 MAXIMUM
TAIL AND FITTING NAIL COPLANARITY TO BE 0.1 MAXIMUM
6. ELV 及び RoHS 適合品
ELV AND RoHS COMPLIANT


9.2	10.5	11.9	7.6	13.0	503376-4010	40
8.0	9.3	10.7	6.4	11.8	503376-3410	34
7.2	8.5	9.9	5.6	11.0	503376-3010	30
E	D	C	B	A	EMBOSSED PACKAGE オーダー番号 ORDER No.	極数 CIRCUITS

CONNECTOR SERIES No. : 503376-**19

REVISED EC NO: J2010-0351 DRAWN: TOSHI MA CHKD: S MARUYAMA APPR: MSASAO	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
		10 UNDER	± 0.2	DRAWN BY M. TAKASAKI	DATE 2009/06/03	TITLE 0.4 B-TO-B CONN. RA PLUG NAIL ASSY (WITH BOSS)			
		10 OVER 30 UNDER	± 0.25	CHECKED BY M. HAYASHI	DATE 2009/06/03				
		30 OVER	± 0.3	APPROVED BY N. UKITA	DATE 2009/06/03				
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.			SHEET NO.
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-503376-001			1 OF 2
A	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

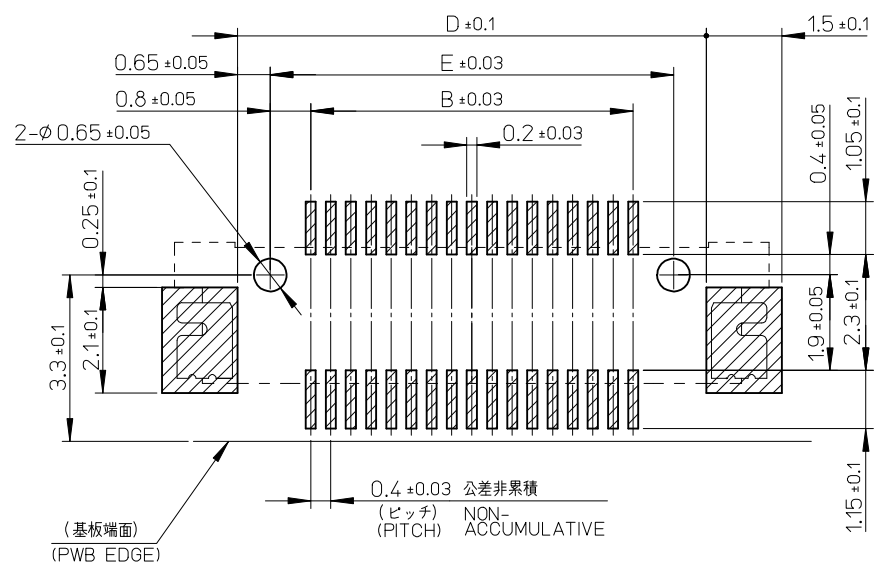

推奨基板レイアウト(マウント面)
RECOMMENDED P.W.BOARD
PATTERN DIMENSION. (REFERENCE)
(MOUNTING AREA)

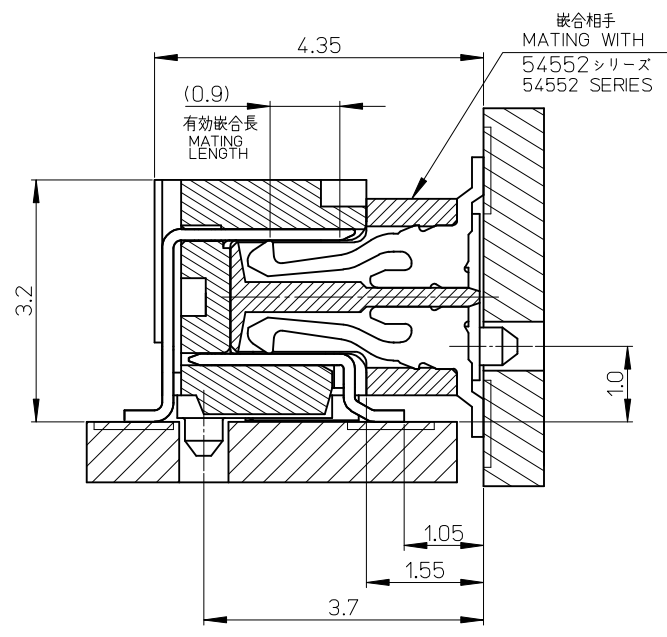

嵌合断面 及び ボス位置 (参考)
MATED AND BOSS POSITION
DRAWING(REFERENCE)

REVISED EC NO.: J2010-0351 DRWN: TOSHIMA CHKD: SMARUYAMA APPR: MSASAO A		DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		CONNECTOR SERIES No. : 503376-**-19			
			10 UNDER ±0.2		DRAWN BY DATE M. TAKASAKI 2009/06/03		SCALE 15:1	DESIGN UNITS METRIC	 THIRD ANGLE PROJECTION	
			10 OVER 30 UNDER ±0.25		CHECKED BY DATE M. HAYASHI 2009/06/03		TITLE 0.4 B-T0-B CONN. RA PLUG NAIL ASSY (WITH BOSS)			
			30 OVER ±0.3		APPROVED BY DATE N. UKITA 2009/06/03					 MOLEX INCORPORATED
			ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.			
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-503376-001			2 OF 2
			A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

10

9

8

7

6



5

4


3

2

1

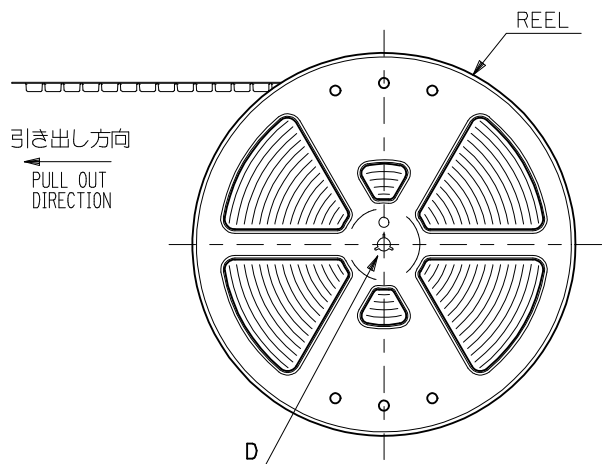


DETAIL D

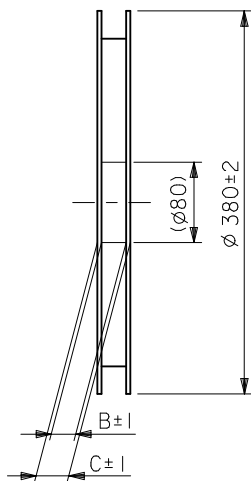

NOTES

- 製品詳細寸法については SD-503376-001 を参照ください。
RE DETAILED DIMENSION, SEE SD-503376-001
- 梱包数量：1500個/リール
NUMBER OF CONNECTORS : 1500PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

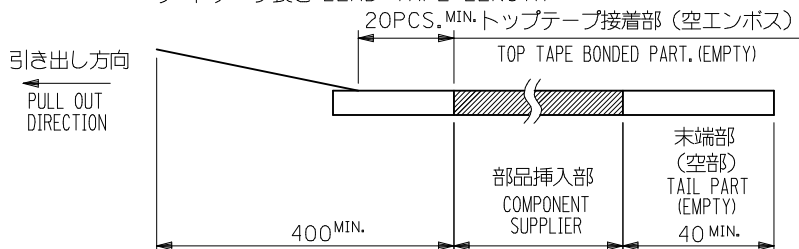

- 材料 (MATERIAL)
キャリアテープ (CARRIER TAPE) : ポリプロピレン (POLYPROPYLENE)
トップテープ (TOPTAPE) : PET, PE, PEF
リール (REEL) : ポリスチレン (PS) (リサイクル材を含む)
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>
- ELV 及び RoHS適合品
ELV AND RoHS COMPLIANT.

503376-4010	40
503376-3410	34
503376-3010	30
MATERIAL NO.	極数 CIRCUITS

REVISED EC NO.: J2010-0351 2009/09/04 DRWN: TOSHIMA 2009/09/04 CHKD: SMARUYAMA 2009/09/04 APPR: MSASAO	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	M. TAKASAKI	2009/06/03	TITLE EMBSTP PKG FOR 0.4 B/B CONN. RA PLUG NAIL ASSY				
		10 OVER 30 UNDER	± 0.25	M. HAYASHI	2009/06/03					
		30 OVER	± 0.3	N. UKITA	2009/06/03	MOLEX INCORPORATED				
		ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.			SHEET NO.	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-503376-002			1 OF 2		
	A	REV	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

9

8

7

6

5

4

3

2

10 9 8 7 6 5 4 3 2 1

F


E

D

C

B

A

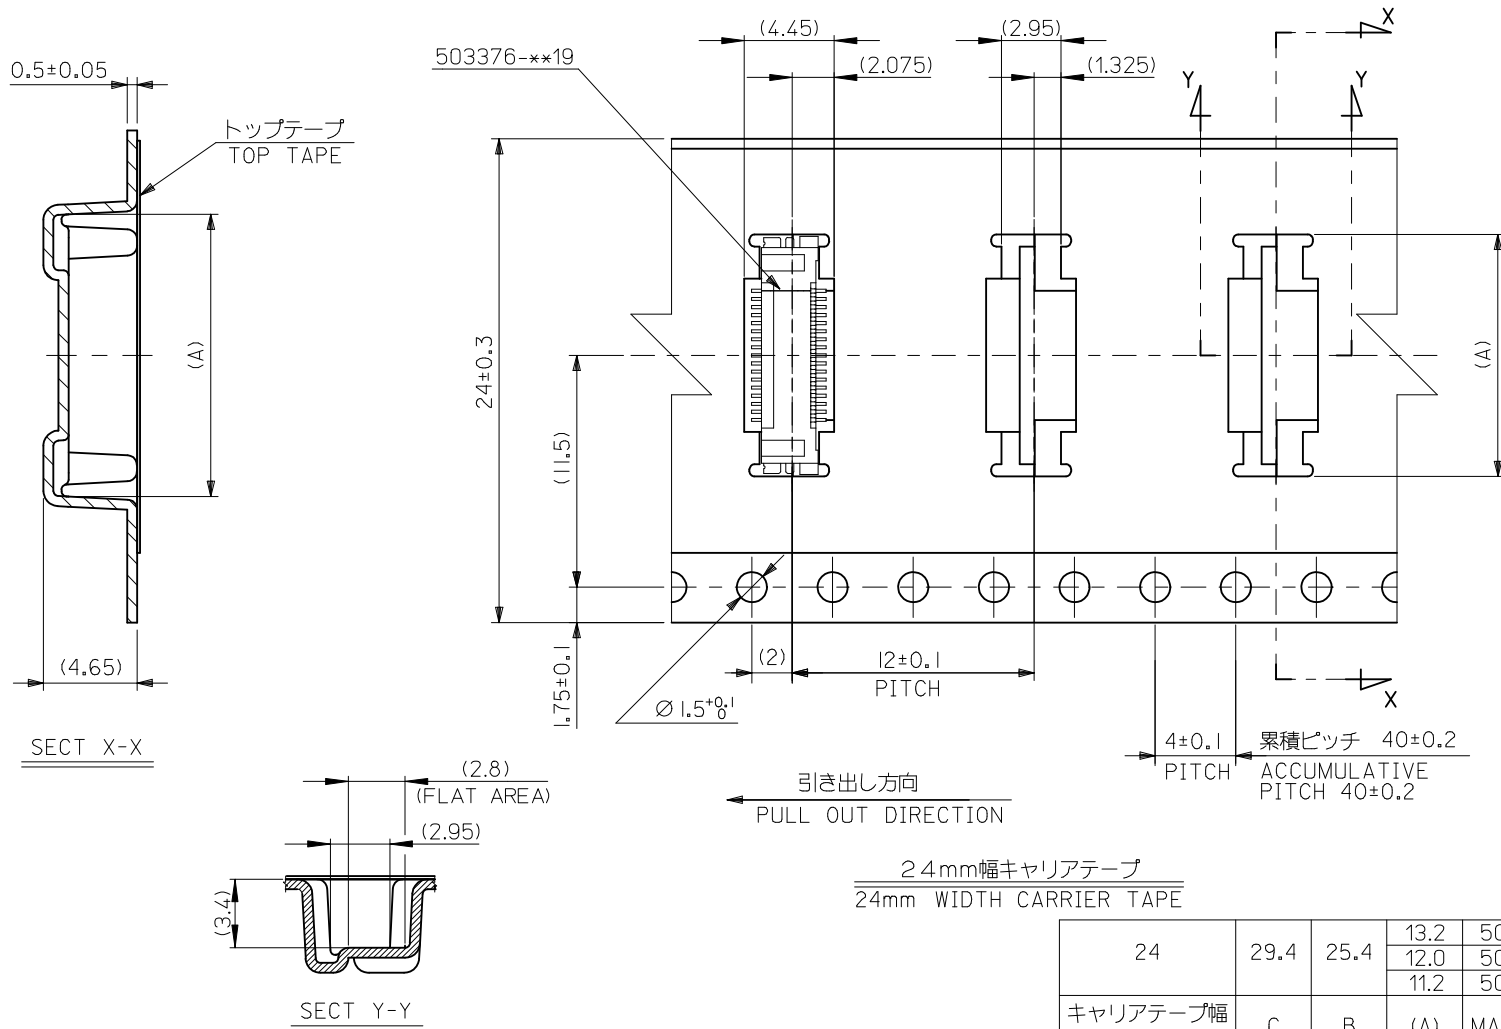

24	29.4	25.4	13.2	503376-4010	40
			12.0	503376-3410	34
			11.2	503376-3010	30
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	MATERIAL NO.	極数 CIRCUITS

REVISED EC NO: J2010-0351 DRWN: TOSHIMA CHKD: SMARUYAMA APPR: MSASAO A	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	MODEL NO.	THIRD ANGLE	
				MM ONLY		---	DESIGN UNITS	PROJECTION	
		10 UNDER		±0.2	DRAWN BY	DATE	TITLE EMBSTP PKG FOR 0.4 B/B CONN. RA PLUG NAIL ASSY		
		10 OVER 30 UNDER		±0.25	CHECKED BY	DATE			
		30 OVER		±0.3	APPROVED BY	DATE			
	ANGULAR ±3 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-503376-002		2 OF 2			
		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.