



# NC265



## No Clean Liquid Flux

### Features:

- Rosin and Resin-Free
- Halide-Free
- Broad Process Window
- Low Post Process Residues
- Fast Wetting for SN100C<sup>®</sup> and SAC alloys
- Lead-Free and Tin-Lead Compatible

### Description:

NC265 is an alcohol-based no-clean liquid flux formulated to offer a very wide process window for lead-free and tin-lead wave soldering operations. NC265 offers faster wetting for SN100C<sup>®</sup> and SAC alloys than previously formulated fluxes and is compatible with a broad range of lead-free and tin-lead solder alloys. NC265 offers low post-process residues and has proven to reduce preventative maintenance requirements for spray fluxing applications. NC265 is designed to be a no-clean, non-visible residue flux, which can be cleaned if critical to the product application.


### Application:

- NC265 is formulated for application via spray, foam, brush, mist, or dip. For spraying, NC265 is ready to use directly from its container, no thinning required. When spray fluxing, it is imperative that proper flux coverage and uniformity be achieved and maintained. A dry flux coating of 500-1500 micrograms per square inch is recommended as a starting point.
- When nitrogen sealed wave solder equipment is used, it is generally necessary to apply slightly more flux than normal as a result of excess drying due to the extended length of the equipment.
- When foaming, air stones should be supplied with compressed air, free of oil and moisture. Adjust foam head to achieve uniform bubble size for optimum coverage. During foaming applications, it is periodically necessary to add AIM's Common Flux Thinner to replace that which is lost due through evaporation.

### Process Control:

Because of the low percentage of solids in this flux, control of specific gravity with automated equipment usually is found to be ineffective; therefore, control via titration is necessary. AIM's Titration Kit has proven to be cost-effective, user friendly, quick and accurate. Titration should be carried out at least once an hour for flux foaming operations, or more often if large variances are found.

### Thermal Profile:

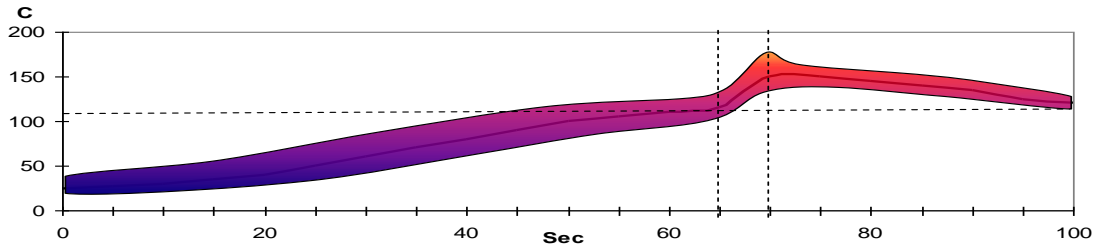

<b>RATE of RISE</b> 2-3 °C / SEC MAX	<b>PROGRESS THROUGH</b> 66°C - 77°C ( 150 - 170°F )	<b>PCB TOP SIDE TEMP</b> 87°C - 115°C ( 190°F - 240°F )	<b>COOLDOWN</b> ≤ 4°C
	≤ 40 SECONDS	JUST BEFORE WAVE	

### Cleaning:

NC265 can be cleaned, if necessary, with saponified water or an appropriate solvent cleaner. Please refer to the AIM No-Clean-Cleaner Matrix for a list of suitable cleaning materials.

**Handling:**

- NC265 has an unopened shelf life of 1 year when stored at room temperature.
- Do not store near fire or flame.
- Keep away from sunlight as it may degrade product.
- NC265 is shipped ready-to-use, no mixing necessary.
- Do not mix used and unused chemical in the same container.
- Reseal any opened containers.

**Safety:**

- Use with adequate ventilation and proper personal protective equipment.
- Refer to the accompanying Material Safety Data Sheet for any specific emergency information.
- Do not dispose of any hazardous materials in non-approved containers.

**Physical Properties:**

Parameter	Value
J-STD-004	ORL0
Visual	Clear, Colorless
Odor	Aromatic (Slightly)
Solids Content	4.05% ± 0.5
Acid Number	35.74 ± 2.13 mg KOH/gr flux

Parameter	Value
Specific Gravity	0.7976 ± 0.0087 (water = 1)
Flash Point	< 10°C
Boiling Point	82°C
pH (1% solution /water)	4.4012 ± 1.0212

**Corrosion Testing:**

Parameter	Requirements	Results
Copper Mirror (24 hrs @ 25°C, 50%RH)	IPC-TM-650-2.3.32	Low
Halide Test (Silver Chromate)	IPC-TM-650-2.2.33	Pass

**Surface Insulation Resistance:**

Reference	Property	Pass-Fail Criteria	Results
IPC-TM-650 method 2.6.3.3 85°C / 85% R.H.	Control coupons	>1E+9 Ω at 96 and 168 hrs	3.15E+9 Ω and 3.02E+9 Ω Pass
	Sample coupons – pattern up	>1E+8 Ω at 96 and 168 hrs	3.03E+9 Ω and 2.93E+9 Ω Pass
	Sample coupons – pattern down	>1E+8 Ω at 96 and 168 hrs	4.26E+8 Ω and 6.03E+8 Ω Pass
	Post-test visual inspection	No dendrite growth or corrosion	Pass

**Electromigration:**

Test	Conditions	Specification	Results
Electromigration Bellcore GR-78 Flux Requirements	65°C/85% R.H. 500 hrs – Control	Rf/Ri > 0.1	7.67E+10 Ω / 5.53E+10 Ω – Pass
	65°C/85% R.H. 500 hrs – Sample	Rf/Ri > 0.1	1.69E+11 Ω / 2.30E+10 Ω – Pass

Canada +1-514-494-2000 · USA +1-401-463-5605 · Mexico +52-656-630-0032 · Europe +44-1737-222-258  
 Asia-Pacific +86-755-2993-6487 · India +91-80-41554753 · info@aimsolder.com · www.aimsolder.com  
 AIM IS ISO9001:2008 CERTIFIED

The information contained herein is based on data considered accurate and is offered at no charge. Product information is based upon the assumption of proper handling and operating conditions. All information pertaining to solder paste is produced with 45-micron powder. Liability is expressly disclaimed for any loss or injury arising out of the use of this information or the use of any materials designated. Please refer to <http://www.aimsolder.com/Home/TermsConditions.aspx> to review AIM's terms and conditions.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.