


SMALL SIGNAL SCHOTTKY DIODE

DESCRIPTION

Metal to silicon junction diode featuring high break-down, low turn-on voltage and ultrafast switching. Primarily intended for high level UHF/VHF detection and pulse application with broad dynamic range. Matched batches are available on request

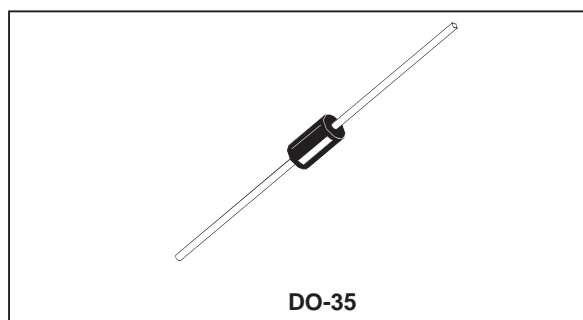

ABSOLUTE RATINGS (limiting values)

| Symbol | Parameter | | Value | Unit |
|--------------------|--------------------------------------------------------------------|--------------------------|----------------------------|------------------|
| V_{RRM} | Repetitive Peak Reverse Voltage | | 70 | V |
| I_F | Forward Continuous Current* | $T_a = 25^\circ\text{C}$ | 15 | mA |
| P_{tot} | Power Dissipation* | $T_a = 25^\circ\text{C}$ | 430 | mW |
| T_{stg} T_j | Storage and Junction Temperature Range | | - 65 to 200 - 65 to 200 | $^\circ\text{C}$ |
| T_L | Maximum Lead Temperature for Soldering during 10s at 4mm from Case | | 230 | $^\circ\text{C}$ |

THERMAL RESISTANCE

| Symbol | Test Conditions | Value | Unit |
|---------------|-------------------|-------|--------------------|
| $R_{th(j-a)}$ | Junction-ambient* | 400 | $^\circ\text{C/W}$ |

ELECTRICAL CHARACTERISTICS

STATIC CHARACTERISTICS

| Symbol | Test Conditions | | Min. | Typ. | Max. | Unit |
|------------|------------------------------|-----------------------|------|------|------|---------------|
| V_{BR} | $T_{amb} = 25^\circ\text{C}$ | $I_R = 10\mu\text{A}$ | 70 | | | V |
| V_F^{**} | $T_{amb} = 25^\circ\text{C}$ | $I_F = 1\text{mA}$ | | | 0.41 | V |
| | $T_{amb} = 25^\circ\text{C}$ | $I_F = 15\text{mA}$ | | | 1 | |
| I_R^{**} | $T_{amb} = 25^\circ\text{C}$ | $V_R = 50\text{V}$ | | | 0.2 | μA |

DYNAMIC CHARACTERISTICS

| Symbol | Test Conditions | | | Min. | Typ. | Max. | Unit |
|--------|------------------------------|--------------------|-------------------|------|------|------|------|
| C | $T_{amb} = 25^\circ\text{C}$ | $V_R = 0\text{V}$ | $f = 1\text{MHz}$ | | | 2 | pF |
| τ | $T_{amb} = 25^\circ\text{C}$ | $I_F = 5\text{mA}$ | Krakauer Method | | | 100 | ps |

* On infinite heatsink with 4mm lead length

** Pulse test: $t_p \leq 300\mu\text{s}$ $\delta < 2\%$.

Matched batches available on request. Test conditions (forward voltage and/or capacitance) according to customer specification.

Fig. 1: Forward current versus forward voltage at low level (typical values).

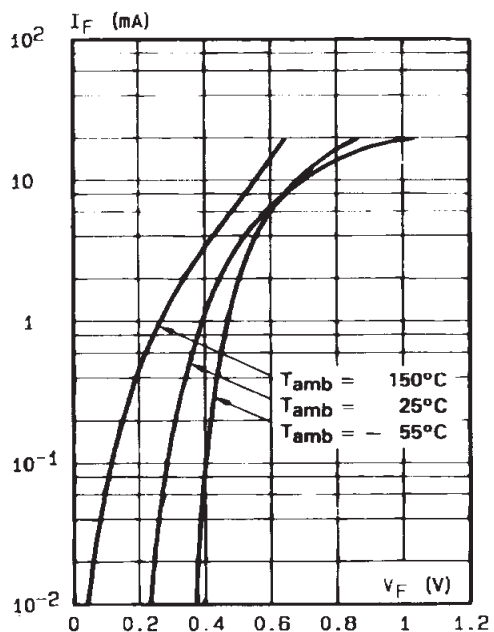


Fig. 2: Capacitance C versus reverse applied voltage V_R (typical values).

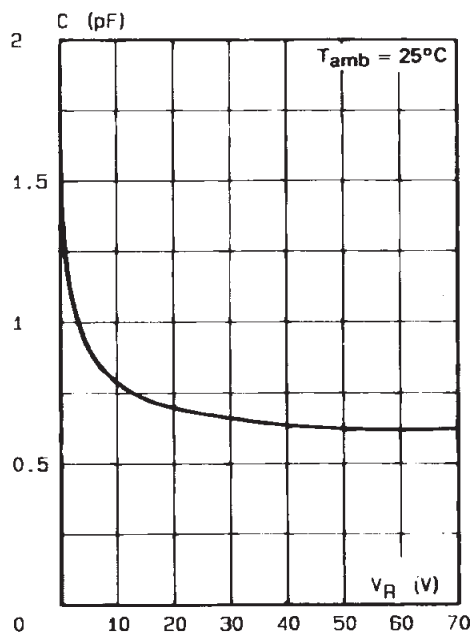


Fig. 3: Reverse current versus ambient temperature.



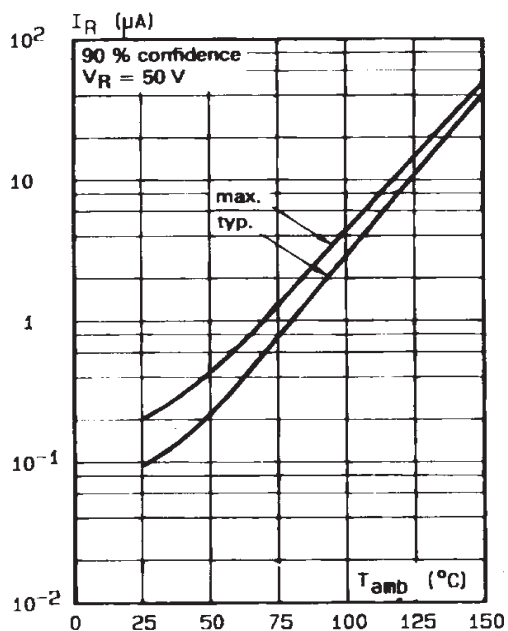


Fig. 4: Reverse current versus continuous reverse voltage (typical values).

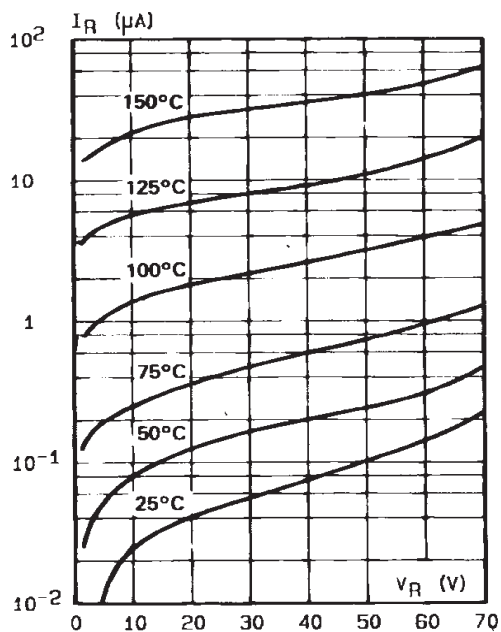

PACKAGE MECHANICAL DATA

DO-35

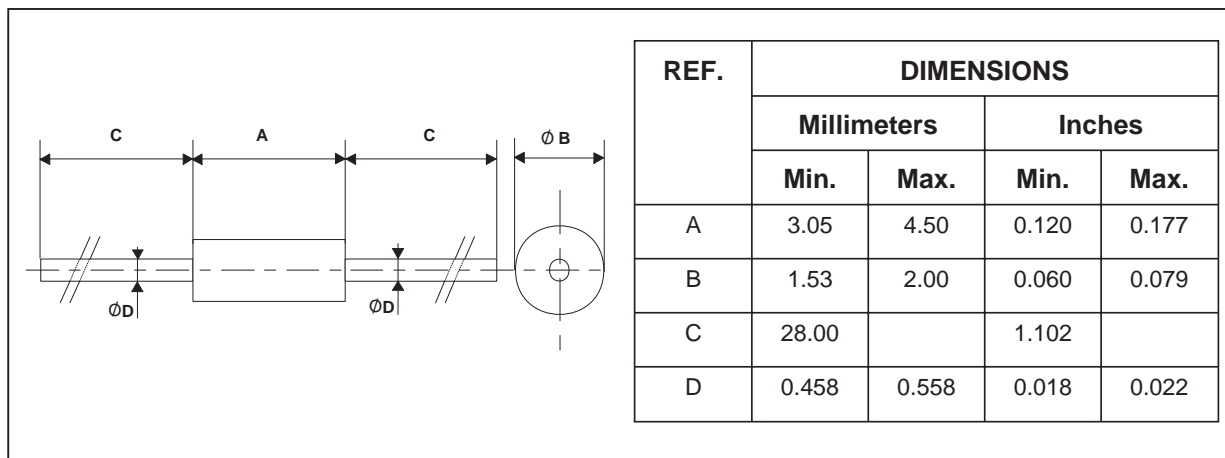

Cooling method : by convection and conduction

Marking: clear, ring at cathode end.

Weight: 0.15g

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied.

STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2001 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia

Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.