

## NC7SP74

### TinyLogic® ULP D-Type Flip-Flop with Preset and Clear

#### General Description

The NC7SP74 is a single D-type CMOS Flip-Flop with preset and clear from Fairchild's Ultra Low Power (ULP) Series of TinyLogic®. Ideal for applications where battery life is critical, this product is designed for ultra low power consumption within the  $V_{CC}$  operating range of 0.9V to 3.6V.

The internal circuit is composed of a minimum of inverter stages including the output buffer, to enable ultra low static and dynamic power.

The NC7SP74, for lower drive requirements, is uniquely designed for optimized power and speed, and is fabricated with an advanced CMOS technology to achieve best in class speed operation while maintaining extremely low CMOS power dissipation.

The signal level applied to the D input is transferred to the Q output during the positive going transition of the CLK pulse.

#### Features


- Space saving US8 surface mount package
- MicroPak™ Pb-Free leadless package
- 0.9V to 3.6V  $V_{CC}$  supply operation
- 3.6V overvoltage tolerant I/Os at  $V_{CC}$  from 0.9V to 3.6V
- $t_{PD}$ 
  - 3.0 ns typ for 3.0V to 3.6V  $V_{CC}$
  - 4.0 ns typ for 2.3V to 2.7V  $V_{CC}$
  - 5.0 ns typ for 1.65V to 1.95V  $V_{CC}$
  - 6.0 ns typ for 1.40V to 1.60V  $V_{CC}$
  - 9.0 ns typ for 1.10V to 1.30V  $V_{CC}$
  - 24.0 ns typ for 0.90V  $V_{CC}$
- Power-Off high impedance inputs and outputs
- Static Drive ( $I_{OH}/I_{OL}$ )
  - ±2.6 mA @ 3.00V  $V_{CC}$
  - ±2.1 mA @ 2.30V  $V_{CC}$
  - ±1.5 mA @ 1.65V  $V_{CC}$
  - ±1.0 mA @ 1.40V  $V_{CC}$
  - ±0.5 mA @ 1.10V  $V_{CC}$
  - ±20  $\mu$ A @ 0.9V  $V_{CC}$
- Uses patented Quiet Series™ noise/EMI reduction circuitry
- Ultra low dynamic power

#### Ordering Code:

| Order Number | Package Number | Product Code Top Mark | Package Description                               | Supplied As               |
|--------------|----------------|-----------------------|---------------------------------------------------|---------------------------|
| NC7SP74K8X   | MAB08A         | P74                   | 8-Lead US8, JEDEC MO-187, Variation CA 3.1mm Wide | 3k Units on Tape and Reel |
| NC7SP74L8X   | MAC08A         | X9                    | Pb-Free 8-Lead MicroPak, 1.6 mm Wide              | 5k Units on Tape and Reel |

Pb-Free package per JEDEC J-STD-020B.

#### Battery Life vs. $V_{CC}$ Supply Voltage



TinyLogic ULP and ULP-A with up to 50% less power consumption can extend your battery life significantly.

$$\text{Battery Life} = (V_{\text{battery}} * I_{\text{battery}} * 9) / (P_{\text{device}}) / 24 \text{hrs/day}$$

$$\text{Where, } P_{\text{device}} = (I_{CC} * V_{CC}) + (C_{PD} + C_L) * V_{CC}^2 * f$$

Assumes ideal 3.6V Lithium Ion battery with current rating of 900mAh and derated 90% and device frequency at 10MHz, with  $C_L = 15$  pF load

TinyLogic® is a registered trademark of Fairchild Semiconductor Corporation.

MicroPak™ and Quiet Series™ are trademarks of Fairchild Semiconductor Corporation.

## Pin Descriptions

| Pin Names                       | Description         |
|---------------------------------|---------------------|
| D                               | Data Input          |
| CK                              | Clock Pulse Input   |
| $\overline{\text{CLR}}$         | Direct Clear Input  |
| $\text{Q}, \overline{\text{Q}}$ | Flip-Flop Output    |
| $\overline{\text{PR}}$          | Direct Preset Input |

## Truth Table

| Inputs                  |                        |   |              | Outputs      |                         | Function  |
|-------------------------|------------------------|---|--------------|--------------|-------------------------|-----------|
| $\overline{\text{CLR}}$ | $\overline{\text{PR}}$ | D | CK           | Q            | $\overline{\text{Q}}$   |           |
| L                       | H                      | X | X            | L            | H                       | Clear     |
| H                       | L                      | X | X            | H            | L                       | Preset    |
| L                       | L                      | X | X            | H            | H                       | —         |
| H                       | H                      | L | $\uparrow$   | L            | H                       | —         |
| H                       | H                      | H | $\uparrow$   | H            | L                       | —         |
| H                       | H                      | X | $\downarrow$ | $\text{Q}_n$ | $\overline{\text{Q}}_n$ | No Change |

H = HIGH Logic Level

L = LOW Logic Level


 $\text{Q}_n$  = No change in data

X = Immaterial

Z = High Impedance


 $\uparrow$  = Rising Edge $\downarrow$  = Falling edge

## Logic Symbol

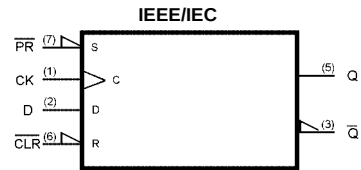


## Connection Diagrams

Pin Assignments for US8



(Top View)


Pin One Orientation Diagram



AAA represents Product Code Top Mark - see ordering code

**Note:** Orientation of Top Mark determines Pin One location. Read the top product code mark left to right, Pin One is the lower left pin (see diagram).

Pad Assignments for MicroPak



(Top Thru View)

**Absolute Maximum Ratings**(Note 1)

|                                                   |                          |
|---------------------------------------------------|--------------------------|
| Supply Voltage ( $V_{CC}$ )                       | -0.5V to +4.6V           |
| DC Input Voltage ( $V_{IN}$ )                     | -0.5V to +4.6V           |
| DC Output Voltage ( $V_{OUT}$ )                   | -0.5V to +7.0V           |
| HIGH or LOW State (Note 2)                        | -0.5V to $V_{CC} + 0.5V$ |
| $V_{CC} = 0V$                                     | -0.5V to 4.6V            |
| DC Input Diode Current ( $I_{IK}$ ) $V_{IN} < 0V$ | $\pm 50$ mA              |
| DC Output Diode Current ( $I_{OK}$ )              |                          |
| $V_{OUT} < 0V$                                    | -50 mA                   |
| $V_{OUT} > V_{CC}$                                | +50 mA                   |
| DC Output Source/Sink Current ( $I_{OH}/I_{OL}$ ) | $\pm 50$ mA              |
| DC $V_{CC}$ or Ground Current per                 |                          |
| Supply Pin ( $I_{CC}$ or Ground)                  | $\pm 50$ mA              |
| Storage Temperature Range ( $T_{STG}$ )           | -65°C to +150°C          |

**Recommended Operating Conditions** (Note 3)

|                                                 |                  |
|-------------------------------------------------|------------------|
| Power Supply                                    | 0.9V to 3.6V     |
| Input Voltage ( $V_{IN}$ )                      | 0V to 3.6V       |
| Output Voltage ( $V_{OUT}$ )                    |                  |
| HIGH or LOW State                               | 0V to $V_{CC}$   |
| $V_{CC} = 0V$                                   | 0V to 3.6V       |
| Output Current in ( $I_{OH}/I_{OL}$ )           |                  |
| $V_{CC} = 3.0V$ to 3.6V                         | $\pm 2.6$ mA     |
| $V_{CC} = 2.3V$ to 2.7V                         | $\pm 2.1$ mA     |
| $V_{CC} = 1.65V$ to 1.95V                       | $\pm 1.5$ mA     |
| $V_{CC} = 1.40V$ to 1.60V                       | $\pm 1.0$ mA     |
| $V_{CC} = 1.10V$ to 1.30V                       | $\pm 0.5$ mA     |
| $V_{CC} = 0.9V$                                 | $\pm 20$ $\mu$ A |
| Free Air Operating Temperature ( $T_A$ )        | -40°C to +85°C   |
| Minimum Input Edge Rate ( $\Delta t/\Delta V$ ) |                  |
| $V_{IN} = 0.8V$ to 2.0V, $V_{CC} = 3.0V$        | 10 ns/V          |

**Note 1:** Absolute Maximum Ratings: are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Note 2:**  $I_O$  Absolute Maximum rating must be observed.

**Note 3:** Unused inputs must be held HIGH or LOW. They may not float.

**DC Electrical Characteristics**

| Symbol   | Parameter                    | $V_{CC}$<br>(V)              | $T_A = +25^\circ\text{C}$ |                      | $T_A = -40^\circ\text{C to } +85^\circ\text{C}$ |                      | Units | Conditions                 |
|----------|------------------------------|------------------------------|---------------------------|----------------------|-------------------------------------------------|----------------------|-------|----------------------------|
|          |                              |                              | Min                       | Max                  | Min                                             | Max                  |       |                            |
| $V_{IH}$ | HIGH Level<br>Input Voltage  | 0.90                         |                           | $0.65 \times V_{CC}$ |                                                 | $0.65 \times V_{CC}$ | V     |                            |
|          |                              | $1.10 \leq V_{CC} \leq 1.30$ |                           | $0.65 \times V_{CC}$ |                                                 | $0.65 \times V_{CC}$ |       |                            |
|          |                              | $1.40 \leq V_{CC} \leq 1.60$ |                           | $0.65 \times V_{CC}$ |                                                 | $0.65 \times V_{CC}$ |       |                            |
|          |                              | $1.65 \leq V_{CC} \leq 1.95$ |                           | $0.65 \times V_{CC}$ |                                                 | $0.65 \times V_{CC}$ |       |                            |
|          |                              | $2.30 \leq V_{CC} \leq 2.70$ |                           | 1.6                  |                                                 | 1.6                  |       |                            |
| $V_{IL}$ | LOW Level<br>Input Voltage   | $3.00 \leq V_{CC} \leq 3.60$ |                           | 2.1                  |                                                 | 2.1                  | V     |                            |
|          |                              | 0.90                         |                           | $0.35 \times V_{CC}$ |                                                 | $0.35 \times V_{CC}$ |       |                            |
|          |                              | $1.10 \leq V_{CC} \leq 1.30$ |                           | $0.35 \times V_{CC}$ |                                                 | $0.35 \times V_{CC}$ |       |                            |
|          |                              | $1.40 \leq V_{CC} \leq 1.60$ |                           | $0.35 \times V_{CC}$ |                                                 | $0.35 \times V_{CC}$ |       |                            |
|          |                              | $1.65 \leq V_{CC} \leq 1.95$ |                           | $0.35 \times V_{CC}$ |                                                 | $0.35 \times V_{CC}$ |       |                            |
| $V_{OH}$ | HIGH Level<br>Output Voltage | $2.30 \leq V_{CC} \leq 2.70$ |                           | 0.7                  |                                                 | 0.7                  | V     | $I_{OH} = -20 \mu\text{A}$ |
|          |                              | $3.00 \leq V_{CC} \leq 3.60$ |                           | 0.9                  |                                                 | 0.9                  |       |                            |
|          |                              | 0.90                         | $V_{CC} - 0.1$            |                      | $V_{CC} - 0.1$                                  |                      |       |                            |
|          |                              | $1.10 \leq V_{CC} \leq 1.30$ | $V_{CC} - 0.1$            |                      | $V_{CC} - 0.1$                                  |                      |       |                            |
|          |                              | $1.40 \leq V_{CC} \leq 1.60$ | $V_{CC} - 0.1$            |                      | $V_{CC} - 0.1$                                  |                      |       |                            |
|          |                              | $1.65 \leq V_{CC} \leq 1.95$ | $V_{CC} - 0.1$            |                      | $V_{CC} - 0.1$                                  |                      |       |                            |
|          |                              | $2.30 \leq V_{CC} \leq 2.70$ | $V_{CC} - 0.1$            |                      | $V_{CC} - 0.1$                                  |                      |       |                            |
|          |                              | $3.00 \leq V_{CC} \leq 3.60$ | $V_{CC} - 0.1$            |                      | $V_{CC} - 0.1$                                  |                      |       |                            |
|          |                              | $1.10 \leq V_{CC} \leq 1.30$ | $0.75 \times V_{CC}$      |                      | $0.70 \times V_{CC}$                            |                      |       | $I_{OH} = -0.5 \text{ mA}$ |
|          |                              | $1.40 \leq V_{CC} \leq 1.60$ | 1.07                      |                      | 0.99                                            |                      |       | $I_{OH} = -1.0 \text{ mA}$ |
|          |                              | $1.65 \leq V_{CC} \leq 1.95$ | 1.24                      |                      | 1.22                                            |                      |       | $I_{OH} = -1.5 \text{ mA}$ |
|          |                              | $2.30 \leq V_{CC} \leq 2.70$ | 1.95                      |                      | 1.87                                            |                      |       | $I_{OH} = -2.1 \text{ mA}$ |
|          |                              | $3.00 \leq V_{CC} \leq 3.60$ | 2.61                      |                      | 2.55                                            |                      |       | $I_{OH} = -2.6 \text{ mA}$ |

# DC Electrical Characteristics (Continued)


| Symbol           | Parameter                   | V <sub>CC</sub><br>(V)        | T <sub>A</sub> = +25°C |     | T <sub>A</sub> = −40°C to +85°C |     | Units | Conditions                                    |
|------------------|-----------------------------|-------------------------------|------------------------|-----|---------------------------------|-----|-------|-----------------------------------------------|
|                  |                             |                               | Min                    | Max | Min                             | Max |       |                                               |
| V <sub>OL</sub>  | LOW Level<br>Output Voltage | 0.90                          |                        | 0.1 |                                 | 0.1 | V     | I <sub>OL</sub> = 20 μA                       |
|                  |                             | 1.10 ≤ V <sub>CC</sub> ≤ 1.30 |                        | 0.1 |                                 | 0.1 |       |                                               |
|                  |                             | 1.40 ≤ V <sub>CC</sub> ≤ 1.60 |                        | 0.1 |                                 | 0.1 |       |                                               |
|                  |                             | 1.65 ≤ V <sub>CC</sub> ≤ 1.95 |                        | 0.1 |                                 | 0.1 |       |                                               |
|                  |                             | 2.30 ≤ V <sub>CC</sub> ≤ 2.70 |                        | 0.1 |                                 | 0.1 |       |                                               |
|                  |                             | 3.00 ≤ V <sub>CC</sub> ≤ 3.60 |                        | 0.1 |                                 | 0.1 |       |                                               |
|                  |                             | 1.10 ≤ V <sub>CC</sub> ≤ 1.30 | 0.30 × V <sub>CC</sub> |     | 0.30 × V <sub>CC</sub>          |     |       | I <sub>OL</sub> = 0.5 mA                      |
|                  |                             | 1.40 ≤ V <sub>CC</sub> ≤ 1.60 | 0.31                   |     | 0.37                            |     |       | I <sub>OL</sub> = 1.0 mA                      |
|                  |                             | 1.65 ≤ V <sub>CC</sub> ≤ 1.95 | 0.31                   |     | 0.35                            |     |       | I <sub>OL</sub> = 1.5 mA                      |
|                  |                             | 2.30 ≤ V <sub>CC</sub> ≤ 2.70 | 0.31                   |     | 0.33                            |     |       | I <sub>OL</sub> = 2.1 mA                      |
|                  |                             | 3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 0.31                   |     | 0.33                            |     |       | I <sub>OL</sub> = 2.6 mA                      |
| I <sub>IN</sub>  | Input Leakage Current       | 0.90 to 3.60                  | ±0.1                   |     | ±0.5                            |     | μA    | 0 ≤ V <sub>I</sub> ≤ 3.6V                     |
| I <sub>OFF</sub> | Power Off Leakage Current   | 0                             | 0.5                    |     | 0.5                             |     | μA    | 0 ≤ (V <sub>I</sub> , V <sub>O</sub> ) ≤ 3.6V |
| I <sub>CC</sub>  | Quiescent Supply Current    | 0.90 to 3.60                  | 0.9                    |     | 0.9                             |     | μA    | V <sub>I</sub> = V <sub>CC</sub> or GND       |

| AC Electrical Characteristics (10pF, 1MΩ) |                                                                  |                               |                        |      |     |                                 |     |       |                                                 |               |
|-------------------------------------------|------------------------------------------------------------------|-------------------------------|------------------------|------|-----|---------------------------------|-----|-------|-------------------------------------------------|---------------|
| Symbol                                    | Parameter                                                        | V <sub>CC</sub><br>(V)        | T <sub>A</sub> = +25°C |      |     | T <sub>A</sub> = −40°C to +85°C |     | Units | Conditions                                      | Figure Number |
|                                           |                                                                  |                               | Min                    | Typ  | Max | Min                             | Max |       |                                                 |               |
| f <sub>MAX</sub>                          | Maximum Clock Frequency                                          | 0.90                          | 40.0                   |      |     |                                 |     | MHz   | C <sub>L</sub> = 10 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 5  |
|                                           |                                                                  | 1.10 ≤ V <sub>CC</sub> ≤ 1.30 | 50                     |      |     | 50                              |     |       |                                                 |               |
|                                           |                                                                  | 1.40 ≤ V <sub>CC</sub> ≤ 1.60 | 75                     |      |     | 75                              |     |       |                                                 |               |
|                                           |                                                                  | 1.65 ≤ V <sub>CC</sub> ≤ 1.95 | 100                    |      |     | 100                             |     |       |                                                 |               |
|                                           |                                                                  | 2.30 ≤ V <sub>CC</sub> ≤ 2.70 | 125                    |      |     | 125                             |     |       |                                                 |               |
|                                           |                                                                  | 3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 150                    |      |     | 150                             |     |       |                                                 |               |
| t <sub>PLH</sub><br>t <sub>PHL</sub>      | Propagation Delay<br>CK to Q, $\overline{Q}$                     | 0.90                          | 24.0                   |      |     |                                 |     | ns    | C <sub>L</sub> = 10 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 3  |
|                                           | 1.10 ≤ V <sub>CC</sub> ≤ 1.30                                    | 4.0                           | 15.0                   | 22.0 | 3.5 | 31.0                            |     |       |                                                 |               |
|                                           | 1.40 ≤ V <sub>CC</sub> ≤ 1.60                                    | 2.0                           | 9.0                    | 13.0 | 1.5 | 14.0                            |     |       |                                                 |               |
|                                           | 1.65 ≤ V <sub>CC</sub> ≤ 1.95                                    | 1.5                           | 7.0                    | 11.0 | 1.0 | 13.0                            |     |       |                                                 |               |
|                                           | 2.30 ≤ V <sub>CC</sub> ≤ 2.70                                    | 1.0                           | 5.0                    | 8.0  | 0.8 | 9.0                             |     |       |                                                 |               |
|                                           | 3.00 ≤ V <sub>CC</sub> ≤ 3.60                                    | 1.0                           | 4.0                    | 7.0  | 0.5 | 8.0                             |     |       |                                                 |               |
| t <sub>PLH</sub><br>t <sub>PHL</sub>      | Propagation Delay<br>CLR, $\overline{PR}$ , to Q, $\overline{Q}$ | 0.90                          | 6.5                    |      |     |                                 |     | ns    | C <sub>L</sub> = 10 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 3  |
|                                           | 1.10 ≤ V <sub>CC</sub> ≤ 1.30                                    | 4.0                           | 12.0                   | 23.0 | 4.0 | 34.0                            |     |       |                                                 |               |
|                                           | 1.40 ≤ V <sub>CC</sub> ≤ 1.60                                    | 2.0                           | 9.0                    | 12.0 | 2.0 | 14.0                            |     |       |                                                 |               |
|                                           | 1.65 ≤ V <sub>CC</sub> ≤ 1.95                                    | 1.5                           | 7.0                    | 11.0 | 1.5 | 13.0                            |     |       |                                                 |               |
|                                           | 2.30 ≤ V <sub>CC</sub> ≤ 2.70                                    | 1.0                           | 5.0                    | 9.0  | 1.0 | 9.0                             |     |       |                                                 |               |
|                                           | 3.00 ≤ V <sub>CC</sub> ≤ 3.60                                    | 1.0                           | 4.0                    | 7.0  | 1.0 | 8.0                             |     |       |                                                 |               |
| t <sub>S</sub>                            | Setup Time,<br>CK to D                                           | 0.90                          | 10.0                   |      |     |                                 |     | ns    | C <sub>L</sub> = 10 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 4  |
|                                           | 1.10 ≤ V <sub>CC</sub> ≤ 1.30                                    | 7.0                           |                        |      | 7.0 |                                 |     |       |                                                 |               |
|                                           | 1.40 ≤ V <sub>CC</sub> ≤ 1.60                                    | 3.0                           |                        |      | 3.0 |                                 |     |       |                                                 |               |
|                                           | 1.65 ≤ V <sub>CC</sub> ≤ 1.95                                    | 2.0                           |                        |      | 2.0 |                                 |     |       |                                                 |               |
|                                           | 2.30 ≤ V <sub>CC</sub> ≤ 2.70                                    | 1.5                           |                        |      | 1.5 |                                 |     |       |                                                 |               |
|                                           | 3.00 ≤ V <sub>CC</sub> ≤ 3.60                                    | 1.0                           |                        |      | 1.0 |                                 |     |       |                                                 |               |
| t <sub>H</sub>                            | Hold Time,<br>CK to D                                            | 0.90                          | 1.0                    |      |     |                                 |     | ns    | C <sub>L</sub> = 10 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 4  |
|                                           | 1.10 ≤ V <sub>CC</sub> ≤ 1.30                                    | 0.5                           |                        |      | 0.5 |                                 |     |       |                                                 |               |
|                                           | 1.40 ≤ V <sub>CC</sub> ≤ 1.60                                    | 0.5                           |                        |      | 0.5 |                                 |     |       |                                                 |               |
|                                           | 1.65 ≤ V <sub>CC</sub> ≤ 1.95                                    | 0.5                           |                        |      | 0.5 |                                 |     |       |                                                 |               |
|                                           | 2.30 ≤ V <sub>CC</sub> ≤ 2.70                                    | 0.5                           |                        |      | 0.5 |                                 |     |       |                                                 |               |
|                                           | 3.00 ≤ V <sub>CC</sub> ≤ 3.60                                    | 0.5                           |                        |      | 0.5 |                                 |     |       |                                                 |               |
| t <sub>W</sub>                            | Pulse Width,<br>CK, $\overline{PR}$ , CLR                        | 0.90                          | 5.0                    |      |     |                                 |     | ns    | C <sub>L</sub> = 10 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 5  |
|                                           | 1.10 ≤ V <sub>CC</sub> ≤ 1.30                                    | 5.0                           |                        |      | 5.0 |                                 |     |       |                                                 |               |
|                                           | 1.40 ≤ V <sub>CC</sub> ≤ 1.60                                    | 3.0                           |                        |      | 3.0 |                                 |     |       |                                                 |               |
|                                           | 1.65 ≤ V <sub>CC</sub> ≤ 1.95                                    | 2.5                           |                        |      | 2.5 |                                 |     |       |                                                 |               |
|                                           | 2.30 ≤ V <sub>CC</sub> ≤ 2.70                                    | 2.5                           |                        |      | 2.5 |                                 |     |       |                                                 |               |
|                                           | 3.00 ≤ V <sub>CC</sub> ≤ 3.60                                    | 2.0                           |                        |      | 2.0 |                                 |     |       |                                                 |               |
| t <sub>REC</sub>                          | Recover Time<br>$\overline{CLR}$ , $\overline{PR}$ to CK         | 0.90                          | 12.0                   |      |     |                                 |     | ns    | C <sub>L</sub> = 10 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 4  |
|                                           | 1.10 ≤ V <sub>CC</sub> ≤ 1.30                                    | 8.5                           |                        |      | 8.5 |                                 |     |       |                                                 |               |
|                                           | 1.40 ≤ V <sub>CC</sub> ≤ 1.60                                    | 3.5                           |                        |      | 3.5 |                                 |     |       |                                                 |               |
|                                           | 1.65 ≤ V <sub>CC</sub> ≤ 1.95                                    | 3.0                           |                        |      | 3.0 |                                 |     |       |                                                 |               |
|                                           | 2.30 ≤ V <sub>CC</sub> ≤ 2.70                                    | 2.5                           |                        |      | 2.5 |                                 |     |       |                                                 |               |
|                                           | 3.00 ≤ V <sub>CC</sub> ≤ 3.60                                    | 2.0                           |                        |      | 2.0 |                                 |     |       |                                                 |               |

| AC Electrical Characteristics (15pF, 1M $\Omega$ ) |                                                                                |                                                                                                                                                                           |                                 |                                    |                                    |                                 |                                    |       |
|----------------------------------------------------|--------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------|------------------------------------|------------------------------------|---------------------------------|------------------------------------|-------|
| Symbol                                             | Parameter                                                                      | V <sub>CC</sub><br>(V)                                                                                                                                                    | T <sub>A</sub> = +25°C          |                                    |                                    | T <sub>A</sub> = -40°C to +85°C |                                    | Units |
|                                                    |                                                                                |                                                                                                                                                                           | Min                             | Typ                                | Max                                | Min                             | Max                                |       |
| t <sub>MAX</sub>                                   | Maximum Clock Frequency                                                        | 0.90<br>1.10 ≤ V <sub>CC</sub> ≤ 1.30<br>1.40 ≤ V <sub>CC</sub> ≤ 1.60<br>1.65 ≤ V <sub>CC</sub> ≤ 1.95<br>2.30 ≤ V <sub>CC</sub> ≤ 2.70<br>3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 50<br>75<br>100<br>125<br>150   | 40.0                               |                                    | 150<br>200<br>250<br>175<br>200 |                                    | MHz   |
| t <sub>PLH</sub><br>t <sub>PHL</sub>               | Propagation Delay<br>CK to Q, $\overline{Q}$                                   | 0.90<br>1.10 ≤ V <sub>CC</sub> ≤ 1.30<br>1.40 ≤ V <sub>CC</sub> ≤ 1.60<br>1.65 ≤ V <sub>CC</sub> ≤ 1.95<br>2.30 ≤ V <sub>CC</sub> ≤ 2.70<br>3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 5.0<br>3.0<br>2.0<br>1.5<br>1.0 | 27.0<br>16.0<br>10.0<br>7.0<br>4.0 | 23.0<br>14.0<br>11.0<br>8.0<br>7.0 | 4.5<br>2.5<br>2.0<br>1.0<br>0.5 | 34.0<br>16.0<br>13.0<br>9.0<br>8.0 | ns    |
| t <sub>PLH</sub><br>t <sub>PHL</sub>               | Propagation Delay<br>$\overline{CLR}$ , $\overline{PR}$ , to Q, $\overline{Q}$ | 0.90<br>1.10 ≤ V <sub>CC</sub> ≤ 1.30<br>1.40 ≤ V <sub>CC</sub> ≤ 1.60<br>1.65 ≤ V <sub>CC</sub> ≤ 1.95<br>2.30 ≤ V <sub>CC</sub> ≤ 2.70<br>3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 5.0<br>3.0<br>2.0<br>1.5<br>1.0 | 27.0<br>15.0<br>10.0<br>7.0<br>4.0 | 24.0<br>13.0<br>11.0<br>9.0<br>7.0 | 5.0<br>3.0<br>2.0<br>1.5<br>1.0 | 37.0<br>16.0<br>13.0<br>9.0<br>8.0 | ns    |
| t <sub>S</sub>                                     | Setup Time,<br>CK to D                                                         | 0.90<br>1.10 ≤ V <sub>CC</sub> ≤ 1.30<br>1.40 ≤ V <sub>CC</sub> ≤ 1.60<br>1.65 ≤ V <sub>CC</sub> ≤ 1.95<br>2.30 ≤ V <sub>CC</sub> ≤ 2.70<br>3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 7.0<br>3.0<br>2.0<br>1.5<br>1.0 | 10.0                               |                                    | 7.0<br>3.0<br>2.0<br>1.5<br>1.0 |                                    | ns    |
| t <sub>H</sub>                                     | Hold Time,<br>CK to D                                                          | 0.90<br>1.10 ≤ V <sub>CC</sub> ≤ 1.30<br>1.40 ≤ V <sub>CC</sub> ≤ 1.60<br>1.65 ≤ V <sub>CC</sub> ≤ 1.95<br>2.30 ≤ V <sub>CC</sub> ≤ 2.70<br>3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 0.5<br>0.5<br>0.5<br>0.5<br>0.5 | 1.0                                |                                    | 0.5<br>0.5<br>0.5<br>0.5<br>0.5 |                                    | ns    |
| t <sub>W</sub>                                     | Pulse Width,<br>CK, $\overline{PR}$ , $\overline{CLR}$                         | 0.90<br>1.10 ≤ V <sub>CC</sub> ≤ 1.30<br>1.40 ≤ V <sub>CC</sub> ≤ 1.60<br>1.65 ≤ V <sub>CC</sub> ≤ 1.95<br>2.30 ≤ V <sub>CC</sub> ≤ 2.70<br>3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 5.0<br>3.0<br>2.5<br>2.5<br>2.0 | 5.0                                |                                    | 5.0<br>3.0<br>2.5<br>2.5<br>2.0 |                                    | ns    |
| t <sub>REC</sub>                                   | Recover Time<br>$\overline{CLR}$ , $\overline{PR}$ to CK                       | 0.90<br>1.10 ≤ V <sub>CC</sub> ≤ 1.30<br>1.40 ≤ V <sub>CC</sub> ≤ 1.60<br>1.65 ≤ V <sub>CC</sub> ≤ 1.95<br>2.30 ≤ V <sub>CC</sub> ≤ 2.70<br>3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 8.5<br>3.5<br>3.0<br>2.5<br>2.0 | 12.0                               |                                    | 8.5<br>3.5<br>3.0<br>2.5<br>2.0 |                                    | ns    |


| AC Electrical Characteristics (30pF, 1MΩ) |                                                                  |                               |                        |       |                                                      |                                 |      |       |                                                 |               |
|-------------------------------------------|------------------------------------------------------------------|-------------------------------|------------------------|-------|------------------------------------------------------|---------------------------------|------|-------|-------------------------------------------------|---------------|
| Symbol                                    | Parameter                                                        | V <sub>CC</sub><br>(V)        | T <sub>A</sub> = +25°C |       |                                                      | T <sub>A</sub> = −40°C to +85°C |      | Units | Conditions                                      | Figure Number |
|                                           |                                                                  |                               | Min                    | Typ   | Max                                                  | Min                             | Max  |       |                                                 |               |
| f <sub>MAX</sub>                          | Maximum Clock Frequency                                          | 0.90                          | 40.0                   |       |                                                      |                                 |      | MHz   | C <sub>L</sub> = 30 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 5  |
|                                           |                                                                  | 1.10 ≤ V <sub>CC</sub> ≤ 1.30 | 50                     |       |                                                      | 150                             |      |       |                                                 |               |
|                                           |                                                                  | 1.40 ≤ V <sub>CC</sub> ≤ 1.60 | 75                     |       |                                                      | 200                             |      |       |                                                 |               |
|                                           |                                                                  | 1.65 ≤ V <sub>CC</sub> ≤ 1.95 | 100                    |       |                                                      | 250                             |      |       |                                                 |               |
|                                           |                                                                  | 2.30 ≤ V <sub>CC</sub> ≤ 2.70 | 125                    |       |                                                      | 175                             |      |       |                                                 |               |
|                                           |                                                                  | 3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 150                    |       |                                                      | 200                             |      |       |                                                 |               |
| t <sub>PLH</sub><br>t <sub>PHL</sub>      | Propagation Delay<br>CK to Q, $\overline{Q}$                     | 0.90                          | 34.0                   |       |                                                      |                                 |      | ns    | C <sub>L</sub> = 30 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 3  |
|                                           |                                                                  | 1.10 ≤ V <sub>CC</sub> ≤ 1.30 | 6.0                    | 18.0  | 27.0                                                 | 5.0                             | 43.0 |       |                                                 |               |
|                                           |                                                                  | 1.40 ≤ V <sub>CC</sub> ≤ 1.60 | 4.0                    | 11.0  | 17.0                                                 | 3.0                             | 18.0 |       |                                                 |               |
|                                           |                                                                  | 1.65 ≤ V <sub>CC</sub> ≤ 1.95 | 2.0                    | 8.0   | 13.0                                                 | 2.0                             | 15.0 |       |                                                 |               |
|                                           |                                                                  | 2.30 ≤ V <sub>CC</sub> ≤ 2.70 | 1.0                    | 6.0   | 10.0                                                 | 1.0                             | 11.0 |       |                                                 |               |
|                                           |                                                                  | 3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 0.8                    | 5.0   | 8.0                                                  | 0.5                             | 10.0 |       |                                                 |               |
| t <sub>PLH</sub><br>t <sub>PHL</sub>      | Propagation Delay<br>CLR, $\overline{PR}$ , to Q, $\overline{Q}$ | 0.90                          | 34.0                   |       |                                                      |                                 |      | ns    | C <sub>L</sub> = 30 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 3  |
|                                           |                                                                  | 1.10 ≤ V <sub>CC</sub> ≤ 1.30 | 6.0                    | 17.0  | 28.0                                                 | 5.5                             | 46.0 |       |                                                 |               |
|                                           |                                                                  | 1.40 ≤ V <sub>CC</sub> ≤ 1.60 | 4.0                    | 11.0  | 16.0                                                 | 3.5                             | 18.0 |       |                                                 |               |
|                                           |                                                                  | 1.65 ≤ V <sub>CC</sub> ≤ 1.95 | 2.0                    | 8.0   | 13.0                                                 | 2.5                             | 15.0 |       |                                                 |               |
|                                           |                                                                  | 2.30 ≤ V <sub>CC</sub> ≤ 2.70 | 1.0                    | 6.0   | 9.0                                                  | 1.5                             | 11.0 |       |                                                 |               |
|                                           |                                                                  | 3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 0.8                    | 5.0   | 8.0                                                  | 1.0                             | 10.0 |       |                                                 |               |
| t <sub>S</sub>                            | Setup Time,<br>CK to D                                           | 0.90                          | 10.0                   |       |                                                      |                                 |      | ns    | C <sub>L</sub> = 30 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 4  |
|                                           |                                                                  | 1.10 ≤ V <sub>CC</sub> ≤ 1.30 | 7.0                    |       |                                                      | 7.0                             |      |       |                                                 |               |
|                                           |                                                                  | 1.40 ≤ V <sub>CC</sub> ≤ 1.60 | 3.0                    |       |                                                      | 3.0                             |      |       |                                                 |               |
|                                           |                                                                  | 1.65 ≤ V <sub>CC</sub> ≤ 1.95 | 2.0                    |       |                                                      | 2.0                             |      |       |                                                 |               |
|                                           |                                                                  | 2.30 ≤ V <sub>CC</sub> ≤ 2.70 | 1.5                    |       |                                                      | 1.5                             |      |       |                                                 |               |
|                                           |                                                                  | 3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 1.0                    |       |                                                      | 1.0                             |      |       |                                                 |               |
| t <sub>H</sub>                            | Hold Time,<br>CK to D                                            | 0.90                          | 1.0                    |       |                                                      |                                 |      | ns    | C <sub>L</sub> = 30 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 4  |
|                                           |                                                                  | 1.10 ≤ V <sub>CC</sub> ≤ 1.30 | 0.5                    |       |                                                      | 0.5                             |      |       |                                                 |               |
|                                           |                                                                  | 1.40 ≤ V <sub>CC</sub> ≤ 1.60 | 0.5                    |       |                                                      | 0.5                             |      |       |                                                 |               |
|                                           |                                                                  | 1.65 ≤ V <sub>CC</sub> ≤ 1.95 | 0.5                    |       |                                                      | 0.5                             |      |       |                                                 |               |
|                                           |                                                                  | 2.30 ≤ V <sub>CC</sub> ≤ 2.70 | 0.5                    |       |                                                      | 0.5                             |      |       |                                                 |               |
|                                           |                                                                  | 3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 0.5                    |       |                                                      | 0.5                             |      |       |                                                 |               |
| t <sub>W</sub>                            | Pulse Width,<br>CK, $\overline{PR}$ , CLR                        | 0.90                          | 5.0                    |       |                                                      |                                 |      | ns    | C <sub>L</sub> = 30 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 5  |
|                                           |                                                                  | 1.10 ≤ V <sub>CC</sub> ≤ 1.30 | 5.0                    |       |                                                      | 4.0                             |      |       |                                                 |               |
|                                           |                                                                  | 1.40 ≤ V <sub>CC</sub> ≤ 1.60 | 3.0                    |       |                                                      | 3.0                             |      |       |                                                 |               |
|                                           |                                                                  | 1.65 ≤ V <sub>CC</sub> ≤ 1.95 | 2.5                    |       |                                                      | 2.0                             |      |       |                                                 |               |
|                                           |                                                                  | 2.30 ≤ V <sub>CC</sub> ≤ 2.70 | 2.5                    |       |                                                      | 3.0                             |      |       |                                                 |               |
|                                           |                                                                  | 3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 2.0                    |       |                                                      | 2.0                             |      |       |                                                 |               |
| t <sub>REC</sub>                          | Recover Time<br>CLR, $\overline{PR}$ to CK                       | 0.90                          | 12.0                   |       |                                                      |                                 |      | ns    | C <sub>L</sub> = 30 pF<br>R <sub>D</sub> = 1 MΩ | Figures 1, 4  |
|                                           |                                                                  | 1.10 ≤ V <sub>CC</sub> ≤ 1.30 | 8.5                    |       |                                                      | 8.5                             |      |       |                                                 |               |
|                                           |                                                                  | 1.40 ≤ V <sub>CC</sub> ≤ 1.60 | 3.5                    |       |                                                      | 3.5                             |      |       |                                                 |               |
|                                           |                                                                  | 1.65 ≤ V <sub>CC</sub> ≤ 1.95 | 3.0                    |       |                                                      | 3.0                             |      |       |                                                 |               |
|                                           |                                                                  | 2.30 ≤ V <sub>CC</sub> ≤ 2.70 | 2.5                    |       |                                                      | 2.5                             |      |       |                                                 |               |
|                                           |                                                                  | 3.00 ≤ V <sub>CC</sub> ≤ 3.60 | 2.0                    |       |                                                      | 2.0                             |      |       |                                                 |               |
| Capacitance                               |                                                                  |                               |                        |       |                                                      |                                 |      |       |                                                 |               |
| Symbol                                    | Parameter                                                        | Typ                           | Max                    | Units | Conditions                                           | Figure Number                   |      |       |                                                 |               |
| C <sub>IN</sub>                           | Input Capacitance                                                | 2.0                           |                        | pF    | V <sub>CC</sub> = 0V                                 |                                 |      |       |                                                 |               |
| C <sub>OUT</sub>                          | Output Capacitance                                               | 4.0                           |                        | pF    | V <sub>CC</sub> = 0V                                 |                                 |      |       |                                                 |               |
| C <sub>PD</sub>                           | Power Dissipation Capacitance                                    | 8.0                           |                        | pF    | V <sub>I</sub> = 0V or V <sub>CC</sub><br>f = 10 MHz | Figure 2                        |      |       |                                                 |               |

## AC Loading and Waveforms



$C_L$  includes load and stray capacitance  
Input PRR = 1.0 MHz;  $t_w = 500$  ns

FIGURE 1. AC Test Circuit

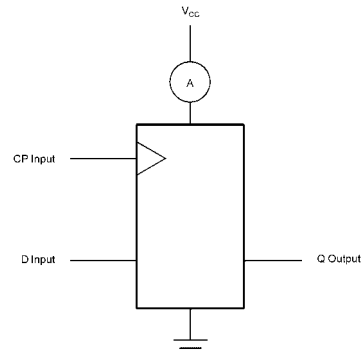

CP Input = AC Waveform;  $t_r = t_f = 2.5$  ns;  
CP Input PRR = 10 MHz; Duty Cycle = 50%  
D Input PRR = 5MHz; Duty Cycle = 50%

FIGURE 2.  $I_{CCD}$  Test Circuit

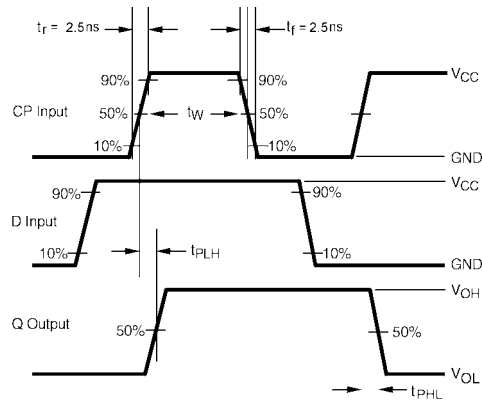


FIGURE 3. AC Waveforms

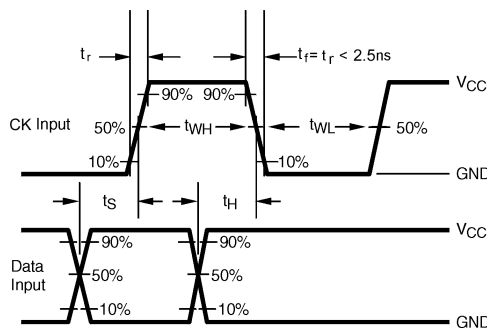


FIGURE 4. AC Waveforms

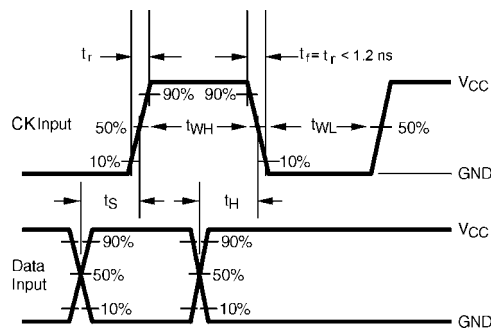
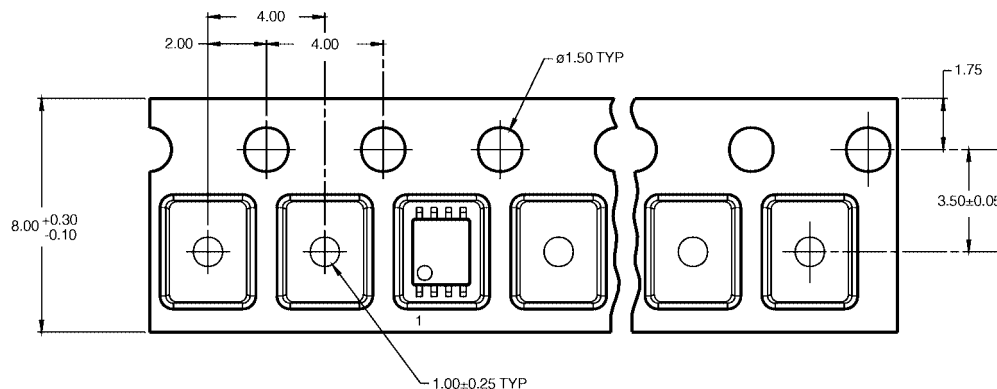


FIGURE 5. AC Waveforms

### TAPE FORMAT for US8


| Package Designator | Tape Section       | Number Cavities | Cavity Status | Cover Tape Status |
|--------------------|--------------------|-----------------|---------------|-------------------|
| K8X                | Leader (Start End) | 125 (typ)       | Empty         | Sealed            |
|                    | Carrier            | 3000            | Filled        | Sealed            |
|                    | Trailer (Hub End)  | 75 (typ)        | Empty         | Sealed            |

**TAPE DIMENSIONS** inches (millimeters)


### TAPE FORMAT for MicroPak

| Package Designator | Tape Section       | Number Cavities | Cavity Status | Cover Tape Status |
|--------------------|--------------------|-----------------|---------------|-------------------|
| L8X                | Leader (Start End) | 125 (typ)       | Empty         | Sealed            |
|                    | Carrier            | 3000            | Filled        | Sealed            |
|                    | Trailer (Hub End)  | 75 (typ)        | Empty         | Sealed            |

**TAPE DIMENSIONS** inches (millimeters)


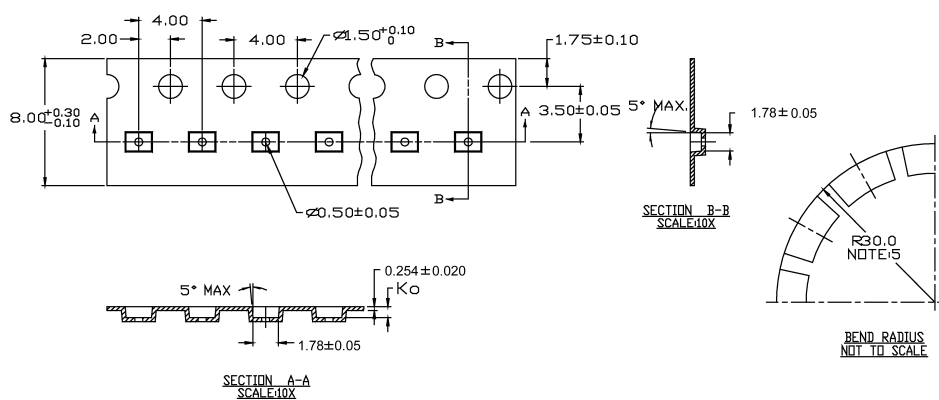


**Tape and Reel Specification** (Continued)  
**REEL DIMENSIONS** inches (millimeters)



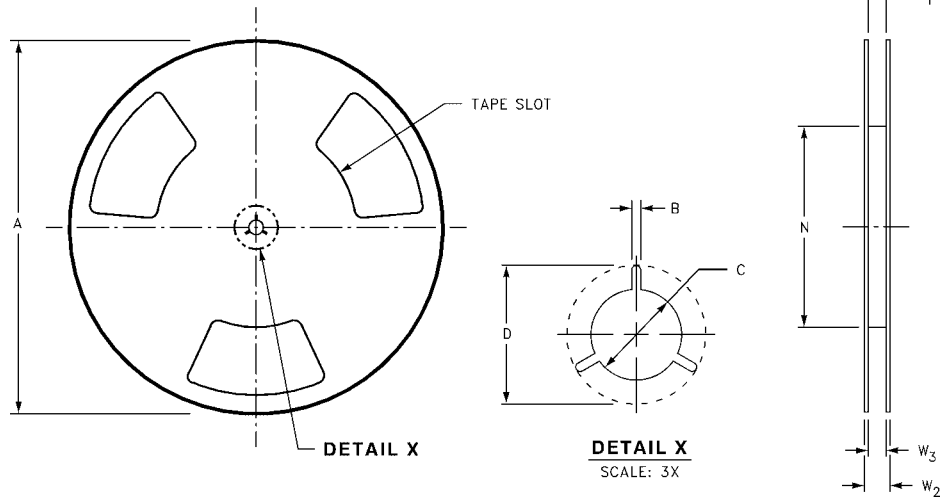


| Tape Size | A              | B               | C                | D                | N                | W1                                            | W2               | W3                                       |
|-----------|----------------|-----------------|------------------|------------------|------------------|-----------------------------------------------|------------------|------------------------------------------|
| 8 mm      | 7.0<br>(177.8) | 0.059<br>(1.50) | 0.512<br>(13.00) | 0.795<br>(20.20) | 2.165<br>(55.00) | $0.331 + 0.059/-0.000$<br>(8.40 + 1.50/-0.00) | 0.567<br>(14.40) | $W1 + 0.078/-0.039$<br>(W1 + 2.00/-1.00) |

# Physical Dimensions inches (millimeters) unless otherwise noted

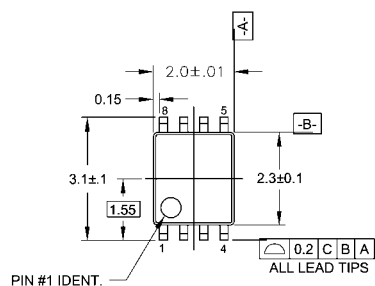

## LAND PATTERN RECOMMENDATION

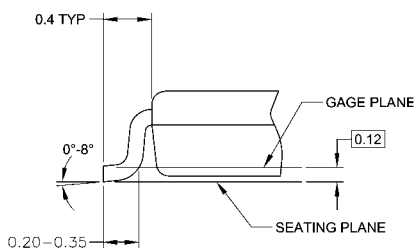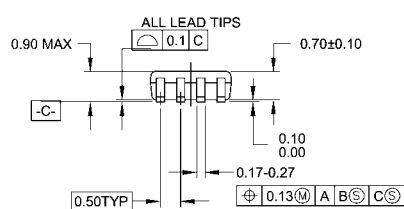

## DETAIL A


## NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-187
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS ARE EXCLUSIVE OF BURRS, MOLD FLASH, AND TIE BAR EXTRUSIONS.
- D. DIMENSIONS AND TOLERANCES PER ANSI Y14.5M, 1982.

MAB08AREVC

8-Lead US8, JEDEC MO-187, Variation CA 3.1mm Wide  
Package Number MAB08A

## Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

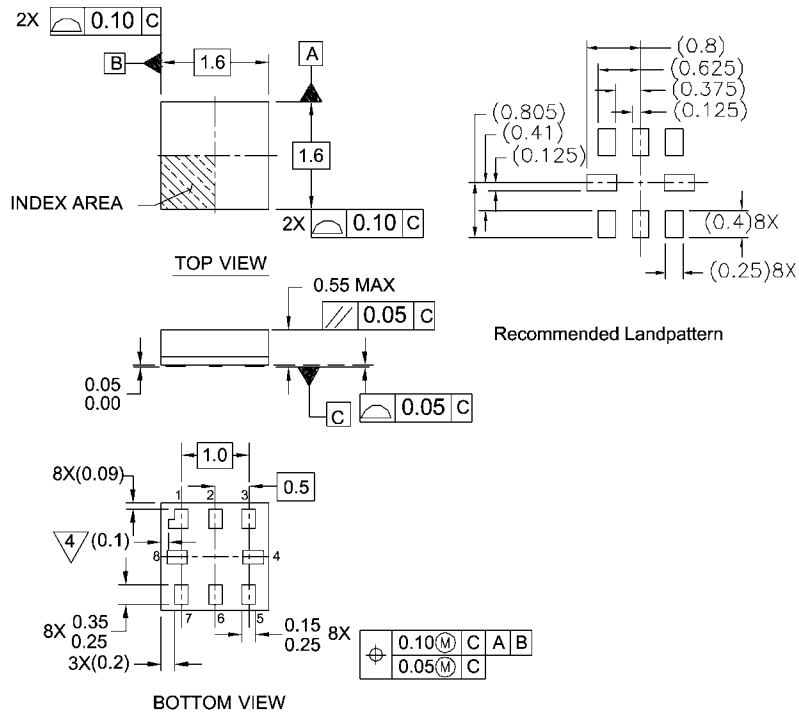

### Notes:

1. PACKAGE CONFORMS TO JEDEC MO-255 VARIATION UAAD
2. DIMENSIONS ARE IN MILLIMETERS
3. DRAWING CONFORMS TO ASME Y.14M-1994
4. PIN 1 FLAG, END OF PACKAGE OFFSET.

MAC08AREVC

**Pb-Free 8-Lead MicroPak, 1.6 mm Wide  
Package Number MAC08A**

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

### LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

[www.fairchildsemi.com](http://www.fairchildsemi.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.