ATC 100 A Series Porcelain Superchip® Multilayer Capacitors

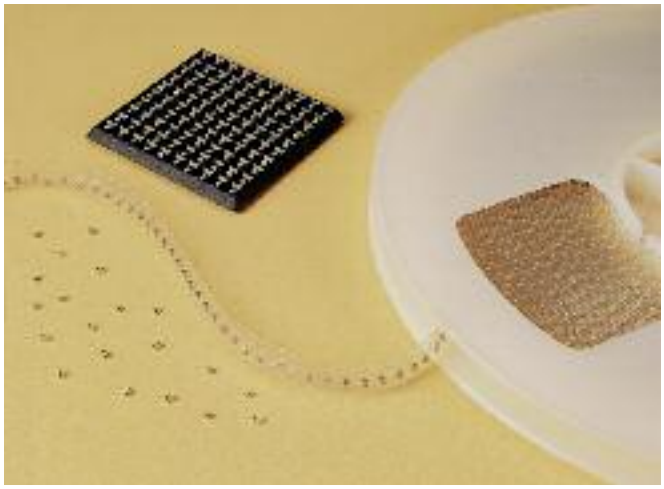

- **Case A Size (.055" x .055")**
- **High Q**
- **Low ESR/ESL**
- **Low Noise**
- **Extended WVDC up to 250 VDC**
- **Capacitance Range 0.1 pF to 100 pF**
- **Ultra-Stable Performance**
- **High Self-Resonance**
- **Established Reliability (QPL)**

ATC, the industry leader, offers new improved ESR/ESL performance for the 100 A Series RF/Microwave Capacitors. This is ATC's most versatile high Q, high self resonant multilayer capacitor. High density porcelain construction provides a rugged, hermetic package.

Typical functional applications: Bypass, Coupling, Tuning, Feedback, Impedance Matching and DC Blocking.

Typical circuit applications: Microwave/RF/IF Amplifiers, Mixers, Oscillators, Low Noise Amplifiers, Filter Networks, Timing Circuits and Delay Lines.

ENVIRONMENTAL TESTS

ATC 100 A Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:
MIL-STD-202, Method 107, Condition A.

MOISTURE RESISTANCE:
MIL-STD-202, Method 106.

LOW VOLTAGE HUMIDITY:
MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:
MIL-STD-202, Method 108, for 2000 hours, at 125°C.
200% WVDC applied.

ELECTRICAL AND MECHANICAL SPECIFICATIONS

QUALITY FACTOR (Q): greater than 10,000 at 1 MHz.

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):
+90 ±20 PPM/°C (-55°C to +125°C)

INSULATION RESISTANCE (IR):
0.1 pF to 100 pF:
10^6 Megohms min. @ +25°C at rated WVDC.
10^5 Megohms min. @ +125°C at rated WVDC.

WORKING VOLTAGE (WVDC):
See Capacitance Values Table, page 2.

DIELECTRIC WITHSTANDING VOLTAGE (DWV):
250% of rated WVDC for 5 secs.

RETRACE: Less than ±(0.02% or 0.02 pF), whichever is greater.

AGING EFFECTS: None

PIEZOELECTRIC EFFECTS: None
(No capacitance variation with voltage or pressure).

CAPACITANCE DRIFT: ±(0.02% or 0.02 pF), whichever is greater.

OPERATING TEMPERATURE RANGE:
From -55°C to +125°C (No derating of working voltage).

TERMINATION STYLES: Available in various surface mount styles. See Mechanical Configurations, page 3.

TERMINAL STRENGTH: Terminations for chips and pellets withstand a pull of 5 lbs. min., 10 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.

AMERICAN TECHNICAL CERAMICS

ATC North America
+1-631-622-4700
sales@atceramics.com

ATC Europe
+46 8 6800410
sales@atceramics-europe.com

ATC Asia
+86-755-2396-8759
sales@atceramics-asia.com

THE ENGINEERS' CHOICE®
ISO 9001 REGISTERED

ATC 100 A Capacitance Values

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC STD.	RATED WVDC EXT.
0R1	0.1	B	150	250 EXTENDED VOLTAGE
0R2	0.2			
0R3	0.3	B, C		
0R4	0.4			
0R5	0.5	B, C, D		
0R6	0.6			
0R7	0.7			
0R8	0.8			
0R9	0.9			
1R0	1.0			
1R1	1.1			
1R2	1.2			
1R3	1.3			
1R4	1.4			
1R5	1.5			
1R6	1.6			
1R7	1.7			
1R8	1.8			
1R9	1.9			
2R0	2.0			
2R1	2.1			

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC STD.	RATED WVDC EXT.
2R2	2.2	B, C, D	150	250 EXTENDED VOLTAGE
2R4	2.4			
2R7	2.7			
3R0	3.0			
3R3	3.3			
3R6	3.6			
3R9	3.9			
4R3	4.3			
4R7	4.7			
5R1	5.1			
5R6	5.6			
6R2	6.2			
6R8	6.8	B, C, J, K, M		
7R5	7.5			
8R2	8.2			
9R1	9.1			
100	10	F, G, J, K, M		
110	11			
120	12			
130	13			
150	15			

CAP. CODE	CAP. (pF)	TOL.	RATED WVDC STD.	RATED WVDC EXT.
160	16	F, G, J, K, M	150	250 EXTENDED VOLTAGE
180	18			
200	20			
220	22			
240	24			
270	27			
300	30			
330	33			
360	36			
390	39			
430	43			
470	47			
510	51			
560	56			
620	62	F, G, J, K, M		200 EXT VOLT
680	68			
750	75			
820	82			
910	91			
101	100			

VRMS = 0.707 X WVDC
SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.
NOTE: EXTENDED WVDC DOES NOT APPLY TO CDR PRODUCTS.

CAPACITANCE TOLERANCE

Code	B	C	D	F	G	J	K	M
Tol.	±0.1 pF	±0.25 pF	±0.5 pF	±1%	±2%	±5%	±10%	±20%

ATC PART NUMBER CODE

ATC100 A 10 0 J W 150 X T

- Series — ATC100
- Case Size — A
- Capacitance Code: First 2 significant digits for capacitance. R=Decimal Point — 10
- Indicates number of zeros following digits of capacitance in picofarads except for decimal values. — 0
- Capacitance Tolerance — J
- Termination Code — W
- WVDC — 150
- Laser Marking — X
- Packaging — T
  - T - Tape and Reel, 1000 pc. qty.*
  - TV - Vertical Orientation of Product, Tape and Reel, 1000 pc. qty.*
  - I - Special Packaging. Consult Factory.
  - *Consult ATC for other quantities

ATC Cap-Pac® packaging (100 pc. qty. std.) is also available. For this option, leave last field blank.

The above part number refers to a 100 A Series (case size A) 10 pF capacitor, J tolerance (±5%), 150 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and ATC Tape and Reel packaging.

ATC accepts orders for our parts using designations ***with*** or ***without*** the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.

ATC 100 A Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	MIL-PRF-55681	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
					LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
100A	W	CDR12BG	A Solder Plate		.055 +.015 -.010 (1.40 +0.38 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	Tin/Lead, Solder Plated over Nickel Barrier Termination
100A	P	CDR12BG	A Pellet		.055 +.025 -.010 (1.40 +0.64 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	Heavy Tin/Lead Coated, over Nickel Barrier Termination
100A	T	N/A	A Solderable Nickel Barrier		.055 +.015 -.010 (1.40 +0.38 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	***RoHS Compliant*** Tin Plated over Nickel Barrier Termination
100A	CA	CDR11BG	A Gold Chip		.055 +.015 -.010 (1.40 +0.38 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	***RoHS Compliant*** Gold Plated over Nickel Barrier Termination

For a complete military catalog, request American Technical Ceramics document ATC 001-818.

ATC 100 A Non-Magnetic Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	MIL-PRF-55681	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
					LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
100A	WN	Meets Require-ments	A Non-Mag Solder Plate		.055 +.025 -.010 (1.40 +0.64 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination
100A	PN	Meets Require-ments	A Non-Mag Pellet		.055 +.035 -.010 (1.40 +0.89 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination
100A	TN	Meets Require-ments	A Non-Mag Solderable Barrier		.055 +.025 -.010 (1.40 +0.64 -0.25)	.055 ±.015 (1.40 ±0.38)	.057 (1.45) max.	.010 +.010 -.005 (0.25 +0.25 -0.13)	***RoHS Compliant*** Tin Plated over Non-Magnetic Barrier Termination

All 100 A Capacitors are available laser marked with ATC's identification, capacitance code and tolerance.

Suggested Mounting Pad Dimensions

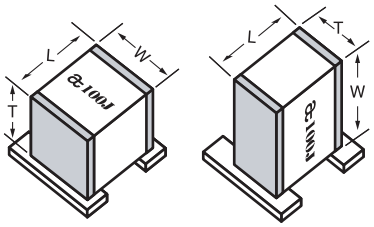

Horizontal Electrode Orientation

Vertical Electrode Orientation



Case A

	Pad Size	A Min.	B Min.	C Min.	D Min.
Vertical Mount	Normal	.070	.050	.030	.130
	High Density	.050	.030	.030	.090
Horizontal Mount	Normal	.080	.050	.030	.130
	High Density	.060	.030	.030	.090

ATC 100 A Performance Data

ESR VS. CAPACITANCE
ATC SERIES 100, CASE A

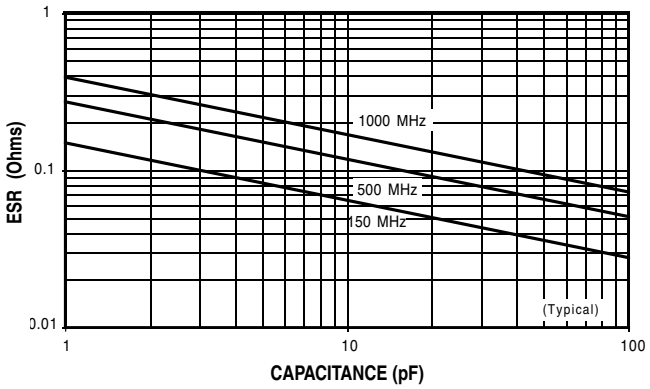

Q VS. CAPACITANCE
ATC SERIES 100, CASE A

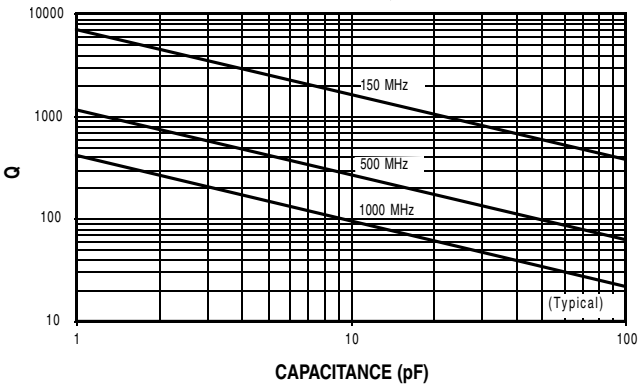

SERIES RESONANCE VS. CAPACITANCE
ATC SERIES 100, CASE A

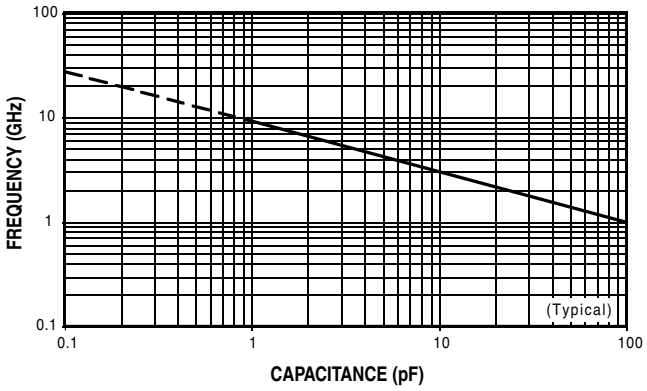

CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE A

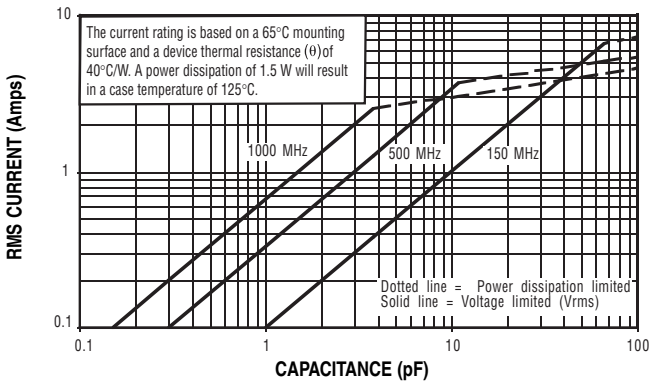

CAPACITANCE CHANGE VS. TEMPERATURE
ATC SERIES 100, CASE A

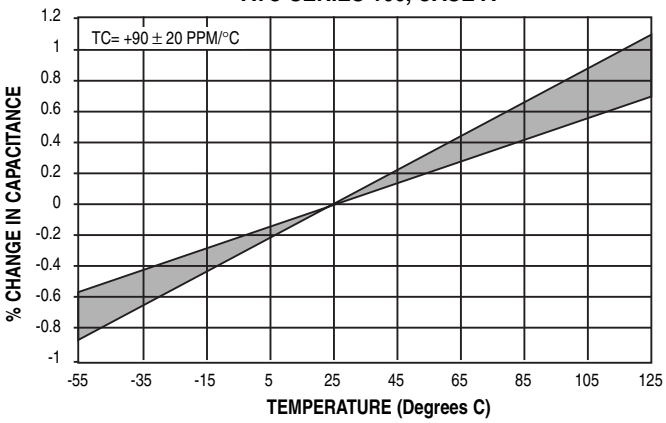

ATC 100 A Performance Data

CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE A, EXTENDED VOLTAGE

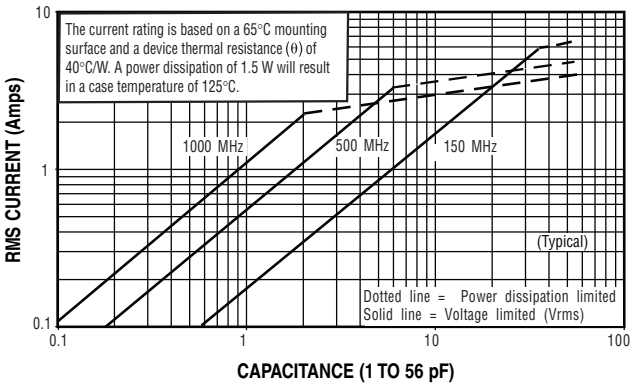

CURRENT RATING VS. CAPACITANCE
ATC SERIES 100, CASE A, EXTENDED VOLTAGE

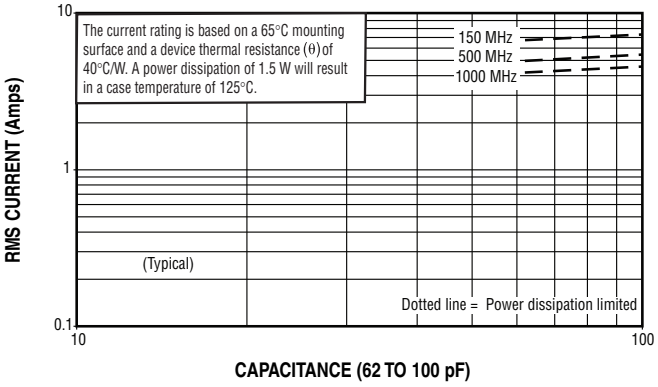

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 1996 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-806 Rev. L 9/12

AMERICAN TECHNICAL CERAMICS

ATC North America
+1-631-622-4700
sales@atceramics.com

ATC Europe
+46 8 6800410
sales@atceramics-europe.com

ATC Asia
+86-755-2396-8759
sales@atceramics-asia.com

THE ENGINEERS' CHOICE®
ISO 9001 REGISTERED

www.atceramics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

American Technical Ceramics (ATC):

100A0R1BT150XT 100A0R1BW150XT 100A0R2BT150XT 100A0R2BW150XT 100A0R3BT150XT 100A0R3BW150XT 100A0R3CT150XT 100A0R3CW150XT 100A0R4BT150XT 100A0R4BW150XT 100A0R4CT150XT 100A0R4CW150XT 100A0R5BT150XT 100A0R5BW150XT 100A0R5CT150XT 100A0R5CW150XT 100A0R5DT150XT 100A0R5DW150XT 100A0R6BT150XT 100A0R6BW150XT 100A0R6CT150XT 100A0R6CW150XT 100A0R6DT150XT 100A0R6DW150XT 100A0R7BT150XT 100A0R7BW150XT 100A0R7CT150XT 100A0R7CW150XT 100A0R7DT150XT 100A0R7DW150XT 100A0R8BT150XT 100A0R8BW150XT 100A0R8CT150XT 100A0R8CW150XT 100A0R8DT150XT 100A0R8DW150XT 100A0R9BT150XT 100A0R9BW150XT 100A0R9CT150XT 100A0R9CW150XT 100A0R9DT150XT 100A0R9DW150XT 100A100FT150XT 100A100FW150XT 100A100GT150XT 100A100GW150XT 100A100JT150XT 100A100JW150XT 100A100KT150XT 100A100KW150XT 100A100MT150XT 100A100MW150XT 100A101FT150XT 100A101FW150XT 100A101GT150XT 100A101GW150XT 100A101JW150XT 100A101KT150XT 100A101KW150XT 100A101MT150XT 100A101MW150XT 100A110FT150XT 100A110FW150XT 100A110GT150XT 100A110GW150XT 100A110JT150XT 100A110JW150XT 100A110KT150XT 100A110KW150XT 100A110MT150XT 100A110MW150XT 100A120FT150XT 100A120FW150XT 100A120GT150XT 100A120GW150XT 100A120JT150XT 100A120JW150XT 100A120KT150XT 100A120KW150XT 100A120MT150XT 100A120MW150XT 100A130FT150XT 100A130FW150XT 100A130GT150XT 100A130GW150XT 100A130JT150XT 100A130JW150XT 100A130KT150XT 100A130KW150XT 100A130MT150XT 100A130MW150XT 100A150FT150XT 100A150FW150XT 100A150GT150XT 100A150GW150XT 100A150JW150XT 100A150KT150XT 100A150KW150XT 100A150MT150XT 100A150MW150XT

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.

Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.