

# ATC 100 A Series Porcelain Superchip® Multilayer Capacitors

- Case A Size  
(.055" x .055")
- High Q
- Low ESR/ESL
- Low Noise
- Extended WVDC  
up to 250 VDC
- Capacitance Range  
0.1 pF to 100 pF
- Ultra-Stable Performance
- High Self-Resonance
- Established Reliability (QPL)

ATC, the industry leader, offers new improved ESR/ESL performance for the 100 A Series RF/Microwave Capacitors. This is ATC's most versatile high Q, high self resonant multilayer capacitor. High density porcelain construction provides a rugged, hermetic package.

Typical functional applications: Bypass, Coupling, Tuning, Feedback, Impedance Matching and DC Blocking.

Typical circuit applications: Microwave/RF/IF Amplifiers, Mixers, Oscillators, Low Noise Amplifiers, Filter Networks, Timing Circuits and Delay Lines.

## ENVIRONMENTAL TESTS

ATC 100 A Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

### THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A.

### MOISTURE RESISTANCE:

MIL-STD-202, Method 106.

### LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

### LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C.  
200% WVDC applied.



## ELECTRICAL AND MECHANICAL SPECIFICATIONS

**QUALITY FACTOR (Q):** greater than 10,000 at 1 MHz.

**TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):**  
+90 ±20 PPM/°C (-55°C to +125°C)

### INSULATION RESISTANCE (IR):

0.1 pF to 100 pF:

10<sup>6</sup> Megohms min. @ +25°C at rated WVDC.

10<sup>5</sup> Megohms min. @ +125°C at rated WVDC.

### WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2.

### DIELECTRIC WITHSTANDING VOLTAGE (DWV):

250% of rated WVDC for 5 secs.

**RETRACE:** Less than ±(0.02% or 0.02 pF), whichever is greater.

**AGING EFFECTS:** None

### PIEZOELECTRIC EFFECTS:

None  
(No capacitance variation with voltage or pressure).

**CAPACITANCE DRIFT:** ±(0.02% or 0.02 pF), whichever is greater.

### OPERATING TEMPERATURE RANGE:

From -55°C to +125°C (No derating of working voltage).

**TERMINATION STYLES:** Available in various surface mount styles. See Mechanical Configurations, page 3.

**TERMINAL STRENGTH:** Terminations for chips and pellets withstand a pull of 5 lbs. min., 10 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



AMERICAN TECHNICAL CERAMICS

ATC North America  
+1-631-622-4700  
sales@atceramics.com

ATC Europe  
+46 8 6800410  
sales@atceramics-europe.com

ATC Asia  
+86-755-2396-8759  
sales@atceramics-asia.com

THE  
ENGINEERS'  
CHOICE®  
ISO 9001 REGISTERED

www.atceramics.com

ATC # 001-806 Rev. L 9/12

# ATC 100 A Capacitance Values

| CAP.<br>CODE | CAP.<br>(pF) | TOL.    | RATED WVDC |                     | CAP.<br>CODE | CAP.<br>(pF) | TOL.    | RATED WVDC |                     | CAP.<br>CODE | CAP.<br>(pF) | TOL.             | RATED WVDC |                     |
|--------------|--------------|---------|------------|---------------------|--------------|--------------|---------|------------|---------------------|--------------|--------------|------------------|------------|---------------------|
|              |              |         | STD.       | EXT.                |              |              |         | STD.       | EXT.                |              |              |                  | STD.       | EXT.                |
| 0R1          | 0.1          | B       | 150        | EXTENDED<br>VOLTAGE | 2R2          | 2.2          | B, C, D | 150        | EXTENDED<br>VOLTAGE | 160          | 16           | F, G, J,<br>K, M | 150        | EXTENDED<br>VOLTAGE |
| 0R2          | 0.2          | B, C    |            |                     | 2R4          | 2.4          |         |            |                     | 180          | 18           |                  |            |                     |
| 0R3          | 0.3          |         |            |                     | 2R7          | 2.7          |         |            |                     | 200          | 20           |                  |            |                     |
| 0R4          | 0.4          | B, C, D |            |                     | 3R0          | 3.0          |         |            |                     | 220          | 22           |                  |            |                     |
| 0R5          | 0.5          |         |            |                     | 3R3          | 3.3          |         |            |                     | 240          | 24           |                  |            |                     |
| 0R6          | 0.6          |         |            |                     | 3R6          | 3.6          |         |            |                     | 270          | 27           |                  |            |                     |
| 0R7          | 0.7          |         |            |                     | 3R9          | 3.9          |         |            |                     | 300          | 30           |                  |            |                     |
| 0R8          | 0.8          |         |            |                     | 4R3          | 4.3          |         |            |                     | 330          | 33           |                  |            |                     |
| 0R9          | 0.9          |         |            |                     | 4R7          | 4.7          |         |            |                     | 360          | 36           |                  |            |                     |
| 1R0          | 1.0          |         |            |                     | 5R1          | 5.1          |         |            |                     | 390          | 39           |                  |            |                     |
| 1R1          | 1.1          |         |            |                     | 5R6          | 5.6          |         |            |                     | 430          | 43           |                  |            |                     |
| 1R2          | 1.2          |         |            |                     | 6R2          | 6.2          |         |            |                     | 470          | 47           |                  |            |                     |
| 1R3          | 1.3          |         |            | 6R8                 | 6.8          | 510          | 51      |            |                     |              |              |                  |            |                     |
| 1R4          | 1.4          |         |            | 7R5                 | 7.5          | 560          | 56      |            |                     |              |              |                  |            |                     |
| 1R5          | 1.5          |         |            | 8R2                 | 8.2          | 620          | 62      |            |                     |              |              |                  |            |                     |
| 1R6          | 1.6          |         |            | 9R1                 | 9.1          | 680          | 68      |            |                     |              |              |                  |            |                     |
| 1R7          | 1.7          |         |            | 100                 | 10           | 750          | 75      |            |                     |              |              |                  |            |                     |
| 1R8          | 1.8          |         |            | 110                 | 11           | 820          | 82      |            |                     |              |              |                  |            |                     |
| 1R9          | 1.9          |         |            | 120                 | 12           | 910          | 91      |            |                     |              |              |                  |            |                     |
| 2R0          | 2.0          |         |            | 130                 | 13           | 101          | 100     |            |                     |              |              |                  |            |                     |
| 2R1          | 2.1          |         |            | 150                 | 15           |              |         |            |                     |              |              |                  |            |                     |

VRMS = 0.707 X WVDC


SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE. PLEASE CONSULT FACTORY.

NOTE: EXTENDED WVDC DOES NOT APPLY TO CDR PRODUCTS.

## CAPACITANCE TOLERANCE

| Code | B       | C        | D       | F   | G   | J   | K    | M    |
|------|---------|----------|---------|-----|-----|-----|------|------|
| Tol. | ±0.1 pF | ±0.25 pF | ±0.5 pF | ±1% | ±2% | ±5% | ±10% | ±20% |

## ATC PART NUMBER CODE

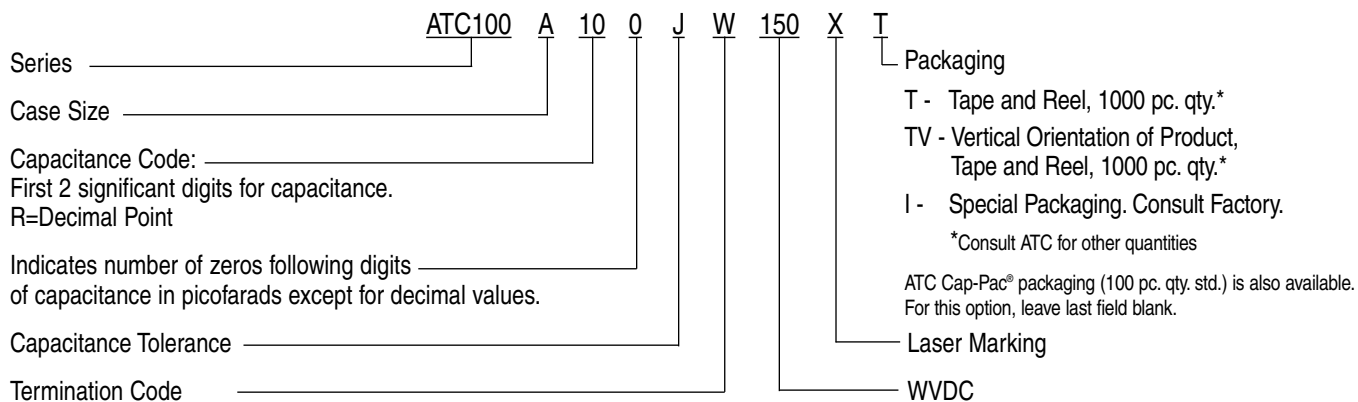

The above part number refers to a 100 A Series (case size A) 10 pF capacitor,

J tolerance (±5%), 150 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and ATC Tape and Reel packaging.

ATC accepts orders for our parts using designations **with** or **without** the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.

## AMERICAN TECHNICAL CERAMICS

ATC North America

+1-631-622-4700 • sales@atceramics.com


ATC Europe

+46 8 6800410 • sales@atceramics-europe.com

ATC Asia

+86-755-2396-8759 • sales@atceramics-asia.com

# ATC 100 A Capacitors: Mechanical Configurations

| ATC SERIES & CASE SIZE | ATC TERM. CODE | MIL-PRF-55681 | CASE SIZE & TYPE                                                                                                       | OUTLINES<br><br>W/T IS A TERMINATION SURFACE                                      | BODY DIMENSIONS<br>INCHES (mm)                |                            |                     | LEAD AND TERMINATION<br>DIMENSIONS AND MATERIALS |                                                                         |
|------------------------|----------------|---------------|------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------|----------------------------|---------------------|--------------------------------------------------|-------------------------------------------------------------------------|
|                        |                |               |                                                                                                                        |                                                                                   | LENGTH<br>(L)                                 | WIDTH<br>(W)               | THICKNESS<br>(T)    | OVERLAP<br>(Y)                                   | MATERIALS                                                               |
| 100A                   | W              | CDR12BG       | A<br><br>Solder Plate                 |  | .055<br>+.015 -.010<br>(1.40<br>+.38<br>-.25) | .055 ±.015<br>(1.40 ±0.38) | .057 (1.45)<br>max. | .010<br>+.010 -.005<br>(0.25<br>+.025 -.013)     | Tin/Lead, Solder Plated over<br>Nickel Barrier Termination              |
| 100A                   | P              | CDR12BG       | A<br><br>Pellet                       |  | .055<br>+.025 -.010<br>(1.40<br>+.64<br>-.25) | .055 ±.015<br>(1.40 ±0.38) | .057 (1.45)<br>max. | .010<br>+.010 -.005<br>(0.25<br>+.025 -.013)     | Heavy Tin/Lead Coated,<br>over Nickel Barrier<br>Termination            |
| 100A                   | T              | N/A           | A<br><br>Solderable<br>Nickel Barrier |  | .055<br>+.015 -.010<br>(1.40<br>+.38<br>-.25) | .055 ±.015<br>(1.40 ±0.38) | .057 (1.45)<br>max. | .010<br>+.010 -.005<br>(0.25<br>+.025 -.013)     | <b>RoHS Compliant</b><br>Tin Plated over<br>Nickel Barrier Termination  |
| 100A                   | CA             | CDR11BG       | A<br><br>Gold Chip                    |  | .055<br>+.015 -.010<br>(1.40<br>+.38<br>-.25) | .055 ±.015<br>(1.40 ±0.38) | .057 (1.45)<br>max. | .010<br>+.010 -.005<br>(0.25<br>+.025 -.013)     | <b>RoHS Compliant</b><br>Gold Plated over<br>Nickel Barrier Termination |

For a complete military catalog, request American Technical Ceramics document ATC 001-818.




A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America  
+1-631-622-4700 • sales@atceramics.com

ATC Europe  
+46 8 6800410 • sales@atceramics-europe.com


ATC Asia  
+86-755-2396-8759 • sales@atceramics-asia.com

# ATC 100 A Non-Magnetic Capacitors: Mechanical Configurations

| ATC SERIES & CASE SIZE | ATC TERM. CODE | MIL-PRF-55681      | CASE SIZE & TYPE                | OUTLINES<br><br>W/T IS A TERMINATION SURFACE                                      | BODY DIMENSIONS<br>INCHES (mm)                |                           |                     | LEAD AND TERMINATION<br>DIMENSIONS AND MATERIALS |                                                                           |
|------------------------|----------------|--------------------|---------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------|---------------------------|---------------------|--------------------------------------------------|---------------------------------------------------------------------------|
|                        |                |                    |                                 |                                                                                   | LENGTH<br>(L)                                 | WIDTH<br>(W)              | THICKNESS<br>(T)    | OVERLAP<br>(Y)                                   | MATERIALS                                                                 |
| 100A                   | WN             | Meets Requirements | A<br>Non-Mag Solder Plate       |  | .055<br>+.025 -.010<br>(1.40<br>+.64<br>-.25) | .055 ±.015<br>(1.40 ±.38) | .057 (1.45)<br>max. | .010<br>+.010 -.005<br>(0.25<br>+.025 -.013)     | Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination             |
| 100A                   | PN             | Meets Requirements | A<br>Non-Mag Pellet             |  | .055<br>+.035 -.010<br>(1.40<br>+.89<br>-.25) | .055 ±.015<br>(1.40 ±.38) | .057 (1.45)<br>max. | .010<br>+.010 -.005<br>(0.25<br>+.025 -.013)     | Heavy Tin/Lead Coated, over Non-Magnetic Barrier Termination              |
| 100A                   | TN             | Meets Requirements | A<br>Non-Mag Solderable Barrier |  | .055<br>+.025 -.010<br>(1.40<br>+.64<br>-.25) | .055 ±.015<br>(1.40 ±.38) | .057 (1.45)<br>max. | .010<br>+.010 -.005<br>(0.25<br>+.025 -.013)     | <b>RoHS Compliant</b><br>Tin Plated over Non-Magnetic Barrier Termination |

All 100 A Capacitors are available laser marked with ATC's identification, capacitance code and tolerance.

## Suggested Mounting Pad Dimensions

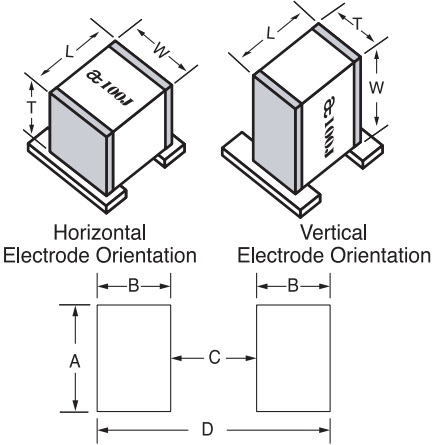

Horizontal Electrode Orientation

Vertical Electrode Orientation

Case A

|                  | Pad Size     | A Min. | B Min. | C Min. | D Min. |
|------------------|--------------|--------|--------|--------|--------|
| Vertical Mount   | Normal       | .070   | .050   | .030   | .130   |
|                  | High Density | .050   | .030   | .030   | .090   |
| Horizontal Mount | Normal       | .080   | .050   | .030   | .130   |
|                  | High Density | .060   | .030   | .030   | .090   |

A M E R I C A N T E C H N I C A L C E R A M I C S


ATC North America  
+1-631-622-4700 • sales@atceramics.com

ATC Europe  
+46 8 6800410 • sales@atceramics-europe.com


ATC Asia  
+86-755-2396-8759 • sales@atceramics-asia.com

# ATC 100 A Performance Data


**ESR VS. CAPACITANCE**  
ATC SERIES 100, CASE A

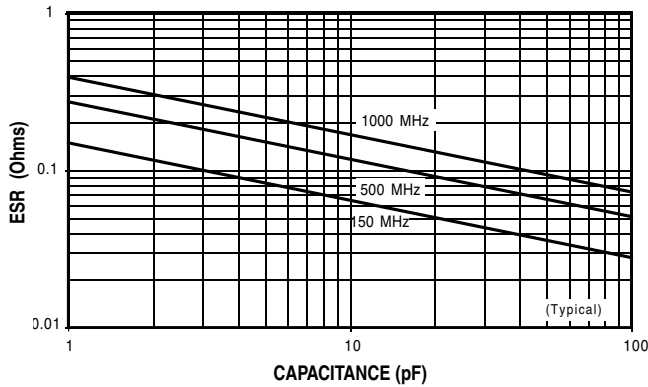


**Q VS. CAPACITANCE**  
ATC SERIES 100, CASE A

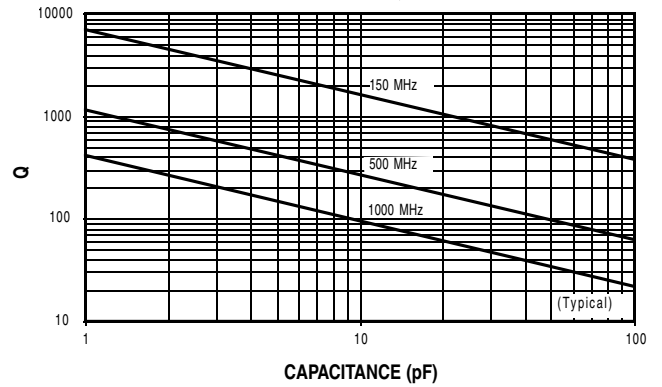


**SERIES RESONANCE VS. CAPACITANCE**  
ATC SERIES 100, CASE A

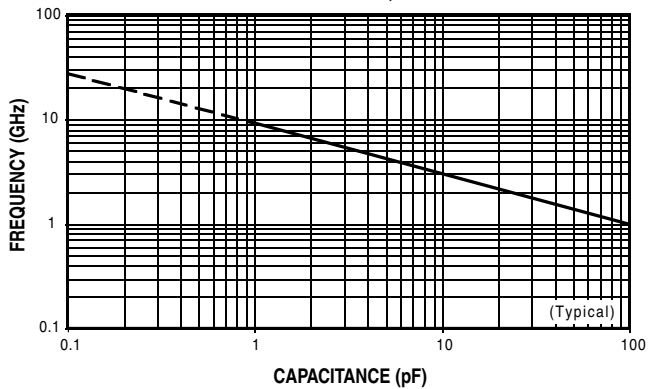

**CURRENT RATING VS. CAPACITANCE**  
ATC SERIES 100, CASE A

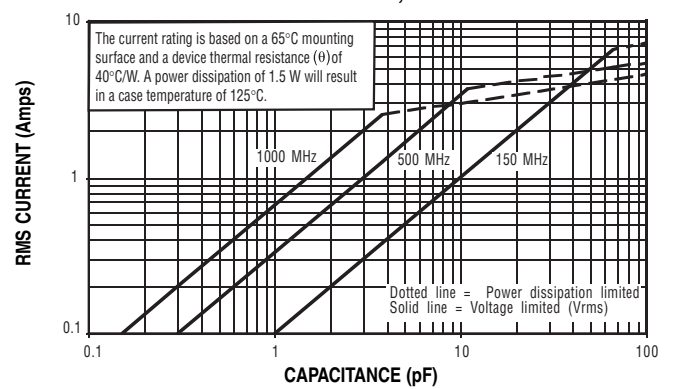

**CAPACITANCE CHANGE VS. TEMPERATURE**  
ATC SERIES 100, CASE A

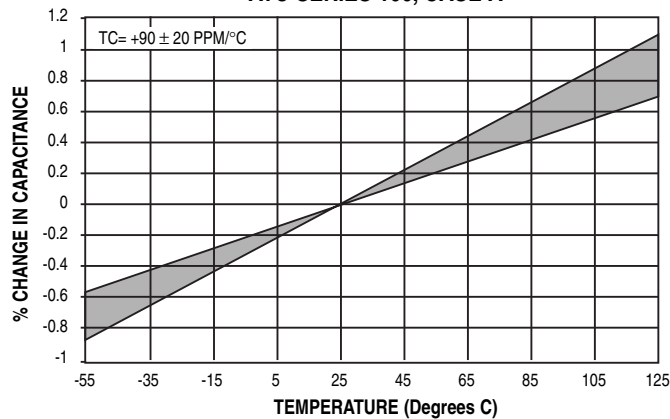

**A M E R I C A N   T E C H N I C A L   C E R A M I C S**

**ATC North America**  
+1-631-622-4700 • sales@atceramics.com

**ATC Europe**  
+46 8 6800410 • sales@atceramics-europe.com


**ATC Asia**  
+86-755-2396-8759 • sales@atceramics-asia.com

# ATC 100 A Performance Data

**CURRENT RATING VS. CAPACITANCE**  
**ATC SERIES 100, CASE A, EXTENDED VOLTAGE**



**CURRENT RATING VS. CAPACITANCE**  
**ATC SERIES 100, CASE A, EXTENDED VOLTAGE**

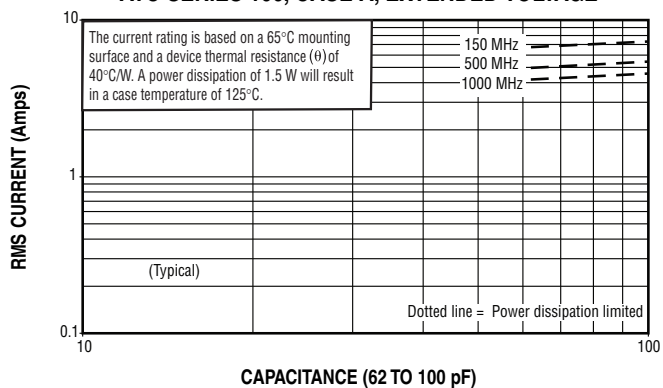

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at [www.atceramics.com/productfinder/default.asp](http://www.atceramics.com/productfinder/default.asp). Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 1996 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-806 Rev. L 9/12



**AMERICAN TECHNICAL CERAMICS**

**ATC North America**  
+1-631-622-4700  
[sales@atceramics.com](mailto:sales@atceramics.com)

**ATC Europe**  
+46 8 6800410  
[sales@atceramics-europe.com](mailto:sales@atceramics-europe.com)

**ATC Asia**  
+86-755-2396-8759  
[sales@atceramics-asia.com](mailto:sales@atceramics-asia.com)

**THE ENGINEERS' CHOICE®**  
ISO 9001 REGISTERED

**[www.atceramics.com](http://www.atceramics.com)**

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## American Technical Ceramics (ATC):

[100A0R1BT150XT](#) [100A0R1BW150XT](#) [100A0R2BT150XT](#) [100A0R2BW150XT](#) [100A0R3BT150XT](#)  
[100A0R3BW150XT](#) [100A0R3CT150XT](#) [100A0R3CW150XT](#) [100A0R4BT150XT](#) [100A0R4BW150XT](#)  
[100A0R4CT150XT](#) [100A0R4CW150XT](#) [100A0R5BT150XT](#) [100A0R5BW150XT](#) [100A0R5CT150XT](#)  
[100A0R5CW150XT](#) [100A0R5DT150XT](#) [100A0R5DW150XT](#) [100A0R6BT150XT](#) [100A0R6BW150XT](#)  
[100A0R6CT150XT](#) [100A0R6CW150XT](#) [100A0R6DT150XT](#) [100A0R6DW150XT](#) [100A0R7BT150XT](#)  
[100A0R7BW150XT](#) [100A0R7CT150XT](#) [100A0R7CW150XT](#) [100A0R7DT150XT](#) [100A0R7DW150XT](#)  
[100A0R8BT150XT](#) [100A0R8BW150XT](#) [100A0R8CT150XT](#) [100A0R8CW150XT](#) [100A0R8DT150XT](#)  
[100A0R8DW150XT](#) [100A0R9BT150XT](#) [100A0R9BW150XT](#) [100A0R9CT150XT](#) [100A0R9CW150XT](#)  
[100A0R9DT150XT](#) [100A0R9DW150XT](#) [100A100FT150XT](#) [100A100FW150XT](#) [100A100GT150XT](#)  
[100A100GW150XT](#) [100A100JT150XT](#) [100A100JW150XT](#) [100A100KT150XT](#) [100A100KW150XT](#) [100A100MT150XT](#)  
[100A100MW150XT](#) [100A101FT150XT](#) [100A101FW150XT](#) [100A101GT150XT](#) [100A101GW150XT](#)  
[100A101JW150XT](#) [100A101KT150XT](#) [100A101KW150XT](#) [100A101MT150XT](#) [100A101MW150XT](#) [100A110FT150XT](#)  
[100A110FW150XT](#) [100A110GT150XT](#) [100A110GW150XT](#) [100A110JT150XT](#) [100A110JW150XT](#)  
[100A110KT150XT](#) [100A110KW150XT](#) [100A110MT150XT](#) [100A110MW150XT](#) [100A120FT150XT](#) [100A120FW150XT](#)  
[100A120GT150XT](#) [100A120GW150XT](#) [100A120JT150XT](#) [100A120JW150XT](#) [100A120KT150XT](#)  
[100A120KW150XT](#) [100A120MT150XT](#) [100A120MW150XT](#) [100A130FT150XT](#) [100A130FW150XT](#)  
[100A130GT150XT](#) [100A130GW150XT](#) [100A130JT150XT](#) [100A130JW150XT](#) [100A130KT150XT](#) [100A130KW150XT](#)  
[100A130MT150XT](#) [100A130MW150XT](#) [100A150FT150XT](#) [100A150FW150XT](#) [100A150GT150XT](#)  
[100A150GW150XT](#) [100A150JW150XT](#) [100A150KT150XT](#) [100A150KW150XT](#) [100A150MT150XT](#)  
[100A150MW150XT](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.