


## MEMS audio sensor high-performance analog bottom-port microphone

Datasheet - production data



**RHLGA metal cap 3-lead**  
**3.35 x 2.5 x 0.98 mm**

### Description

The MP23AB02B is a compact, low-power microphone built with a low-profile sensing element.

The sensing element, capable of detecting acoustic waves, is manufactured using a specialized silicon micromachining process to produce audio sensors.

The MP23AB02B has an acoustic overload point of 125 dB SPL with a 64 dB signal-to-noise ratio.

The MP23AB02B is available in a package compliant with reflow soldering and is guaranteed to operate over an extended temperature range from -40 °C to +85 °C.

### Features

- Single supply voltage operation
- Low power consumption
- Omnidirectional sensitivity
- High signal-to-noise ratio
- High bandwidth
- Package compliant with reflow soldering

**Table 1. Device summary**

| Order code  | Temperature range (°C) | Package                | Packing       |
|-------------|------------------------|------------------------|---------------|
| MP23AB02B   | -40 to +85             | (3.35 x 2.5 x 0.98) mm | Tray          |
| MP23AB02BTR | -40 to +85             | (3.35 x 2.5 x 0.98) mm | Tape and reel |

# 1 Pin description

Figure 1. Pin connections

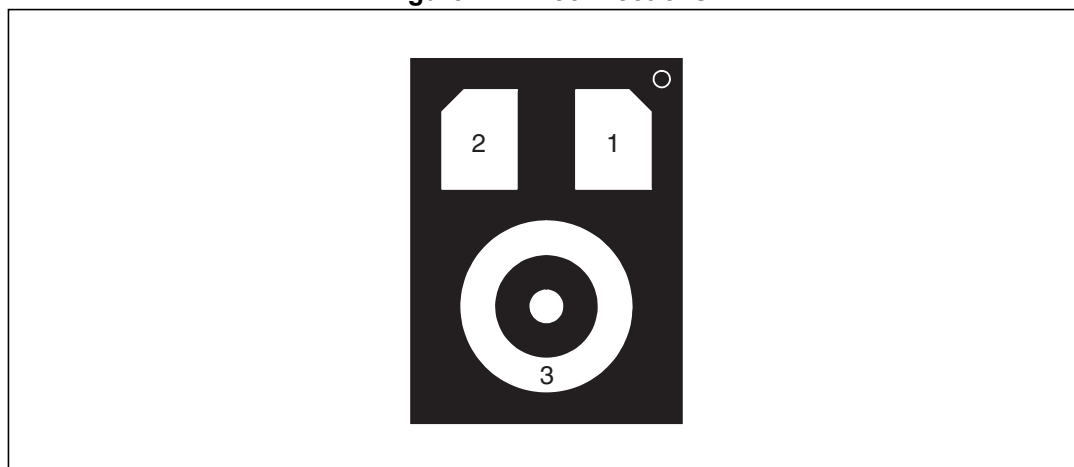


Table 2. Pin description

| Pin n° | Pin name | Function      |
|--------|----------|---------------|
| 1      | Out      | Analog output |
| 2      | Vdd      | Power supply  |
| 3      | GND      | Ground        |

## 2 Acoustic and electrical specifications

### 2.1 Acoustic and electrical characteristics

The values listed in the table below are specified for  $V_{dd} = 1.8\text{ V}$ ,  $T_{amb} = 25\text{ °C}$  unless otherwise specified.

**Table 3. Acoustic and electrical characteristics**


| Symbol | Parameter                   | Test condition                       | Min. | Typ. <sup>(1)</sup> | Max. | Unit   |
|--------|-----------------------------|--------------------------------------|------|---------------------|------|--------|
| Vdd    | Supply voltage              |                                      | 1.6  | 1.8                 | 3.6  | V      |
| Idd    | Current consumption         | mean value = 2 V                     |      | 150                 | 220  | μA     |
| So     | Sensitivity                 | 1 kHz (0 dB = 1 V/Pa)                | -41  | -38                 | -35  | dBV/PA |
| SNR    | Signal-to-noise ratio       | A-weighted, 1 kHz<br>(0 dB = 1 V/Pa) |      | 64                  |      | dBA    |
| Top    | Operating temperature range |                                      | -40  |                     | +85  | °C     |

1. Typical specifications are not guaranteed

**Table 4. Distortion specifications at 1 kHz**

| Parameter  | Test condition | Value  |
|------------|----------------|--------|
| Distortion | 94             | < 0.5% |
| Distortion | 120            | < 2%   |
| Distortion | 124            | = 10%  |

**Figure 2. Frequency response**

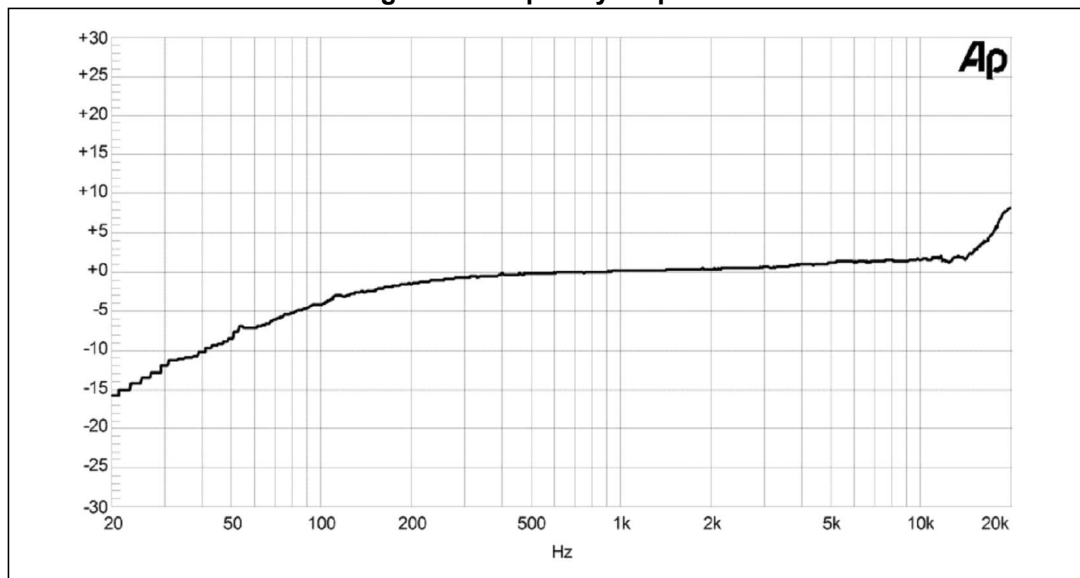

### 3 Absolute maximum ratings

Stresses above those listed as “Absolute maximum ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device under these conditions is not implied. Exposure to maximum rating conditions for extended periods may affect device reliability.

**Table 5. Absolute maximum ratings**

| Symbol           | Ratings                   | Maximum value | Unit |
|------------------|---------------------------|---------------|------|
| V <sub>dd</sub>  | Supply voltage            | -0.5 to 4     | V    |
| T <sub>STG</sub> | Storage temperature range | -40 to +125   | °C   |




This device is sensitive to mechanical shock, improper handling can cause permanent damage to the part.



This device is sensitive to electrostatic discharge (ESD), improper handling can cause permanent damage to the part.

## 4 Application recommendations

Figure 3. MP23AB02B electrical connections and external component values

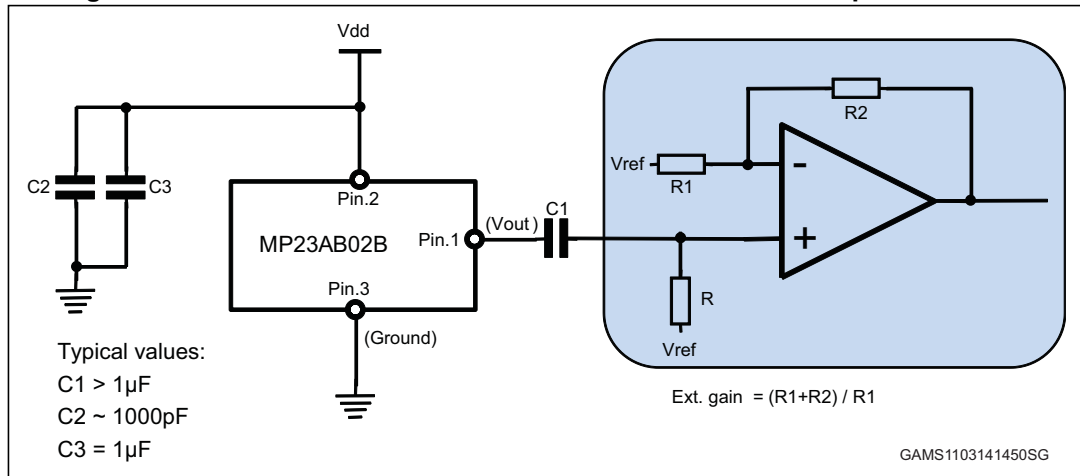

## 5 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK<sup>®</sup> packages, depending on their level of environmental compliance. ECOPACK<sup>®</sup> specifications, grade definitions and product status are available at: [www.st.com](http://www.st.com). ECOPACK<sup>®</sup> is an ST trademark.

**TOP VIEW**

**BOTTOM VIEW**


8419346\_A

Table 6. RHLGA metal cap 3-lead (3.35 x 2.5 x 0.98 mm) package dimensions

| Reference | Dimensions (mm) |       |       |
|-----------|-----------------|-------|-------|
|           | Min.            | Typ.  | Max.  |
| A1        | 0.880           | 0.980 | 1.080 |
| A2        | 0.200           | 0.250 | 0.300 |
| D1        | 3.250           | 3.350 | 3.450 |
| D2        | 0.495           | 0.595 | 0.695 |
| D3        | 2.770           | 2.920 | 3.070 |
| R1        | 0.275           | 0.325 | 0.375 |
| R2        |                 | 0.28  |       |
| R3        |                 | 0.25  |       |
| E1        | 2.400           | 2.500 | 2.600 |
| E2        | 1.150           | 1.250 | 1.350 |
| E3        | 1.920           | 2.070 | 2.220 |
| L1        | 1.480           | 1.520 | 1.560 |
| L2        | 1.180           | 1.220 | 1.260 |
| N1        | 0.885           | 0.925 | 0.965 |
| N2        | 0.570           | 0.610 | 0.650 |
| T1        | 0.860           | 0.900 | 0.940 |
| T2        | 0.640           | 0.680 | 0.720 |
| G1        | 0.900           | 0.950 | 1.000 |
| G2        | 1.400           | 1.550 | 1.600 |
| G3        | 0.100           | 0.150 | 0.200 |
| P1        | 1.425           | 1.475 | 1.525 |
| P2        | 1.000           | 1.050 | 1.100 |
| d         |                 | 0.150 |       |
| K         |                 | 0.050 |       |



Figure 5. RHLGA tape and reel (dimensions are in mm.)

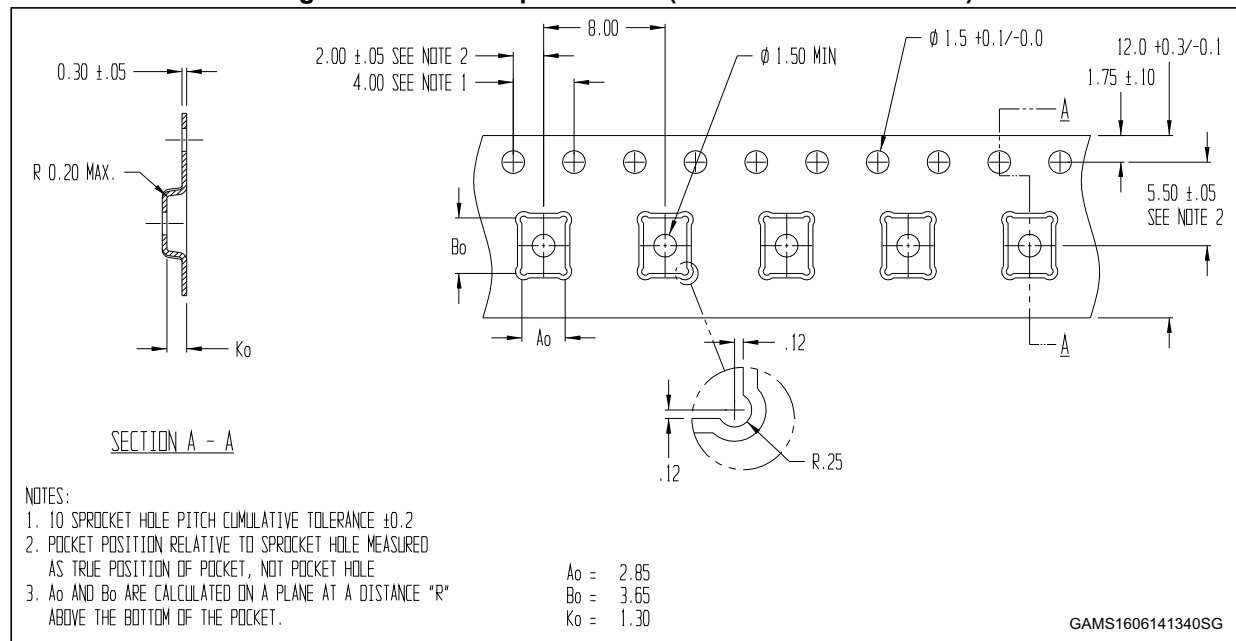



## 7 Revision history

**Table 8. Document revision history**

| Date        | Revision | Changes                                                          |
|-------------|----------|------------------------------------------------------------------|
| 21-Mar-2014 | 1        | Initial release.                                                 |
| 16-Jun-2014 | 2        | Updated <a href="#">Figure 5 on page 9</a> .                     |
| 22-Sep-2014 | 3        | Updated acoustic overload point in <a href="#">Description</a> . |

**IMPORTANT NOTICE – PLEASE READ CAREFULLY**

STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2014 STMicroelectronics – All rights reserved



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.