

**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2120****General Description**

The AP2120 series are positive voltage regulator ICs fabricated by CMOS process. Each of these ICs consists of a voltage reference, an error amplifier, a resistor network for setting output voltage, a current limit circuit for current protection.

The AP2120 series feature high supply voltage ripple rejection, low dropout voltage, low noise, high output voltage accuracy, and low current consumption which make them ideal for use in various battery-powered devices.

The AP2120 series have 1.2V, 1.3V, 1.5V, 1.8V, 2.5V, 2.8V, 3.0V, 3.2V, 3.3V and 5.0V versions.

The AP2120 are available in standard SOT-23 package.

**Features**

- Low Dropout Voltage at  $I_{OUT}=100mA$ : 200mV Typical (Except 1.2V, 1.3V and 1.5V Versions)
- Low Quiescent Current: 25 $\mu A$  Typical
- High Ripple Rejection: 65dB Typical ( $f=1kHz$ )
- Output Current: More Than 150mA (250mA Limit)
- Extremely Low Noise: 15 $\mu V_{rms}$ @ $V_{OUT}=1.2V$ , 1.3V, 1.5V (10Hz to 100kHz)
- Excellent Line Regulation: 4mV Typical
- Excellent Load Regulation: 12mV Typical
- High Output Voltage Accuracy:  $\pm 2\%$
- Excellent Line Transient Response and Load Transient Response
- Compatible with Low ESR Ceramic Capacitor (as Low as 1 $\mu F$ )

**Applications**

- Mobile Phones, Cordless Phones
- Wireless Communication Equipment
- Portable Games
- Cameras, Video Recorders
- Sub-board Power Supplies for Telecom Equipment
- Battery Powered Equipment

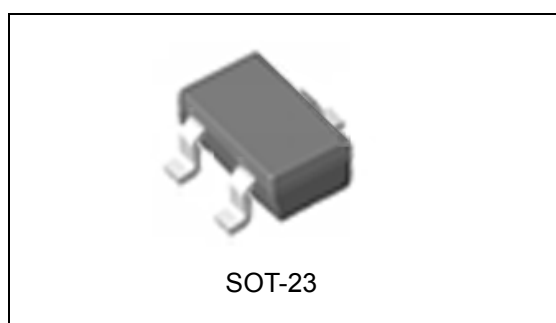


Figure 1. Package Types of AP2120

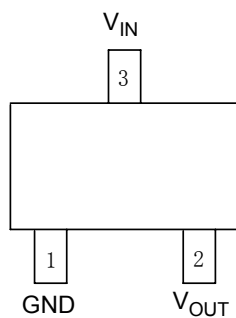
**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2120****Pin Configuration**N Package  
(SOT-23)

Figure 2. Pin Configuration of AP2120 (Top View)

**Pin Description**

| Pin Number | Pin Name  | Function                 |
|------------|-----------|--------------------------|
| 1          | GND       | Ground                   |
| 2          | $V_{OUT}$ | Regulated Output Voltage |
| 3          | $V_{IN}$  | Input Voltage            |

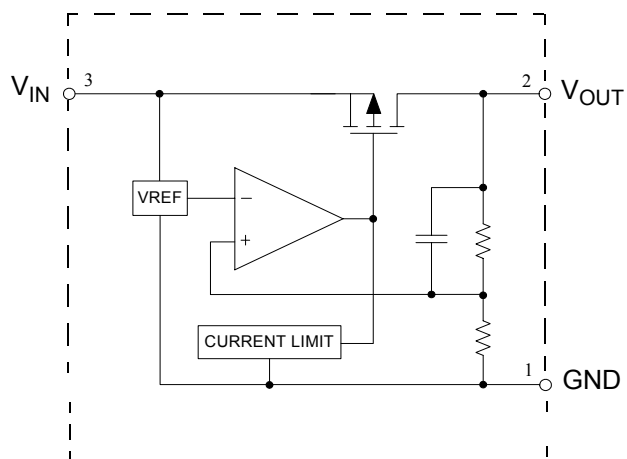
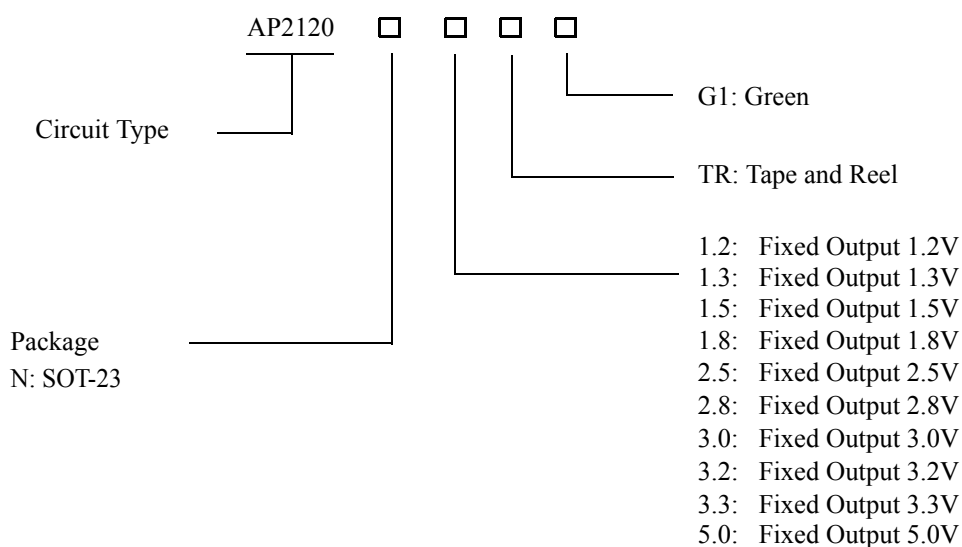
**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2120****Functional Block Diagram**

Figure 3. Functional Block Diagram of AP2120

**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2120****Ordering Information**

| Package | Temperature Range | Part Number     | Marking ID | Packing Type |
|---------|-------------------|-----------------|------------|--------------|
| SOT-23  | -40 to 85°C       | AP2120N-1.2TRG1 | GR4        | Tape & Reel  |
|         |                   | AP2120N-1.3TRG1 | GR5        | Tape & Reel  |
|         |                   | AP2120N-1.5TRG1 | GR6        | Tape & Reel  |
|         |                   | AP2120N-1.8TRG1 | GR7        | Tape & Reel  |
|         |                   | AP2120N-2.5TRG1 | GR8        | Tape & Reel  |
|         |                   | AP2120N-2.8TRG1 | GR9        | Tape & Reel  |
|         |                   | AP2120N-3.0TRG1 | GS2        | Tape & Reel  |
|         |                   | AP2120N-3.2TRG1 | GS3        | Tape & Reel  |
|         |                   | AP2120N-3.3TRG1 | GS4        | Tape & Reel  |
|         |                   | AP2120N-5.0TRG1 | GS5        | Tape & Reel  |

BCD Semiconductor's products, as designated with "G1" suffix in the part number, are RoHS compliant and Green.

**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2120****Absolute Maximum Ratings (Note 1)**

| Parameter                           | Symbol        | Value                | Unit |
|-------------------------------------|---------------|----------------------|------|
| Input Voltage                       | $V_{IN}$      | 6.5                  | V    |
| Enable Input Voltage                | $V_{CE}$      | -0.3 to $V_{IN}+0.3$ | V    |
| Output Current                      | $I_{OUT}$     | 300                  | mA   |
| Junction Temperature                | $T_J$         | 150                  | °C   |
| Storage Temperature Range           | $T_{STG}$     | -65 to 150           | °C   |
| Lead Temperature (Soldering, 10sec) | $T_{LEAD}$    | 260                  | °C   |
| Thermal Resistance (Note 2)         | $\theta_{JA}$ | 250                  | °C/W |
| ESD (Human Body Model)              | ESD           | 2000                 | V    |
| ESD (Machine Model)                 | ESD           | 200                  | V    |

Note 1: Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "Recommended Operating Conditions" is not implied. Exposure to "Absolute Maximum Ratings" for extended periods may affect device reliability.

Note 2: Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device outside of its operating ratings. The maximum allowable power dissipation is a function of the maximum junction temperature,  $T_{J(max)}$ , the junction-to-ambient thermal resistance,  $\theta_{JA}$ , and the ambient temperature,  $T_A$ . The maximum allowable power dissipation at any ambient temperature is calculated using:  $P_{D(max)} = (T_{J(max)} - T_A) / \theta_{JA}$ . Exceeding the maximum allowable power dissipation will result in excessive die temperature.

**Recommended Operating Conditions**

| Parameter                            | Symbol   | Min | Max | Unit |
|--------------------------------------|----------|-----|-----|------|
| Input Voltage                        | $V_{IN}$ | 2   | 6   | V    |
| Operating Junction Temperature Range | $T_J$    | -40 | 85  | °C   |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2120

## Electrical Characteristics

### AP2120-1.2 Electrical Characteristics

( $V_{IN}=2.2V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                                   | Min   | Typ       | Max   | Unit              |
|----------------------------------------|-------------------------------------|--------------------------------------------------------------|-------|-----------|-------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=2.2V$<br>$1mA \leq I_{OUT} \leq 30mA$                | 1.176 | 1.2       | 1.224 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                              |       |           | 6     | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                                          | 150   |           |       | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=2.2V$<br>$1mA \leq I_{OUT} \leq 80mA$                |       | 12        | 40    | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $2.2V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$                 |       | 4         | 16    | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                               |       | 700       | 900   | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                              |       | 700       | 900   |                   |
|                                        |                                     | $I_{OUT}=150mA$                                              |       | 700       | 900   |                   |
|                                        |                                     | $I_{OUT}=200mA$                                              |       | 700       | 900   |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=2.2V$ , $I_{OUT}=0mA$                                |       | 25        | 50    | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=2.2V$                    |       | 65        |       | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                               |       | $\pm 120$ |       | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                              |       | $\pm 100$ |       | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                                 |       | 50        |       | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$ , $I_{OUT}=0$<br>$10Hz \leq f \leq 100kHz$ |       | 15        |       | $\mu V_{rms}$     |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2120

## Electrical Characteristics (Continued)

### AP2120-1.3 Electrical Characteristics

( $V_{IN}=2.3V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                                   | Min   | Typ       | Max   | Unit              |
|----------------------------------------|-------------------------------------|--------------------------------------------------------------|-------|-----------|-------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=2.3V$<br>$1mA \leq I_{OUT} \leq 30mA$                | 1.274 | 1.3       | 1.326 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                              |       |           | 6     | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                                          | 150   |           |       | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=2.3V$<br>$1mA \leq I_{OUT} \leq 80mA$                |       | 12        | 40    | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $2.3V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$                 |       | 4         | 16    | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                               |       | 600       | 800   | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                              |       | 600       | 800   |                   |
|                                        |                                     | $I_{OUT}=150mA$                                              |       | 600       | 800   |                   |
|                                        |                                     | $I_{OUT}=200mA$                                              |       | 600       | 800   |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=2.3V$ , $I_{OUT}=0mA$                                |       | 25        | 50    | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=2.3V$                    |       | 65        |       | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                               |       | $\pm 130$ |       | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                              |       | $\pm 100$ |       | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                                 |       | 50        |       | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$ , $I_{OUT}=0$<br>$10Hz \leq f \leq 100kHz$ |       | 15        |       | $\mu V_{rms}$     |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2120

## Electrical Characteristics (Continued)

### AP2120-1.5 Electrical Characteristics

( $V_{IN}=2.5V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                                   | Min  | Typ       | Max  | Unit              |
|----------------------------------------|-------------------------------------|--------------------------------------------------------------|------|-----------|------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=2.5V$<br>$1mA \leq I_{OUT} \leq 30mA$                | 1.47 | 1.5       | 1.53 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                              |      |           | 6    | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                                          | 150  |           |      | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=2.5V$<br>$1mA \leq I_{OUT} \leq 80mA$                |      | 12        | 40   | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $2.3V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$                 |      | 4         | 16   | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                               |      | 400       | 600  | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                              |      | 400       | 600  |                   |
|                                        |                                     | $I_{OUT}=150mA$                                              |      | 400       | 600  |                   |
|                                        |                                     | $I_{OUT}=200mA$                                              |      | 400       | 600  |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=2.5V$ , $I_{OUT}=0mA$                                |      | 25        | 50   | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=2.5V$                    |      | 65        |      | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                               |      | $\pm 150$ |      | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                              |      | $\pm 100$ |      | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                                 |      | 50        |      | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$ , $I_{OUT}=0$<br>$10Hz \leq f \leq 100kHz$ |      | 15        |      | $\mu V_{rms}$     |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2120

## Electrical Characteristics (Continued)

### AP2120-1.8 Electrical Characteristics

( $V_{IN}=2.8V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min   | Typ       | Max   | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|-------|-----------|-------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=2.8V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 1.764 | 1.8       | 1.836 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |       |           | 6     | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 150   |           |       | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=2.8V$<br>$1mA \leq I_{OUT} \leq 80mA$  |       | 12        | 40    | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $2.3V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |       | 4         | 16    | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |       | 20        | 40    | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |       | 200       | 300   |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |       | 300       | 500   |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=2.8V$ , $I_{OUT}=0mA$                  |       | 25        | 50    | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=2.8V$      |       | 65        |       | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |       | $\pm 180$ |       | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |       | $\pm 100$ |       | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |       | 50        |       | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |       | 30        |       | $\mu V_{rms}$     |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2120

## Electrical Characteristics (Continued)

### AP2120-2.5 Electrical Characteristics

( $V_{IN}=3.5V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min  | Typ                         | Max  | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|------|-----------------------------|------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=3.5V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 2.45 | 2.5                         | 2.55 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |      |                             | 6    | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 150  |                             |      | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=3.5V$<br>$1mA \leq I_{OUT} \leq 80mA$  |      | 12                          | 40   | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $3V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$     |      | 4                           | 16   | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |      | 20                          | 40   | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |      | 200                         | 300  |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |      | 300                         | 500  |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=3.5V$ , $I_{OUT}=0mA$                  |      | 25                          | 50   | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=3.5V$      |      | 65                          |      | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |      | <b><math>\pm 250</math></b> |      | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |      | <b><math>\pm 100</math></b> |      | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |      | 50                          |      | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |      | 30                          |      | $\mu V_{rms}$     |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2120

## Electrical Characteristics (Continued)

### AP2120-2.8 Electrical Characteristics

( $V_{IN}=3.8V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min   | Typ       | Max   | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|-------|-----------|-------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=3.8V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 2.744 | 2.8       | 2.856 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |       |           | 6     | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 150   |           |       | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=3.8V$<br>$1mA \leq I_{OUT} \leq 80mA$  |       | 12        | 40    | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $3.3V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |       | 4         | 16    | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |       | 20        | 40    | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |       | 200       | 300   |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |       | 300       | 500   |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=3.8V$ , $I_{OUT}=0mA$                  |       | 25        | 50    | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=3.8V$      |       | 65        |       | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |       | $\pm 280$ |       | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |       | $\pm 100$ |       | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |       | 50        |       | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |       | 30        |       | $\mu V_{rms}$     |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2120

## Electrical Characteristics (Continued)

### AP2120-3.0 Electrical Characteristics

( $V_{IN}=4V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min  | Typ       | Max  | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|------|-----------|------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=4V$<br>$1mA \leq I_{OUT} \leq 30mA$    | 2.94 | 3.0       | 3.06 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |      |           | 6    | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 150  |           |      | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=4V$<br>$1mA \leq I_{OUT} \leq 80mA$    |      | 12        | 40   | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $3.5V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |      | 4         | 16   | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |      | 20        | 40   | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |      | 200       | 300  |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |      | 300       | 500  |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=4V$ , $I_{OUT}=0mA$                    |      | 25        | 50   | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=4V$        |      | 65        |      | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |      | $\pm 300$ |      | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |      | $\pm 100$ |      | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |      | 50        |      | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |      | 30        |      | $\mu V_{rms}$     |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2120

## Electrical Characteristics (Continued)

### AP2120-3.2 Electrical Characteristics

( $V_{IN}=4.2V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min   | Typ       | Max   | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|-------|-----------|-------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=4.2V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 3.136 | 3.2       | 3.264 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |       |           | 6     | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 150   |           |       | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=4.2V$<br>$1mA \leq I_{OUT} \leq 80mA$  |       | 12        | 40    | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $3.7V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |       | 4         | 16    | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |       | 20        | 40    | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |       | 200       | 300   |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |       | 300       | 500   |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=4.2V$ , $I_{OUT}=0mA$                  |       | 25        | 50    | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=4.2V$      |       | 65        |       | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |       | $\pm 320$ |       | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |       | $\pm 100$ |       | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |       | 50        |       | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |       | 30        |       | $\mu V_{rms}$     |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2120

## Electrical Characteristics (Continued)

### AP2120-3.3 Electrical Characteristics

( $V_{IN}=4.3V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min   | Typ                         | Max   | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|-------|-----------------------------|-------|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=4.3V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 3.234 | 3.3                         | 3.366 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |       |                             | 6     | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 150   |                             |       | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=4.3V$<br>$1mA \leq I_{OUT} \leq 80mA$  |       | 12                          | 40    | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $3.8V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |       | 4                           | 16    | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |       | 20                          | 40    | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |       | 200                         | 300   |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |       | 300                         | 500   |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=4.3V$ , $I_{OUT}=0mA$                  |       | 25                          | 50    | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=4.3V$      |       | 65                          |       | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |       | <b><math>\pm 330</math></b> |       | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |       | <b><math>\pm 100</math></b> |       | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |       | 50                          |       | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |       | 30                          |       | $\mu V_{rms}$     |



# HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR

AP2120

## Electrical Characteristics (Continued)

### AP2120-5.0 Electrical Characteristics

( $V_{IN}=6.0V$ ,  $T_J=25^{\circ}C$ ,  $C_{IN}=1\mu F$ ,  $C_{OUT}=1\mu F$ , **Bold** typeface applies over  $-40^{\circ}C \leq T_J \leq 85^{\circ}C$ , unless otherwise specified.)

| Parameter                              | Symbol                              | Conditions                                     | Min | Typ                         | Max | Unit              |
|----------------------------------------|-------------------------------------|------------------------------------------------|-----|-----------------------------|-----|-------------------|
| Output Voltage                         | $V_{OUT}$                           | $V_{IN}=6.0V$<br>$1mA \leq I_{OUT} \leq 30mA$  | 4.9 | 5.0                         | 5.1 | V                 |
| Input Voltage                          | $V_{IN}$                            |                                                |     |                             | 6   | V                 |
| Output Current                         | $I_{OUT}$                           | $V_{IN}-V_{OUT}=1V$                            | 150 |                             |     | mA                |
| Load Regulation                        | $V_{RLOAD}$                         | $V_{IN}=4.3V$<br>$1mA \leq I_{OUT} \leq 80mA$  |     | 12                          | 40  | mV                |
| Line Regulation                        | $V_{RLINE}$                         | $5.5V \leq V_{IN} \leq 6V$<br>$I_{OUT}=30mA$   |     | 4                           | 16  | mV                |
| Dropout Voltage                        | $V_{DROP}$                          | $I_{OUT}=10mA$                                 |     | 20                          | 40  | mV                |
|                                        |                                     | $I_{OUT}=100mA$                                |     | 200                         | 300 |                   |
|                                        |                                     | $I_{OUT}=150mA$                                |     | 300                         | 500 |                   |
| Quiescent Current                      | $I_Q$                               | $V_{IN}=6.0V$ , $I_{OUT}=0mA$                  |     | 25                          | 50  | $\mu A$           |
| Power Supply Rejection Ratio           | PSRR                                | Ripple 0.5Vp-p, $f=1kHz$<br>$V_{IN}=6.0V$      |     | 65                          |     | dB                |
| Output Voltage Temperature Coefficient | $\Delta V_{OUT}/\Delta T$           | $I_{OUT}=30mA$                                 |     | <b><math>\pm 330</math></b> |     | $\mu V/^{\circ}C$ |
|                                        | $(\Delta V_{OUT}/V_{OUT})/\Delta T$ |                                                |     | <b><math>\pm 100</math></b> |     | ppm/ $^{\circ}C$  |
| Short Current Limit                    | $I_{LIMIT}$                         | $V_{OUT}=0V$                                   |     | 50                          |     | mA                |
| RMS Output Noise                       | $V_{NOISE}$                         | $T_A=25^{\circ}C$<br>$10Hz \leq f \leq 100kHz$ |     | 30                          |     | $\mu V_{rms}$     |

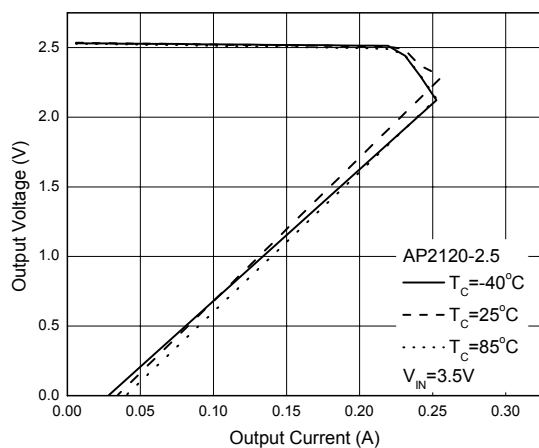
**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2120****Typical Performance Characteristics**

Figure 4. Output Voltage vs. Output Current

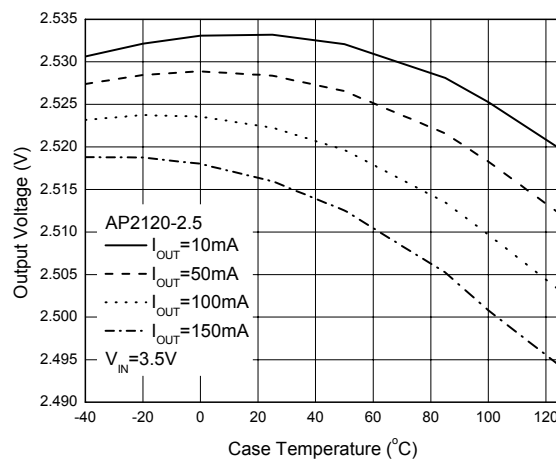


Figure 5. Output Voltage vs. Case Temperature

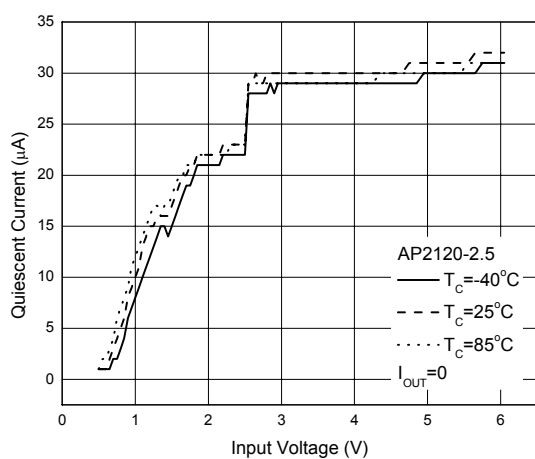


Figure 6. Quiescent Current vs. Input Voltage

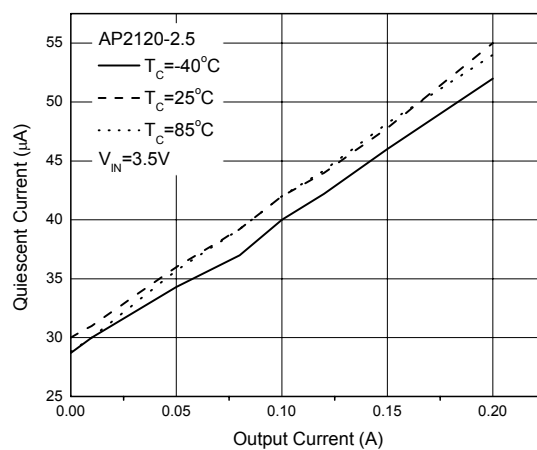


Figure 7. Quiescent Current vs. Output Current

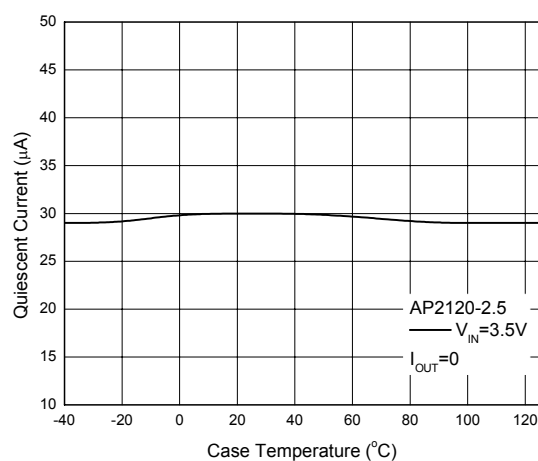
**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2120****Typical Performance Characteristics (Continued)**

Figure 8. Quiescent Current vs. Case Temperature

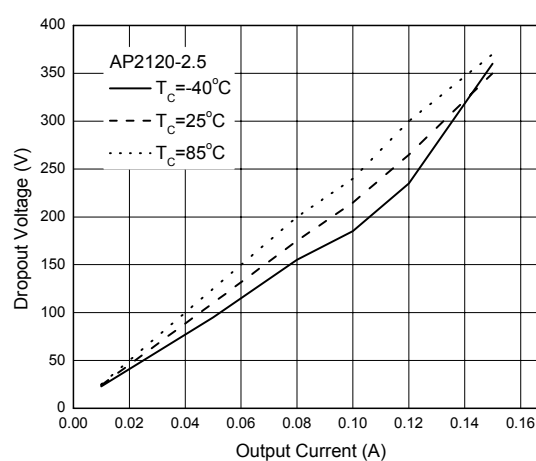


Figure 9. Dropout Voltage vs. Output Current

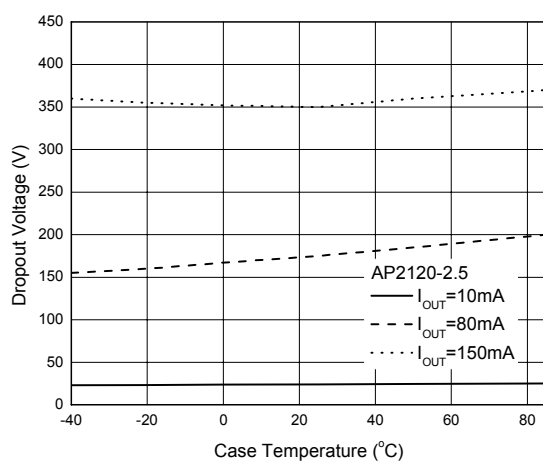
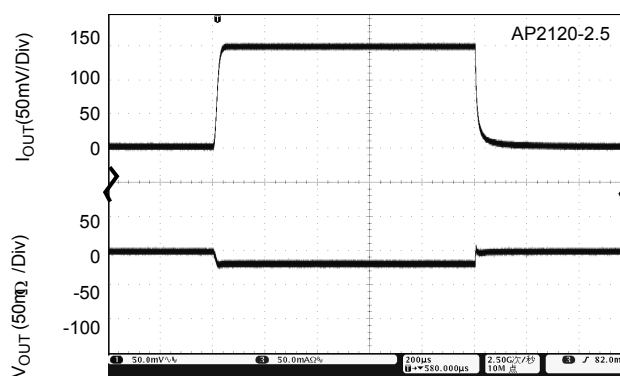


Figure 10. Dropout Voltage vs. Case Temperature

Figure 11. Load Transient ( $I_{\text{OUT}}=0$  to 150mA)

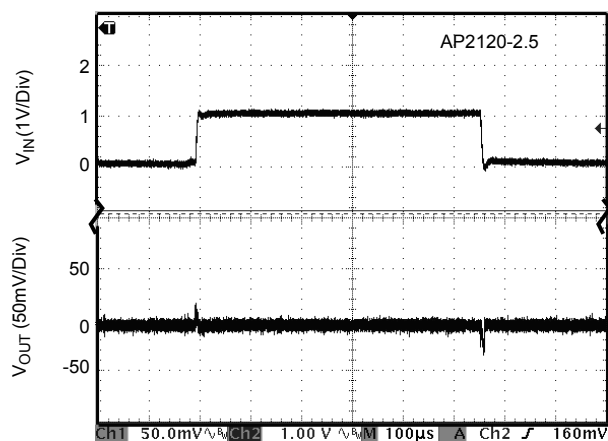
**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2120****Typical Performance Characteristics (Continued)**

Figure 12. Line Transient  
(Condition:  $V_{IN}=2.5V$  to  $3.5V$ ,  $I_{OUT}=10mA$ )

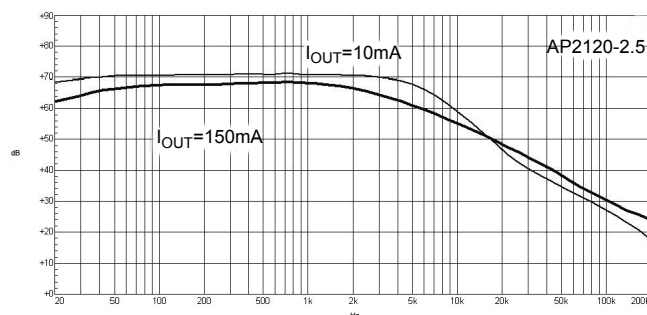


Figure 13. PSRR vs. Frequency

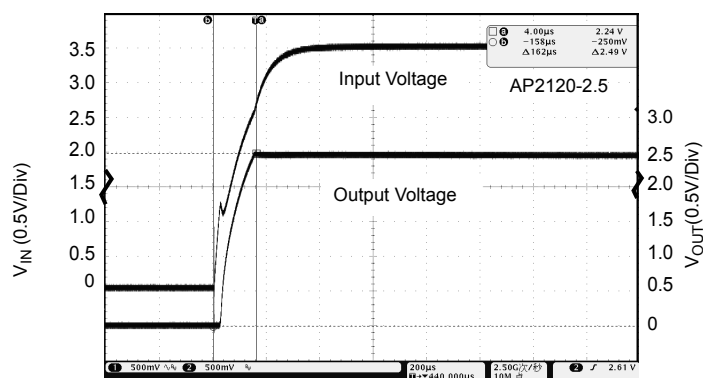
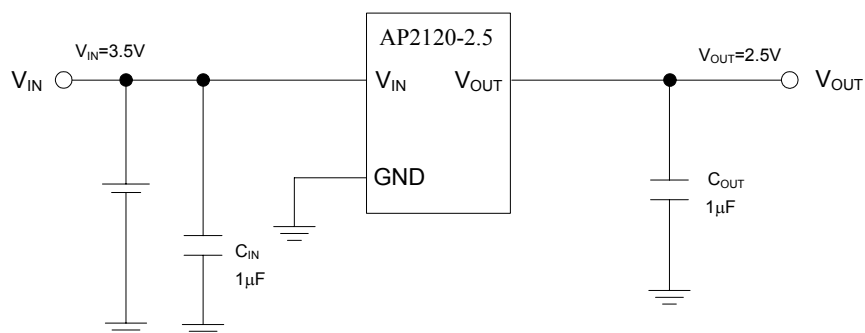
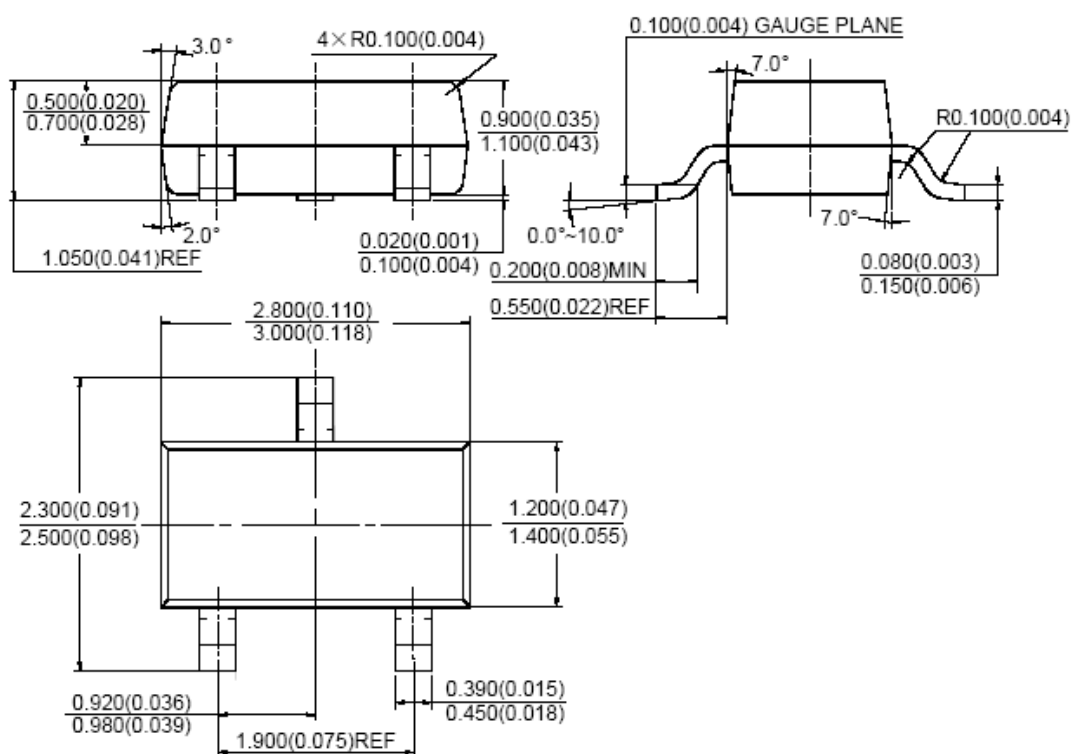


Figure 14. Start-up

**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2120****Typical Application**

Note: Filter capacitors are required at the AP2120's input and output. 1μF capacitor is required at the input. The minimum output capacitance required for stability should be more than 1μF with ESR from 0.01Ω to 100Ω. Ceramic capacitors are recommended.

Figure 15. Typical Application of AP2120

**HIGH SPEED, EXTREMELY LOW NOISE LDO REGULATOR****AP2120****Mechanical Dimensions****SOT-23****Unit: mm(inch)**



## **BCD Semiconductor Manufacturing Limited**

<http://www.bcdsemi.com>

### **IMPORTANT NOTICE**

BCD Semiconductor Manufacturing Limited reserves the right to make changes without further notice to any products or specifications herein. BCD Semiconductor Manufacturing Limited does not assume any responsibility for use of any its products for any particular purpose, nor does BCD Semiconductor Manufacturing Limited assume any liability arising out of the application or use of any its products or circuits. BCD Semiconductor Manufacturing Limited does not convey any license under its patent rights or other rights nor the rights of others.

---

#### **MAIN SITE**

##### **- Headquarters**

##### **BCD Semiconductor Manufacturing Limited**

No. 1600, Zi Xing Road, Shanghai Zizhu Science-based Industrial Park, 200241, China  
Tel: +86-21-24162266, Fax: +86-21-24162277

##### **- Wafer Fab**

##### **Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd.**

800 Yi Shan Road, Shanghai 200233, China  
Tel: +86-21-6485 1491, Fax: +86-21-5450 0008

#### **REGIONAL SALES OFFICE**

##### **Shenzhen Office**

**Shanghai SIM-BCD Semiconductor Manufacturing Co., Ltd., Shenzhen Office**  
Room E, 5F, Noble Center, No.1006, 3rd Fuzhong Road, Futian District, Shenzhen, 518026, China  
Tel: +86-755-8826 7951  
Fax: +86-755-8826 7865

##### **Taiwan Office**

**BCD Semiconductor (Taiwan) Company Limited**  
4F, 298-1, Rui Guang Road, Nei-Hu District, Taipei, Taiwan  
Tel: +886-2-2656 2808  
Fax: +886-2-2656 2806

##### **USA Office**

**BCD Semiconductor Corp.**  
30920 Huntwood Ave. Hayward, CA 94544, USA  
Tel : +1-510-324-2988  
Fax: +1-510-324-2788



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.