

COM Express Compact Module

Low Power Consumption

conga-CA

Best Performance / Watt COM Express™ Module

Compact size for easy integration


Extremely low power consumption,
Flat Panel detection ...

COM 
Express®



Formfactor	COM Express™ Compact, (95 x 95 mm), Type II Connector Layout
CPU	Intel® Atom™ processor Z530 1.6 GHz, 533 MHz FSB and memory bus speed, 512k L2 cache, 45 nm, with Hyper-Threading Technology and Intel® Virtualization Technology Intel® Atom™ processor Z510 1.1 GHz, 400 MHz FSB and memory bus speed, 512k L2 cache, 45 nm
DRAM	Up to 1 GByte on-board DDR2 400/533 MHz
Chipset	Intel® System Controller Hub US15W
Ethernet	Gigabit Ethernet Realtek RTL8111
I/O Interfaces	2x SATA, 1x EIDE (UDMA-66/100), PCI bus Rev. 2.3, LPC bus, 8x USB 2.0, I²C bus, up to 2 PCI Express links optional
Sound	Intel® High Definition Audio (Intel® HD Audio)
Graphics	Intel® Graphics Media Accelerator 500 (Intel® GMA 500), up to 256 MByte frame buffer supporting Direct X 9.0E and Open GL 2.0
Video Decode Acceleration	Full hardware acceleration for MPEG2, MPEG4, H.264, WMV9 and VC1
Motion Video Support	Single channel 112 MHz LVDS transmitter, support for flat panels (1920x1080) with 1x18 and 1x24 bit data mapping up to resolutions of 1366x768 pixel Single channel SDVO interface, supports resolutions up to 1280x1024 pixel Dual independent display support
congatec Board Controller	Multi Stage Watchdog, non-volatile User Data Storage, Manufacturing and Board Information, Board Statistics, BIOS Setup, Data Backup, I²C bus (fast mode, 400 kHz, multi-master), Power Loss Control
Embedded BIOS Features	OEM Logo, OEM CMOS Defaults, LCD Control, Display Auto Detection, Backlight Control, Flash Update, based on AMIBIOS®
Power Management	ACPI 3.0 with battery support
Operating Systems	Microsoft® Windows XP, Microsoft® Windows® embedded Standard, Microsoft® Windows CE 6.0, Linux 2.6, QNX 6.x
Power Consumption	Typ. application 5 Watt
Temperature	Operating: 0 to +60°C Storage: -20 to +80°C, extended temperature versions in preparation
Humidity	Operating: 10 to 90% r. H. non cond. Storage: 5 to 95% r. H. non cond.
Size	95 x 95 mm (3¾" x 3¾")

Block Diagram conga-CA

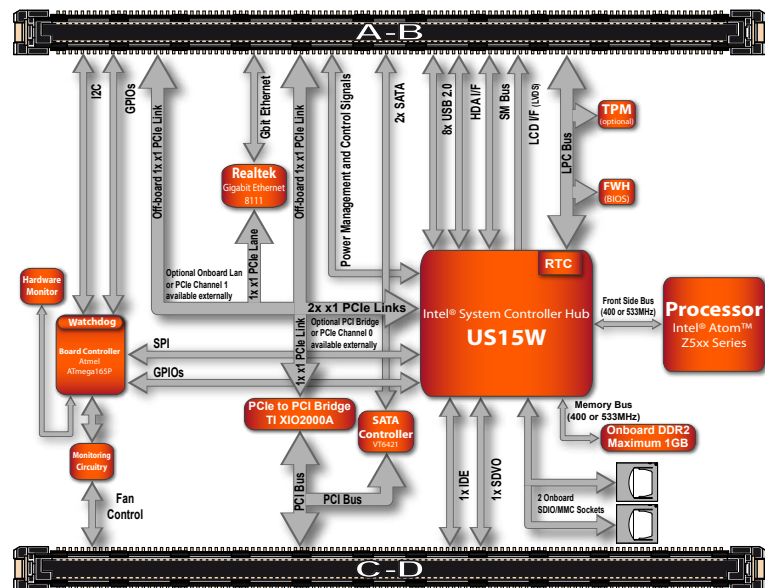

Order Information conga-CA

Article	PN	CPU-Z510	CPU-Z530	512MB onboard	1.0 GB onboard	SATA	GB Ethernet	PCIe	PCI	Onboard SDIO MMC Sockets
conga-CA/Z510-512	087477	✓		✓		✓	✓		✓	✓
conga-CA/Z510-1G	044412	✓			✓	✓	✓		✓	✓
conga-CA/Z530-1G	061125		✓		✓	✓	✓		✓	✓
conga-CA/Z530-1G GBE/PCIe	061127		✓		✓		✓	1x x1		

Article	PN	Description
conga-CA/HSP-B	055441	Heatspreader, Standoff with 2.7mm bore hole
conga-CA/HSP-T	061788	Heatspreader, Standoff with M2.5mm thread

Engineering Tools / Accessories for COM Express®

conga-CEVAL	065749	Evaluation carrier board for COM-Express-modules
conga-Cdebug	047854	COM-Express debugging platform. Including cable for COM, PS/2 and VGA.
conga-CKIT	064714	COM-Express-Starterkit, incl. conga-CEVAL, conga-CDEBUG, conga-FPA1 (PN: 024241), Dual DVI-D ADD2 card, Power supply, USB-Stick, ... Without COM Express-module
conga-MCB	020715	Mini Carrier Board for COM Express with smart battery manager interface for mobile applications.
conga-SBM²C-module	014141	SMART Battery Manager Module for COM Express
conga-SBM²C-kit	029874	Starterkit to evaluate SBM-Features for COM Express with SMART-Battery Manager Module and cable set
conga-SBM²C Licence and Design Kit	025478	SMART Battery Manager Module Design Kit for COM including licence agreement for costumer integration, Hardware design files (Schematics, Bill of Material), Battery Manager Firmware (incl. commented source code), AVR-Programming Tool AT90 JTAG ICE MKII
conga-LDVI/EPI	011115	LVDS to DVI converter board for digital flat panels with onboard EEPROM
conga-HDMI/Display Port adapter	500014	The conga-HDMI/DisplayPort adapter is used to convert the chipset graphic ports Port-B, Port-C and Port-D to the HDMI or DisplayPort Interface
DVI-D ADD2 Card	058500	ADD2 display adapter card with single DVI-D digital output. Suitable for all Intel based platforms that support Serial Digital Display Outputs (SDVO) on the standard, x16 PCI Express Graphics (PEG) port.
Dual DVI-D ADD2 Card	013226	ADD2 display adapter card with dual independent DVI-D output. Suitable for all Intel based platforms that support Serial Digital Display Outputs (SDVO) on the standard, x16 PCI Express Graphics (PEG) port.
conga-FPA2	047250	Flatpanel prototype adapter to develop your own flatpanel adapter Including cables set.
COM-Express-carrierboard-Socket-5	400007	Connector for COM-Express carrier boards, height 5mm, packing unit 4 pieces



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.