


not recommended for new design in

Features

- ◆ Ultra wide 4 : 1 input range
- ◆ Extended operating temperature range
-40°C to +85°C
- ◆ I/O isolation 1500 VDC
- ◆ Input filter meets EN 55022, class A and
FCC, Level A
- ◆ Remote On/Off
- ◆ Adjustable output
- ◆ Industry standard footprint
- ◆ Shielded metal case with insulated
baseplate
- ◆ Optional heatsink
- ◆ Lead free design - RoHS compliant
- ◆ 3-year product warranty

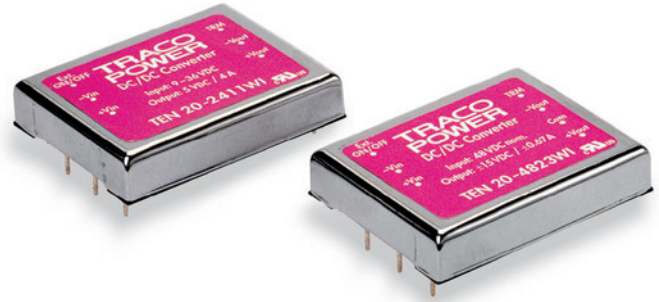

The TEN 20WI series is a family of high performance 20W DC/DC converter modules featuring ultra wide 4:1 input voltage ranges in a compact 2" x 1.6" low profile package with industry-standard footprint. A very high efficiency allows an operating temperature range of -40°C to 85°C. A built-in EMI input filter complies with EN 55022, class A. Further standard features include remote On/Off, output voltage trimming, over voltage protection and short-circuit protection. Typical applications for these converters are battery operated equipment and distributed power architectures in communication and industrial electronics, everywhere where isolated, tightly regulated voltages are required.

Models

| Order code | Input voltage range | Output voltage | Output current max. | Efficiency typ. |
|---------------|--|----------------|---------------------|-----------------|
| TEN 20-2411WI | 9 – 36 VDC (24 VDC nominal) | 5 VDC | 4'000 mA | 79 % |
| TEN 20-2412WI | | 12 VDC | 1'670 mA | 81 % |
| TEN 20-2413WI | | 15 VDC | 1'330 mA | 81 % |
| TEN 20-2421WI | | ±5 VDC | ±2'000 mA | 79 % |
| TEN 20-2422WI | | ±12 VDC | ±835 mA | 81 % |
| TEN 20-2423WI | | ±15 VDC | ±665 mA | 82 % |
| TEN 20-4811WI | 18 – 75 VDC (48 VDC nominal) | 5 VDC | 4'000 mA | 80 % |
| TEN 20-4812WI | | 12 VDC | 1'670 mA | 81 % |
| TEN 20-4813WI | | 15 VDC | 1'330 mA | 81 % |
| TEN 20-4821WI | | ±5 VDC | ±2'000 mA | 79 % |
| TEN 20-4822WI | | ±12 VDC | ±835 mA | 83 % |
| TEN 20-4823WI | | ±15 VDC | ±665 mA | 84 % |

Input Specifications

| | |
|-----------------------------------|--|
| Input current at no load | 24 Vin models: 35 mA typ. 48 Vin models: 25 mA typ. |
| Input current at full load | 24 Vin models: 1000 mA typ. 48 Vin models: 500 mA typ. |
| Surge voltage (100 msec. max.) | 24 Vin models: 50 V max. 48 Vin models: 100 V max. |
| Conducted noise (input) | 24 Vin models: EN 55022 level A, FCC part 15, level A without external components 48 Vin models: with capacitor 2.2 µF/100V, 1812 MLCC |
| ESD (input) | EN 61000-4-2, perf. criteria B |
| Fast transient (input) | EN 61000-4-4, perf. criteria B |
| Surge (input) | EN 61000-4-5, perf. criteria B |

Output Specifications

| | |
|---|--|
| Voltage set accuracy | ±2 % |
| Output voltage adjustment | ±10 % |
| Regulation | – Input variation Vin min. to Vin max. – Load variation 25 – 100%: single output models: ±0.5 % max. dual output models: ±3 % max. (balanced load) ±5 % max. (load cross variation 25 % / 100 %) |
| Temperature coefficient | ±0.02 %/K |
| Ripple and noise (20 MHz Bandwidth) | single output models: 75 mVpk-pk max. dual output models: 100 mVpk-pk max. |
| Start up time (nominal Vin and constant resistive load) | 20 ms typ. |
| Transient Response (25% load step change) | 500 µs typ. |
| Short circuit protection | indefinite (automatic recovery) |
| Over load protection | 150 % of Iout max typ. foldback |
| Over voltage protection | 5 Vout models: 6.2 V 12 Vout models: 15 V 15 Vout models: 18 V |
| Minimum load | 10% of rated max current (operation at lower load condition will not damage these converters, however, they may not meet all listed specifications) |
| Capacitive load | 5 Vout models / ± 5 Vout models: 6'800 µF max. / ±3'400 µF max. 12 Vout models / ±12 Vout models: 2'200 µF max. / ±680 µF max. 15 Vout models / ±15 Vout models: 755 µF max. / ±450 µF max. |

General Specifications

| | | |
|---|---|--|
| Temperature ranges | – Operating – Case temperature – Storage | –40°C to +85°C +100°C max. –55°C to +105°C |
| Thermal impedance | – with heat-sink TEN-HS2 – without heat-sink | 8.24 K/watt 10 K/watt |
| Derating | | see graphs on page 3 to 5 |
| Humidity (non condensing) | | 95 % rel H max. |
| Reliability, calculated MTBF (MIL-HDBK-217F, at +70°C, ground benign) | | >1.9 Mio. h |
| Isolation voltage (60 sec.) | – Input/Output | 1'500 VDC |
| Isolation capacitance | – Input/Output | 300 pF typ. |
| Isolation resistance | – Input/Output (500 VDC) | >1'000 M Ohm |


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications

| | | |
|-----------------------------|--|---|
| Switching frequency (fixed) | | 300 kHz typ. (Pulse width modulation PWM) |
| Vibration | | 10–55Hz, 2G, 30 minutes along X,Y,Z |
| Remote On/Off | – ON: – OFF: – OFF idle current: | 3.5 ... 12 VDC or open circuit. 0 ... 1.2 VDC or short circuit pin 3 and pin 2 20 mA typ. |
| Safety standards | | UL 1950, IEC/EN 60950-1 compliance up to 60 VDC input voltage (SELV limit) |
| Safety approvals | – UL/cUL | www.ul.com > UL File no.: e188913 |
| Environmental compliance | – Reach – RoHS | www.tracopower.com/products/reach-declaration.pdf RoHS directive 2011/65/EU |


Output Voltage Adjustment

Trim up



| Ru [kohm]* | | 5V | 12V | 15V |
|----------------------|------|-----|-----|-----|
| output | | | | |
| +5% | 3.9 | 56 | 470 | |
| +10% | 0.47 | 6.8 | 2.2 | |
| output ±5V ±12V ±15V | | | | |
| +5% | 10 | 22 | 39 | |
| +10% | 0.82 | 1.5 | 6.8 | |

Trim down





| Rd [kohm]* | | 5V | 12V | 15V |
|----------------------|------|-----|-----|-----|
| output | | | | |
| -5% | 5.6 | 47 | 56 | |
| -10% | 0.68 | 2.7 | 1.8 | |
| output ±5V ±12V ±15V | | | | |
| -5% | 15 | 47 | 47 | |
| -10% | 1.2 | 10 | 8.2 | |

*approximate values


Power De-rating

- ⋯ Natural convection with heat-sink TEN-HS2
- Natural convection without heat-sink

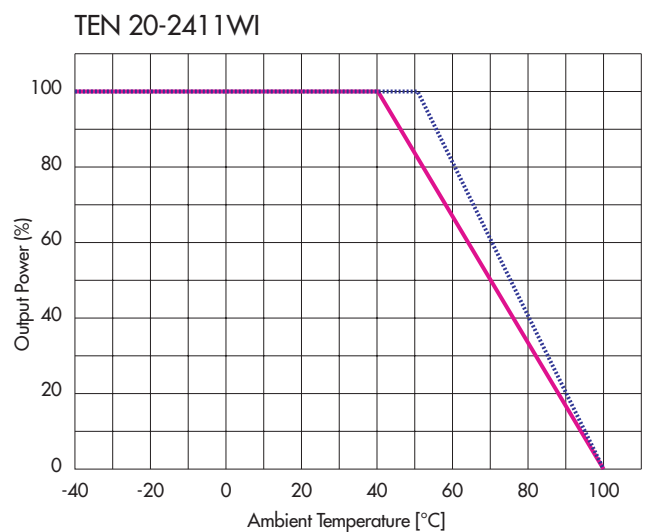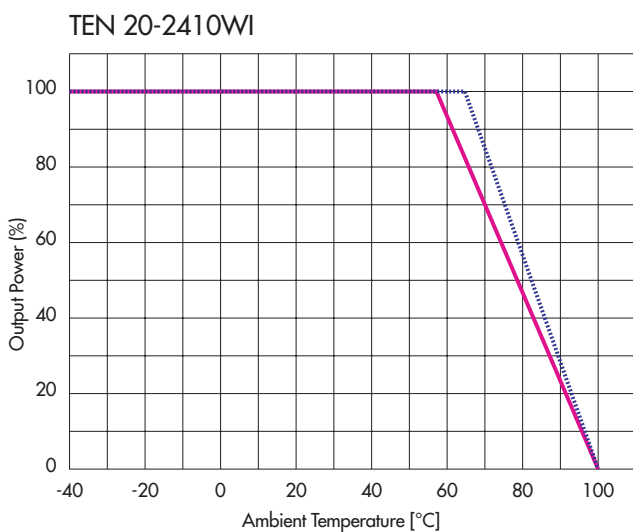


Power De-rating


TEN 20-2412WI

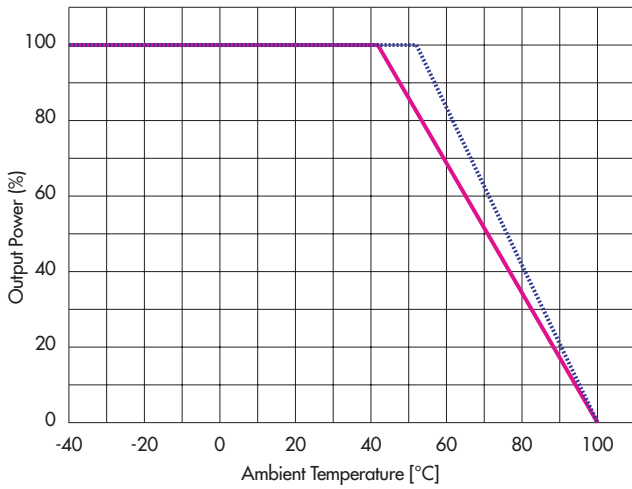


TEN 20-2413WI

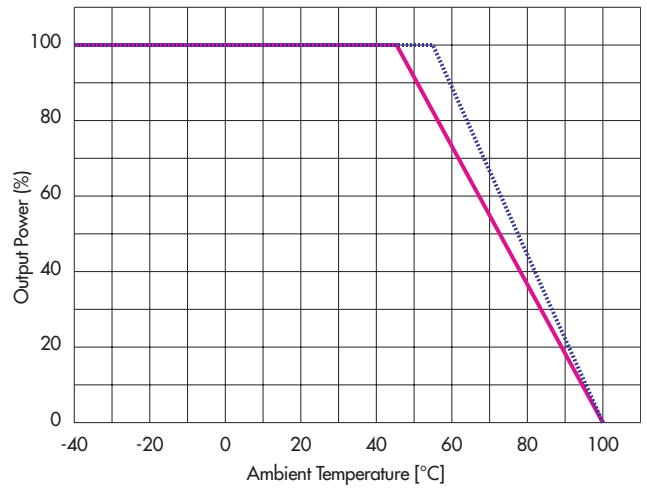


TEN 20-2421WI

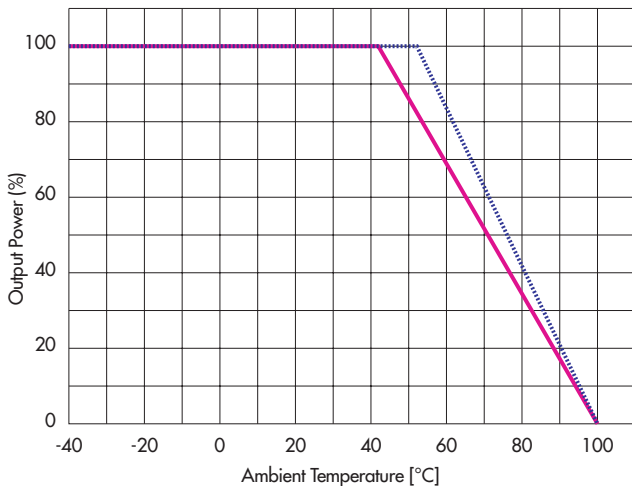


TEN 20-2422WI

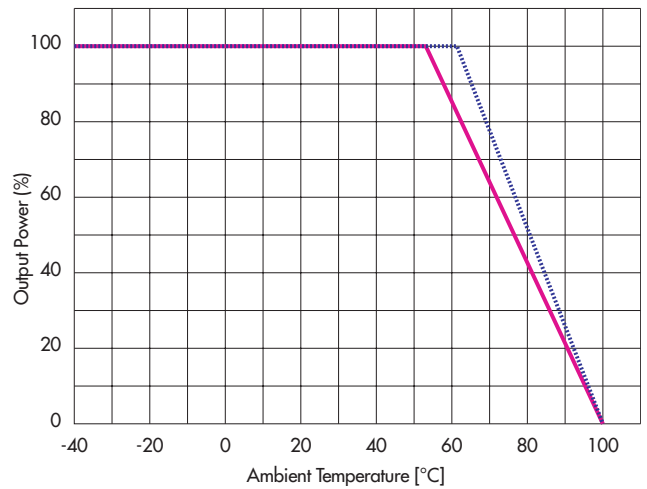

TEN 20-2423WI

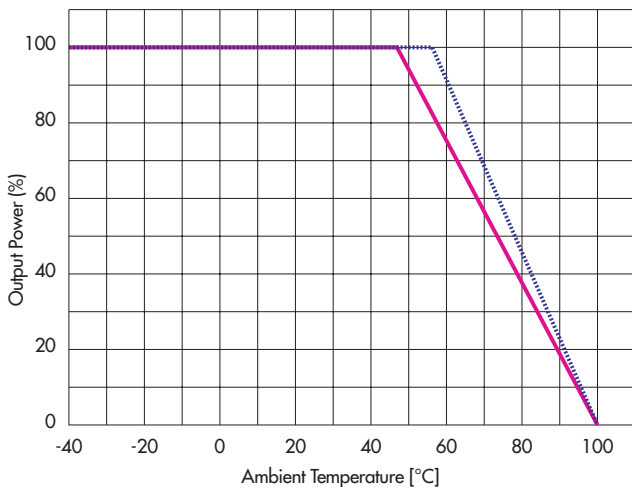


TEN 20-4810WI

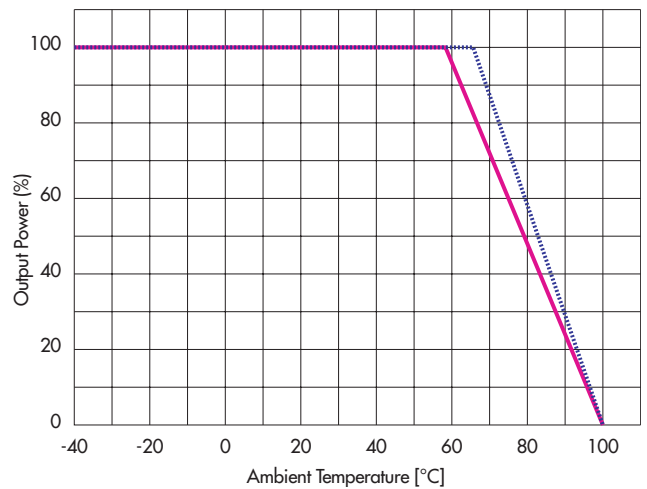


Power De-rating


TEN 20-4811WI

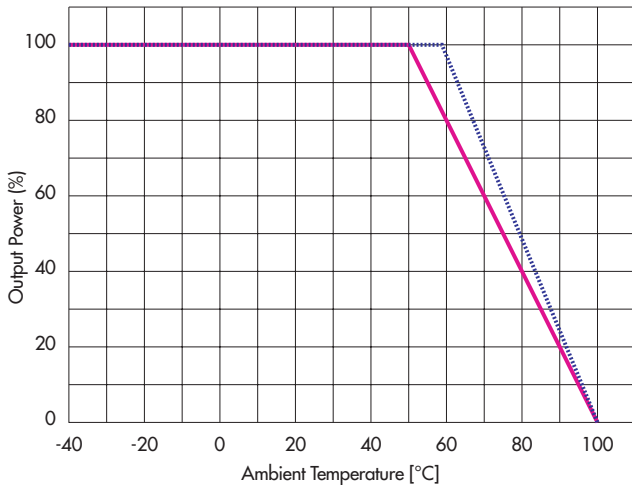


TEN 20-4812WI

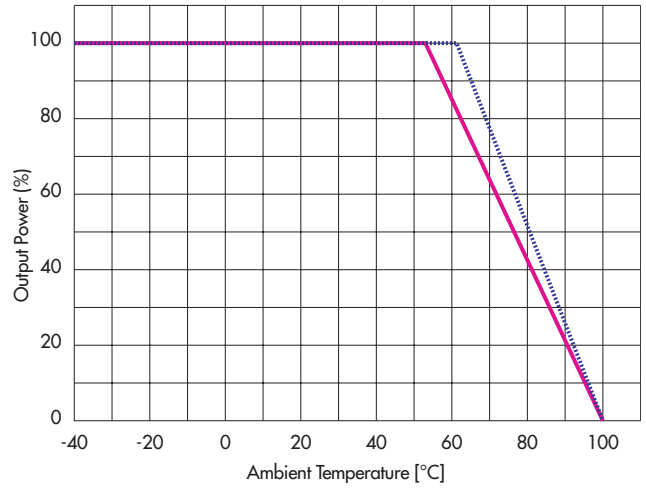


TEN 20-4813WI

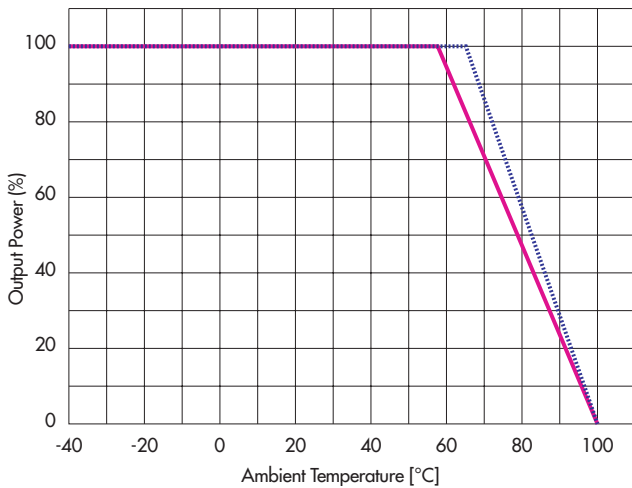


TEN 20-4821WI

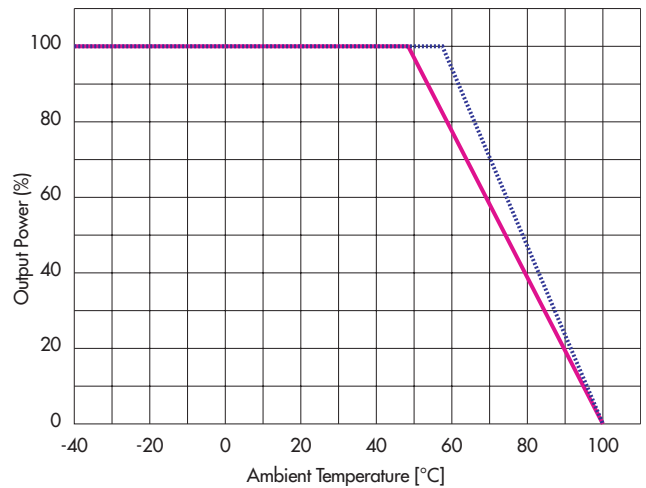

TEN 20-4822WI

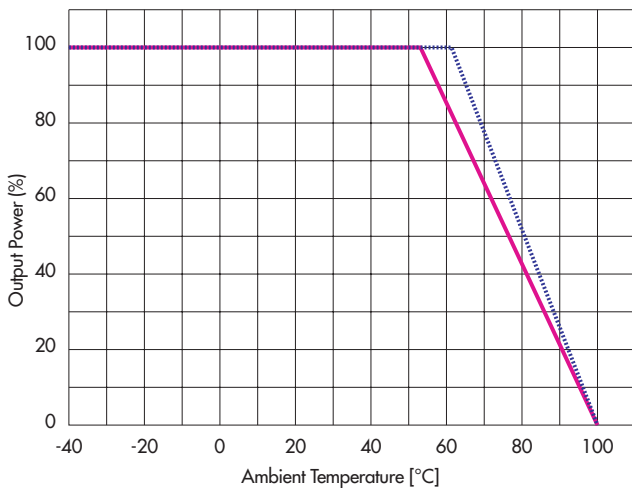


TEN 20-4823WI

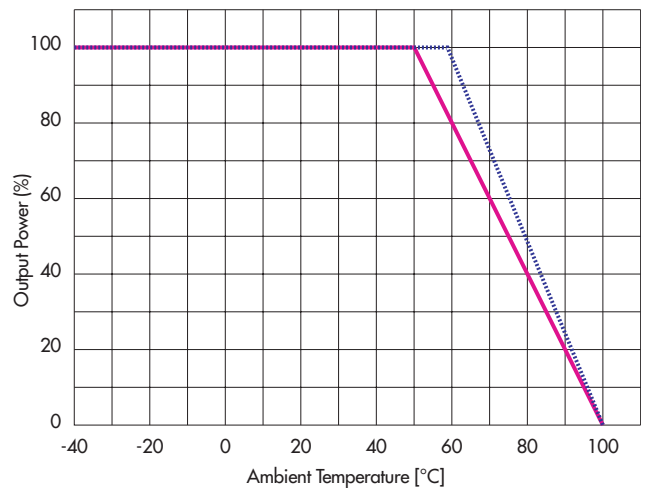

Physical Specifications

| | |
|-----------------------|------------------------|
| Casing material | copper, nickel plated |
| Baseplate material | non conductive FR4 |
| Potting material | epoxy (UL 94V-0 rated) |
| Weight | 50 g (1.2oz) |
| Soldering temperature | max. 265°C / 10 sec. |


Outline Dimensions

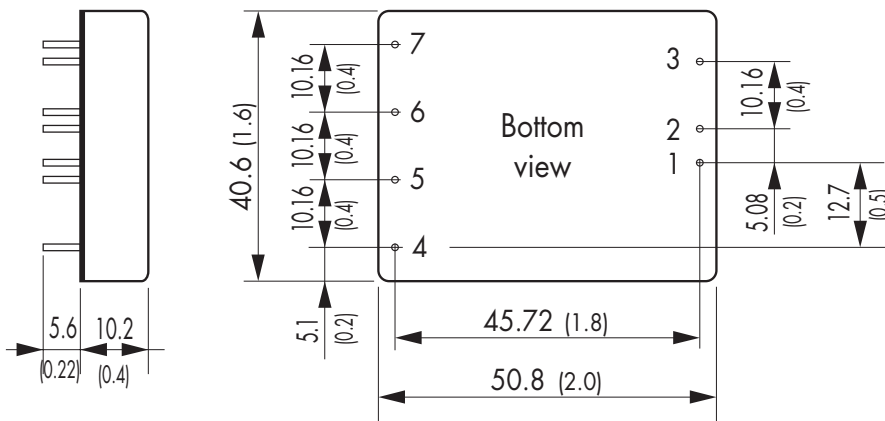



| Pin-Out | | |
|---------|---------------|------------|
| Pin | Single | Dual |
| 1 | +Vin (Vcc) | +Vin (Vcc) |
| 2 | -Vin (GND) | -Vin (GND) |
| 3 | Remote On/Off | |
| 4 | No pin | +Vout |
| 5 | +Vout | Common |
| 6 | -Vout | -Vout |
| 7 | Trim | |

Dimensions in [mm], () = Inch
 Pin diameter: 1.0 ±0.05 (0.02 ±0.002)
 Pin pitch tolerances: ±0.35 (±0.014)
 Casing tolerances: ±0.5 (±0.02)

Heat-sink TEN-HS2

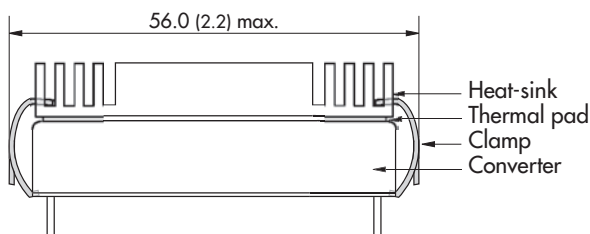

Order code: TEN-HS2
 (cont.: heat-sink, thermal pad, 2 clamps)
Material: Aluminum
Finish: Anodic treatment (black)
Weight: 19 g (0.67oz) (without converter)

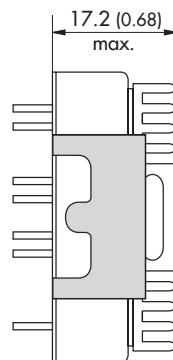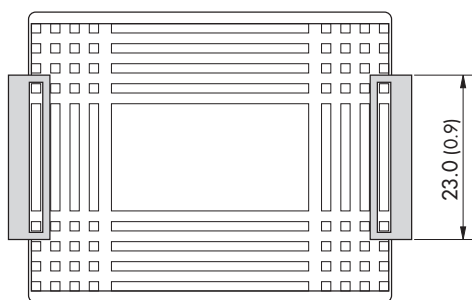

Note:
 The product label on converter has to be removed before mounting the heat-sink.
 For volume orders converters will be supplied with heat-sinks already mounted.
 Please contact factory for quotation.
 Separate heat-sinks are only available for prototypes and small quantity orders.

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.