



ANGLESTAR® PROTRACTOR SYSTEM (APS)

SPECIFICATIONS

- ◆ Complete angle measurement system
- ◆ Battery or external powered
- ◆ Ranges: $\pm 19.99^\circ$, $\pm 45.0^\circ$ and 0 to $+90^\circ$
- ◆ Remote sensing up to 200 feet

The AngleStar® Protractor System (APS) is a ready to use, stand-alone system for angle measurements. The system incorporates an AngleStar® ratiometric electronic clinometer, a digital LCD display, and a four foot interconnecting cable (*cable lengths up to 200 feet are available, consult factory for details*).

This system will operate for 500 hours on one 9 volt battery (not included), or may be powered from an external power source between +9 and +15 VDC, drawing minimal current. The display may be mounted up to 200 feet from the sensor for remote sensing applications such as drilling equipment or tower crane overload protection.

There are three systems to choose from; ± 19.99 degrees with 0.01 degree resolution, $\pm 45^\circ$ or 0-90°, both having 0.1 degree resolution.

FEATURES

- ◆ Separate sensor and display
- ◆ Remote sensing up to 200 feet
- ◆ External power jack
- ◆ 500 hour battery life
- ◆ Integral easel stand for readout

APPLICATIONS


- ◆ Crane safety systems
- ◆ Crawler drill mast angle
- ◆ Antenna positioning
- ◆ Machine tool angle
- ◆ Platform leveling/monitoring
- ◆ Audio speaker array alignment

PERFORMANCE SPECIFICATIONS

ELECTRICAL	
Battery life	500 hours (approx.)
External power	+9 to +15VDC
Linearity	
P/N's 02160023-000 and 02160021-000 ($\pm 19.99^\circ$ & $\pm 45^\circ$ models)	
Null to 10°	$\pm 0.1^\circ$
10° to 45°	$\pm 1\%$ of reading
P/N 02160025-000 (0 to $+90^\circ$ model)	
0° to $+90^\circ$	$\pm 2\%$ of reading
Null repeatability	$\pm 0.1^\circ$
Cross axis error	$< 1\%$
Sensor time constant	0.3 seconds
Sensor frequency response	0.5Hz
ENVIRONMENTAL/MECHANICAL	
Temperature range	-18° to $+55^\circ\text{C}$ (0 to $+131^\circ\text{F}$)
Cable	Four conductors, 26 AWG, PVC jacket, 4 foot length standard

* All values are nominal unless otherwise noted!

DIMENSIONS

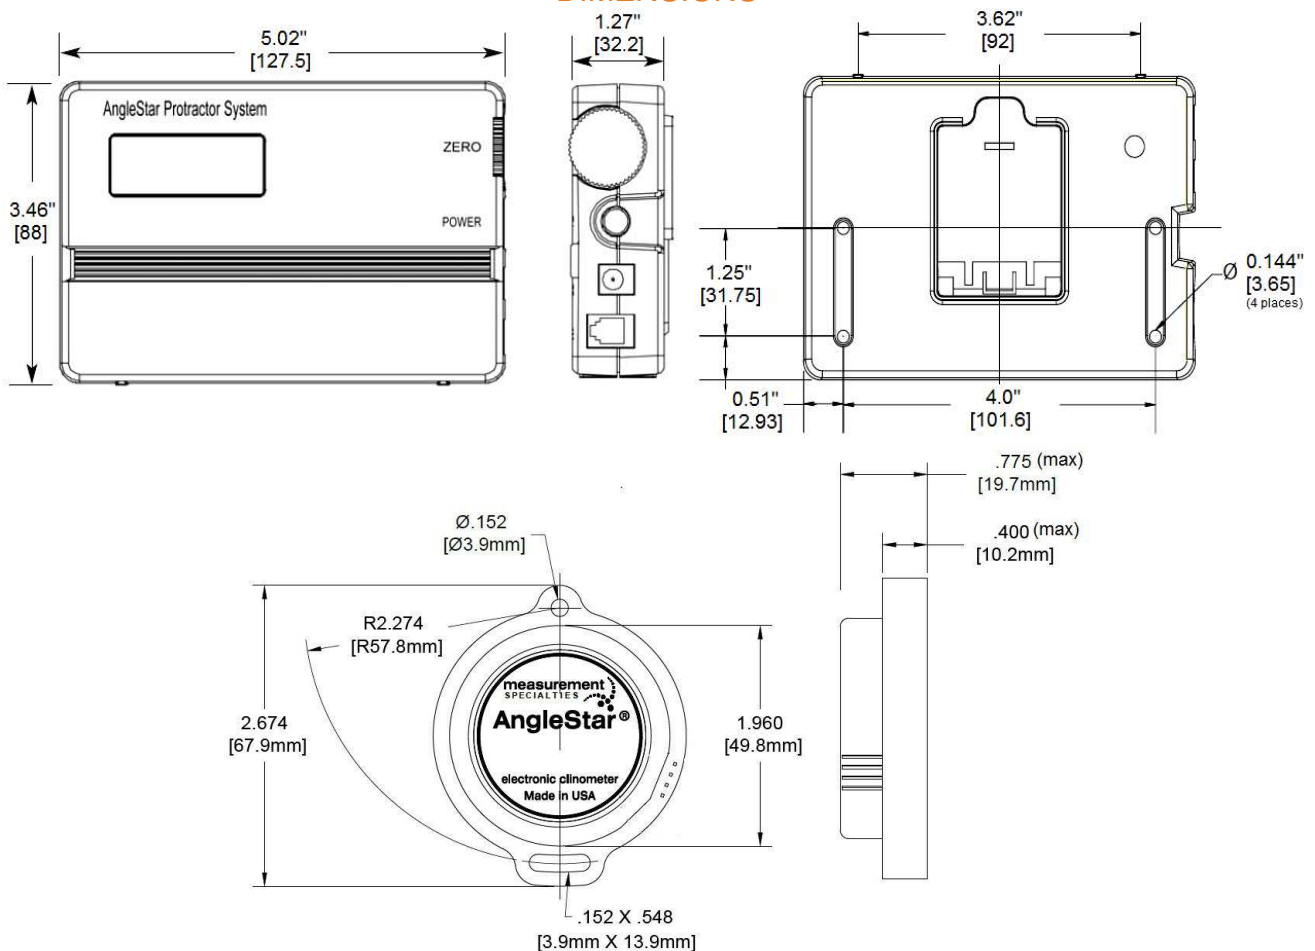

Dimensions are in inches [mm], and are nominal unless otherwise specified

ORDERING INFORMATION

MODEL	MEASUREMENT RANGE	PART NUMBER
Standard	±45°	02160021-000
High Resolution	±19.99°	02160023-000
90 Degree	0 to +90°	02160025-000

OPTIONS	
NIST calibration	0216002X-400

ACCESSORIES	
10 foot cable assembly	04160001-010
20 foot cable assembly	04160001-020
30 foot cable assembly	04160001-030
40 foot cable assembly	04160001-040
50 foot cable assembly	04160001-050
100 foot cable assembly	04160001-100
150 foot cable assembly	04160001-150
200 foot cable assembly	04160001-200

NORTH AMERICA

Measurement Specialties, Inc.,
 a TE Connectivity Company
 Phone: 800-522-6752
 Email: customercare.hmpt@te.com

EUROPE

MEAS Deutschland GmbH (Europe)
 a TE Connectivity Company
 Phone: 800-440-5100
 Email: customercare.tlse@te.com

ASIA

Measurement Specialties (China), Ltd.,
 a TE Connectivity Company
 Phone: 0400-820-6015
 Email: customercare.shzn@te.com

TE.com/sensorsolutions

Measurement Specialties, Inc., a TE Connectivity company.

Measurement Specialties, TE Connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2015 TE Connectivity Ltd. family of companies All Rights Reserved.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.