


MKP3V120, MKP3V240



Description

Bidirectional devices designed for direct interface with the ac power line. Upon reaching the breakover voltage in each direction, the device switches from a blocking state to a low voltage on-state. Conduction will continue like a Triac until the main terminal current drops below the holding current. The plastic axial lead package provides high pulse current capability at low cost. Glass passivation insures reliable operation.

Features

- High Pressure Sodium Vapor Lighting
- Strobes and Flashers
- Ignitors
- High Voltage Regulators
- Pulse Generators
- Used to Trigger Gates of SCR's and Triac
-  Indicates UL Registered – File #E128662
- These are Pb-Free Devices

Axial Lead

AXIAL LEAD
CASE 59
STYLE 2



Functional Diagram



Additional Information



Datasheet



Resources



Samples

Maximum Ratings ($T_J = 25^\circ\text{C}$ unless otherwise noted)

| Rating | Symbol | Value | Unit |
|--|--------------------------------------|-----------------------|------------------|
| Peak Repetitive Off-State Voltage (Note 1) (– 40 to 125°C, Sine Wave, 50 to 60 Hz, Gate Open) | V_{DRM} V_{RRM} | ± 90 ± 180 | V |
| On-State RMS Current (All Conduction Angles; $T_L = 80^\circ\text{C}$, Lead Length = 3/8") | $I_{\text{T (RMS)}}$ | ± 1.0 | A |
| Peak Non-Repetitive Surge Current (60 Hz One Cycle, Sine Wave, $T_J = 125^\circ\text{C}$) | I_{TSM} | ± 20 | A |
| Operating Junction Temperature Range | T_J | -40 to +125 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{stg} | -40 to +150 | $^\circ\text{C}$ |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

Thermal Characteristics

| Rating | Symbol | Value | Unit |
|--|-----------------------|-------|--------------------|
| Thermal Resistance, Junction-to-Lead (Lead Length = 3/8") | $R_{\theta\text{JL}}$ | 15 | $^\circ\text{C/W}$ |
| Lead Solder Temperature (Lead Length $\geq 1/16"$ from Case, 10 s Max) | T_L | 260 | $^\circ\text{C}$ |

Electrical Characteristics - OFF ($T_j = 25^\circ\text{C}$ unless otherwise noted; Electricals apply in both directions)

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|------------------|-----|-----|-----|---------------|
| Repetitive Peak Off–State Current (50 to 60 Hz Sine Wave) $V_{\text{DRM}} = 90\text{V}$, MKP3V120 $V_{\text{DRM}} = 180\text{V}$, MKP3V240 | I_{DRM} | - | - | 10 | μA |

Electrical Characteristics - ON ($T_j = 25^\circ\text{C}$ unless otherwise noted; Electricals apply in both directions)

| Characteristic | Symbol | Min | Typ | Max | Unit | |
|--|-----------------|---|-----|-----|------------|---|
| Breakover Voltage | V_{BO} | MKP3V120 $I_{\text{BO}} = 200 \mu\text{A}$ | 110 | - | 130 | V |
| | | MKP3V240 $I_{\text{BO}} = 200 \mu\text{A}$ | 220 | - | 250 | |
| Peak On–State Voltage ($I_{\text{TM}} = 1 \text{ A Peak}$, Pulse Width $\leq 300 \mu\text{s}$, Duty Cycle $\leq 2\%$) | V_{TM} | - | 1.1 | 1.5 | V | |
| Dynamic Holding Current (Sine Wave, 60 Hz, $R_L = 100 \Omega$) | I_{H} | - | - | 100 | mA | |
| Switching Resistance (Sine Wave, 50 to 60 Hz) | R_s | 0.1 | - | - | k Ω | |

Dynamic Characteristics

| Characteristic | Symbol | Min | Typ | Max | Unit |
|--|--------|-----|-----|-----|------------------|
| Critical Rate–of–Rise of On–State Current, Critical Damped Waveform Circuit ($I_{\text{PK}} = 130 \Omega$, Pulse Width = 10 μsec) | dv/dt | - | 120 | - | V/ μs |

Voltage Current Characteristic of SCR

| Symbol | Parameter |
|-----------|---|
| V_{DRM} | Peak Repetitive Forward Off State Voltage |
| I_{DRM} | Peak Forward Blocking Current |
| V_{RRM} | Peak Repetitive Reverse Off State Voltage |
| I_{RRM} | Peak Reverse Blocking Current |
| V_{TM} | Maximum On State Voltage |
| I_H | Holding Current |



Figure 1. Maximum Case Temperature

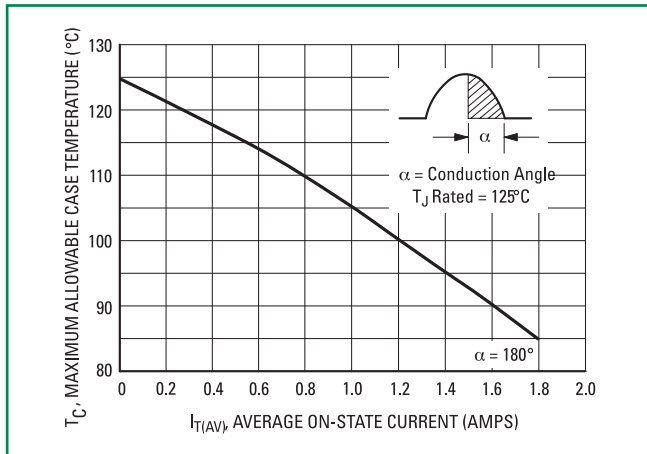


Figure 2. Maximum Ambient Temperature

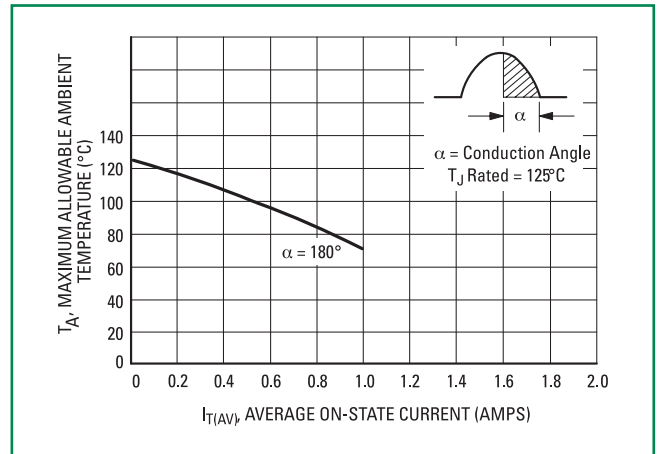


Figure 3. Typical Forward Voltage



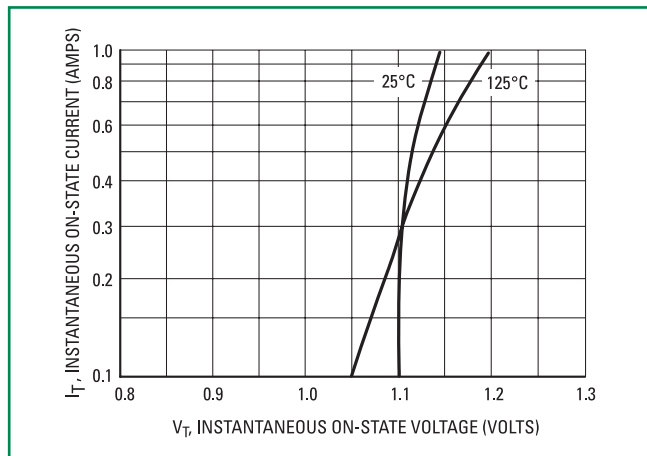


Figure 4. Typical Power Dissipation

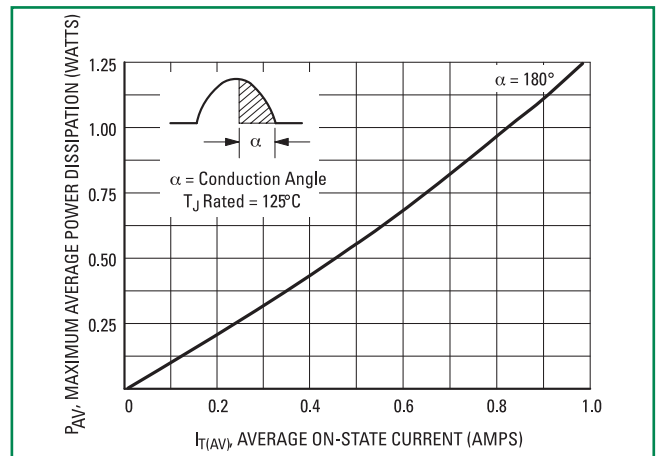

Thermal Characteristics

Figure 5. Thermal Response

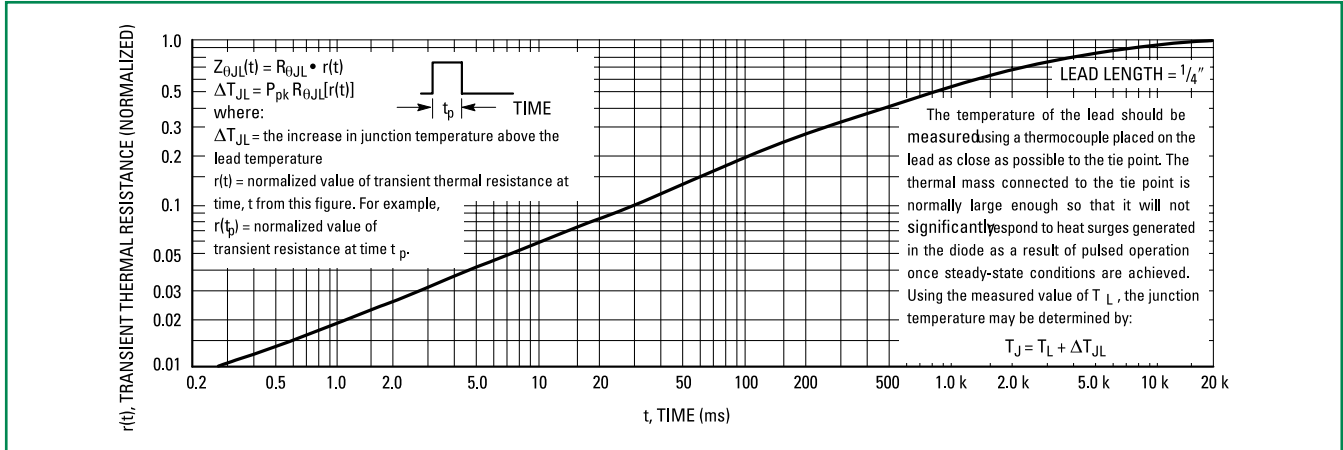

Typical Characteristics

Figure 6. Typical Breakover Current



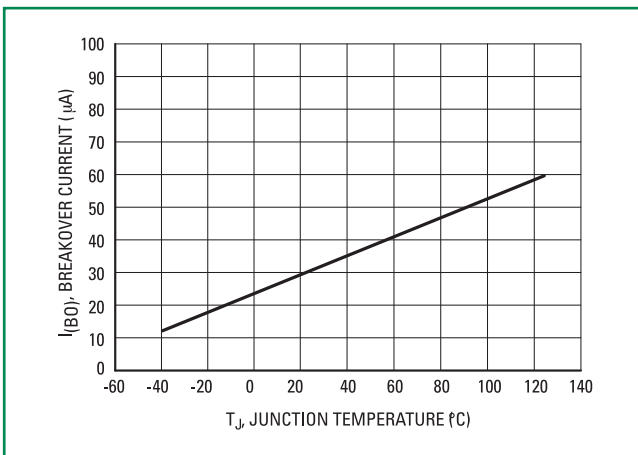


Figure 7. Typical Holding Current

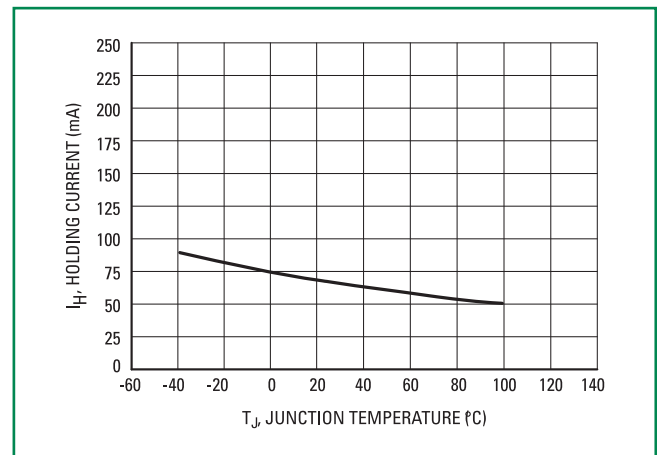

Dimensions

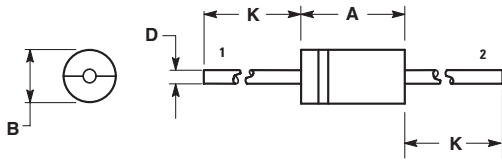


| Dim | Inches | | Millimeters | |
|-----|--------|-------|-------------|------|
| | Min | Max | Min | Max |
| A | 0.287 | 0.374 | 7.30 | 9.50 |
| B | 0.189 | 0.209 | 4.80 | 5.30 |
| D | 0.047 | 0.051 | 1.20 | 1.30 |
| K | 1.000 | --- | 25.40 | --- |

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. ALL RULES AND NOTES ASSOCIATED WITH JEDEC DO-41 267-04 OBSOLETE, NEW STANDARD 267-05.

STYLE 2: NO POLARITY

Part Marking System

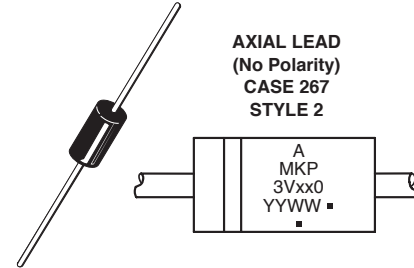

- A= Assembly Location
 - xx = 12 or 24
 - YY, Y= Year
 - WW = Work Week
 - = Pb-Free Package
- (Note: Microdot may be in either location)

Ordering Information

| Device | Package | Shipping |
|-------------|------------|-----------------------|
| MKP3V120G | Axial Lead | 500 Units / Box |
| MKP3V120RLG | | 1500 / Tape & Reel |
| MKP3V240G | | 500 Units / Box |
| MKP3V240RLG | | 1500 / Tape & Reel |

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at: www.littelfuse.com/disclaimer-electronics



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.