

LOW DROPOUT VOLTAGE REGULATOR

■ GENERAL DISCRIPTION


NJU7741/44 is a low dropout voltage regulator with ON/OFF control and Output shunt switch.

Advanced CMOS technology achieves high ripple rejection and ultra low quiescent current.

It is suitable for reset small micro controller and other logic chips.

NJU7744 features shunt switch which improves turn off response of output voltage when ON/OFF control is used.

■ PACKAGE OUTLINE




NJU7741/44F



■ FEATURES

- Ultra Low quiescent Current $I_q = 1.5\mu A$ typ. ($I_o = 0mA$)
- Output capacitor with 0.1uF ceramic capacitor
- Output Current $I_o(max.) = 100mA$
- High Precision Output $V_o \pm 1.0\%$
- Low Dropout Voltage 0.17V typ. ($I_o = 60mA$, $V_o = 3V$ version)
- With ON/OFF Control (Active High)
- With Output Shunt Switch Only NJU7744
- Internal Short Circuit Current Limit
- CMOS Technology
- Package Outline SOT-23-5

■ PIN CONFIGURATION

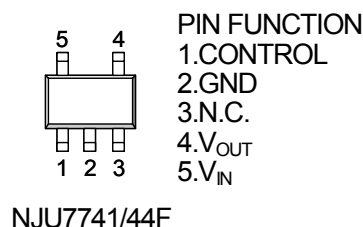

■ EQUIVALENT CIRCUIT

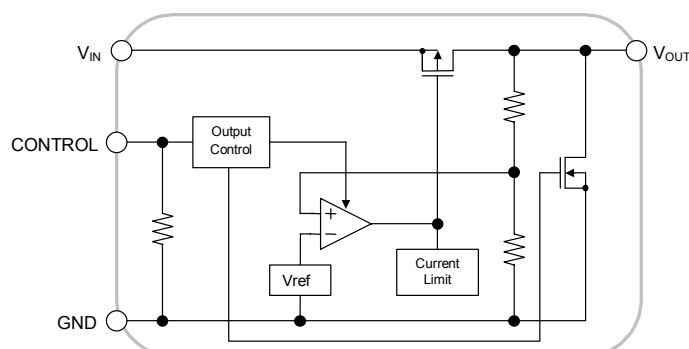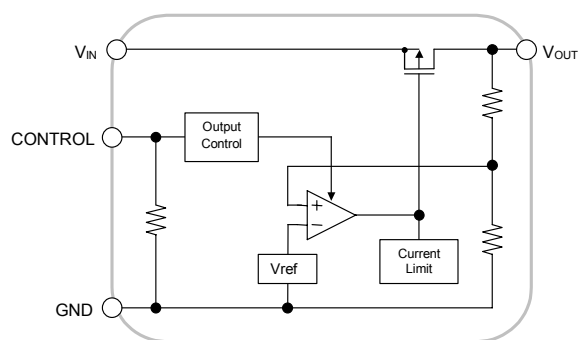

NJU7741/44

■ OUTPUT VOLTAGE RANK LIST

DEVICE NAME	V _{OUT}	DEVICE NAME	V _{OUT}	DEVICE NAME	V _{OUT}
NJU774*F15	1.5V	NJU774*F28	2.8V	NJU774*F04	4.0V
NJU774*F18	1.8V	NJU774*F29	2.9V	NJU774*F45	4.5V
NJU774*F19	1.9V	NJU774*F03	3.0V	NJU774*F05	5.0V
NJU774*F02	2.0V	NJU774*F31	3.1V	NJU774*F06	6.0V
NJU774*F25	2.5V	NJU774*F33	3.3V		
NJU774*F27	2.7V	NJU774*F37	3.7V		

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

PARAMETER	SYMBOL	RATINGS	UNIT
Input Voltage	V _{IN}	+10	V
Control Voltage	V _{CONT}	+10(*1)	V
Power Dissipation	P _D	SOT-23-5 350(*2) 200(*3)	mW
Operating Temperature	Topr	-40 ~ +85	°C
Storage Temperature	Tstg	-40 ~ +125	°C
Output Sink Current at OFF-state(*4)	I _O	10	mA

(*1) : When input voltage is less than +10V, the absolute maximum control voltage is equal to the input voltage.

(*2) : Mounted on glass epoxy board based on EIA/JEDEC. (114.3x76.2x1.6mm: 2Layers)

(*3) : Device itself

(*4) : This maximum rating is applied to NJU7744.

■ ELECTRICAL CHARACTERISTICS (V_{IN}=V_O+1V, C_{IN}=0.1μF, C_O=0.1μF, Ta=25°C)


PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Voltage	V _O	I _O =30mA	-1.0%	—	+1.0%	V
Input Voltage	V _{IN}		—	—	9	V
Quiescent Current	I _Q	I _O =0mA, V _{CONT} =V _{IN} , Except I _{CONT}	—	1.5	3.5	μA
Quiescent Current at Control OFF	I _{Q(OFF)}	V _{CONT} =0V	—	0.1	1	μA
Output Current	I _O	V _O =0.3V	100	—	—	mA
Short Circuit Limit	I _{LIM}	V _O =0V	—	25	—	mA
Line Regulation	ΔV _O /ΔV _{IN}	V _{IN} = V _O +1V~V _O +6.0V(V _O <3.0V) V _{IN} = V _O +1V~9.0V(V _O ≥3.0V), I _O =30mA	—	—	0.30	%/V
Load Regulation	ΔV _O /ΔV _O	I _O =0~100mA	—	—	0.15	%/mA
Dropout Voltage	ΔV _{I-O}	I _O =40mA	1.5V≤V _O ≤2.0V	—	0.19	0.60 V
		I _O =60mA	2.0V≤V _O ≤2.4V	—	0.19	0.29 V
			2.5V≤V _O ≤2.7V	—	0.18	0.27 V
			2.8V≤V _O ≤3.3V	—	0.17	0.26 V
			3.4V≤V _O ≤5.0V	—	0.16	0.24 V
			5.1V≤V _O ≤6.0V	—	0.15	0.22 V
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔTa	Ta=0~85°C, I _O =10mA	—	±100	—	ppm/°C
Pull-down Resistance	R _{CONT}		2	5	10	MΩ
Control Voltage for ON-State	V _{CONT(ON)}		1.6	—	V _{IN}	V
Control Voltage for OFF-State	V _{CONT(OFF)}		0	—	0.3	V
Pull-down Resistance at OFF-state(note 3)	R _{O(OFF)}	V _{CONT} =0V (V _O =3.0V Version)	—	300	—	Ω

(*5) This electrical characteristics is applied to NJU7744.


The above specification is a common specification for all voltages.

Therefore, it may be different from the individual specification for a specific output Voltage.

■ POWER DISSIPATION vs. AMBIENT TEMPERATURE

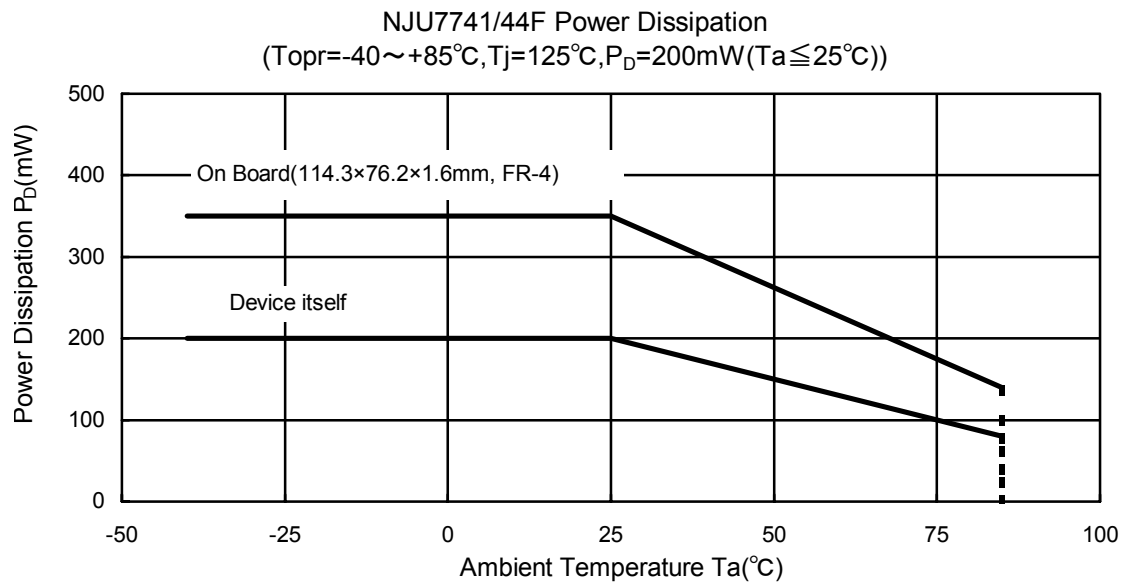


■ TEST CIRCUIT

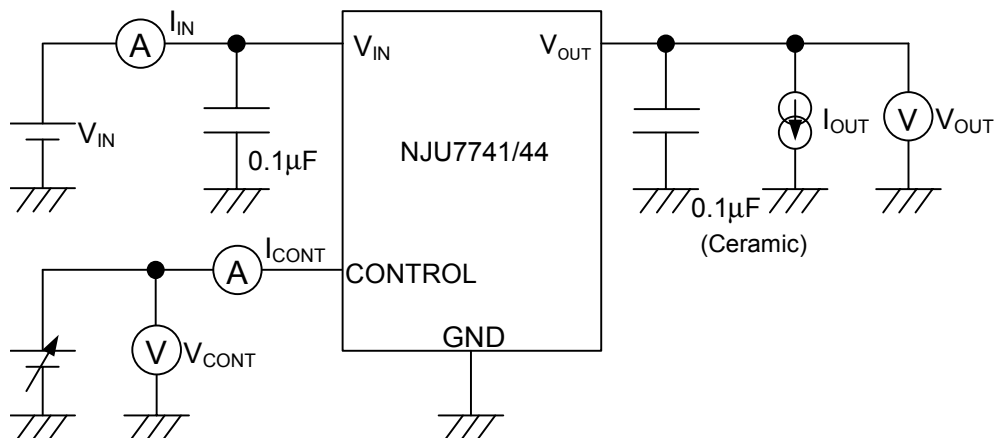


■ TYPICAL APPLICATION

① In case that ON/OFF Control is not required:

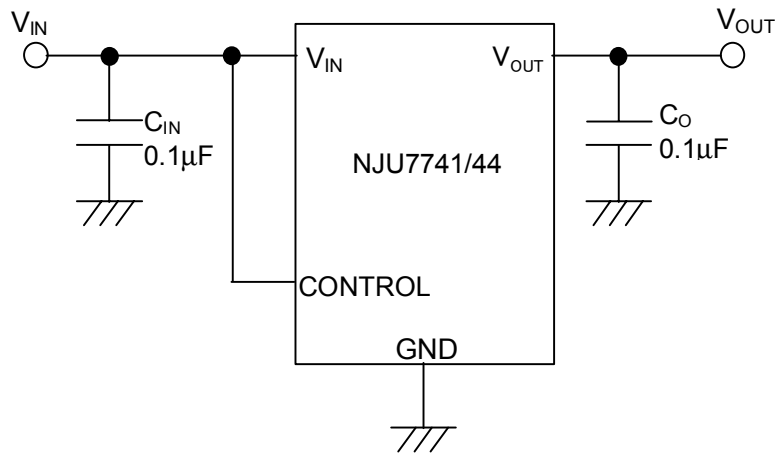

Connect control terminal to V_{IN} terminal.






② In use of ON/OFF Control

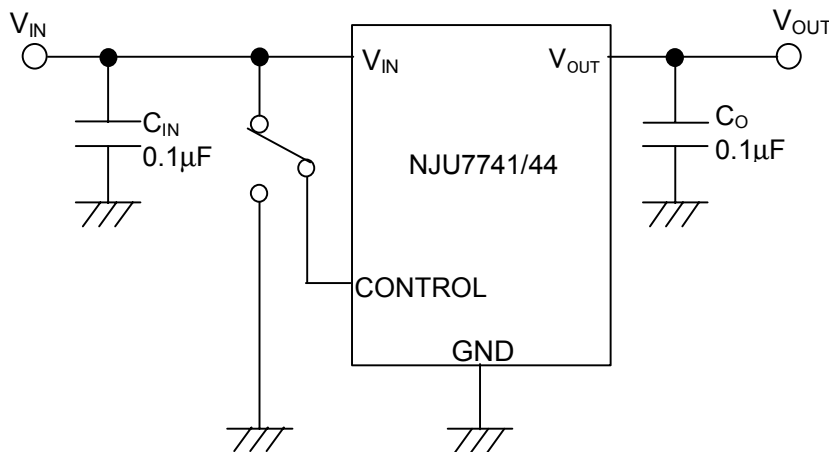







State of control terminal:

- "H" → output is enabled.
- "L" or "open" → output is disabled.

TYPICAL CHARACTERISTICS

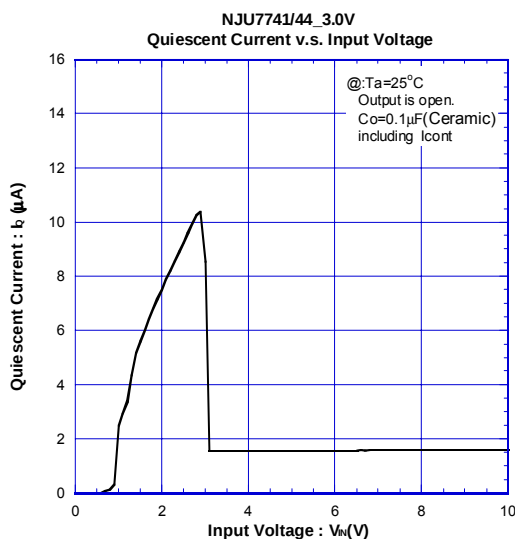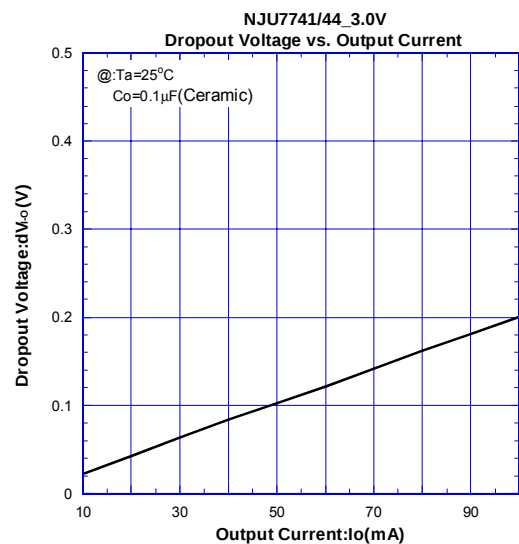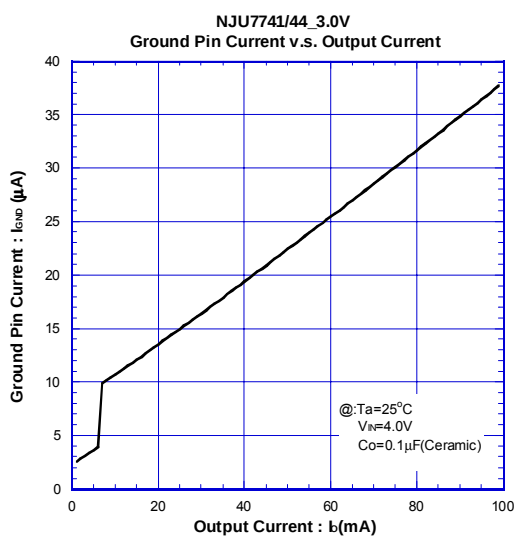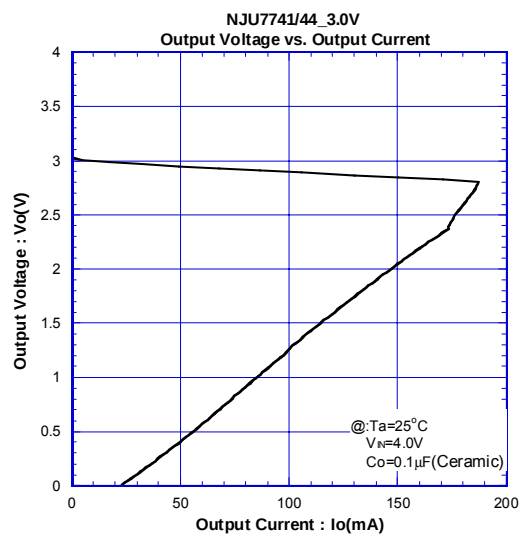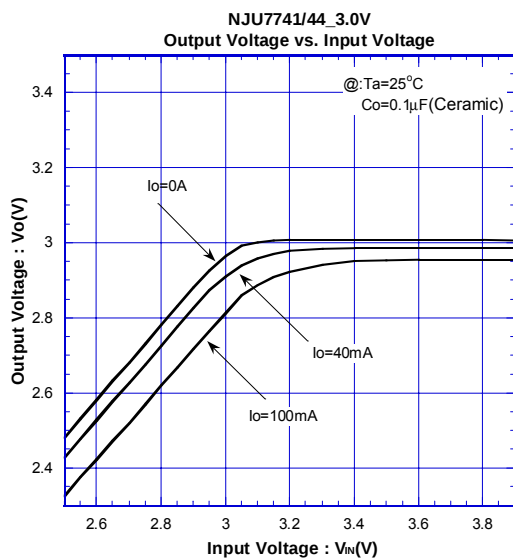

TYPICAL CHARACTERISTICS

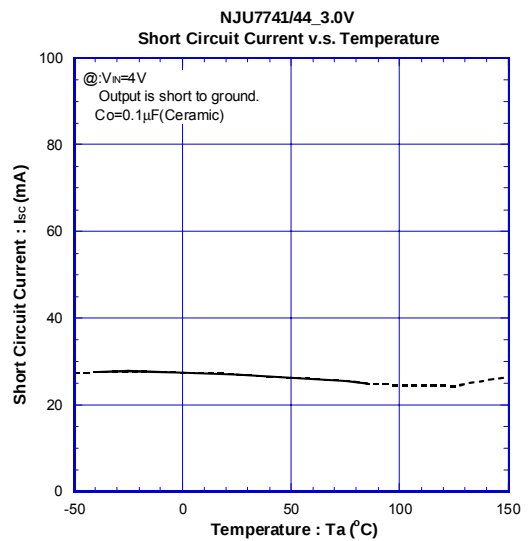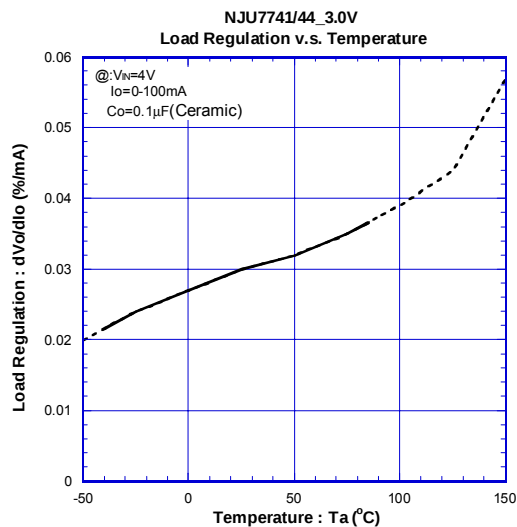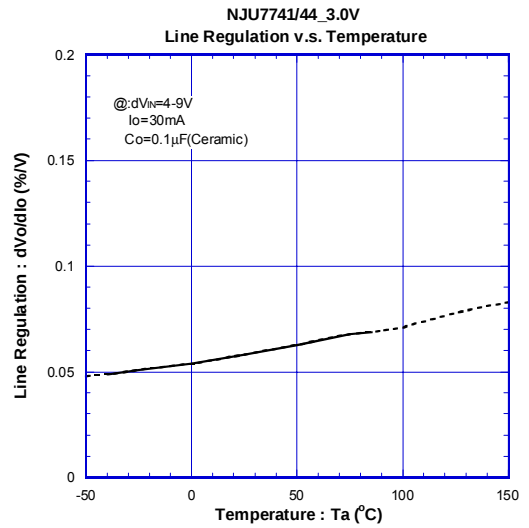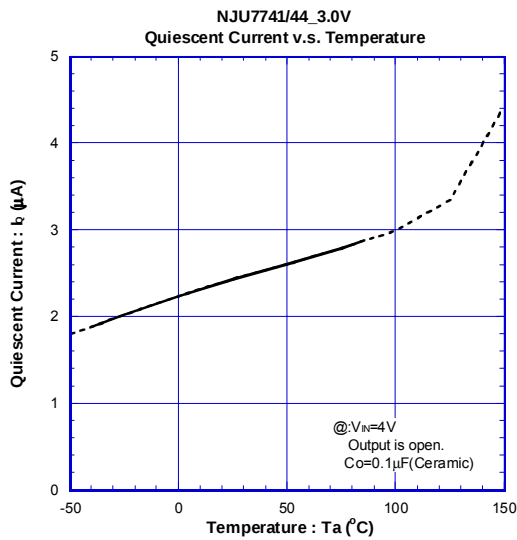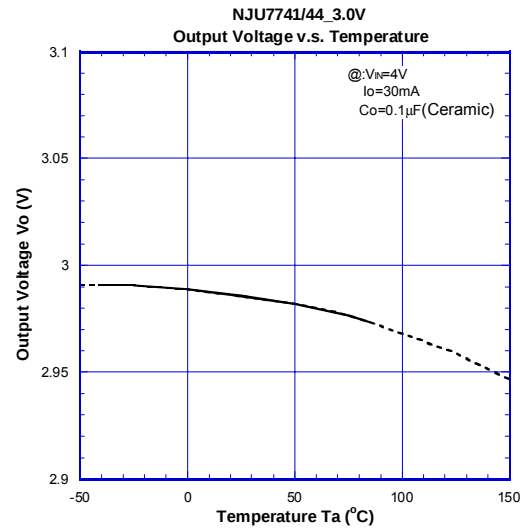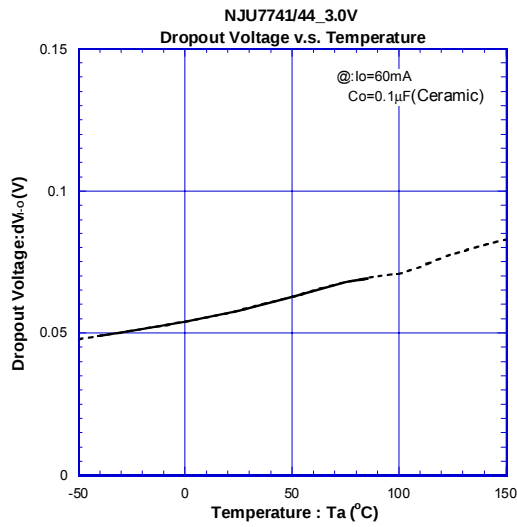

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[NJR:](#)

[NJU7744F37-TE1](#) [NJU7744F06-TE1](#) [NJU7741F33-TE2](#) [NJU7744F19-TE1](#) [NJU7744F03-TE1](#) [NJU7741F27-TE1](#)
[NJU7744F25-TE1](#) [NJU7741F33-TE1](#) [NJU7741F18-TE1](#) [NJU7741F28-TE1](#) [NJU7744F33-TE1](#) [NJU7741F03-TE1](#)
[NJU7744F18-TE1](#) [NJU7741F37-TE1](#) [NJU7744F27-TE1](#) [NJU7741F05-TE2](#) [NJU7744F05-TE1](#) [NJU7741F15-TE1](#)
[NJU7741F06-TE1](#) [NJU7741F02-TE1](#) [NJU7741F25-TE1](#) [NJU7744F02-TE1](#) [NJU7744F15-TE1](#) [NJU7744F28-TE1](#)
[NJU7741F19-TE1](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.