

**AUTOMOTIVE
LOW PROFILE
MICRO-ISO RELAY**

CV RELAYS (ACV)



Micro ISO
1 Form C type



Micro ISO
1 Form A type

FEATURES

- **Low profile:**
22.5 mm(L)×15 mm(W)×15.7 mm(H)
.886 inch(L)×.591 inch(W)×.618 inch(H)
- **Low temperature rise**
Terminal temperature has been reduced compared with using our conventional product
- **Low sound pressure level**
Noise level has been reduced approx.10dB compared with using our conventional product.
- **Wide line-up**
Micro ISO terminal types and resistor inside type.
- **Plastic sealed type**
Plastically sealed for automatic cleaning.
- **Compact and high-capacity 20A load switching**
N.O.: 20A 14V DC, N.C.: 10A 14V DC
(Max. carrying current: at 85°C 185°F)

RoHS compliant

TYPICAL APPLICATIONS

- Headlights
- Magnetic clutches
- Radiator fans
- Blowers
- Fog lamps
- Tail lights
- Heaters
- Defoggers
- Horns
- Condenser fans, etc.

ORDERING INFORMATION

ACV

Contact arrangement

1: 1 Form C

3: 1 Form A

Mounting classification

1: Micro ISO plug-in type

Protective element

0: None (Standard type)

2: With resistor inside

Coil voltage, DC

12: 12 V

TYPES

Contact arrangement	Coil voltage	Protective construction	Mounting classification	Part No.
1 Form A	12 V DC	Sealed type	Micro ISO plug-in type	ACV31012
1 Form C			Micro ISO plug-in type	ACV11012

Note: Please use "ACV**212" to order built-in resistor type. (Asterisks "*" should be filled in from ORDERING INFORMATION.)

Standard packing: Carton: 50 pcs.; Case: 200 pcs.

RATING

1. Coil data

Nominal coil voltage	Pick-up voltage* (at 20°C 68°F)	Drop-out voltage (at 20°C 68°F)	Nominal operating current [±10%] (at 20°C 68°F)	Coil resistance [±10%] (at 20°C 68°F)	Nominal operating power (at 20°C 68°F)	Usable voltage range (at 85°C 185°F)
12V DC	Max. 7.0 V DC (Initial)	Min. 0.6 V DC (Initial)	67 mA, 84 mA (with resistor)	180Ω, 142.3Ω (with resistor)	0.8 W, 1.0 W (with resistor)	10 to 16V DC

Note: * Other pick-up voltage types are also available. Please contact us for details.

2. Specifications

Characteristics		Item		Specifications			
Contact	Arrangement		1 Form A		1 Form C		
	Contact resistance (Initial)		Typ 3mΩ (By voltage drop 6V DC 1A)				
	Contact voltage drop (after electrical life test)		N.O.: Max. 0.2 V (By voltage drop 14 V DC 20 A)	N.O.: Max. 0.2 V (By voltage drop 14 V DC 20 A)	N.C.: Max. 0.5 V (By voltage drop 14 V DC 10 A)		
	Contact material		Ag alloy (Cadmium free)				
Rating	Nominal switching capacity (resistive load)		N.O.: 20 A 14V DC	N.O.: 20 A 14V DC, N.C.: 10 A 14V DC			
	Max. carrying current (at 85°C 185°F, continuous)		N.O.: 20 A 14V DC	N.O.: 20 A 14V DC N.C.: 10 A 14V DC			
	Nominal operating power		0.8 W, 1.0 W (built-in resistor type)				
	Min. switching capacity (resistive load)*1		1 A 12V DC				
Electrical characteristics	Insulation resistance (Initial)		Min. 20 MΩ (at 500V DC)				
	Breakdown voltage (Initial)	Between open contacts	500 VRms for 1 min. (Detection current: 10mA)				
		Between contacts and coil	500 VRms for 1 min. (Detection current: 10mA)				
	Operate time (at nominal voltage) (at 20°C 68°F)		Max. 10ms (excluding contact bounce time) (Initial)				
Mechanical characteristics	Release time (at nominal voltage) (at 20°C 68°F)		Max. 10ms (excluding contact bounce time) (Initial)				
	Shock resistance	Functional	Min. 100 m/s² {10G} (Half-wave pulse of sine wave: 11ms; detection time: 10μs)				
		Destructive	Min. 1,000 m/s² {100G} (Half-wave pulse of sine wave: 6ms)				
	Vibration resistance	Functional	10 Hz to 100 Hz, Min. 44.1 m/s² {4.5G} (Detection time: 10μs)				
		Destructive	10 Hz to 500 Hz, Min. 44.1 m/s² {4.5G}, Time of vibration for each direction; X, Y, Z direction: 4 hours				
Expected life	Mechanical		Min. 10⁶ (at 120 cpm)				
	Electrical (at nominal switching capacity)		Min. 10⁵ (operating frequency: 2s ON, 2s OFF)				
Conditions	Conditions for operation, transport and storage*2		Ambient temperature: -40°C to +85°C -40°F to +185°F*3, Humidity: 5% R.H. to 85% R.H. (Not freezing and condensing at low temperature), air pressure: 86 to 106kPa				
Mass			Approx. 15 g .53 oz				

Notes: *1. This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.


*2. The upper operation ambient temperature limit is the maximum temperature that can satisfy the coil temperature rise value. Please refer to "Usage ambient condition" in CAUTIONS FOR USE OF AUTOMOTIVE RELAYS.

*3. Please inquire if you will be using the relay in a high temperature atmosphere.


* Regarding solder, this product is not MIL (Military Standard) compliant. Please evaluate solder mounting by the actual equipment before using.

REFERENCE DATA**1. Coil temperature rise (20A)**



Point measured: Inside the coil
Contact carrying current: 20A
Coil applied voltage: 13.5V

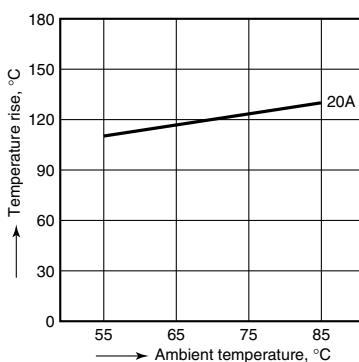**2. Distribution of pick-up and drop-out voltage**

Sample: ACV11012, 100pcs

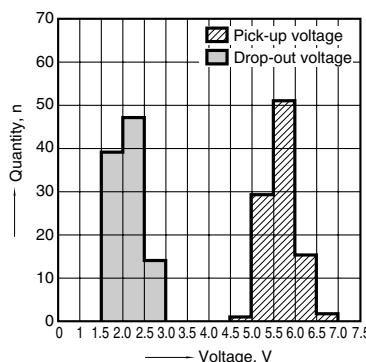**3. Distribution of operate and release time**

Sample: ACV11012, 100pcs.

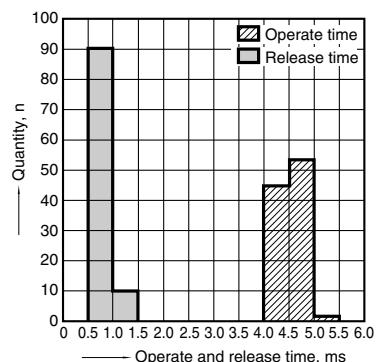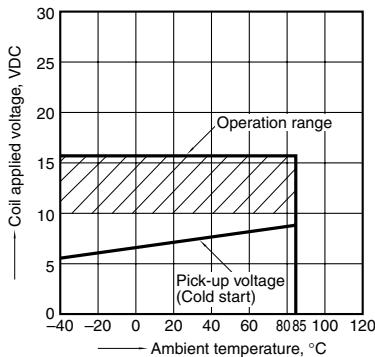**4. Ambient temperature and operating voltage range**

CV (ACV)

5-(1). Electrical life test (Resistive load)


Sample: ACV11012, 3pcs.

Load: Resistive load (NC switching) 10A


Switching frequency: ON 1s, OFF 1s

Ambient temperature: Room temperature


Circuit




Change of pick-up and drop-out voltage

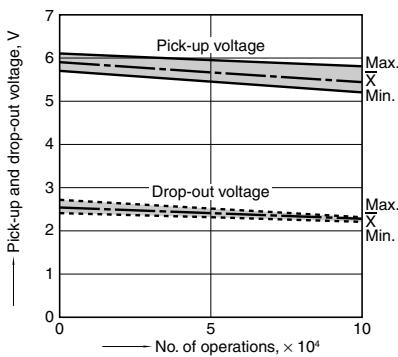

Change of contact resistance

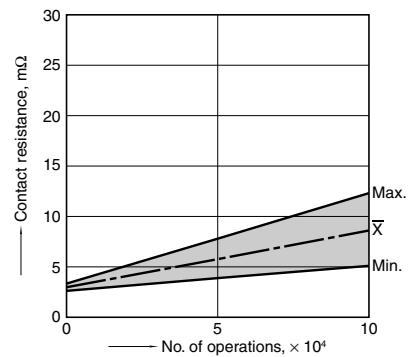

Load current waveform

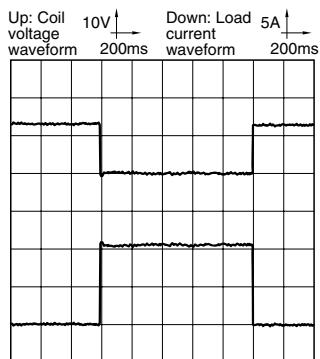

5-(2). Electrical life test (Lamp load)


Sample: ACV31212, 3pcs.

Load: 55Wx4, inrush: 90A/steady: 20A, lamp actual load


Switching frequency: ON 1s, OFF 14s

Ambient temperature: Room temperature

Change of pick-up and drop-out voltage

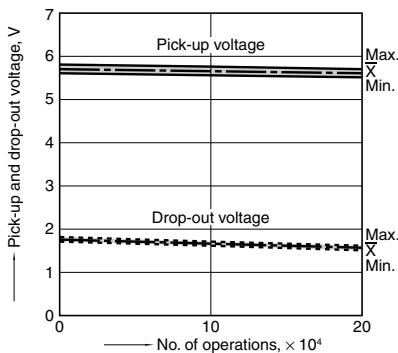


Change of contact resistance

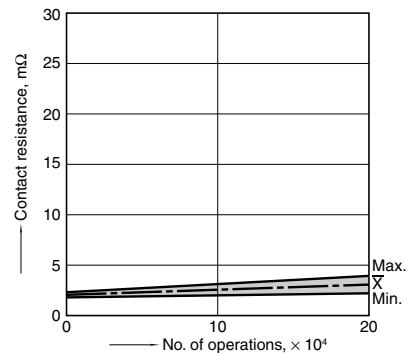


Load current waveform

Inrush current: 90A, steady current: 20A

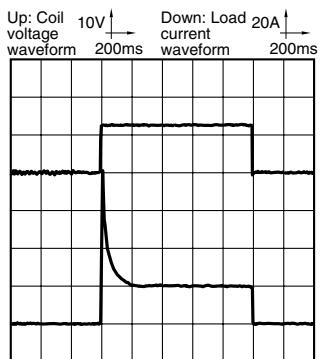


5-(3). Electrical life test (Motor load)
 Sample: ACV31212, 3pcs.
 Load: inrush: 80A/steady: 18A,
 radiator fan actual load (motor free)
 Switching frequency: ON 2s, OFF 6s
 Ambient temperature: Room temperature


Circuit

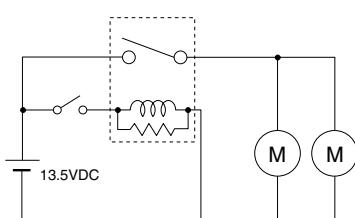

Change of pick-up and drop-out voltage

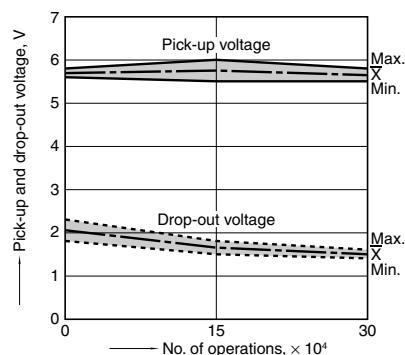


Change of contact resistance

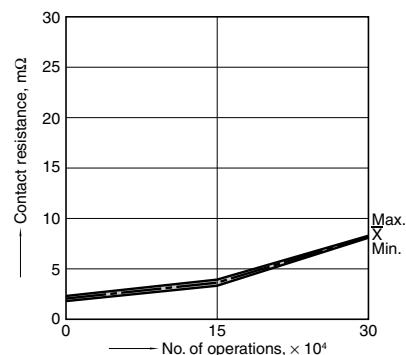

Load current waveform

Inrush current: 80A, steady current: 18A

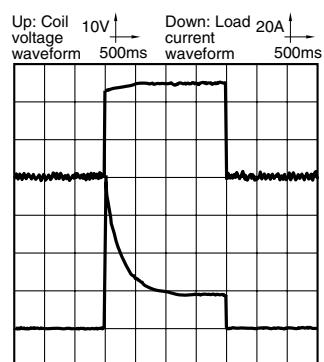


DIMENSIONS (mm inch)

1. Micro ISO plug-in type

CAD Data




External dimensions

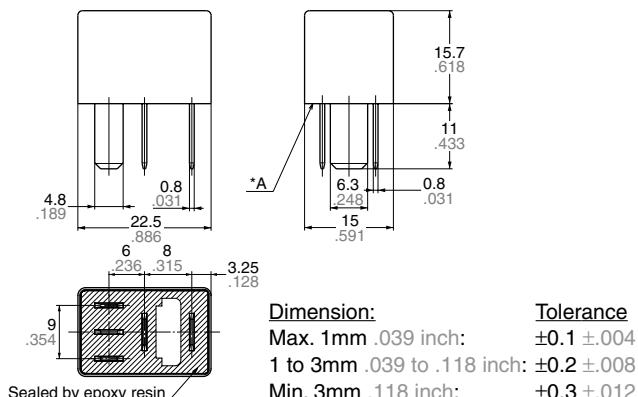


Schematic (Bottom view)

1 Form A



1 Form C



Note: Intervals between terminals is measured at A surface level.

For Cautions for Use, see Relay Technical Information.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[ACV31024](#) [ACV31124](#) [ACV11024](#) [ACV31224](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.