



3M™ HIGH ROUTABILITY INTERNAL MINISAS CABLE ASSEMBLY, 8F68 SERIES


REVISION RECORD		
REV.	ECR/ECN/ECO NUMBER	DATE
A	ECO-0037298	04/11/11
B	ECO-0037543	18/11/11

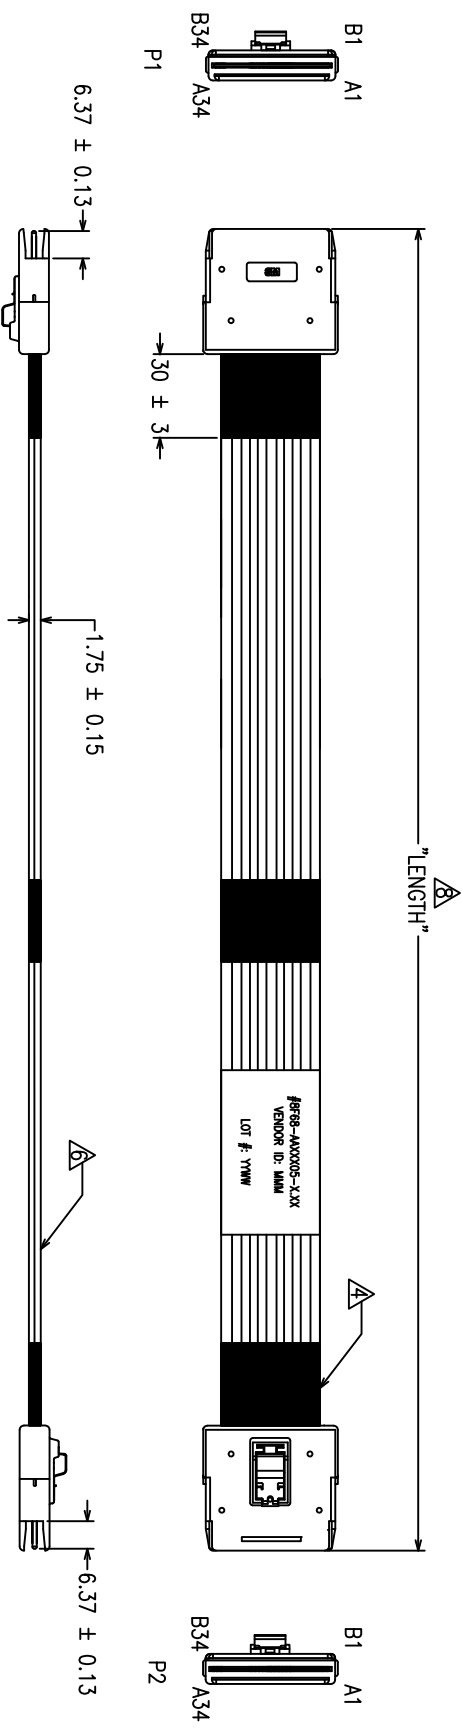

8 F 68 - AA X X 05 - X.XX

CABLE USED  
 PINOUT (SEE PINOUTS ON SHEET 2)  
 LENGTH IN METERS

G : 4-LANE WITH SIDEBANDS, SN-PLATED SIGNAL, CABLE P/N SL8801/12-21DA5-00  
 J : 4-LANE WITH SIDEBANDS, AG-PLATED SIGNAL, CABLE P/N SL8801/12-20DA5-00  
 \* FOR CABLES WITHOUT SIDEBANDS OR OTHER CONFIGURATIONS, PLEASE CONTACT A 3M REPRESENTATIVE.

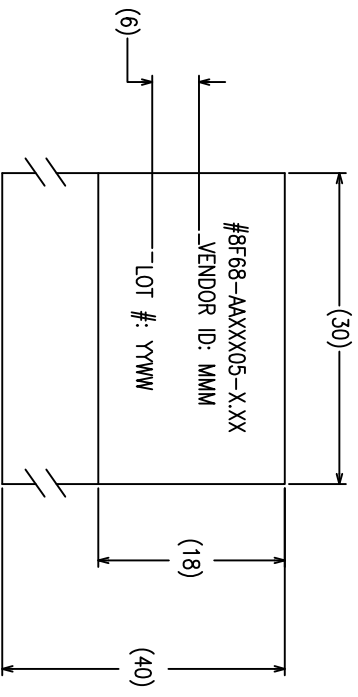

Visit <http://www.3Mconnector.com>

UNIT: MM	DFG	KOK HOE LEE	DATE	18/11/11	 APAC INNOVATION CENTRE	DIVISION	ESD	STATUS	RELEASED
GEN. TOLERANCES	CHKD	YUNLONG QIAO	DATE	18/11/11		MODEL			
LINEAR 0 = ±0.25 .00 = ±0.15 .000 = ±0.05 ANGLE ±1°	APPL	SAJIT BANDHU	DATE	18/11/11		TITLE CABLE ASSEMBLY INTERNAL 68P MINISAS RIBBON TWINAX			
PROJECTION	INTERPRET PER ASME Y14.5M-1994				CRITICAL DIMENSION:	SCALE: NTS	DRAWING NO.	78-5100-2450-4	REV
					DET LST		YES	NO	SHT 1 OF 2

3M™ HIGH ROUTABILITY INTERNAL MINISAS CABLE ASSEMBLY, 8F68 SERIES

REVISION RECORD	
REV.	ECR/EGN/ECO NUMBER DATE
	REFER TO SH1 1 OF 2

PINOUT 1  
BACKPLANE-TO-CONTROLLER

P1	P2	P1	P2
A1 GND	B1 GND	B1 GND	A1 GND
A2 R <sub>x</sub> 0+	B2 I <sub>x</sub> 0+	B2 I <sub>x</sub> 0+	A2 R <sub>x</sub> 0+
A3 R <sub>x</sub> 0-	B3 I <sub>x</sub> 0-	B3 I <sub>x</sub> 0-	A3 R <sub>x</sub> 0-
A4 GND	B4 GND	B4 GND	A4 GND
A5 R <sub>x</sub> 1+	B5 I <sub>x</sub> 1+	B5 I <sub>x</sub> 1+	A5 R <sub>x</sub> 1+
A6 R <sub>x</sub> 1-	B6 I <sub>x</sub> 1-	B6 I <sub>x</sub> 1-	A6 R <sub>x</sub> 1-
A7 GND	B7 GND	B7 GND	A7 GND
A8 R <sub>x</sub> 2+	B8 I <sub>x</sub> 2+	B8 I <sub>x</sub> 2+	A8 R <sub>x</sub> 2+
A9 R <sub>x</sub> 2-	B9 I <sub>x</sub> 2-	B9 I <sub>x</sub> 2-	A9 R <sub>x</sub> 2-
A10 GND	B10 GND	B10 GND	A10 GND
A11 R <sub>x</sub> 3+	B11 I <sub>x</sub> 3+	B11 I <sub>x</sub> 3+	A11 R <sub>x</sub> 3+
A12 R <sub>x</sub> 3-	B12 I <sub>x</sub> 3-	B12 I <sub>x</sub> 3-	A12 R <sub>x</sub> 3-
A13 GND	B13 GND	B13 GND	A13 GND
A14 SIDEBAND	B14 SIDEBAND	B14 SIDEBAND	A14 SIDEBAND
A15 SIDEBAND	B15 SIDEBAND	B15 SIDEBAND	A15 SIDEBAND
A16 SIDEBAND	B16 SIDEBAND	B16 SIDEBAND	A16 SIDEBAND
A17 SIDEBAND	B17 SIDEBAND	B17 SIDEBAND	A17 SIDEBAND
A18 SIDEBAND	B18 SIDEBAND	B18 SIDEBAND	A18 SIDEBAND
A19 SIDEBAND	B19 SIDEBAND	B19 SIDEBAND	A19 SIDEBAND
A20 SIDEBAND	B20 SIDEBAND	B20 SIDEBAND	A20 SIDEBAND
A21 SIDEBAND	B21 SIDEBAND	B21 SIDEBAND	A21 SIDEBAND
A22 GND	B22 GND	B22 GND	A22 GND
A23 R <sub>x</sub> 4+	B23 I <sub>x</sub> 4+	B23 I <sub>x</sub> 4+	A23 R <sub>x</sub> 4+
A24 R <sub>x</sub> 4-	B24 I <sub>x</sub> 4-	B24 I <sub>x</sub> 4-	A24 R <sub>x</sub> 4-
A25 GND	B25 GND	B25 GND	A25 GND
A26 R <sub>x</sub> 5+	B26 I <sub>x</sub> 5+	B26 I <sub>x</sub> 5+	A26 R <sub>x</sub> 5+
A27 R <sub>x</sub> 5-	B27 I <sub>x</sub> 5-	B27 I <sub>x</sub> 5-	A27 R <sub>x</sub> 5-
A28 GND	B28 GND	B28 GND	A28 GND
A29 R <sub>x</sub> 6+	B29 I <sub>x</sub> 6+	B29 I <sub>x</sub> 6+	A29 R <sub>x</sub> 6+
A30 R <sub>x</sub> 6-	B30 I <sub>x</sub> 6-	B30 I <sub>x</sub> 6-	A30 R <sub>x</sub> 6-
A31 GND	B31 GND	B31 GND	A31 GND
A32 R <sub>x</sub> 7+	B32 I <sub>x</sub> 7+	B32 I <sub>x</sub> 7+	A32 R <sub>x</sub> 7+
A33 R <sub>x</sub> 7-	B33 I <sub>x</sub> 7-	B33 I <sub>x</sub> 7-	A33 R <sub>x</sub> 7-
A34 GND	B34 GND	B34 GND	A34 GND

PINOUT 3  
BACKPLANE-TO-CONTROLLER (NO SIDEBANDS)

P1	P2	P1	P2
A1 GND	B1 GND	B1 GND	A1 GND
A2 R <sub>x</sub> 0+	B2 I <sub>x</sub> 0+	B2 I <sub>x</sub> 0+	A2 R <sub>x</sub> 0+
A3 R <sub>x</sub> 0-	B3 I <sub>x</sub> 0-	B3 I <sub>x</sub> 0-	A3 R <sub>x</sub> 0-
A4 GND	B4 GND	B4 GND	A4 GND
A5 R <sub>x</sub> 1+	B5 I <sub>x</sub> 1+	B5 I <sub>x</sub> 1+	A5 R <sub>x</sub> 1+
A6 R <sub>x</sub> 1-	B6 I <sub>x</sub> 1-	B6 I <sub>x</sub> 1-	A6 R <sub>x</sub> 1-
A7 GND	B7 GND	B7 GND	A7 GND
A8 R <sub>x</sub> 2+	B8 I <sub>x</sub> 2+	B8 I <sub>x</sub> 2+	A8 R <sub>x</sub> 2+
A9 R <sub>x</sub> 2-	B9 I <sub>x</sub> 2-	B9 I <sub>x</sub> 2-	A9 R <sub>x</sub> 2-
A10 GND	B10 GND	B10 GND	A10 GND
A11 R <sub>x</sub> 3+	B11 I <sub>x</sub> 3+	B11 I <sub>x</sub> 3+	A11 R <sub>x</sub> 3+
A12 R <sub>x</sub> 3-	B12 I <sub>x</sub> 3-	B12 I <sub>x</sub> 3-	A12 R <sub>x</sub> 3-
A13 GND	B13 GND	B13 GND	A13 GND
A14 SIDEBAND	B14 SIDEBAND	B14 SIDEBAND	A14 SIDEBAND
A15 SIDEBAND	B15 SIDEBAND	B15 SIDEBAND	A15 SIDEBAND
A16 SIDEBAND	B16 SIDEBAND	B16 SIDEBAND	A16 SIDEBAND
A17 SIDEBAND	B17 SIDEBAND	B17 SIDEBAND	A17 SIDEBAND
A18 SIDEBAND	B18 SIDEBAND	B18 SIDEBAND	A18 SIDEBAND
A19 SIDEBAND	B19 SIDEBAND	B19 SIDEBAND	A19 SIDEBAND
A20 SIDEBAND	B20 SIDEBAND	B20 SIDEBAND	A20 SIDEBAND
A21 SIDEBAND	B21 SIDEBAND	B21 SIDEBAND	A21 SIDEBAND
A22 GND	B22 GND	B22 GND	A22 GND
A23 R <sub>x</sub> 4+	B23 I <sub>x</sub> 4+	B23 I <sub>x</sub> 4+	A23 R <sub>x</sub> 4+
A24 R <sub>x</sub> 4-	B24 I <sub>x</sub> 4-	B24 I <sub>x</sub> 4-	A24 R <sub>x</sub> 4-
A25 GND	B25 GND	B25 GND	A25 GND
A26 R <sub>x</sub> 5+	B26 I <sub>x</sub> 5+	B26 I <sub>x</sub> 5+	A26 R <sub>x</sub> 5+
A27 R <sub>x</sub> 5-	B27 I <sub>x</sub> 5-	B27 I <sub>x</sub> 5-	A27 R <sub>x</sub> 5-
A28 GND	B28 GND	B28 GND	A28 GND
A29 R <sub>x</sub> 6+	B29 I <sub>x</sub> 6+	B29 I <sub>x</sub> 6+	A29 R <sub>x</sub> 6+
A30 R <sub>x</sub> 6-	B30 I <sub>x</sub> 6-	B30 I <sub>x</sub> 6-	A30 R <sub>x</sub> 6-
A31 GND	B31 GND	B31 GND	A31 GND
A32 R <sub>x</sub> 7+	B32 I <sub>x</sub> 7+	B32 I <sub>x</sub> 7+	A32 R <sub>x</sub> 7+
A33 R <sub>x</sub> 7-	B33 I <sub>x</sub> 7-	B33 I <sub>x</sub> 7-	A33 R <sub>x</sub> 7-
A34 GND	B34 GND	B34 GND	A34 GND

NOTES:

- A1, A4, A7, A10, A13, A22, A25, A28, A29, A31, A34, B1, B4, B7, B10, B13, B22, B25, B28, B31 AND B34 ARE ALL REFERENCE GROUNDS AND ARE SHORTED TOGETHER THROUGH THE PADDLECARD GROUND PLANES.
- A14-A21 AND B14-B21 HAVE NO CONNECTIONS TO CABLE.

- NOTES:
- ROHS COMPLIANT. SEE REGULATORY INFORMATION APPENDIX IN "ROHS COMPLIANCE" SECTION AT [WWW.3M.COM/INTERCONNECT](http://www.3m.com/interconnect) (E1 & C1 APPLY)
  - PADDLECARD PLATING: 30U" MIN. GOLD PLATING  
50U" MIN. NICKEL UNDERPLATING
  - MINISAS CABLE PLUG DIMENSIONS SHALL CONFORM WITH SFF-8086 AND SFF-8087 STANDARDS.  
MEETS SFF-8086 STANDARD, ELECTRICAL VOLTAGE: 30V /CONTACT

△ CLOTH TAPE WRAPPED AROUND CABLE RIBBONS AT BACK OF EACH CONNECTOR. ALSO, UP TO 2 ADDITIONAL TAPE PIECES WILL BE WRAPPED AROUND THE TWO CABLE RIBBONS SPACED EQUIDISTANT FROM THE CONNECTOR ENDS, AND EACH OTHER, DEPENDING ON ASSY LENGTH A:  
 A <= 200MM NO ADDITIONAL TAPE  
 200MM < A <= 600MM 1 TAPE WRAP  
 600MM < A <= 1000MM 2 TAPE WRAPS

▽ 5. PRODUCT DATA SHEET: 78-5102-0113-6

△ FOUR RIBBONS OF 3M RIBBON TWIN AXIAL CABLE

7. THIS UNIQUE CABLE CONSTRUCTION HAS A THIN ALUMINUM INNER LAYER EXPOSED AT EACH EDGE. USERS SHOULD ASSESS WHETHER THE EXPOSED EDGE PRESENTS A SHORTING RISK IN THEIR SPECIFIC APPLICATION. INSULATING TAPE MAY BE APPLIED AT THE CABLE ASSEMBLY LEVEL, AS NEEDED, TO COVER THIS EXPOSED EDGE IN RISK AREAS.

△ LENGTH TOLERANCE:  
 ± 10MM FOR LENGTH <=0.5 METER  
 ± 15MM FOR LENGTH >0.5 METER

- NOTE:  
 1. A1, A4, A7, A10, A13, A22, A25, A28, A29, A31, A34, B1, B4, B7, B10, B13, B22, B25, B28, B31 AND B34 ARE ALL REFERENCE GROUNDS AND ARE SHORTED TOGETHER THROUGH THE PADDLECARD GROUND PLANES.

Visit <http://www.3mconnector.com>

UNIT: MM	DFLG	KOK HOE LEE	DATE	18/11/11
GEN. TOLERANCES	CHKD	YUNLONG QIAO	DATE	18/11/11
LINER 0 = ±0.25 .00 = ±0.15 .000 = ±0.05	APPL	SAJIT BANDHU	DATE	18/11/11
ANGLE ±1°	THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND IS UNCLASSIFIED FOR PUBLICATION OF THIS DOCUMENT, IN WHOLE OR IN PART, SHALL BE MADE WITHOUT AUTHORIZATION FROM 3M.			
PROJECTION	INTERPRET PER ASME Y14.5M-1994			
CRITICAL DIMENSION: ▲				
SCALE: NTS	TITLE: CABLE ASSEMBLY			
SIZE: A3	DRAWING NO.: 78-5100-2450-4			
DET LST	YES	NO	SHT 2 OF 2	REV B
DIVISION		ESD	STATUS	
MODEL			RELEASED	

F

E

D

C

B

A

F

E

D

C

B

A



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.