

VEP Series



GREEN XP POWER

Specification

Input

| | |
|---------------------|--|
| Input Voltage | <ul style="list-style-type: none"> 8 & 15W: 80-264 VAC 24 W: 80-264 VAC, derate output power 25% <90 VAC |
| Input Frequency | <ul style="list-style-type: none"> 47-63 Hz |
| Input Current | <ul style="list-style-type: none"> 8 W: 0.3 A max at 90 VAC 15 W: 0.5 A max at 90 VAC 24 W: 0.6 A max at 90 VAC |
| Inrush Current | <ul style="list-style-type: none"> 70 A max at 230 VAC, cold start at 25 °C |
| Power Factor | <ul style="list-style-type: none"> EN61000-3-2, class A |
| No Load Input Power | <ul style="list-style-type: none"> <0.3 W |

Output

| | |
|--------------------------|--|
| Output Voltage | <ul style="list-style-type: none"> See tables |
| Initial Set Accuracy | <ul style="list-style-type: none"> ±5% at 50% load |
| Minimum Load | <ul style="list-style-type: none"> No minimum load required |
| Start Up Delay | <ul style="list-style-type: none"> 2 s typical |
| Start Up Rise Time | <ul style="list-style-type: none"> 8 & 15 W: 100 ms typical, 24 W: 50 ms typical |
| Hold Up Time | <ul style="list-style-type: none"> 5 ms typical at full load and 115 VAC |
| Line Regulation | <ul style="list-style-type: none"> ±0.5% max |
| Load Regulation | <ul style="list-style-type: none"> ±5% max |
| Transient Response | <ul style="list-style-type: none"> 4% max. deviation, recovery to <1% within 500 μs for a 50% step load change at 0.2 A/μs |
| Ripple & Noise | <ul style="list-style-type: none"> See tables |
| Overvoltage Protection | <ul style="list-style-type: none"> See tables |
| Overload Protection | <ul style="list-style-type: none"> 120-280% |
| Short Circuit Protection | <ul style="list-style-type: none"> Trip and restart (hiccup mode) |
| Temperature Coefficient | <ul style="list-style-type: none"> 0.2 %/°C |

- Efficiency Efficiency Level V (24 W Level IV)
- CEC2008 & EISA 2007 Compliant
- IT & Medical Approvals
- Interchangeable Input Connectors
- Output Voltages from 5 V to 24 V Available
- Class II Construction
- White Case Version Available

General

| | |
|---------------------|---|
| Efficiency | <ul style="list-style-type: none"> See tables |
| Energy Efficiency | <ul style="list-style-type: none"> Level V Level IV (24 W versions) |
| Isolation | <ul style="list-style-type: none"> 3000 VAC Input to Output |
| Switching Frequency | <ul style="list-style-type: none"> 8 & 15 W: 132 kHz typical, 24 W: 65 kHz typical |
| MTBF | <ul style="list-style-type: none"> 8 - 24 W: 250 kHrs, 36 W: 200 kHrs to MIL-HDBK-217F at 25°C, GB |

Environmental

| | |
|-----------------------|--|
| Operating Temperature | <ul style="list-style-type: none"> 0 °C to +40 °C |
| Cooling | <ul style="list-style-type: none"> Natural convection |
| Operating Humidity | <ul style="list-style-type: none"> 5-95% RH, non-condensing |
| Storage Temperature | <ul style="list-style-type: none"> -25 °C to +70 °C |
| Shock | <ul style="list-style-type: none"> Able to survive 1 m drop onto concrete on each of 6 axes |
| Vibration | <ul style="list-style-type: none"> 10-300 Hz, 1 g 15 mins/sweep. 30 mins for each of 3 axes |

EMC & Safety

| | |
|----------------------|--|
| Emissions | <ul style="list-style-type: none"> EN55022, class B conducted & radiated |
| Harmonic Currents | <ul style="list-style-type: none"> EN61000-3-2, class A |
| Voltage Flicker | <ul style="list-style-type: none"> EN61000-3-3 |
| ESD Immunity | <ul style="list-style-type: none"> EN61000-4-2, ±4 kV contact, ±8 kV air, Perf Criteria A |
| Radiated Immunity | <ul style="list-style-type: none"> EN61000-4-3, 3 V/m, Perf Criteria A |
| EFT/Burst | <ul style="list-style-type: none"> EN61000-4-4, level 2, Perf Criteria A |
| Surge | <ul style="list-style-type: none"> EN61000-4-5, installation class 3, Perf Criteria A |
| Conducted Immunity | <ul style="list-style-type: none"> EN61000-4-6, 3 V, Perf Criteria A |
| Magnetic Field | <ul style="list-style-type: none"> EN61000-4-8, 1 A/m, Perf Criteria A |
| Dips & Interruptions | <ul style="list-style-type: none"> EN61000-4-11, 30% 10 ms, 60% 100 ms, 100% 5000 ms, Perf Criteria A, B, B |
| Safety Approvals | <ul style="list-style-type: none"> 8 & 15W: IEC60601-1:2005, Corr1 & 2, EN60601-1:2005, UL60601-1, cUL60601-1, IEC60950-1:2005, A1+ A2, EN60950-1:2006/A12, UL60950-1:2007. cUL60950-1. 24W: IEC60601-1:2005, Corr1 & 2, EN60601-1:2005, UL60601-1, CSA C22.2.601.1S1-M90, IEC60950-1:2005, A1, EN60950-1:2006/A12, UL60950-1:2007. CSA C22.2 No. 60950-1-03. |


Models and Ratings

| Output Power | Output Voltage ⁽²⁾ | Output Current | Ripple & Noise ⁽¹⁾ | Overvoltage Trip ⁽⁶⁾ | Efficiency ⁽⁴⁾ | Model Number ^(3,5) |
|--------------|-------------------------------|----------------|-------------------------------|---------------------------------|---------------------------|-------------------------------|
| 8.0 W | 5.0V | 1.60 A | 150 mV | 10.0V | 73% | VEP08US05 |
| 8.0 W | 9.0V | 0.88 A | 200 mV | 18.0V | 77% | VEP08US09 |
| 8.0 W | 12.0V | 0.66 A | 200 mV | 20.0V | 77% | VEP08US12 |
| 8.0 W | 15.0V | 0.53 A | 200 mV | 25.0V | 78% | VEP08US15 |
| 10.0 W | 5.0V | 2.00 A | 50 mV | 9.0V | 75% | VEP15US05 |
| 12.6 W | 9.0V | 1.40 A | 100 mV | 15.0V | 80% | VEP15US09 |
| 15.0 W | 12.0V | 1.25 A | 100 mV | 20.0V | 82% | VEP15US12 |
| 15.0 W | 15.0V | 0.90 A | 150 mV | 25.0V | 82% | VEP15US15 |
| 15.0 W | 24.0V | 0.63 A | 200 mV | 35.0V | 83% | VEP15US24 |

Notes

1. Measured at end of DC output lead using 20 MHz bandwidth and 0.1 μF ceramic capacitor in parallel with 10 μF electrolytic capacitor placed at connector terminals.
2. VEP08 models: Other voltages between 3.0 V and 18.0 V are available on request, consult sales for details.
VEP15 models: Other voltages between 3.0 V and 24.0 V are available on request, consult sales for details.
3. A suffix denoting the type of mains plug required must be added to the part number. See below.
4. Efficiency given is the average of efficiencies measured with output loads of 25%, 50%, 75% and 100%.
5. For white case version add suffix -W. MOQ applies, contact sales for details.
6. VEP08 models: Typical trip point, VEP15 models: Maximum trip point.

Mechanical Details

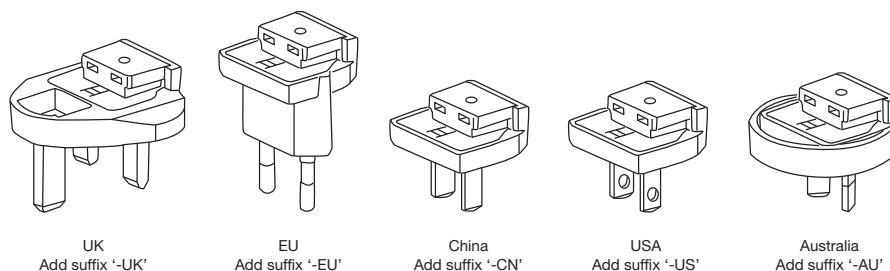

Notes

1. All dimensions in inches (mm). Tolerance is ±0.04 (±1) maximum, except output cable length.
2. Weight: VEP08 - 0.18 lbs (80 g) approx., VEP15 - 0.26 lbs (120 g) approx.
3. Case material is PC Class 94 V-0
4. Output Lead: UL2468 18-24 AWG
5. Mains plugs can be ordered separately. Part numbers are: VEP PLUG UK, VEP PLUG EU, VEP PLUG CN[^], VEP PLUG US or VEP PLUG AU[^]


Models and Ratings

| Output Power | Output Voltage ⁽³⁾ | Output Current | Ripple & Noise ⁽¹⁾ | Overvoltage Trip ⁽⁶⁾ | Efficiency ⁽⁴⁾ | Model Number ^(2,5) |
|--------------|-------------------------------|----------------|-------------------------------|---------------------------------|---------------------------|-------------------------------|
| 12.5 W | 5.0V | 2.5 A | 100 mV | 10.0 V | 73% | VEP24US05 |
| 19.8 W | 9.0V | 2.2 A | 100 mV | 18.0 V | 79% | VEP24US09 |
| 24.0 W | 12.0V | 2.0 A | 100 mV | 20.0 V | 80% | VEP24US12 |
| 24.0 W | 15.0V | 1.6 A | 100 mV | 25.0 V | 80% | VEP24US15 |
| 24.0 W | 24.0V | 1.0 A | 100 mV | 35.0 V | 82% | VEP24US24 |

Notes

1. Measured at end of DC output lead using 20 MHz bandwidth and 0.1 μF ceramic capacitor in parallel with 10 μF electrolytic capacitor placed at connector terminals.
2. A suffix denoting the type of mains plug required must be added to the part number. See below.
3. Other voltages between 3.0 V and 24.0 V are available on request, consult sales for details.
4. Efficiency given is the average of efficiencies measured with output loads of 25%, 50%, 75% and 100%.
5. For white case version add suffix -W. MOQ applies, contact sales for details.
6. Typical trip point.

Mechanical Details

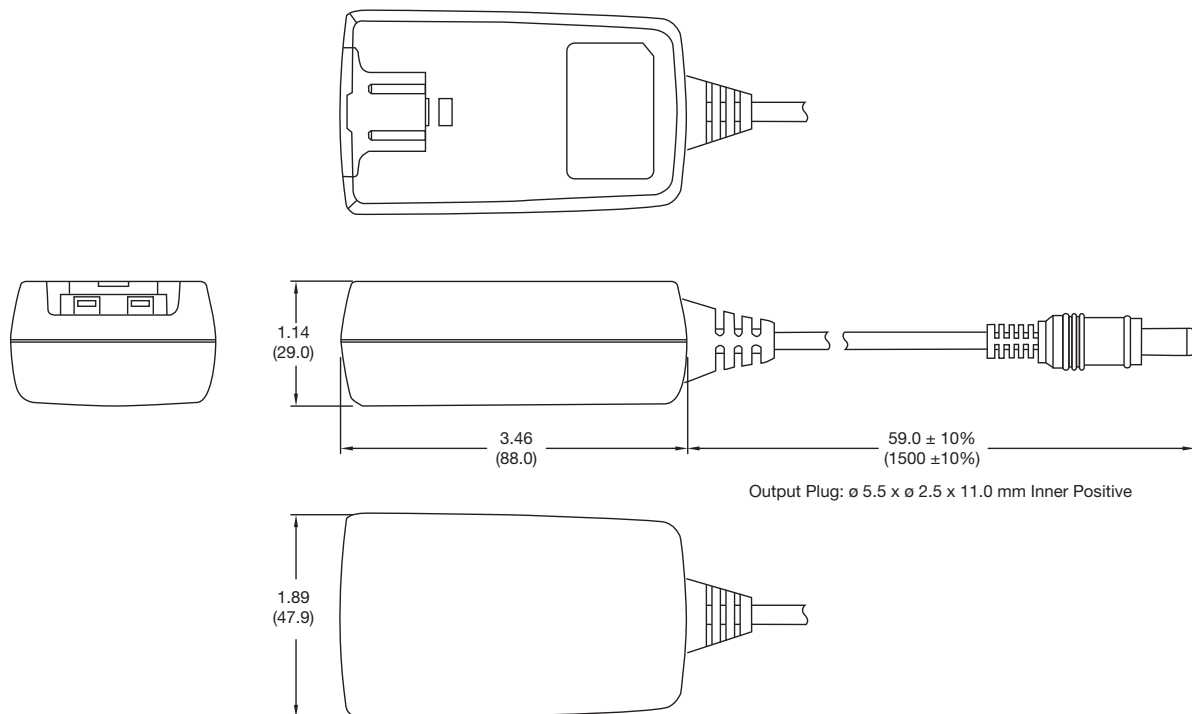

Notes

1. All dimensions in inches (mm). Tolerance is ±0.04 (±1) maximum, except output cable length
2. Weight: 0.35 lbs (160 g) Approx
3. Case material is PC Class 94 V-0
4. Output Lead: UL2468 18-24 AWG
5. Mains plugs can be ordered separately. Part numbers are: VEP PLUG UK, VEP PLUG EU, VEP PLUG CN, VEP PLUG US or VEP PLUG AU



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.