




Surface Mount TRANSZORB[®] Transient Voltage Suppressors

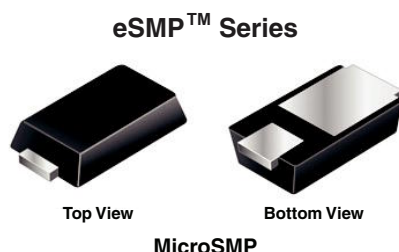

PRIMARY CHARACTERISTICS	
V_{WM}	5.0 V
P_{PPM}	100 W
I_{FSM}	25 A
T_J max.	150 °C

TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units specifically for protecting 5.0 V supplied sensitive equipment against transient overvoltages.

FEATURES

- Very low profile - typical height of 0.65 mm
- Ideal for automated placement
- Oxide planar chip junction
- Uni-directional polarity only
- Peak pulse power: 100 W (10/1000 μ s)
- ESD capability: **15 kV (air), 8 kV (contact)**
- Meets MSL level 1, per J-STD-020C, LF maximum peak of 260 °C
- Solder dip 265 °C max. 10 s, per JESD 22-A111
- AEC-Q101 qualified
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC
- **Halogen-free according to IEC 61249-2-21 definition**
- Find out more about Vishay's Automotive Grade Product requirements at:
www.vishay.com/applications



RoHS
COMPLIANT
HALOGEN
FREE

AUTOMOTIVE
GRADE
Available

MECHANICAL DATA

Case: MicroSMP

Molding compound meets UL 94 V-0 flammability rating

Base P/N-M3 - halogen-free and RoHS compliant, commercial grade

Base P/NHM3 - halogen-free and RoHS compliant, automotive grade

Terminals: Matte tin plated leads, solderable per J-STD-002 and JESD 22-B102

M3 suffix meets JESD 201 class 1A whisker test, HM3 suffix meets JESD 201 class 2 whisker test

Polarity: Color band denotes the cathode end

MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Peak pulse power dissipation ⁽¹⁾⁽²⁾	P_{PPM}	100	W
Peak pulse current with a 10/1000 μ s waveform (fig. 1)	I_{PPM}	10.9	A
Non repetitive peak forward surge current 10 ms single half sine-wave ⁽²⁾	I_{FSM}	25	A
Power dissipation $T_L = 120$ °C ⁽²⁾	P_D	1.0	W
Operating junction and storage temperature range	T_J, T_{STG}	- 55 to + 150	°C

Notes

⁽¹⁾ Non-repetitive current pulse, per fig. 1

⁽²⁾ Mounted on 6.0 mm x 6.0 mm copper pads to each terminal

MSP5.0A

Vishay General Semiconductor

**ELECTRICAL CHARACTERISTICS** ($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

DEVICE TYPE	DEVICE MARKING CODE	BREAKDOWN VOLTAGE V_{BR} AT I_T ⁽¹⁾ (V)		TEST CURRENT I_T (mA)	STAND-OFF VOLTAGE V_{WM} (V)	MAXIMUM REVERSE LEAKAGE AT V_{WM} I_D (μA)	MAXIMUM CLAMPING VOLTAGE ⁽²⁾ V_C (V) AT I_{PPM} (A) 10/1000 μs		MAXIMUM CLAMPING VOLTAGE ⁽²⁾ V_C (V) AT I_{PPM} (A) 8/20 μs	
		MIN.	MAX.							
MSP5.0A	AE	6.40	7.07	10	5.0	100	9.2	10.9	14.5	57

Notes⁽¹⁾ Pulse test: $t_p \leq 50\text{ ms}$ ⁽²⁾ Surge current waveform per Fig. 1 and derate per Fig. 2**THERMAL CHARACTERISTICS** ($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	VALUE	UNIT
Typical thermal resistance ⁽¹⁾	$R_{\theta JA}$ $R_{\theta JL}$	125 30	$^{\circ}\text{C/W}$

Note⁽¹⁾ Thermal resistance from junction to ambient and junction to lead mounted on P.C.B. with 6.0 mm x 6.0 mm copper pad areas. $R_{\theta JL}$ is measured at the terminal of cathode band.**IMMUNITY TO STATIC ELECTRICAL DISCHARGE TO THE FOLLOWING STANDARDS** ($T_A = 25\text{ }^{\circ}\text{C}$ unless otherwise noted)

STANDARD	TEST TYPE	TEST CONDITIONS	SYMBOL	CLASS	VALUE
AEC-Q101-001	Human body model (contact mode)	$C = 100\text{ pF}$, $R = 1.5\text{ k}\Omega$	V_C	H3B	$> 8\text{ kV}$
IEC-61000-4-2 ⁽²⁾	Human body model (air discharge mode) ⁽¹⁾	$C = 150\text{ pF}$, $R = 150\text{ }\Omega$		4	$> 15\text{ kV}$

Notes⁽¹⁾ Immunity to IEC-61000-4-2 air discharge mode has a typical performance $> 30\text{ kV}$ ⁽²⁾ System ESD standard**ORDERING INFORMATION** (Example)

PREFERRED P/N	UNIT WEIGHT (g)	PREFERRED PACKAGE CODE	BASE QUANTITY	DELIVERY MODE
MSP5.0A-E3/89A	0.006	89A	4500	7" diameter plastic tape and reel
MSP5.0AHE3/89A ⁽¹⁾	0.006	89A	4500	7" diameter plastic tape and reel
MSP5.0A-M3/89A	0.006	89A	4500	7" diameter plastic tape and reel
MSP5.0AHM3/89A ⁽¹⁾	0.006	89A	4500	7" diameter plastic tape and reel

Note⁽¹⁾ Automotive grade



RATINGS AND CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

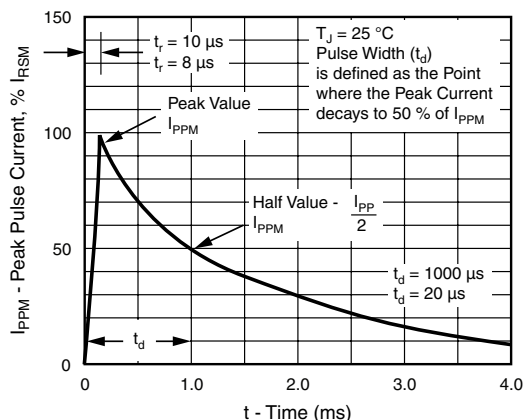


Figure 1. Pulse Waveform

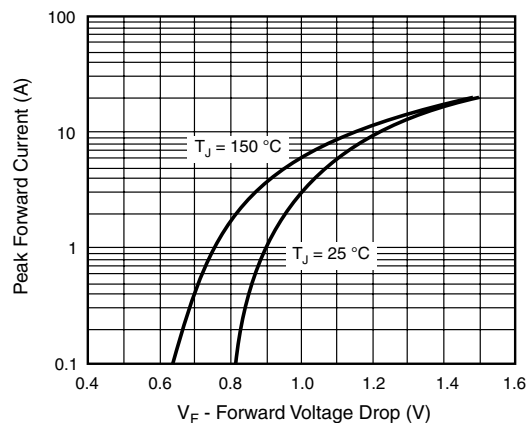


Figure 4. Typical Peak Forward Voltage Drop vs. Peak Forward Current

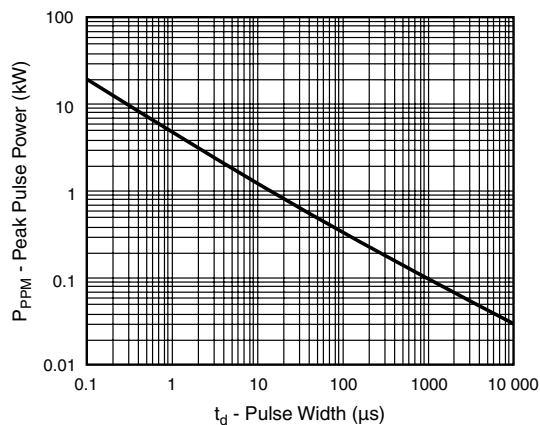


Figure 2. Peak Pulse Power Rating Curve

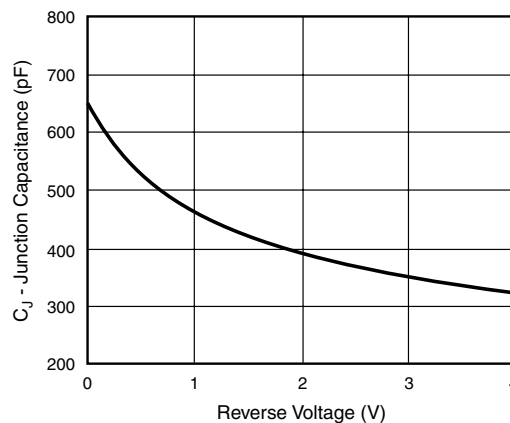


Figure 5. Typical Junction Capacitance

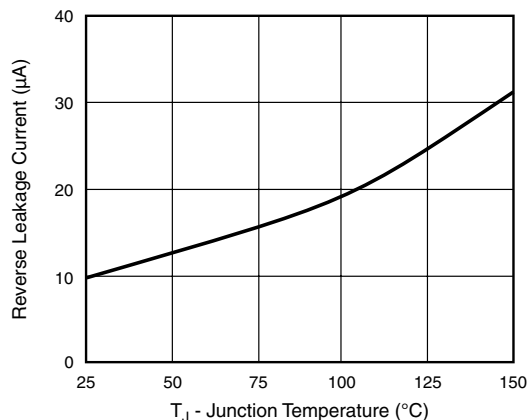


Figure 3. Relative Variation of Leakage Current vs. Junction Temperature


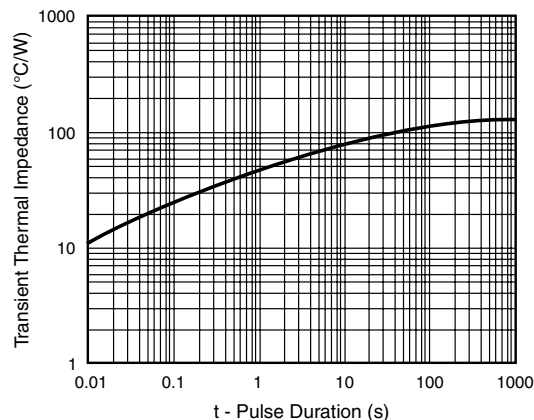


Figure 6. Typical Transient Thermal Impedance

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)**MicroSMP**

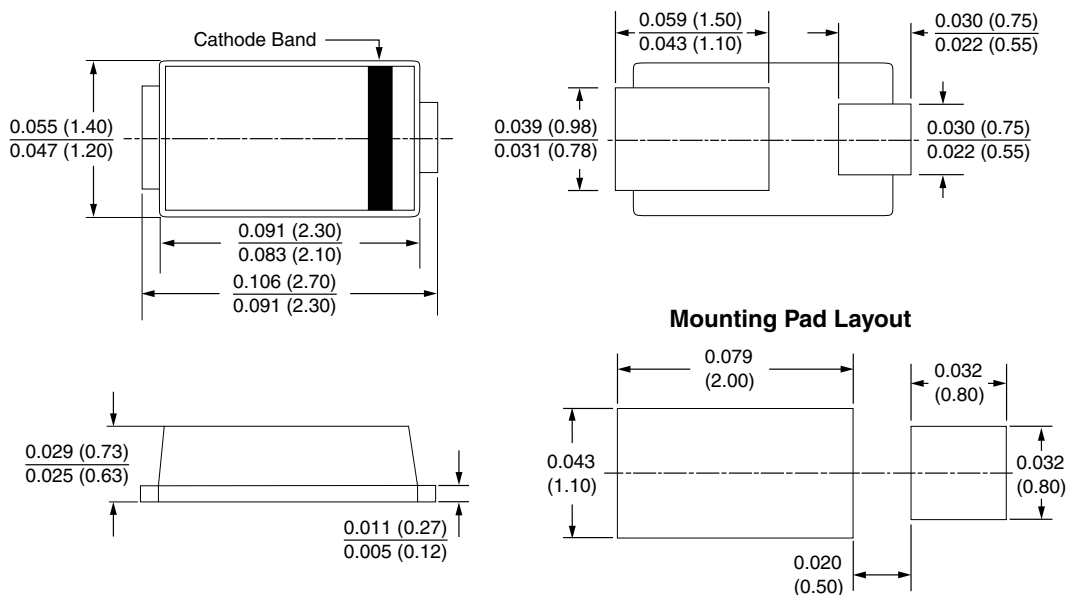

Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.