



T H E R M O M E T R I C S  
A C O M M I T M E N T T O E X C E L L E N C E

# NTC Diode

## Thermometrics

## Thermistors



A range of NTC chip thermistors in DO-35 style glass package (diode outline) with axial solder-coated copper-clad steel wires.

- Designed for accurate temperature measurement, control and compensation
- Tight tolerances on resistance and B value
- Operation up to 482°F (250°C) with excellent stability
- Glass body provides hermetic seal and voltage insulation and excellent stability
- Designed for cost effective solid state sensor
- Lead-wires metallurgically bonded to thermistor element for improved reliability (Type GE only)
- Resistant to corrosive atmospheres and harsh environments
- Available on axial bandolier to IEC-286-1/ EIA-468A and packet taped to EIA RS-481 for MELF.
- Also available loose-packed with axial, radial and SMD wire forms
- Suitable for automotive, telecom (battery packs), HVAC and white goods applications
- Temperature sensing for household appliances such as rice cookers, electronic ranges, ovens, etc.
- Temperature sensing for industrial products such as pharmaceuticals, chemicals, food, etc. components.

# Amphenol

## Advanced Sensors

# Type DK Specifications

Chip thermistor in DO-35 glass package

## Options

- Other resistance values within the ranges shown; e.g. code DKA302\*2 for 3000  $\Omega$   $\pm 2\%$  at 77°F (25°C)
- Reference temperatures in the range 0°F to 302°F (-18°C to 150°C)
- Operation to 572°F (300°C) (no solder coating on wires)
- Wire lengths 0.16 in to 1.26 in (4 mm to 32 mm)  $\pm 0.04$  in ( $\pm 1$  mm) for DK-N; up to 1.02 in (26 mm) for DK-H

## Coding

Replace \* in the codes shown below as follows:

- Axial, loose-packed: N
- Axial, bandoliered: B
- Radial, loose-packed: H
- Surface mount, loose-packed: M



NTC Type DK wires should not be bent within 0.08 in (2 mm) of glass body

## Data

- Operating temperature: -40°F to 482°F (-40°C to 250°C)
- Thermal time constant: 7 seconds (cooling in air)
- Dissipation factor: 3.0 mW/K
- Mass: 0.2 g
- Packing/MOQ: 1000/box (loose), 5000/reel (bandoliered)

| R25 $\Omega$ | Material system | B 25/85 K      | Code R25 $\pm 2\%$ | Code R25 $\pm 3\%$ | Code R25 $\pm 5\%$ | Code R25 $\pm 10\%$ |
|--------------|-----------------|----------------|--------------------|--------------------|--------------------|---------------------|
| 2000         | 2               | 3540 $\pm 1\%$ | DKA202*2           | DKA202*3           | DKA202*5           | DKA202*10           |
| 5000         | 2               | 3540 $\pm 1\%$ | DKA502*2           | DKA502*3           | DKA502*5           | DKA502*10           |
| 10,000       | 2               | 3540 $\pm 1\%$ | DKA103*2           | DKA103*3           | DKA103*5           | DKA103*10           |
| 10,000       | 5A              | 3730 $\pm 2\%$ |                    | DKC103*3           | DKC103*5           | DKC103*10           |
| 12,000       | 5A              | 3730 $\pm 2\%$ | DKC123*2           | DKC123*3           | DKC123*5           | DKC123*10           |
| 10,000       | 3               | 3960 $\pm 1\%$ | DKF103*2           | DKF103*3           | DKF103*5           | DKF103*10           |
| 20,000       | 3               | 3960 $\pm 1\%$ | DKF203*2           | DKF203*3           | DKF203*5           | DKF203*10           |
| 30,000       | 3               | 3960 $\pm 1\%$ | DKF303*2           | DKF303*3           | DKF303*5           | DKF303*10           |
| 50,000       | 3               | 3960 $\pm 1\%$ | DKF503*2           | DKF503*3           | DKF503*5           | DKF503*10           |
| 100,000      | 3               | 3960 $\pm 1\%$ | DKF104*2           | DKF104*3           | DKF104*5           | DKF104*10           |
| 200,000      | G               | 4263 $\pm 2\%$ |                    |                    | DKG204*5           | DKG204*10           |
| 500,000      | D               | 4573 $\pm 2\%$ |                    |                    | DKD504*5           | DKD504*10           |
| 1,000,000    | D               | 4573 $\pm 2\%$ |                    |                    | DKD105*5           | DKD105*10           |

See separate tables for resistance-temperature data.  
Consult factory for additional tolerance requirements.

# Type DKM Specifications

Glass encapsulated SMD thermistor

## Description

A range of thermistors in DO-35 style glass package (diode outline formed for surface lead-wires and applications) with solder-coated copper-clad steel lead-wires.



*NTC Type DKM wires should not be bent within 0.08 in (2 mm) of glass body*

## Options

- Other resistance values within the ranges shown; e.g. code DKA302M2 for 3000 Ω ±2% at 77°F (25°C)
- Reference temperatures in the range 32°F to 302°F (0°C to 150°C)
- For tape and reel, add suffix “AB”
- Operation to 572°F (300°C); no solder coating on lead-wires

## Data

- Operating temperature: -40°F to 482°F (-40°C to 250°C)
- Thermal time constant: 7 seconds (cooling in air)
- Dissipation factor: 3.0 mW/K
- Mass: 0.2 g
- Packing/MOQ: 1000/box (loose)

| R25 Ω     | Material System | B 25/85 K | Code R25 ±2% | Code R25 ±3% | Code R25 ±5% | Code R25 ±10% |
|-----------|-----------------|-----------|--------------|--------------|--------------|---------------|
| 2000      | 2               | 3540 ±1%  | DKA202M2     | DKA202M3     | DKA202M5     | DKA202M10     |
| 5000      | 2               | 3540 ±1%  | DKA502M2     | DKA502M3     | DKA502M5     | DKA502M10     |
| 10,000    | 2               | 3540 ±1%  | DKA103M2     | DKA103M3     | DKA103M5     | DKA103M10     |
| 10,000    | 5A              | 3730 ±2%  |              | DKC103M3     | DKC103M5     | DKC103M10     |
| 10,000    | 3               | 3960 ±1%  | DKF103M2     | DKF103M3     | DKF103M5     | DKF103M10     |
| 20,000    | 3               | 3960 ±1%  | DKF203M2     | DKF203M3     | DKF203M5     | DKF203M10     |
| 30,000    | 3               | 3960 ±1%  | DKF303M2     | DKF303M3     | DKF303M5     | DKF303M10     |
| 50,000    | 3               | 3960 ±1%  | DKF503M2     | DKF503M3     | DKF503M5     | DKF503M10     |
| 100,000   | 3               | 3960 ±1%  | DKF104M2     | DKF104M3     | DKF104M5     | DKF104M10     |
| 200,000   | G               | 4263 ±2%  |              |              | DKG204M5     | DKG204M10     |
| 500,000   | D               | 4573 ±2%  |              |              | DKD504M5     | DKD504M10     |
| 1,000,000 | D               | 4573 ±2%  |              |              | DKD105M5     | DKD105M10     |

See separate tables for resistance-temperature data.  
Consult factory for additional tolerance requirements.

# Type GE Specifications

Glass encapsulated DO-35 package

## Options

- For reel taping
- Nickel leads for welding
- Other resistances in the range 250 Ω to 5 MΩ
- Other tolerances, tolerances at other temperatures
- Alternative leads lengths, lead materials
- Can be expanded to 572°F (300°C) with nickel leads



NTC Type GE dimensions

## Data

- Standard resistance tolerance: ±10% @ 77°F (25°C)
- Dissipation constant: 3.0 mW/K
- Time constant: 7 seconds
- Operating range: -58°F to 400°F (-50°C to 204°C)
- Lead Wires metallurgically bonded to thermistor element for improved reliability

| R <sub>0</sub> @25°C (Ω) | Material System | Beta 25/85 | Type Number           |
|--------------------------|-----------------|------------|-----------------------|
| 250                      | GE5.5*          | 2983       | AL03006-165.9-55-G1   |
| 500                      | GE5.5*          | 2983       | AL03006-331.8-55-G1   |
| 1K                       | GE7.3           | 3499       | AL03006-624-73-G1     |
| 2K                       | GE7.3           | 3499       | AL03006-1248-73-G1    |
| 2786                     | GE10.1          | 4102       | AL03006-1576-101-G1   |
| 3K                       | GE7.6           | 3553       | AL03006-1847-76-G1    |
| 4K                       | GE7.6           | 3553       | AL03006-2463-76-G1    |
| 5K                       | GE7.6           | 3553       | AL03006-3079-76-G1    |
| 10K                      | GE9.7A          | 3992       | AL03006-5818-97-G1    |
| 20K                      | GE9.8           | 3974       | AL03006-11.7K-98-G1   |
| 30K                      | GE9.8           | 3974       | AL03006-17.53K-98-G1  |
| 50K                      | GE9.7B          | 3952       | AL03006-29.1K-97-G1   |
| 100K                     | GE9.7B          | 3952       | AL03006-58.2K-97-G1   |
| 200K                     | GE12.3          | 4365       | AL03006-111.3K-123-G1 |
| 500K                     | GE13.8          | 4567       | AL03006-269.8K-138-G1 |
| 1M                       | GE14.5          | 4661       | AL03006-535K-145-G1   |
| 5M                       | GE16.4          | 4848       | AL03006-2.6M-164-G1   |

\*maximum operating temperature 302°F (150°C)

# Type MELF Specifications

Glass encapsulated SMD thermistor

## Description

Hermetically sealed, glass encapsulated thermistor in SOD-80 SMD package.

## Options

- Pocket Taping
- Other resistances in the range 250  $\Omega$  to 5 M $\Omega$  available
- Other tolerances, tolerances at other temperatures



NTC Type MELF dimensions

## Data

- Standard resistance tolerance:  $\pm 10\%$  @ 77°F (25°C)
- Dissipation constant: 3.0 mW/°C
- Time constant: 7 seconds
- Operating range: -58°F to 400°F (-50°C to 204°C)

| Ro@25° C ( $\Omega$ ) | Material System | Beta 25/85 | Type Number           |
|-----------------------|-----------------|------------|-----------------------|
| 250                   | GE5.5*          | 2983       | 03006-165.9-55-G100   |
| 500                   | GE5.5*          | 2983       | 03006-331.8-55-G100   |
| 1K                    | GE7.3           | 3499       | 03006-624-73-G100     |
| 2K                    | GE7.3           | 3499       | 03006-1248-73-G100    |
| 2786                  | GE10.1          | 4102       | 03006-1576-101-G100   |
| 3K                    | GE7.6           | 3553       | 03006-1847-76-G100    |
| 4K                    | GE7.6           | 3553       | 03006-2463-76-G100    |
| 5K                    | GE7.6           | 3553       | 03006-3079-76-G100    |
| 10K                   | GE9.7A          | 3992       | 03006-5818-97-G100    |
| 20K                   | GE9.8           | 3974       | 03006-11.7K-98-G100   |
| 30K                   | GE9.8           | 3974       | 03006-17.53K-98-G100  |
| 50K                   | GE9.7B          | 3952       | 03006-29.1K-97-G100   |
| 100K                  | GE9.7B          | 3952       | 03006-58.2-97-G100    |
| 200K                  | GE12.3          | 4365       | 03006-111.3K-123-G100 |
| 500K                  | GE13.8          | 4567       | 03006-269.8K-138-G100 |
| 1M                    | GE14.5          | 4661       | 03006-535K-145-G100   |
| 5M                    | GE16.4          | 4848       | 03006-2.6M-164-G100   |

\*maximum operating temperature 302°F (150°C)

# Type TH Specifications


Glass encapsulated radial lead thermistor

| Part Number | Resistance (25 Ω) | β Constant (25/50) | Recommended Maximum Operating Current at 77°F (25°C) | Maximum Permissible Current at 77°F (25°C) |
|-------------|-------------------|--------------------|--|--|
| TH220J33G   | 2.0 K             | 3375 K             | 0.22 mA  | 30.0 mA                                    |
| TH225J13G   | 2.545 K           | 3745 K             | 0.22 mA  | 30.0 mA                                    |
| TH238J34G   | 3.896 K           | 3434 K             | 0.20 mA  | 26.5 mA                                    |
| TH253J34G   | 5.369 K           | 3434 K             | 0.16 mA  | 24.0 mA                                    |
| TH310J34G   | 10.74 K           | 3434 K             | 0.13 mA  | 20.0 mA                                    |
| TH310J36G   | 10.0 K            | 3684 K             | 0.14 mA  | 20.0 mA                                    |
| TH310J39G   | 10.0 K            | 3933 K             | 0.14 mA  | 20.0 mA                                    |
| TH315J39G   | 15.0 K            | 3933 K             | 0.12 mA  | 17.0 mA                                    |
| TH320J39G   | 20.0 K            | 3952 K             | 0.10 mA  | 15.0 mA                                    |
| TH349J39G   | 49.12 K           | 3952 K             | 0.06 mA  | 10.0 mA                                    |
| TH350J39G   | 50.0 K            | 3952 K             | 0.06 mA  | 10.0 mA                                    |
| TH398J40G   | 98.63 K           | 4014 K             | 0.045 mA   | 5.0 mA                                     |
| TH410J40G   | 100.0 K           | 4014 K             | 0.045 mA   | 5.0 mA                                     |
| TH420J34G   | 200.0 K           | 3450 K             | 0.015 mA   | 3.5 mA                                     |
| TH423J41G   | 231.4 K           | 4176 K             | 0.015 mA   | 3.5 mA                                     |
| TH510J44G   | 1,000 K           | 4491 K             | 0.007 mA   | 1.5 mA                                     |
| TH513J44G   | 1,388 K           | 4491 K             | 0.005 mA   | 1.0 mA                                     |

- The tolerance of resistance is ±5% for standard device
- The tolerance of B constant is ±2% for standard device The constant is determined by the equation:  

$$B = 3853.9 \ln (R_{25}/R_{50})$$
 R25 and R50 represent the thermistor resistance at 77°F and 122°F (25°C and 50°C) respectively
- Others: For non-standard devices, consult Thermometrics

| Dissipation Factor (in still air) | Time Constant (in still air) | Operating Temperature Range        | Rated Power at 77°F (25°C) |
|-----------------------------------|------------------------------|------------------------------------|----------------------------|
| 2.0 (mW/°C)                       | 25 (seconds)                 | -40°F to 482°F<br>(-40°C to 250°C) | 25 mW                      |

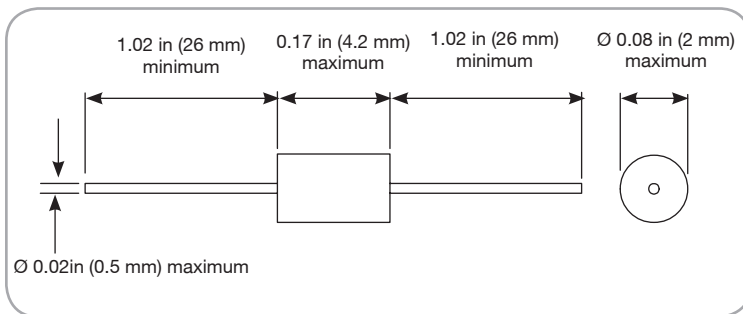

NTC Type TH dimensions

# Explanation of Part Number

|     |     |     |     |     |     |     |   |     |
|-----|-----|-----|-----|-----|-----|-----|---|-----|
| TH  | 410 | S   | 40  | F   | D   | SN  | - | T5  |
| (1) | (2) | (3) | (4) | (5) | (6) | (7) |   | (8) |

| 1                        | 2  | 3 / 5  | 4  | 6   | 7  | 8  |
|--------------------------|--|--|--|---|--|--|
| Type                     | Resistance<br>R(25°C)  | Resistance /<br>B Value<br>Tolerance   | B Value<br>Range   | Standard<br>Temperature   | Lead Wire Type   | Packing<br>& Other<br>Description  |
| Diode Type<br>Thermistor | 225:25x10 <sup>2</sup><br>= 2.5kΩ<br>310:10x10 <sup>3</sup><br>=10kΩ<br>410:10x10 <sup>4</sup><br>=100kΩ | F : ± 1%<br>G : ± 2%<br>H : ± 3%<br>J : ± 5%<br>K : ± 10%<br>L : ± 15%<br>M : ± 20%<br>:<br>:<br><u>S : others</u><br>S : ± 1.5% | 33:3300k<br>~3399k<br>40:4000k<br>~4099k<br>42:4200k<br>~4299k | J : -18°C<br>A : 0°C<br>B : 25°C<br>C : 50°C<br>D : 75°C<br>E : 85°C<br>F : 100°C<br>G : 150°C<br>H : 200°C<br>:<br>:<br>S : others | NR : CP wire<br>NI : Ni plated<br>Sn : Sn plated<br>:<br>:<br>:<br>:<br>S : others | T5 : Taping<br>(52mm,<br>Ammo)<br>-----<br>R3 : Reel<br>(52mm, 3KP)<br>-----<br>C11 : 11mm<br>(Wire cutting)<br>-----<br>Other Special<br>Shape or Dim |

# Amphenol

**Advanced Sensors**

[www.amphenol-sensors.com](http://www.amphenol-sensors.com)

© 2017 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice.  
Other company names and product names used in this document are the registered trademarks or  
trademarks of their respective owners.

AAS-920-320E - 08/2017



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Amphenol:

[DKA502H10](#) [DKA502B10](#) [DKA502N10](#) [DKA502N3](#) [DKA502B3](#) [DKA502N5](#) [DKA502B5](#) [TH420J34GBNI](#)  
[TH410J42GBSN-T5](#) [TH450J44GBSN](#) [TH349G39GDSN](#) [TH248G39GSSN](#) [TH297G39FSSN](#) [TH248S39GSNI](#)  
[TH250H39GBSN](#) [TH310F39FBSN-T5](#) [TH310J37GBSN](#) [TH350H39GBSN](#) [TH420J34GDNI](#) [TH420J41GBSN-T5](#)  
[TH420H34GBNI](#) [TH423J41GBNI](#) [TH513J45GBSN](#) [TH350J39GBPS](#) [TH513F45GBSN](#) [TH310J32GBSN](#)  
[TH238J34GBSN](#) [TH310H36GBSN-T5](#) [TH410H40GDNI](#) [TH310H39GBSN](#) [TH350J39GBNI](#) [TH410J34HBSN](#)  
[TH422H41GHNI](#) [TH310H39FBSN-T5](#) [TH310H41GBSN](#) [TH310J34GBNI](#) [TH310F39FBSN](#) [TH310H34GBNR](#)  
[TH410H40GSNI-C16](#) [TH423H41GGNI](#) [TH320H35GBSN](#) [TH349G39GFNI](#) [TH410J40GDNI](#) [TH510J44GBSN](#)  
[TH423H41GBNI](#) [TH423H41GGNI-B](#) [TH423J41GGNI-B](#) [TH452J44HSSN](#) [TH310J39GBSN\(25/85\)](#) [TH410F39GBSN](#)  
[TH320J39GBSN](#) [TH330H39GBSN](#) [TH349H39GFSN](#) [TH253J34GBSN-T5](#) [TH310H39GASN](#) [TH423H41GHNI](#)  
[TH420H34GDNI](#) [TH420J41GBNI](#) [TH410H40GBNI](#) [TH410J40GBSN-T5](#) [TH420H34GBNI\(25/85\)](#) [TH423J41GHNI](#)  
[TH253J34GBSN](#) [TH320S39GSSN](#) [TH350H39GBPS](#) [TH410J40GBNI](#) [TH349J39GSNI](#) [TH410J40GBPS](#)  
[TH349G39GBSN](#) [TH333J40GBPS-T5](#) [TH250F34GBSN](#) [TH253G34GAPS](#) [TH310H36GBSN](#) [TH316S42GBNR](#)  
[TH349G39GBPS](#) [TH349H39GFNI](#) [TH349J39GSSN](#) [TH330J39GBSN](#) [TH350H39GBNI](#) [TH358S39FFNI](#)  
[TH310G39GBSN](#) [TH420J34GBPS](#) [TH450J44HBSN](#) [TH310H34GBSN](#) [TH349J39GBSN](#) [TH220J33GBSN](#)  
[TH310J34GBSN](#) [TH310J39GBSN](#) [TH250J34GBSN](#) [TH310J34GBSN-T5](#) [TH225J37GBSN](#) [TH410J40GBSN](#)  
[TH349H39GSSN](#) [TH320H39GBSN](#) [TH248H39GSSN](#) [TH297G39FSSN-C11.5](#) [TH310H34GASN](#) [TH350G39GBPS-T5](#)  
[TH315J39GBSN](#) [TH350J39GBSN](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.