



## L4931 SERIES


### VERY LOW DROP VOLTAGE REGULATORS WITH INHIBIT

- VERY LOW DROPOUT VOLTAGE (0.4V)
- VERY LOW QUIESCENT CURRENT  
(TYP. 50  $\mu$ A IN OFF MODE, 600 $\mu$ A IN ON MODE)
- OUTPUT CURRENT UP TO 250 mA
- LOGIC-CONTROLLED ELECTRONIC SHUTDOWN
- OUTPUT VOLTAGES OF 1.25; 1.5; 2.5; 2.7; 3; 3.3; 3.5; 4; 4.5; 4.7; 5; 5.2; 5.5; 6; 8; 12V
- INTERNAL CURRENT AND THERMAL LIMIT
- ONLY 2.2 $\mu$ F FOR STABILITY
- AVAILABLE IN  $\pm 1\%$  (AB) OR 2% (C) SELECTION AT 25°C
- SUPPLY VOLTAGE REJECTION: 70db TYP. FOR 5V VERSION
- TEMPERATURE RANGE: -40 TO 125°C

#### DESCRIPTION


The L4931 series are very Low Drop regulators available in TO-220, SO-8, DPAK, PPAK and TO-92 packages and in a wide range of output voltages.

The very Low Drop voltage (0.4V) and the very low quiescent current make them particularly suitable for Low Noise, Low Power applications and specially in battery powered systems.

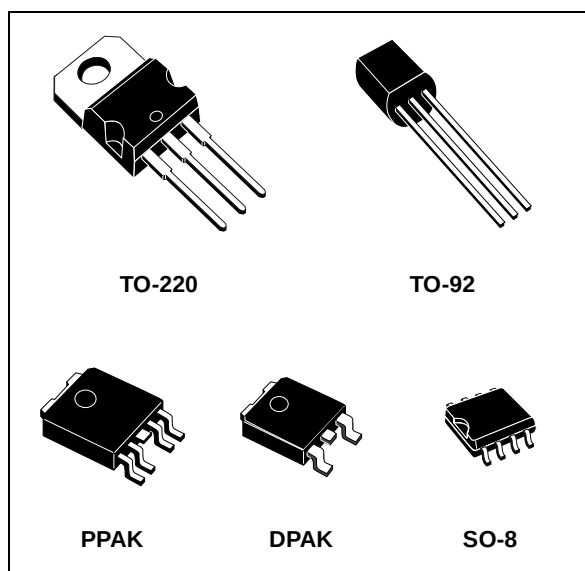

In PPAK and SO-8 packages a Shutdown Logic Control function is available TTL compatible. This means that when the device is used as a local regulator, it is possible to put a part of the board in standby, decreasing the total power consumption. It requires only a 2.2  $\mu$ F capacitor for stability allowing space and cost saving.

#### SCHEMATIC DIAGRAM

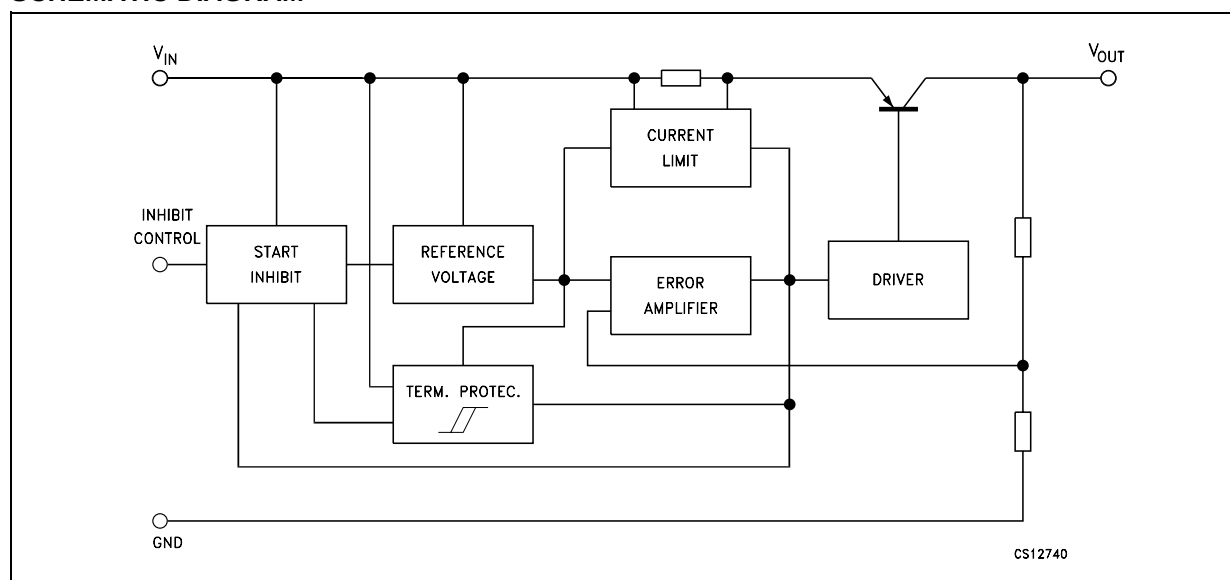

L4931 SERIES

ABSOLUTE MAXIMUM RATINGS

| Symbol    | Parameter                            | Value              | Unit |
|-----------|--------------------------------------|--------------------|------|
| $V_I$     | DC Input Voltage                     | 20                 | V    |
| $I_O$     | Output Current                       | Internally Limited |      |
| $P_{tot}$ | Power Dissipation                    | Internally Limited |      |
| $T_{stg}$ | Storage Temperature Range            | -40 to 150         | °C   |
| $T_{op}$  | Operating Junction Temperature Range | -40 to 125         | °C   |


Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

THERMAL DATA

| Symbol         | Parameter                           | TO-220 | SO-8  | DPAK | PPAK | TO-92 | Unit |
|----------------|-------------------------------------|--------|-------|------|------|-------|------|
| $R_{thj-case}$ | Thermal Resistance Junction-case    | 3      | 20    | 8    | 8    |       | °C/W |
| $R_{thj-amb}$  | Thermal Resistance Junction-ambient | 50     | 55(*) | 100  | 100  | 200   | °C/W |

(\*) Considering 6 cm<sup>2</sup> of copper board heat-sink

CONNECTION DIAGRAM (top view)

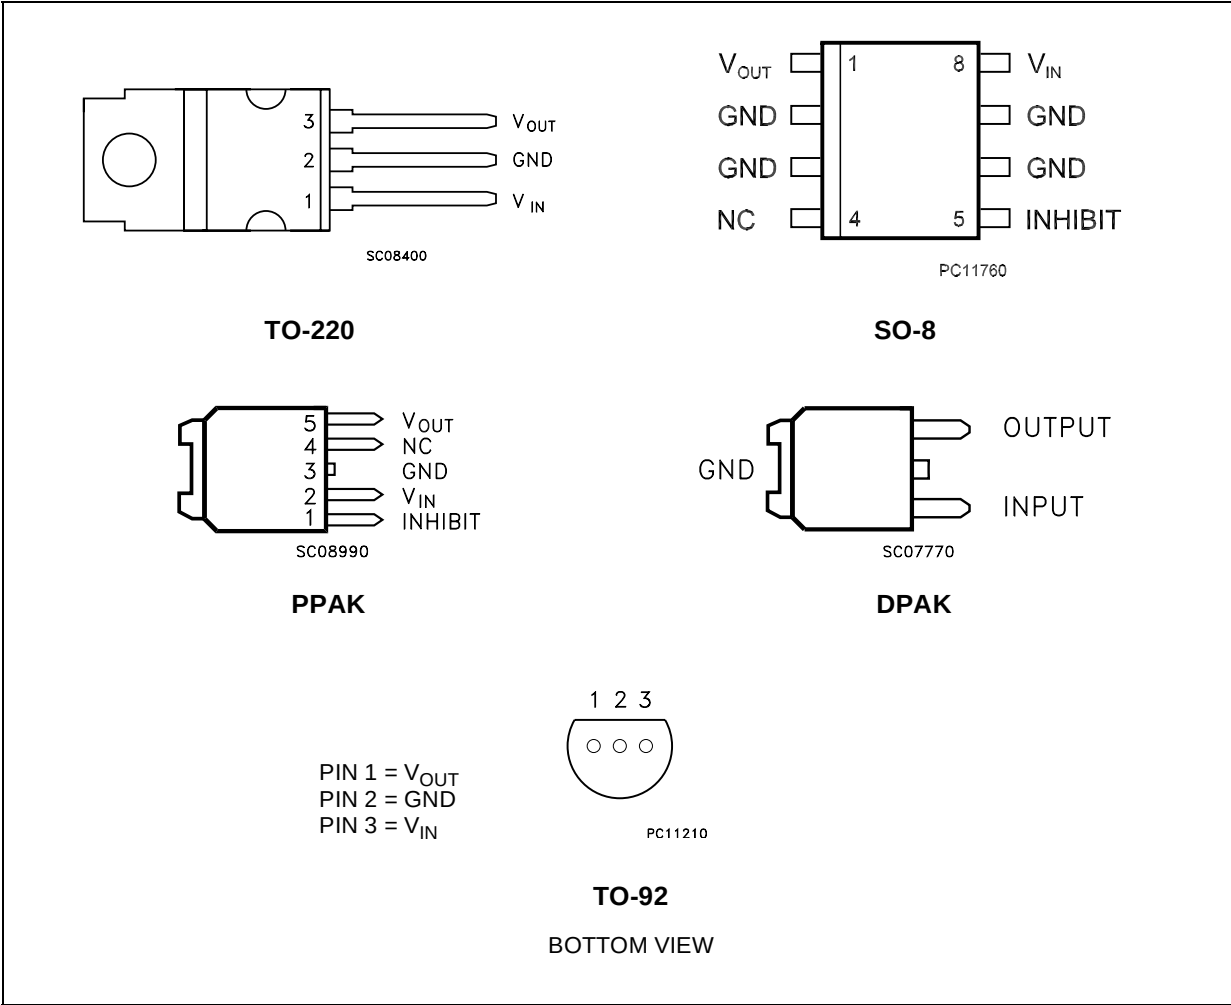


## ORDERING CODES

| TO-220         | SO-8           | PPAK            | DPAK            | TO-92          | OUTPUT VOLTAGE |
|----------------|----------------|-----------------|-----------------|----------------|----------------|
| L4931CV12 (*)  | L4931CD12 (*)  | L4931CPT12 (*)  | L4931CDT12 (*)  | L4931CZ12 (*)  | 1.25 V         |
| L4931ABV12 (*) | L4931ABD12 (*) | L4931ABPT12 (*) | L4931ABDT12 (*) | L4931ABZ12 (*) | 1.25 V         |
| L4931CV15 (*)  | L4931CD15 (*)  | L4931CPT15 (*)  | L4931CDT15 (*)  | L4931CZ15 (*)  | 1.5 V          |
| L4931ABV15 (*) | L4931ABD15 (*) | L4931ABPT15 (*) | L4931ABDT15 (*) | L4931ABZ15 (*) | 1.5 V          |
| L4931CV25 (*)  | L4931CD25      | L4931CPT25 (*)  | L4931CDT25      | L4931CZ25 (*)  | 2.5 V          |
| L4931ABV25 (*) | L4931ABD25     | L4931ABPT25 (*) | L4931ABDT25     | L4931ABZ25 (*) | 2.5 V          |
| L4931CV27      | L4931CD27      | L4931CPT27      | L4931CDT27      | L4931CZ27      | 2.7 V          |
| L4931ABV27     | L4931ABD27     | L4931ABPT27     | L4931ABDT27     | L4931ABZ27     | 2.7 V          |
| L4931CV30      | L4931CD30      | L4931CPT30      | L4931CDT30      | L4931CZ30      | 3 V            |
| L4931ABV30     | L4931ABD30     | L4931ABPT30     | L4931ABDT30     | L4931ABZ30     | 3 V            |
| L4931CV33      | L4931CD33      | L4931CPT33      | L4931CDT33      | L4931CZ33      | 3.3 V          |
| L4931ABV33     | L4931ABD33     | L4931ABPT33     | L4931ABDT33     | L4931ABZ33     | 3.3 V          |
| L4931CV35      | L4931CD35      | L4931CPT35      | L4931CDT35      | L4931CZ35      | 3.5 V          |
| L4931ABV35     | L4931ABD35     | L4931ABPT35     | L4931ABDT35     | L4931ABZ35     | 3.5 V          |
| L4931CV40      | L4931CD40      | L4931CPT40      | L4931CDT40      | L4931CZ40      | 4 V            |
| L4931ABV40     | L4931ABD40     | L4931ABPT40     | L4931ABDT40     | L4931ABZ40     | 4 V            |
| L4931CV45 (*)  | L4931CD45 (*)  | L4931CPT45 (*)  | L4931CDT45 (*)  | L4931CZ45 (*)  | 4.5 V          |
| L4931ABV45 (*) | L4931ABD45 (*) | L4931ABPT45 (*) | L4931ABDT45 (*) | L4931ABZ45 (*) | 4.5 V          |
| L4931CV47      | L4931CD47      | L4931CPT47      | L4931CDT47      | L4931CZ47      | 4.75 V         |
| L4931ABV47     | L4931ABD47     | L4931ABPT47     | L4931ABDT47     | L4931ABZ47     | 4.75 V         |
| L4931CV50      | L4931CD50      | L4931CPT50      | L4931CDT50      | L4931CZ50      | 5 V            |
| L4931ABV50     | L4931ABD50     | L4931ABPT50     | L4931ABDT50     | L4931ABZ50     | 5 V            |
| L4931CV52 (*)  | L4931CD52 (*)  | L4931CPT52 (*)  | L4931CDT52 (*)  | L4931CZ52 (*)  | 5.2 V          |
| L4931ABV52 (*) | L4931ABD52 (*) | L4931ABPT52 (*) | L4931ABDT52 (*) | L4931ABZ52 (*) | 5.2 V          |
| L4931CV55 (*)  | L4931CD55 (*)  | L4931CPT55 (*)  | L4931CDT55 (*)  | L4931CZ55 (*)  | 5.5 V          |
| L4931ABV55 (*) | L4931ABD55 (*) | L4931ABPT55 (*) | L4931ABDT55 (*) | L4931ABZ55 (*) | 5.5 V          |
| L4931CV60      | L4931CD60      | L4931CPT60      | L4931CDT60      | L4931CZ60      | 6 V            |
| L4931ABV60     | L4931ABD60     | L4931ABPT60     | L4931ABDT60     | L4931ABZ60     | 6 V            |
| L4931CV80      | L4931CD80      | L4931CPT80      | L4931CDT80      | L4931CZ80      | 8 V            |
| L4931ABV80     | L4931ABD80     | L4931ABPT80     | L4931ABDT80     | L4931ABZ80     | 8 V            |
| L4931CV120     | L4931CD120     | L4931CPT120     | L4931CDT120     | L4931CZ120     | 12 V           |
| L4931ABV120    | L4931ABD120    | L4931ABPT120    | L4931ABDT120    | L4931ABZ120    | 12 V           |

(\*) Available on request.

## L4931 SERIES

### TEST CIRCUITS

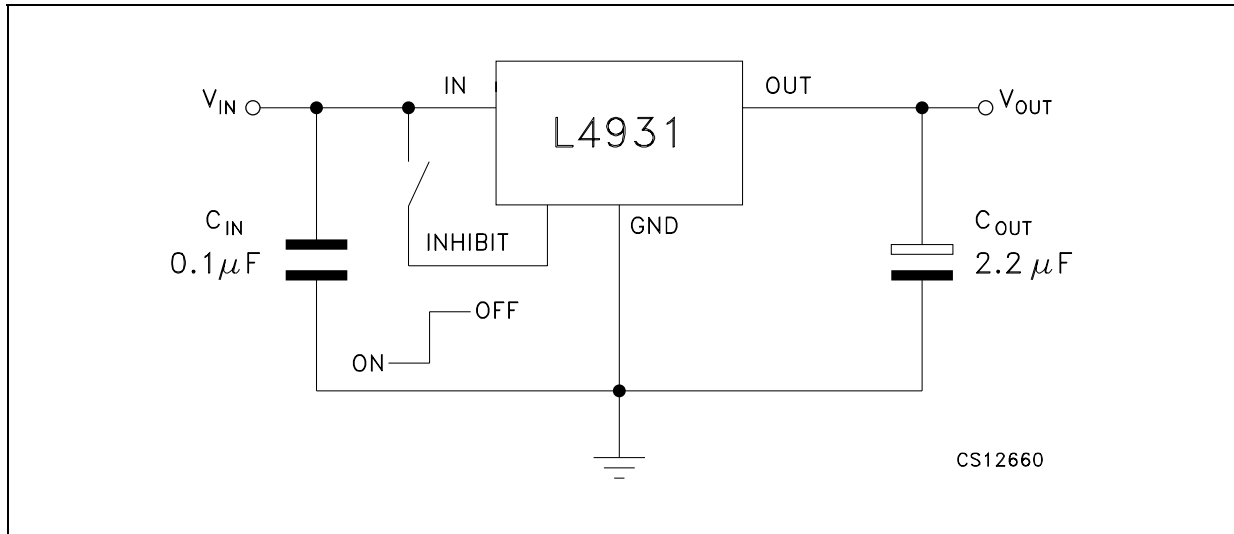

**ELECTRICAL CHARACTERISTICS OF L4931ABxx12** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1 \mu\text{F}$ ,  $C_O = 2.2 \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.                 | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|----------------------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5 \text{ mA}$ $V_I = 3.3 \text{ V}$                                          | 1.238                | 1.25 | 1.263 | V             |
|                  |                              | $I_O = 5 \text{ mA}$ $V_I = 3.3 \text{ V}$ $T_A = -25 \text{ to } 85^\circ\text{C}$ | 1.225                |      | 1.275 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250 \text{ mA}$                                                              | 2.5                  |      | 20    | V             |
| $I_{out}$        | Output Current Limit         |                                                                                     |                      | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 2.5 \text{ to } 20 \text{ V}$ $I_O = 0.5 \text{ mA}$                         |                      | 3    | 15    | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 2.7 \text{ V}$ $I_O = 0.5 \text{ to } 250 \text{ mA}$                        |                      | 3    | 15    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 2.7 \text{ to } 20 \text{ V}$ $I_O = 0 \text{ mA}$                           |                      | 0.6  | 1     | mA            |
|                  |                              | $V_I = 2.7 \text{ to } 20 \text{ V}$ $I_O = 250 \text{ mA}$                         |                      | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6 \text{ V}$                                                                 |                      | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5 \text{ mA}$<br>$V_I = 3.7 \pm 1 \text{ V}$                                 | $f = 120 \text{ Hz}$ | 80   |       | dB            |
|                  |                              |                                                                                     | $f = 1 \text{ KHz}$  | 77   |       |               |
|                  |                              |                                                                                     | $f = 10 \text{ KHz}$ | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10 \text{ Hz to } 100 \text{ KHz}$                                             |                      | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250 \text{ mA}$                                                              |                      | 1.25 |       | V             |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40 \text{ to } 125^\circ\text{C}$                                           |                      |      | 0.8   | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40 \text{ to } 125^\circ\text{C}$                                           | 2                    |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6 \text{ V}$ , $V_C = 6 \text{ V}$                                           |                      | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1 \text{ to } 10 \Omega$ $I_O = 0 \text{ to } 250 \text{ mA}$       | 2                    | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931Cxx12** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 3.3\ \text{V}$                                          | 1.225 | 1.25 | 1.275 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 3.3\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 1.2   |      | 1.3   |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              | 2.5   |      | 20    | V             |
| $I_{\text{out}}$ | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 2.5\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |       | 3    | 18    | mV            |
| $\Delta V_O(*)$  | Load Regulation              | $V_I = 2.7\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 18    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 2.7\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 2.7\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 80   |       | dB            |
|                  |                              | $V_I = 3.7 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 77   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(*)$         | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 1.25 |       | V             |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx15** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 3.5\ \text{V}$                                          | 1.485 | 1.5  | 1.515 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 3.5\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 1.47  |      | 1.53  |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              | 2.5   |      | 20    | V             |
| $I_{\text{out}}$ | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 2.5\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |       | 3    | 15    | mV            |
| $\Delta V_O(*)$  | Load Regulation              | $V_I = 2.7\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 15    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 2.7\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 2.7\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 79   |       | dB            |
|                  |                              | $V_I = 3.7 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 76   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(*)$         | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 1    |       | V             |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

## L4931 SERIES

**ELECTRICAL CHARACTERISTICS OF L4931Cxx15** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 3.5\ \text{V}$                                          | 1.47 | 1.5  | 1.53 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 3.5\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 1.44 |      | 1.56 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              | 2.5  |      | 20   | V             |
| $I_{out}$        | Output Current Limit         |                                                                                     |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 2.5\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |      | 3    | 18   | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 2.7\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |      | 3    | 18   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 2.7\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |      | 0.6  | 1    | mA            |
|                  |                              | $V_I = 2.7\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |      | 4    | 6    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |      | 50   | 100  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |      | 79   |      | dB            |
|                  |                              | $V_I = 3.7 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |      | 76   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |      | 1    |      | V             |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |      |      | 0.8  | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx25** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 4.5\ \text{V}$                                          | 2.475 | 2.5  | 2.525 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 4.5\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 2.45  |      | 2.55  |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |       |      | 20    | V             |
| $I_{out}$        | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 3.2\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |       | 3    | 15    | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 3.4\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 15    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 3.4\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 3.4\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 75   |       | dB            |
|                  |                              | $V_I = 4.4 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 72   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |       |      | 0.8   |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931Cxx25** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 4.5\ \text{V}$                                          | 2.45 | 2.5  | 2.55 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 4.5\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 2.4  |      | 2.6  |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |      |      | 20   | V             |
| $I_{\text{out}}$ | Output Current Limit         |                                                                                     |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 3.3\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |      | 3    | 18   | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 3.5\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |      | 3    | 18   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 3.5\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |      | 0.6  | 1    | mA            |
|                  |                              | $V_I = 3.5\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |      | 4    | 6    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |      | 50   | 100  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |      | 75   |      | dB            |
|                  |                              | $V_I = 4.4 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |      | 72   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |      |      | 0.8  |               |
| $V_{\text{IL}}$  | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |      |      | 0.8  | V             |
| $V_{\text{IH}}$  | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx27** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 4.7\ \text{V}$                                          | 2.673 | 2.7  | 2.727 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 4.7\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 2.646 |      | 2.754 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |       |      | 20    | V             |
| $I_{\text{out}}$ | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 3.4\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |       | 3    | 15    | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 3.6\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 15    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 3.6\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 3.6\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 74   |       | dB            |
|                  |                              | $V_I = 4.6 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 71   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |       |      | 0.8   |               |
| $V_{\text{IL}}$  | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{\text{IH}}$  | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

## L4931 SERIES

**ELECTRICAL CHARACTERISTICS OF L4931Cxx27** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 4.7\ \text{V}$                                          | 2.646 | 2.7  | 2.754 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 4.7\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 2.592 |      | 2.808 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |       |      | 20    | V             |
| $I_{out}$        | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 3.4\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |       | 3    | 18    | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 3.6\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 18    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 3.6\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 3.6\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 74   |       | dB            |
|                  |                              | $V_I = 4.6 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 71   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |       |      | 0.8   |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx30** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                   | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|-----------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 5\ \text{V}$                                          | 2.97 | 3    | 3.03 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 5\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 2.94 |      | 3.06 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                            |      |      | 20   | V             |
| $I_{out}$        | Output Current Limit         |                                                                                   |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 3.7\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                       |      | 3    | 15   | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 3.9\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                      |      | 3    | 15   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 3.9\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                         |      | 0.6  | 1    | mA            |
|                  |                              | $V_I = 3.9\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                       |      | 4    | 6    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                               |      | 50   | 100  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                         |      | 74   |      | dB            |
|                  |                              | $V_I = 4.9 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                   |      | 71   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                              |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                           |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                            |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                  |      |      | 0.8  |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         |      |      | 0.8  | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                         |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$    | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.



**ELECTRICAL CHARACTERISTICS OF L4931Cxx30** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                   | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|-----------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 5\ \text{V}$                                          | 2.94 | 3    | 3.06 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 5\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 2.88 |      | 3.12 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                            |      |      | 20   | V             |
| $I_{out}$        | Output Current Limit         |                                                                                   |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 3.8\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                       |      | 3    | 18   | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 4\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |      | 3    | 18   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 4\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |      | 0.6  | 1    | mA            |
|                  |                              | $V_I = 4\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |      | 4    | 6    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                               |      | 50   | 100  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                         |      | 74   |      | dB            |
|                  |                              | $V_I = 5 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |      | 71   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                              |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                           |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                            |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                  |      |      | 0.8  |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         |      |      | 0.8  | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                         |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$    | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx33** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 5.3\ \text{V}$                                          | 3.267 | 3.3  | 3.333 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 5.3\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 3.234 |      | 3.366 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |       |      | 20    | V             |
| $I_{out}$        | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 4\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                           |       | 3    | 15    | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 4.2\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 15    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 4.2\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 4.2\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 73   |       | dB            |
|                  |                              | $V_I = 5.2 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 70   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |       |      | 0.8   |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

## L4931 SERIES

**ELECTRICAL CHARACTERISTICS OF L4931Cxx33** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 5.3\ \text{V}$                                          | 3.234 | 3.3  | 3.366 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 5.3\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 3.168 |      | 3.432 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |       |      | 20    | V             |
| $I_{out}$        | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 4.1\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |       | 3    | 18    | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 4.3\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 18    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 4.3\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 4.3\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 73   |       | dB            |
|                  |                              | $V_I = 5.3 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 70   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |       |      | 0.8   |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx35** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 5.5\ \text{V}$                                          | 3.465 | 3.5  | 3.535 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 5.5\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 3.43  |      | 3.57  |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |       |      | 20    | V             |
| $I_{out}$        | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 4.2\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |       | 3    | 15    | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 4.4\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 15    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 4.4\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 4.4\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 73   |       | dB            |
|                  |                              | $V_I = 5.4 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 70   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |       |      | 0.8   |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931Cxx35** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 5.5\ \text{V}$                                          | 3.43 | 3.5  | 3.57 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 5.5\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 3.36 |      | 3.64 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |      |      | 20   | V             |
| $I_{out}$        | Output Current Limit         |                                                                                     |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 4.3\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |      | 3    | 18   | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 4.5\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |      | 3    | 18   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 4.5\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |      | 0.6  | 1    | mA            |
|                  |                              | $V_I = 4.5\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |      | 4    | 6    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |      | 50   | 100  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |      | 73   |      | dB            |
|                  |                              | $V_I = 5.5 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |      | 70   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |      |      | 0.8  |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |      |      | 0.8  | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx40** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                   | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|-----------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 6\ \text{V}$                                          | 3.96 | 4    | 4.04 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 6\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 3.92 |      | 4.08 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                            |      |      | 20   | V             |
| $I_{out}$        | Output Current Limit         |                                                                                   |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 4.7\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                       |      | 3.5  | 17.5 | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 4.9\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                      |      | 3    | 15   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 4.9\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                         |      | 0.6  | 1    | mA            |
|                  |                              | $V_I = 4.9\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                       |      | 4    | 6    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                               |      | 50   | 100  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                         |      | 72   |      | dB            |
|                  |                              | $V_I = 5.9 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                   |      | 69   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                              |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                           |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                            |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                  |      |      | 0.8  |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         |      |      | 0.8  | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                         |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$    | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

## L4931 SERIES

**ELECTRICAL CHARACTERISTICS OF L4931Cxx40** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                   | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|-----------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 6\ \text{V}$                                          | 3.92 | 4    | 4.08 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 6\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 3.84 |      | 4.16 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                            |      |      | 20   | V             |
| $I_{out}$        | Output Current Limit         |                                                                                   |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 4.8\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                       |      | 3.5  | 21   | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 5\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |      | 3    | 18   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 5\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |      | 0.6  | 1    | mA            |
|                  |                              | $V_I = 5\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |      | 4    | 6    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                               |      | 50   | 100  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                         |      | 72   |      | dB            |
|                  |                              | $V_I = 6 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |      | 69   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                              |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                           |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                            |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                  |      |      | 0.8  |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         |      |      | 0.8  | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                         |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$    | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx45** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 6.5\ \text{V}$                                          | 4.455 | 4.5  | 4.545 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 6.5\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 4.41  |      | 4.59  |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |       |      | 20    | V             |
| $I_{out}$        | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 5.2\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |       | 3.5  | 17.5  | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 5.4\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 15    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 5.4\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 5.4\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 71   |       | dB            |
|                  |                              | $V_I = 6.4 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 68   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |       |      | 0.8   |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931Cxx45** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 6.5\ \text{V}$                                          | 4.41 | 4.5  | 4.59 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 6.5\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 4.32 |      | 4.68 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |      |      | 20   | V             |
| $I_{\text{out}}$ | Output Current Limit         |                                                                                     |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 5.3\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |      | 3.5  | 21   | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 5.5\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |      | 3    | 18   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 5.5\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |      | 0.6  | 1    | mA            |
|                  |                              | $V_I = 5.5\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |      | 4    | 6    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |      | 50   | 100  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |      | 71   |      | dB            |
|                  |                              | $V_I = 6.5 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |      | 68   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |      |      | 0.8  |               |
| $V_{\text{IL}}$  | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |      |      | 0.8  | V             |
| $V_{\text{IH}}$  | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx47** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 6.7\ \text{V}$                                          | 4.653 | 4.7  | 4.747 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 6.7\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 4.606 |      | 4.794 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |       |      | 20    | V             |
| $I_{\text{out}}$ | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 5.4\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |       | 3.5  | 17.5  | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 5.6\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 15    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 5.6\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 5.6\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 71   |       | dB            |
|                  |                              | $V_I = 6.6 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 68   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |       |      | 0.8   |               |
| $V_{\text{IL}}$  | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{\text{IH}}$  | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

## L4931 SERIES

**ELECTRICAL CHARACTERISTICS OF L4931Cxx47** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 6.7\ \text{V}$                                          | 4.606 | 4.7  | 4.794 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 6.7\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 4.512 |      | 4.888 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |       |      | 20    | V             |
| $I_{out}$        | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 5.5\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |       | 3.5  | 21    | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 5.7\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 18    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 5.7\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 5.7\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 71   |       | dB            |
|                  |                              | $V_I = 6.7 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 68   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |       |      | 0.8   |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx50** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                   | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|-----------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 7\ \text{V}$                                          | 4.95 | 5    | 5.05 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 7\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 4.9  |      | 5.1  |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                            |      |      | 20   | V             |
| $I_{out}$        | Output Current Limit         |                                                                                   |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 5.8\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                       |      | 3.5  | 17.5 | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 6\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |      | 3    | 15   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 6\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |      | 0.6  | 1    | mA            |
|                  |                              | $V_I = 6\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |      | 4    | 6    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                               |      | 50   | 100  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                         |      | 70   |      | dB            |
|                  |                              | $V_I = 7 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |      | 67   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                              |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                           |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                            |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                  |      |      | 0.8  |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         |      |      | 0.8  | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                         |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$    | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931Cxx50** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                   | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|-----------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 7\ \text{V}$                                          | 4.9  | 5    | 5.1  | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 7\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 4.8  |      | 5.2  |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                            |      |      | 20   | V             |
| $I_{\text{out}}$ | Output Current Limit         |                                                                                   |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 5.8\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                       |      | 3.5  | 17.5 | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 6\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |      | 3    | 15   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 6\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |      | 0.6  | 1    | mA            |
|                  |                              | $V_I = 6\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |      | 4    | 6    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                               |      | 50   | 100  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                         |      | 70   |      | dB            |
|                  |                              | $V_I = 7 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |      | 67   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                              |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                           |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                            |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                  |      |      | 0.8  |               |
| $V_{\text{IL}}$  | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         |      |      | 0.8  | V             |
| $V_{\text{IH}}$  | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                         |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$    | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx52** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 7.2\ \text{V}$                                          | 5.148 | 5.2  | 5.252 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 7.2\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 5.096 |      | 5.304 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |       |      | 20    | V             |
| $I_{\text{out}}$ | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 6\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                           |       | 3.5  | 17.5  | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 6.2\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 15    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 6.2\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 6.2\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 70   |       | dB            |
|                  |                              | $V_I = 7.2 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 67   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |       |      | 0.8   |               |
| $V_{\text{IL}}$  | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{\text{IH}}$  | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

## L4931 SERIES

**ELECTRICAL CHARACTERISTICS OF L4931Cxx52** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 7.2\ \text{V}$                                          | 5.096 | 5.2  | 5.304 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 7.2\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 4.992 |      | 5.408 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |       |      | 20    | V             |
| $I_{out}$        | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 6\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                           |       | 3.5  | 21    | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 6.2\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 18    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 6.2\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 6.2\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 70   |       | dB            |
|                  |                              | $V_I = 7.2 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 67   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |       |      | 0.8   |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx55** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 7.5\ \text{V}$                                          | 5.445 | 5.5  | 5.555 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 7.5\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 5.39  |      | 5.61  |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |       |      | 20    | V             |
| $I_{out}$        | Output Current Limit         |                                                                                     |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 6.3\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |       | 3.5  | 17.5  | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 6.5\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 15    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 6.5\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.6  | 1     | mA            |
|                  |                              | $V_I = 6.5\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4    | 6     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |       | 50   | 100   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |       | 70   |       | dB            |
|                  |                              | $V_I = 7.5 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 67   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |       |      | 0.8   |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |       |      | 0.8   | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.



**ELECTRICAL CHARACTERISTICS OF L4931Cxx55** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                     | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|-------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 7.5\ \text{V}$                                          | 5.39 | 5.5  | 5.61 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 7.5\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 5.28 |      | 5.72 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                              |      |      | 20   | V             |
| $I_{out}$        | Output Current Limit         |                                                                                     |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 6.3\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                         |      | 3.5  | 21   | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 6.5\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |      | 3    | 18   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 6.5\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |      | 0.6  | 1    | mA            |
|                  |                              | $V_I = 6.5\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |      | 4    | 6    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                 |      | 50   | 100  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                           |      | 70   |      | dB            |
|                  |                              | $V_I = 7.5 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |      | 67   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                                |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                             |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                              |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                    |      |      | 0.8  |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           |      |      | 0.8  | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                           | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                           |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$      | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx60** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                   | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|-----------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 8\ \text{V}$                                          | 5.94 | 6    | 6.06 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 8\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 5.88 |      | 6.12 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                            |      |      | 20   | V             |
| $I_{out}$        | Output Current Limit         |                                                                                   |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 6.8\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                       |      | 4    | 20   | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 7\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |      | 3    | 15   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 7\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |      | 0.8  | 1.6  | mA            |
|                  |                              | $V_I = 7\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |      | 4.5  | 7    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                               |      | 70   | 140  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                         |      | 69   |      | dB            |
|                  |                              | $V_I = 8 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |      | 66   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                              |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                           |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                            |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                  |      |      | 0.8  |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         |      |      | 0.8  | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                         |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$    | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

## L4931 SERIES

**ELECTRICAL CHARACTERISTICS OF L4931Cxx60** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                   | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|-----------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 8\ \text{V}$                                          | 5.88 | 6    | 6.12 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 8\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 5.76 |      | 6.24 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                            |      |      | 20   | V             |
| $I_{out}$        | Output Current Limit         |                                                                                   |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 6.8\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                       |      | 4    | 24   | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 7\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |      | 3    | 18   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 7\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |      | 0.8  | 1.6  | mA            |
|                  |                              | $V_I = 7\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |      | 4.5  | 7    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                               |      | 70   | 140  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                         |      | 69   |      | dB            |
|                  |                              | $V_I = 8 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |      | 66   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                              |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                           |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                            |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                  |      |      | 0.8  |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         |      |      | 0.8  | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                         | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                         |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$    | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx80** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                    | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 10\ \text{V}$                                          | 7.92 | 8    | 8.08 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 10\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 7.84 |      | 8.16 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                             |      |      | 20   | V             |
| $I_{out}$        | Output Current Limit         |                                                                                    |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 8.8\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                        |      | 4    | 20   | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 9\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                         |      | 3    | 15   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 9\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                            |      | 0.8  | 1.6  | mA            |
|                  |                              | $V_I = 9\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                          |      | 4.5  | 7    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                |      | 70   | 140  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                          |      | 67   |      | dB            |
|                  |                              | $V_I = 10 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |      | 64   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                               |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                            |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                             |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                   |      |      | 0.8  |               |
| $V_{IL}$         | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                          |      |      | 0.8  | V             |
| $V_{IH}$         | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                          | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                          |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$     | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931Cxx80** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                    | Min. | Typ. | Max. | Unit          |
|------------------|------------------------------|------------------------------------------------------------------------------------|------|------|------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 10\ \text{V}$                                          | 7.84 | 8    | 8.16 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 10\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 7.68 |      | 8.32 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                             |      |      | 20   | V             |
| $I_{\text{out}}$ | Output Current Limit         |                                                                                    |      | 300  |      | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 8.9\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                        |      | 4    | 24   | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 9.1\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                       |      | 3    | 18   | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 9.1\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                          |      | 0.8  | 1.6  | mA            |
|                  |                              | $V_I = 9.1\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                        |      | 4.5  | 7    |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                |      | 70   | 140  | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                          |      | 67   |      | dB            |
|                  |                              | $V_I = 10.1 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                   |      | 64   |      |               |
|                  |                              | $f = 10\ \text{KHz}$                                                               |      | 55   |      |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                            |      | 50   |      | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                             |      | 0.4  | 0.6  | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                   |      |      | 0.8  |               |
| $V_{\text{IL}}$  | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                          |      |      | 0.8  | V             |
| $V_{\text{IH}}$  | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                          | 2    |      |      | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                          |      | 10   |      | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$     | 2    | 10   |      | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.

**ELECTRICAL CHARACTERISTICS OF L4931ABxx120** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).

| Symbol           | Parameter                    | Test Conditions                                                                    | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 14\ \text{V}$                                          | 11.88 | 12   | 12.12 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 14\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 11.76 |      | 12.24 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                             |       |      | 20    | V             |
| $I_{\text{out}}$ | Output Current Limit         |                                                                                    |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 12.8\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                       |       | 4    | 20    | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 13\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                        |       | 3    | 15    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 13\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                           |       | 0.8  | 1.6   | mA            |
|                  |                              | $V_I = 13\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                         |       | 4.5  | 7     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                |       | 90   | 180   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                          |       | 64   |       | dB            |
|                  |                              | $V_I = 14 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                     |       | 61   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                               |       | 55   |       |               |
| eN               | Output Noise Voltage         | $B = 10\ \text{Hz to}\ 100\ \text{KHz}$                                            |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                             |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                   |       |      | 0.8   |               |
| $V_{\text{IL}}$  | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                          |       |      | 0.8   | V             |
| $V_{\text{IH}}$  | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                          | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                          |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | $\text{ESR} = 0.1\ \text{to}\ 10\ \Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$     | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.


## L4931 SERIES

**ELECTRICAL CHARACTERISTICS OF L4931Cxx120** (refer to the test circuits,  $T_J = 25^\circ\text{C}$ ,  $C_I = 0.1\ \mu\text{F}$ ,  $C_O = 2.2\ \mu\text{F}$  unless otherwise specified).


| Symbol           | Parameter                    | Test Conditions                                                                    | Min.  | Typ. | Max.  | Unit          |
|------------------|------------------------------|------------------------------------------------------------------------------------|-------|------|-------|---------------|
| $V_O$            | Output Voltage               | $I_O = 5\ \text{mA}$ $V_I = 14\ \text{V}$                                          | 11.76 | 12   | 12.24 | V             |
|                  |                              | $I_O = 5\ \text{mA}$ $V_I = 14\ \text{V}$ $T_A = -25\ \text{to}\ 85^\circ\text{C}$ | 11.52 |      | 12.48 |               |
| $V_I$            | Operating Input Voltage      | $I_O = 250\ \text{mA}$                                                             |       |      | 20    | V             |
| $I_{\text{out}}$ | Output Current Limit         |                                                                                    |       | 300  |       | mA            |
| $\Delta V_O$     | Line Regulation              | $V_I = 12.9\ \text{to}\ 20\ \text{V}$ $I_O = 0.5\ \text{mA}$                       |       | 4    | 24    | mV            |
| $\Delta V_O(^*)$ | Load Regulation              | $V_I = 13.1\ \text{V}$ $I_O = 0.5\ \text{to}\ 250\ \text{mA}$                      |       | 3    | 18    | mV            |
| $I_d$            | Quiescent Current<br>ON MODE | $V_I = 13.1\ \text{to}\ 20\ \text{V}$ $I_O = 0\ \text{mA}$                         |       | 0.8  | 1.6   | mA            |
|                  |                              | $V_I = 13.1\ \text{to}\ 20\ \text{V}$ $I_O = 250\ \text{mA}$                       |       | 4.5  | 7     |               |
|                  | OFF MODE                     | $V_I = 6\ \text{V}$                                                                |       | 90   | 180   | $\mu\text{A}$ |
| SVR              | Supply Voltage Rejection     | $I_O = 5\ \text{mA}$ $f = 120\ \text{Hz}$                                          |       | 64   |       | dB            |
|                  |                              | $V_I = 14.1 \pm 1\ \text{V}$ $f = 1\ \text{KHz}$                                   |       | 61   |       |               |
|                  |                              | $f = 10\ \text{KHz}$                                                               |       | 55   |       |               |
| eN               | Output Noise Voltage         | B = 10 Hz to 100 KHz                                                               |       | 50   |       | $\mu\text{V}$ |
| $V_d(^*)$        | Dropout Voltage              | $I_O = 250\ \text{mA}$                                                             |       | 0.4  | 0.6   | V             |
|                  |                              | $I_O = 250\ \text{mA}$ $T_J = -40\ \text{to}\ 125^\circ\text{C}$                   |       |      | 0.8   |               |
| $V_{\text{IL}}$  | Control Input Logic Low      | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                          |       |      | 0.8   | V             |
| $V_{\text{IH}}$  | Control Input Logic High     | $T_A = -40\ \text{to}\ 125^\circ\text{C}$                                          | 2     |      |       | V             |
| $I_I$            | Control Input Current        | $V_I = 6\ \text{V}$ , $V_C = 6\ \text{V}$                                          |       | 10   |       | $\mu\text{A}$ |
| $C_O$            | Output Bypass Capacitance    | ESR = 0.1 to 10 $\Omega$ $I_O = 0\ \text{to}\ 250\ \text{mA}$                      | 2     | 10   |       | $\mu\text{F}$ |

(\*) For SO-8 package the maximum limit of load regulation and dropout is increased by 20 mV.


**Figure 1 : Supply Current vs Output Current**

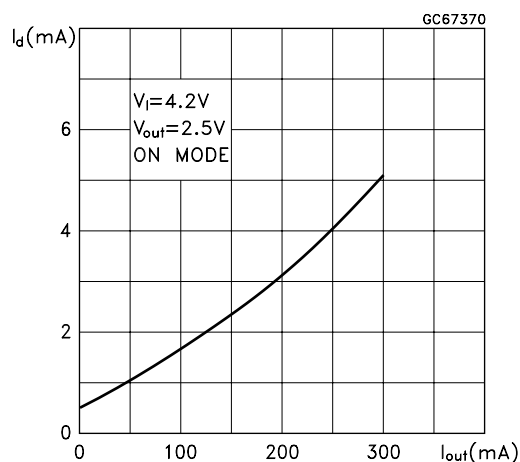


**Figure 4 : Supply Current vs Temperature**

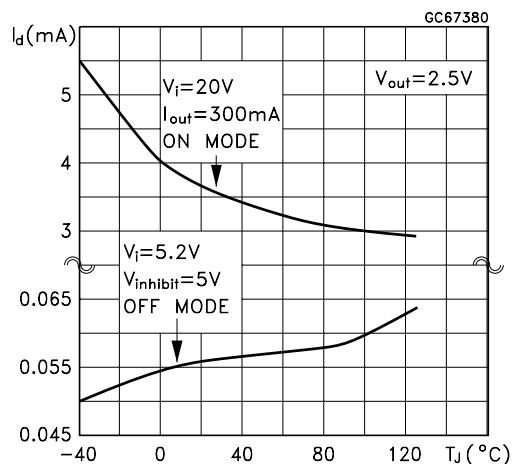


**Figure 2 : Dropout Voltage vs Temperature**

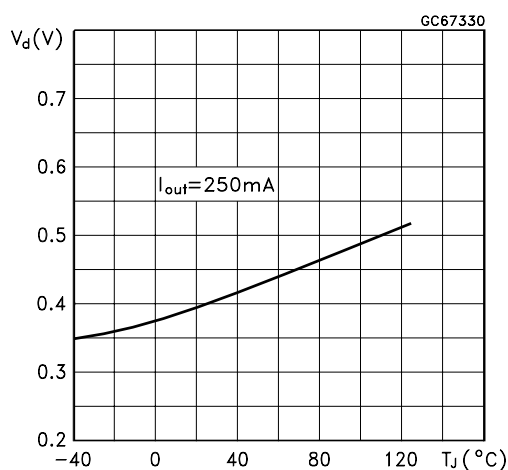


**Figure 5 : Short Circuit Current vs Dropout Voltage**

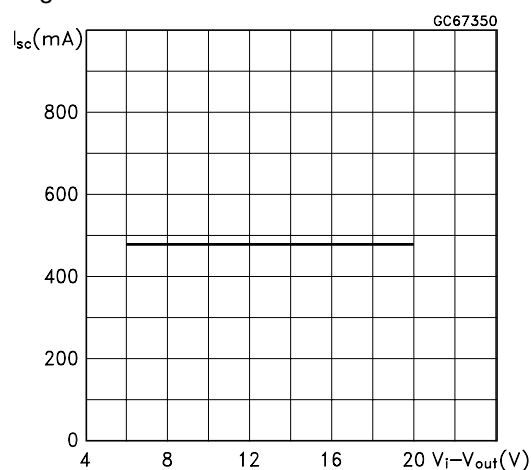

**Figure 3 : Supply Current vs Input Voltage**

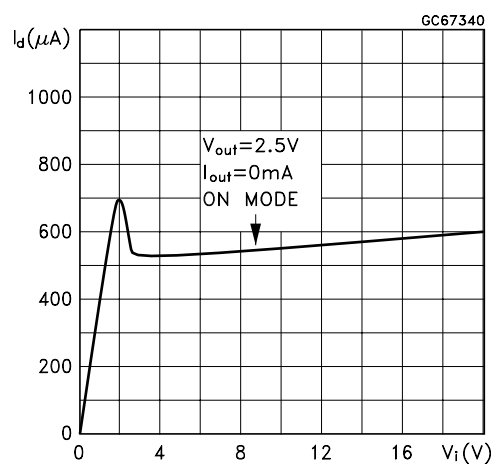


**Figure 6 : S.V.R. vs Input Voltage Signal Frequency**

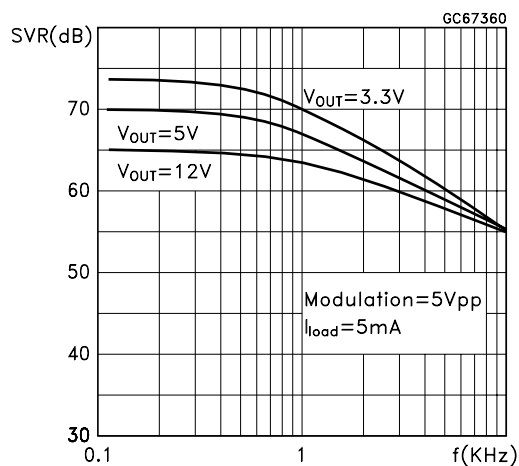


## TO-220 MECHANICAL DATA

| DIM. | mm.   |      |       | inch  |       |       |
|------|-------|------|-------|-------|-------|-------|
|      | MIN.  | TYP  | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 4.40  |      | 4.60  | 0.173 |       | 0.181 |
| C    | 1.23  |      | 1.32  | 0.048 |       | 0.051 |
| D    | 2.40  |      | 2.72  | 0.094 |       | 0.107 |
| D1   |       | 1.27 |       |       | 0.050 |       |
| E    | 0.49  |      | 0.70  | 0.019 |       | 0.027 |
| F    | 0.61  |      | 0.88  | 0.024 |       | 0.034 |
| F1   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| F2   | 1.14  |      | 1.70  | 0.044 |       | 0.067 |
| G    | 4.95  |      | 5.15  | 0.194 |       | 0.203 |
| G1   | 2.4   |      | 2.7   | 0.094 |       | 0.106 |
| H2   | 10.0  |      | 10.40 | 0.393 |       | 0.409 |
| L2   |       | 16.4 |       |       | 0.645 |       |
| L4   | 13.0  |      | 14.0  | 0.511 |       | 0.551 |
| L5   | 2.65  |      | 2.95  | 0.104 |       | 0.116 |
| L6   | 15.25 |      | 15.75 | 0.600 |       | 0.620 |
| L7   | 6.2   |      | 6.6   | 0.244 |       | 0.260 |
| L9   | 3.5   |      | 3.93  | 0.137 |       | 0.154 |
| DIA. | 3.75  |      | 3.85  | 0.147 |       | 0.151 |

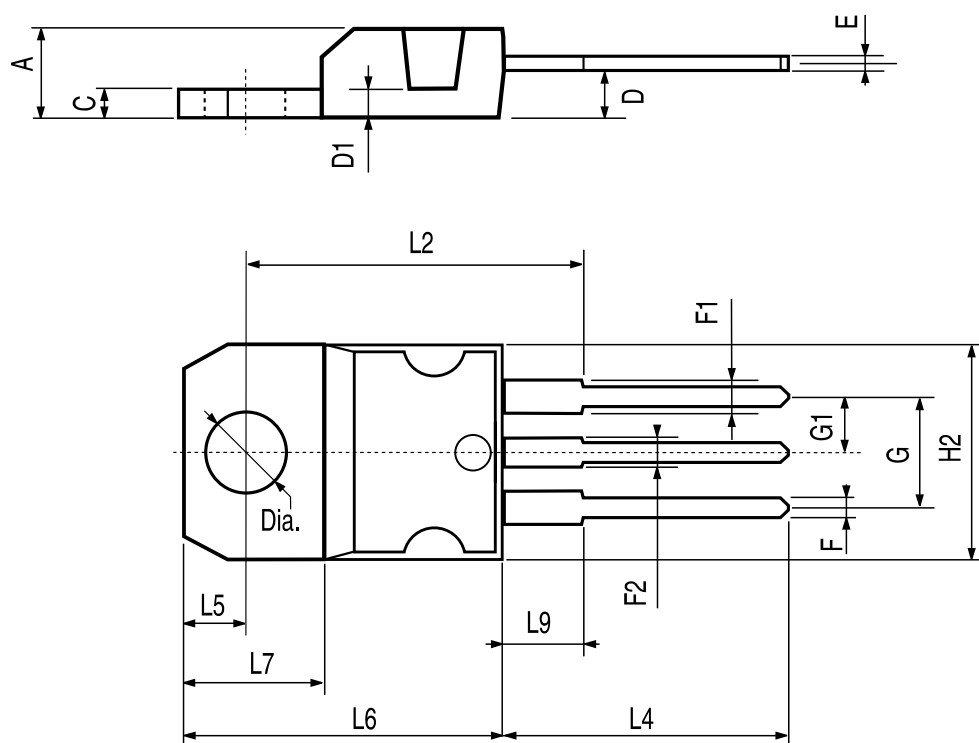


TO-92 MECHANICA DATA

| DIM. | mm.  |     |       | mils  |      |       |
|------|------|-----|-------|-------|------|-------|
|      | MIN. | TYP | MAX.  | MIN.  | TYP. | MAX.  |
| A    | 4.32 |     | 4.95  | 170.1 |      | 194.9 |
| b    | 0.36 |     | 0.51  | 14.2  |      | 20.1  |
| D    | 4.45 |     | 4.95  | 175.2 |      | 194.9 |
| E    | 3.30 |     | 3.94  | 129.9 |      | 155.1 |
| e    | 2.41 |     | 2.67  | 94.9  |      | 105.1 |
| e1   | 1.14 |     | 1.40  | 44.9  |      | 55.1  |
| L    | 12.7 |     | 15.49 | 500.0 |      | 609.8 |
| R    | 2.16 |     | 2.41  | 85.0  |      | 94.9  |
| S1   | 0.92 |     | 1.52  | 36.2  |      | 59.8  |
| W    | 0.41 |     | 0.56  | 16.1  |      | 22.0  |

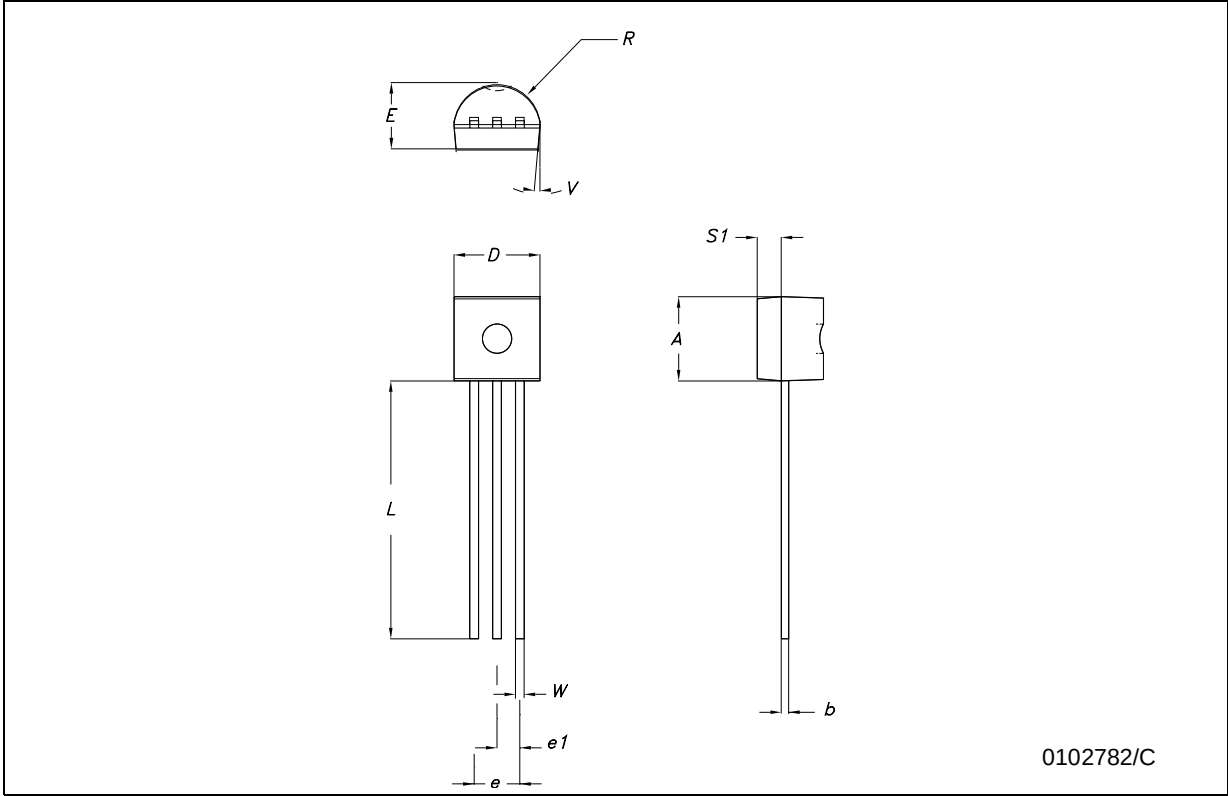

## SO-8 MECHANICAL DATA

| DIM. | mm.       |      |      | inch  |       |       |
|------|-----------|------|------|-------|-------|-------|
|      | MIN.      | TYP  | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 1.35      |      | 1.75 | 0.053 |       | 0.069 |
| A1   | 0.10      |      | 0.25 | 0.04  |       | 0.010 |
| A2   | 1.10      |      | 1.65 | 0.043 |       | 0.065 |
| B    | 0.33      |      | 0.51 | 0.013 |       | 0.020 |
| C    | 0.19      |      | 0.25 | 0.007 |       | 0.010 |
| D    | 4.80      |      | 5.00 | 0.189 |       | 0.197 |
| E    | 3.80      |      | 4.00 | 0.150 |       | 0.157 |
| e    |           | 1.27 |      |       | 0.050 |       |
| H    | 5.80      |      | 6.20 | 0.228 |       | 0.244 |
| h    | 0.25      |      | 0.50 | 0.010 |       | 0.020 |
| L    | 0.40      |      | 1.27 | 0.016 |       | 0.050 |
| k    | 8° (max.) |      |      |       |       |       |
| ddd  |           |      | 0.1  |       |       | 0.04  |

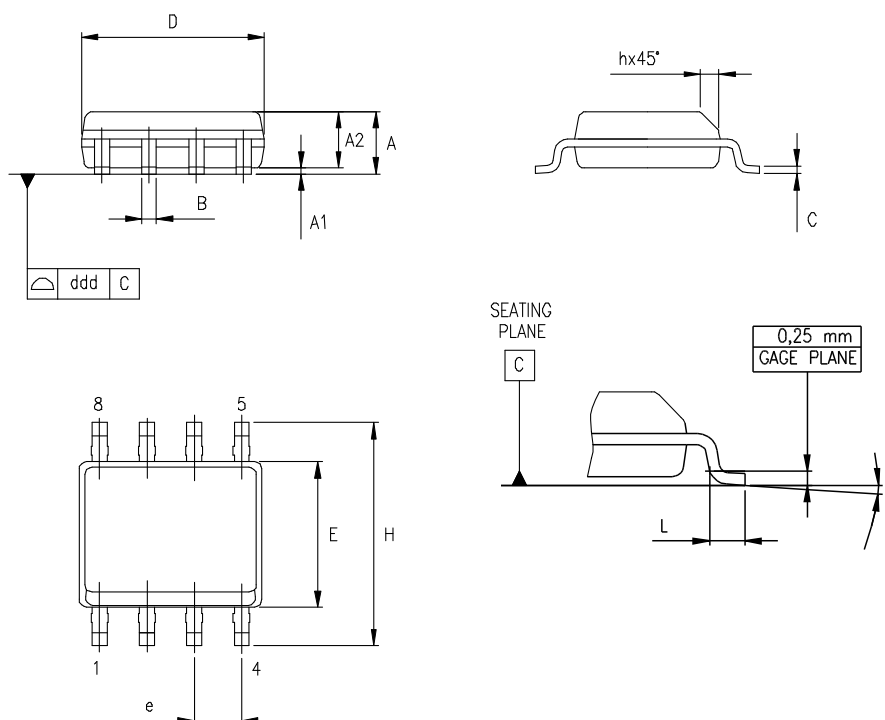


0016023/C



## DPAK MECHANICAL DATA


| DIM. | mm.  |      |      | inch  |       |       |
|------|------|------|------|-------|-------|-------|
|      | MIN. | TYP  | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 2.2  |      | 2.4  | 0.086 |       | 0.094 |
| A1   | 0.9  |      | 1.1  | 0.035 |       | 0.043 |
| A2   | 0.03 |      | 0.23 | 0.001 |       | 0.009 |
| B    | 0.64 |      | 0.9  | 0.025 |       | 0.035 |
| B2   | 5.2  |      | 5.4  | 0.204 |       | 0.212 |
| C    | 0.45 |      | 0.6  | 0.017 |       | 0.023 |
| C2   | 0.48 |      | 0.6  | 0.019 |       | 0.023 |
| D    | 6    |      | 6.2  | 0.236 |       | 0.244 |
| D1   |      | 5.1  |      |       | 0.200 |       |
| E    | 6.4  |      | 6.6  | 0.252 |       | 0.260 |
| E1   |      | 4.7  |      |       | 0.185 |       |
| e    |      | 2.28 |      |       | 0.090 |       |
| e1   | 4.4  |      | 4.6  | 0.173 |       | 0.181 |
| H    | 9.35 |      | 10.1 | 0.368 |       | 0.397 |
| L    |      | 1    |      |       | 0.039 |       |
| (L1) |      | 2.8  |      |       | 0.110 |       |
| L2   |      | 0.8  |      |       | 0.031 |       |
| L4   | 0.6  |      | 1    | 0.023 |       | 0.039 |

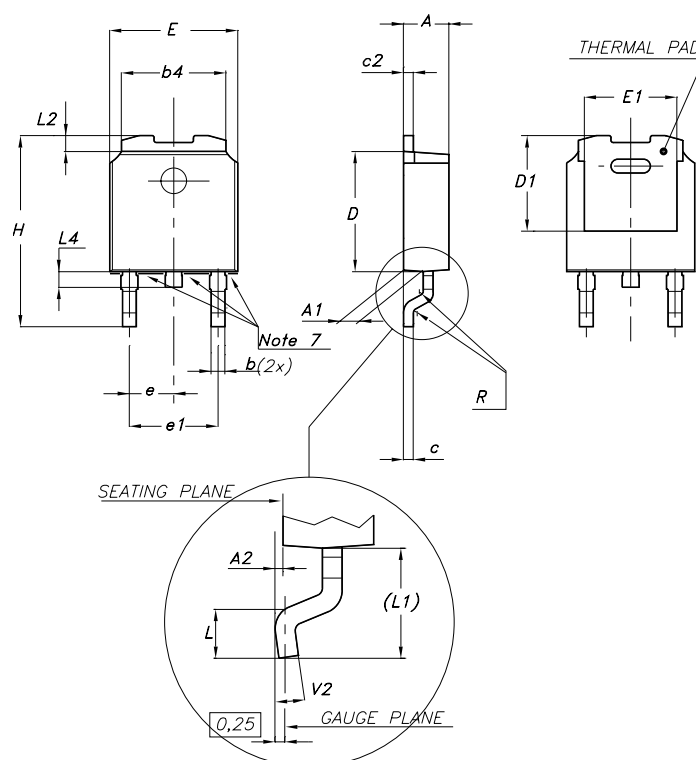

0068772-F

## PPAK MECHANICAL DATA


| DIM. | mm.  |     |      | inch  |       |       |
|------|------|-----|------|-------|-------|-------|
|      | MIN. | TYP | MAX. | MIN.  | TYP.  | MAX.  |
| A    | 2.2  |     | 2.4  | 0.086 |       | 0.094 |
| A1   | 0.9  |     | 1.1  | 0.035 |       | 0.043 |
| A2   | 0.03 |     | 0.23 | 0.001 |       | 0.009 |
| B    | 0.4  |     | 0.6  | 0.015 |       | 0.023 |
| B2   | 5.2  |     | 5.4  | 0.204 |       | 0.212 |
| C    | 0.45 |     | 0.6  | 0.017 |       | 0.023 |
| C2   | 0.48 |     | 0.6  | 0.019 |       | 0.023 |
| D    | 6    |     | 6.2  | 0.236 |       | 0.244 |
| E    | 6.4  |     | 6.6  | 0.252 |       | 0.260 |
| G    | 4.9  |     | 5.25 | 0.193 |       | 0.206 |
| G1   | 2.38 |     | 2.7  | 0.093 |       | 0.106 |
| H    | 9.35 |     | 10.1 | 0.368 |       | 0.397 |
| L2   |      | 0.8 |      |       | 0.031 |       |
| L4   | 0.6  |     | 1    | 0.023 |       | 0.039 |

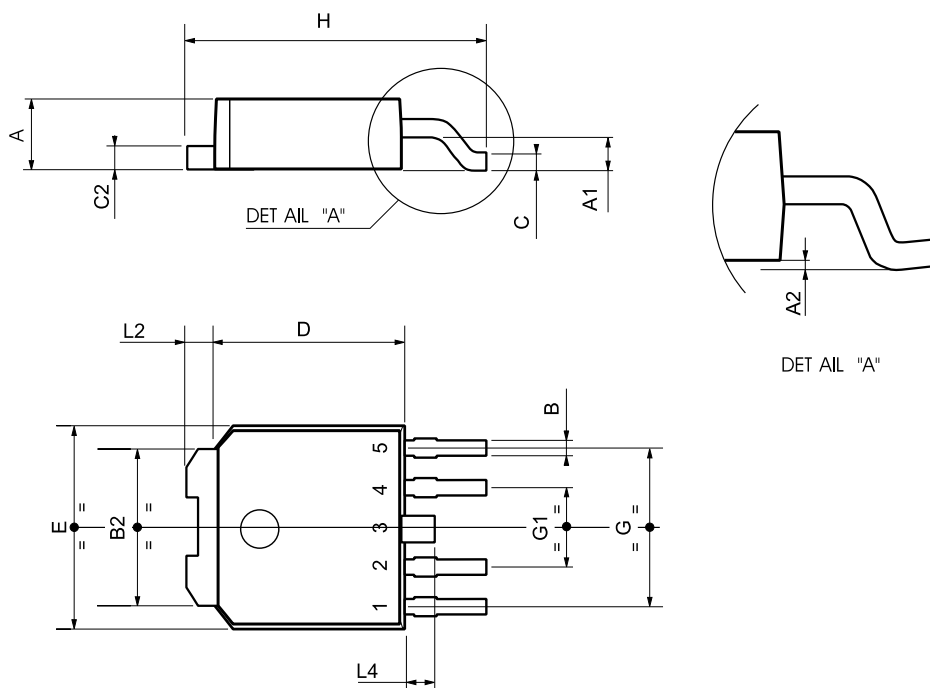

0078180-B


## Tape &amp; Reel DPAK-PPAK MECHANICAL DATA

| DIM. | mm.   |       |       | inch  |       |        |
|------|-------|-------|-------|-------|-------|--------|
|      | MIN.  | TYP   | MAX.  | MIN.  | TYP.  | MAX.   |
| A    |       |       | 330   |       |       | 12.992 |
| C    | 12.8  | 13.0  | 13.2  | 0.504 | 0.512 | 0.519  |
| D    | 20.2  |       |       | 0.795 |       |        |
| N    | 60    |       |       | 2.362 |       |        |
| T    |       |       | 22.4  |       |       | 0.882  |
| Ao   | 6.80  | 6.90  | 7.00  | 0.268 | 0.272 | 0.276  |
| Bo   | 10.40 | 10.50 | 10.60 | 0.409 | 0.413 | 0.417  |
| Ko   | 2.55  | 2.65  | 2.75  | 0.100 | 0.104 | 0.105  |
| Po   | 3.9   | 4.0   | 4.1   | 0.153 | 0.157 | 0.161  |
| P    | 7.9   | 8.0   | 8.1   | 0.311 | 0.315 | 0.319  |

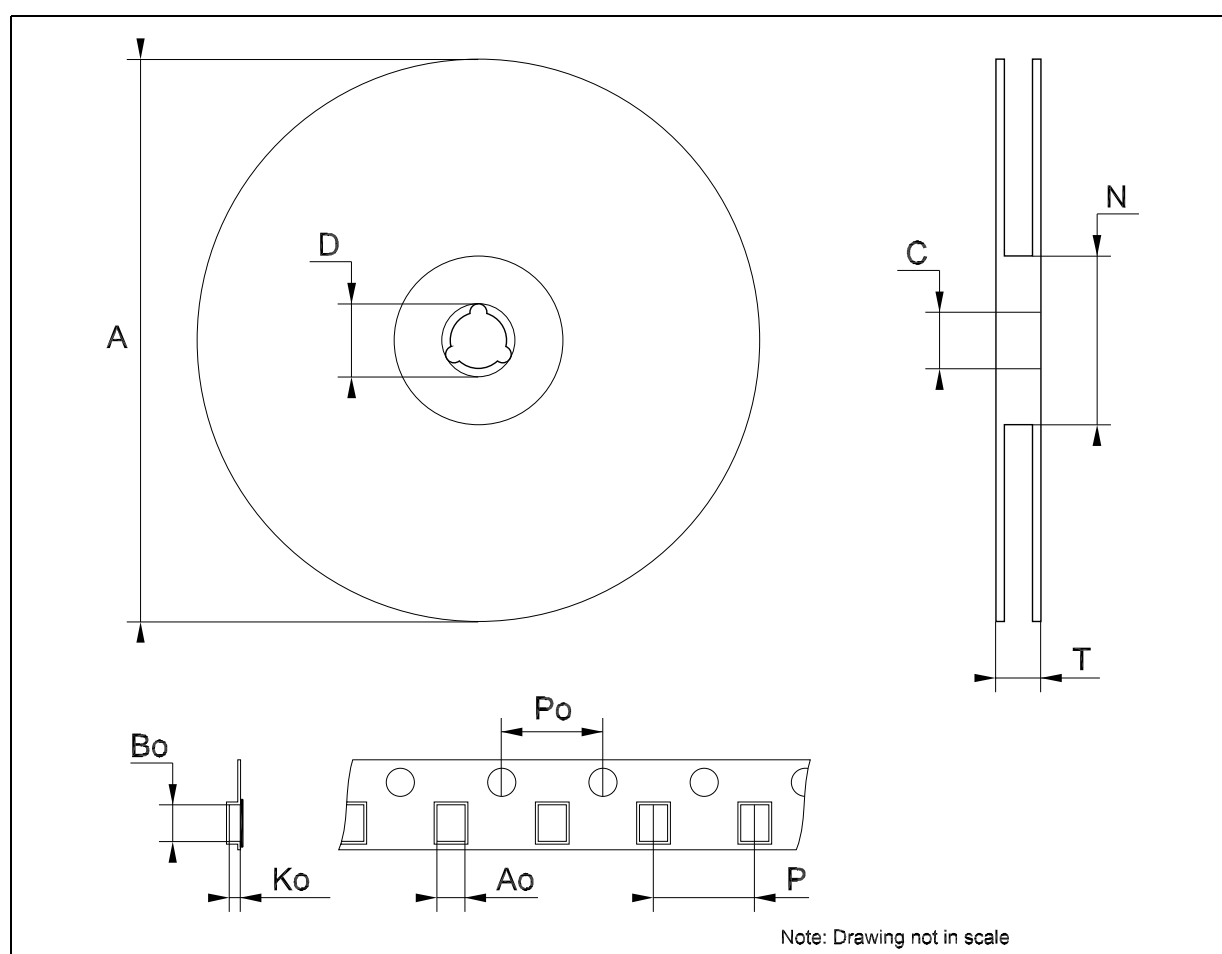

## Tape &amp; Reel SO-8 MECHANICAL DATA

| DIM. | mm.  |     |      | inch  |      |        |
|------|------|-----|------|-------|------|--------|
|      | MIN. | TYP | MAX. | MIN.  | TYP. | MAX.   |
| A    |      |     | 330  |       |      | 12.992 |
| C    | 12.8 |     | 13.2 | 0.504 |      | 0.519  |
| D    | 20.2 |     |      | 0.795 |      |        |
| N    | 60   |     |      | 2.362 |      |        |
| T    |      |     | 22.4 |       |      | 0.882  |
| Ao   | 8.1  |     | 8.5  | 0.319 |      | 0.335  |
| Bo   | 5.5  |     | 5.9  | 0.216 |      | 0.232  |
| Ko   | 2.1  |     | 2.3  | 0.082 |      | 0.090  |
| Po   | 3.9  |     | 4.1  | 0.153 |      | 0.161  |
| P    | 7.9  |     | 8.1  | 0.311 |      | 0.319  |

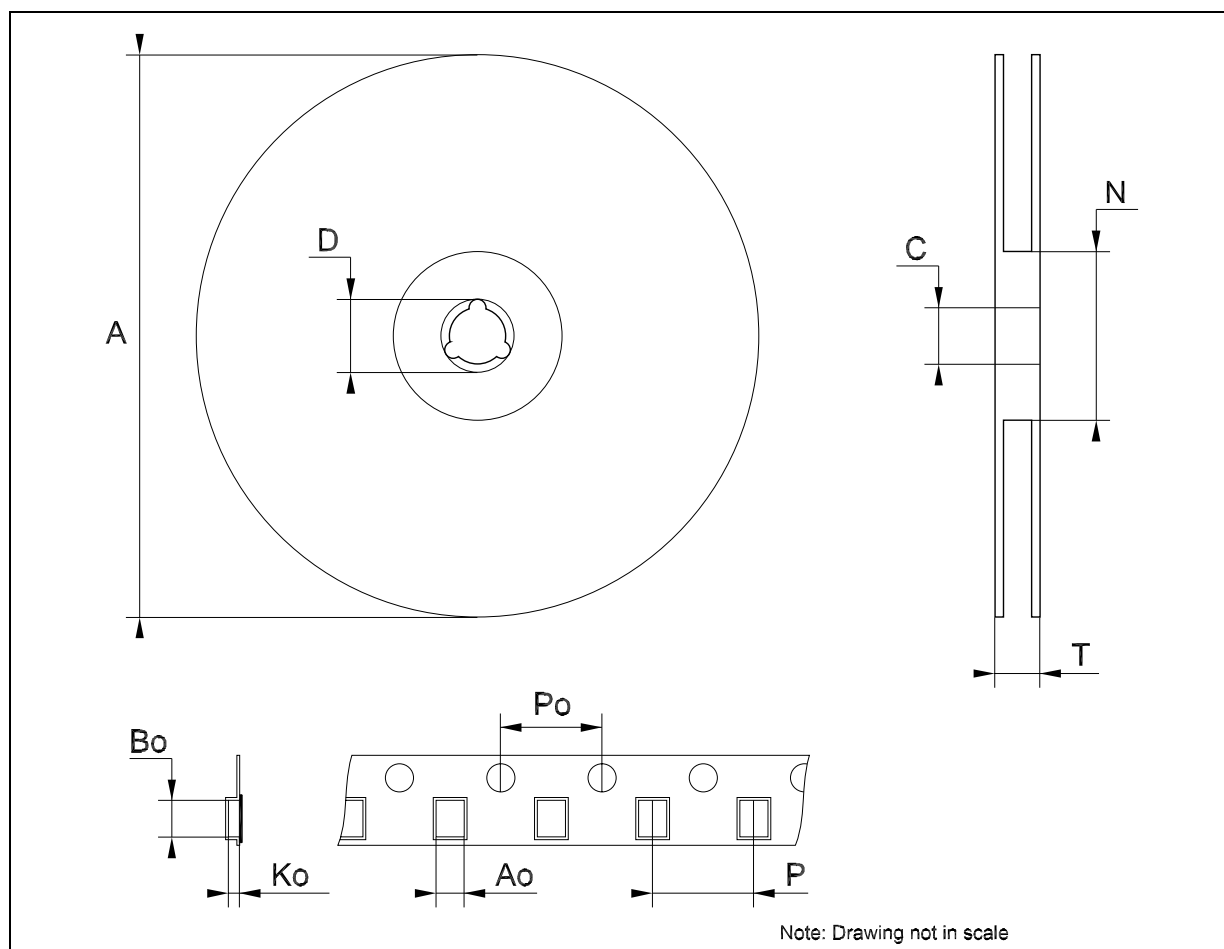

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics  
All other names are the property of their respective owners

© 2004 STMicroelectronics - All Rights Reserved  
STMicroelectronics GROUP OF COMPANIES

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States.

<http://www.st.com>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.