

## Features

- Pin- and function-compatible with CY7C1019B
- High speed
  - $t_{AA} = 10 \text{ ns}$
- Low active power
  - $I_{CC} = 80 \text{ mA @ } 10 \text{ ns}$
- Low CMOS standby power
  - $I_{SB2} = 3 \text{ mA}$
- 2.0 V Data retention
- Automatic power-down when deselected
- CMOS for optimum speed/power
- Center power/ground pinout
- Easy memory expansion with  $\overline{CE}$  and  $\overline{OE}$  options
- Functionally equivalent to CY7C1019B
- Available in Pb-free 32-pin 400-Mil wide Molded SOJ and 32-pin TSOP II packages

## Functional Description

The CY7C1019D <sup>[1]</sup> is a high-performance CMOS static RAM organized as 131,072 words by 8 bits. Easy memory expansion is provided by an active LOW Chip Enable ( $\overline{CE}$ ), an active LOW Output Enable ( $\overline{OE}$ ), and tri-state drivers. This device has an automatic power-down feature that significantly reduces power consumption when deselected. The eight input and output pins (IO<sub>0</sub> through IO<sub>7</sub>) are placed in a high-impedance state when:

- Deselected ( $\overline{CE}$  HIGH)
- Outputs are disabled ( $\overline{OE}$  HIGH)
- When the write operation is active ( $\overline{CE}$  LOW, and  $\overline{WE}$  LOW).


Write to the device by taking Chip Enable ( $\overline{CE}$ ) and Write Enable ( $\overline{WE}$ ) inputs LOW. Data on the eight IO pins (IO<sub>0</sub> through IO<sub>7</sub>) is then written into the location specified on the address pins (A<sub>0</sub> through A<sub>16</sub>).

Read from the device by taking Chip Enable ( $\overline{CE}$ ) and Output Enable ( $\overline{OE}$ ) LOW while forcing Write Enable ( $\overline{WE}$ ) HIGH. Under these conditions, the contents of the memory location specified by the address pins appears on the IO pins.

The CY7C1019D device is suitable for interfacing with processors that have TTL I/P levels. It is not suitable for processors that require CMOS I/P levels. Please see [Electrical Characteristics on page 4](#) for more details and suggested alternatives.

For a complete list of related documentation, [click here](#).

## Logic Block Diagram

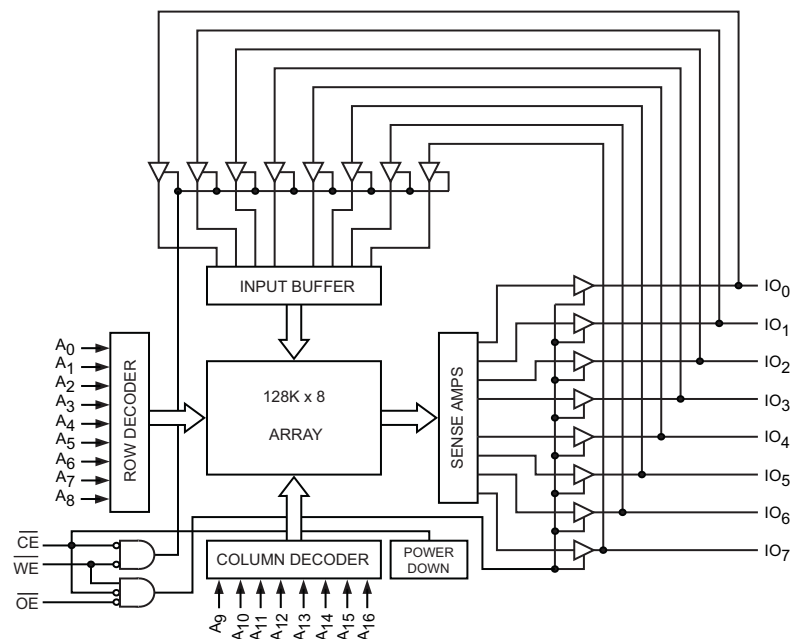

### Note


1. For guidelines on SRAM system design, please refer to the 'System Design Guidelines' Cypress application note, available on the internet at [www.cypress.com](http://www.cypress.com).

## Contents

|   |           |  |           |
|---|-----------|--|-----------|
| <b>Pin Configuration</b> .....              | <b>3</b>  | <b>Ordering Information</b> .....                    | <b>11</b> |
| <b>Selection Guide</b> .....                | <b>3</b>  | Ordering Code Definitions .....                      | 11        |
| <b>Maximum Ratings</b> .....                | <b>4</b>  | <b>Package Diagrams</b> .....                        | <b>12</b> |
| <b>Operating Range</b> .....                | <b>4</b>  | <b>Acronyms</b> .....                                | <b>14</b> |
| <b>Electrical Characteristics</b> .....     | <b>4</b>  | <b>Document Conventions</b> .....                    | <b>14</b> |
| <b>Capacitance</b> .....                    | <b>5</b>  | Units of Measure .....                               | 14        |
| <b>Thermal Resistance</b> .....             | <b>5</b>  | <b>Document History Page</b> .....                   | <b>15</b> |
| <b>AC Test Loads and Waveforms</b> .....    | <b>5</b>  | <b>Sales, Solutions, and Legal Information</b> ..... | <b>16</b> |
| <b>Data Retention Characteristics</b> ..... | <b>6</b>  | Worldwide Sales and Design Support .....             | 16        |
| <b>Data Retention Waveform</b> .....        | <b>6</b>  | Products .....                                       | 16        |
| <b>Switching Characteristics</b> .....      | <b>7</b>  | PSoC® Solutions .....                                | 16        |
| <b>Switching Waveforms</b> .....            | <b>8</b>  | Cypress Developer Community .....                    | 16        |
| <b>Truth Table</b> .....                    | <b>11</b> | Technical Support .....                              | 16        |

**Pin Configuration**

**Figure 1. 32-pin SOJ / TSOP II pinout (Top View)**

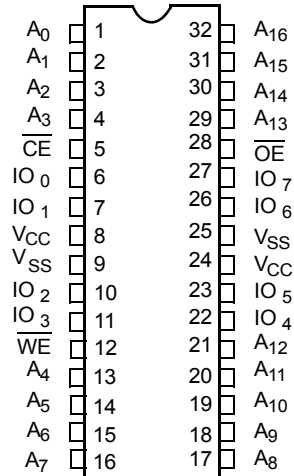

**Selection Guide**

| Description               | -10 (Industrial) | Unit |
|---------------------------|------------------|------|
| Maximum Access Time       | 10               | ns   |
| Maximum Operating Current | 80               | mA   |
| Maximum Standby Current   | 3                | mA   |

## Maximum Ratings

Exceeding the maximum ratings may impair the useful life of the device. These user guidelines are not tested.

|   |                                   |
|---|-----------------------------------|
| Storage Temperature .....                                   | -65 °C to +150 °C                 |
| Ambient Temperature with Power Applied .....                | -55 °C to +125 °C                 |
| Supply Voltage on V <sub>CC</sub> to Relative GND [2] ..... | -0.5 V to +6.0 V                  |
| DC Voltage Applied to Outputs in High Z State [2] .....     | -0.5 V to V <sub>CC</sub> + 0.5 V |

|   |                                   |
|---|-----------------------------------|
| DC Input Voltage [2] .....                                    | -0.5 V to V <sub>CC</sub> + 0.5 V |
| Current into Outputs (LOW) .....                              | 20 mA                             |
| Static Discharge Voltage (per MIL-STD-883, Method 3015) ..... | > 2001 V                          |
| Latch-up Current .....  | > 200 mA                          |

## Operating Range

| Range      | Ambient Temperature | V <sub>CC</sub> | Speed |
|------------|---------------------|-----------------|-------|
| Industrial | -40 °C to +85 °C    | 5 V ± 0.5 V     | 10 ns |

## Electrical Characteristics

Over the Operating Range

| Parameter        | Description                                   | Test Conditions  | -10 (Industrial) |                       | Unit |    |
|------------------|---|--|------------------|-----------------------|------|----|
|                  |   |  | Min              | Max                   |      |    |
| V <sub>OH</sub>  | Output HIGH Voltage                           | I <sub>OH</sub> = -4.0 mA  | 2.4              | -                     | V    |    |
|                  |   | I <sub>OH</sub> = -0.1 mA  | -                | 3.4 [3]               |      |    |
| V <sub>OL</sub>  | Output LOW Voltage                            | I <sub>OL</sub> = 8.0 mA   | -                | 0.4                   | V    |    |
| V <sub>IH</sub>  | Input HIGH Voltage                            |  | 2.2              | V <sub>CC</sub> + 0.5 | V    |    |
| V <sub>IL</sub>  | Input LOW Voltage [2]                         |  | -0.5             | 0.8                   | V    |    |
| I <sub>IX</sub>  | Input Leakage Current                         | GND ≤ V <sub>I</sub> ≤ V <sub>CC</sub>   | -1               | +1                    | μA   |    |
| I <sub>OZ</sub>  | Output Leakage Current                        | GND ≤ V <sub>I</sub> ≤ V <sub>CC</sub> , Output Disabled   | -1               | +1                    | μA   |    |
| I <sub>CC</sub>  | V <sub>CC</sub> Operating Supply Current      | V <sub>CC</sub> = Max, I <sub>OUT</sub> = 0 mA, f = f <sub>max</sub> = 1/t <sub>RC</sub>   | 100 MHz          | -                     | 80   | mA |
|                  |   |  | 83 MHz           | -                     | 72   | mA |
|                  |   |  | 66 MHz           | -                     | 58   | mA |
|                  |   |  | 40 MHz           | -                     | 37   | mA |
| I <sub>SB1</sub> | Automatic CE Power-Down Current – TTL Inputs  | Max V <sub>CC</sub> , CE ≥ V <sub>IH</sub> , V <sub>IN</sub> ≥ V <sub>IH</sub> or V <sub>IN</sub> ≤ V <sub>IL</sub> , f = f <sub>max</sub> | -                | 10                    | mA   |    |
| I <sub>SB2</sub> | Automatic CE Power-Down Current – CMOS Inputs | Max V <sub>CC</sub> , CE ≥ V <sub>CC</sub> - 0.3 V, V <sub>IN</sub> ≥ V <sub>CC</sub> - 0.3 V, or V <sub>IN</sub> ≤ 0.3 V, f = 0           | -                | 3                     | mA   |    |

### Note

- V<sub>IL</sub> (min) = -2.0 V and V<sub>IH</sub> (max) = V<sub>CC</sub> + 1 V for pulse durations of less than 5 ns.
- Please note that the maximum V<sub>OH</sub> limit does not exceed minimum CMOS V<sub>IH</sub> of 3.5V. If you are interfacing this SRAM with 5 V legacy processors that require a minimum V<sub>IH</sub> of 3.5 V, please refer to Application Note [AN6081](#) for technical details and options you may consider.

### Capacitance


| Parameter <sup>[4]</sup> | Description        | Test Conditions  | Max | Unit |
|--------------------------|--------------------|--|-----|------|
| C <sub>IN</sub>          | Input capacitance  | T <sub>A</sub> = 25 °C, f = 1 MHz, V <sub>CC</sub> = 5.0 V | 6   | pF   |
| C <sub>OUT</sub>         | Output capacitance |  | 8   | pF   |

### Thermal Resistance

| Parameter <sup>[4]</sup> | Description                              | Test Conditions   | 400-Mil Wide SOJ | TSOP II | Unit |
|--------------------------|--|---|------------------|---------|------|
| Θ <sub>JA</sub>          | Thermal resistance (junction to ambient) | Still Air, soldered on a 3 × 4.5 inch, four-layer printed circuit board | 56.29            | 62.22   | °C/W |
| Θ <sub>JC</sub>          | Thermal resistance (junction to case)    |   | 38.14            | 21.43   | °C/W |

### AC Test Loads and Waveforms

Figure 2. AC Test Loads and Waveforms <sup>[5]</sup>

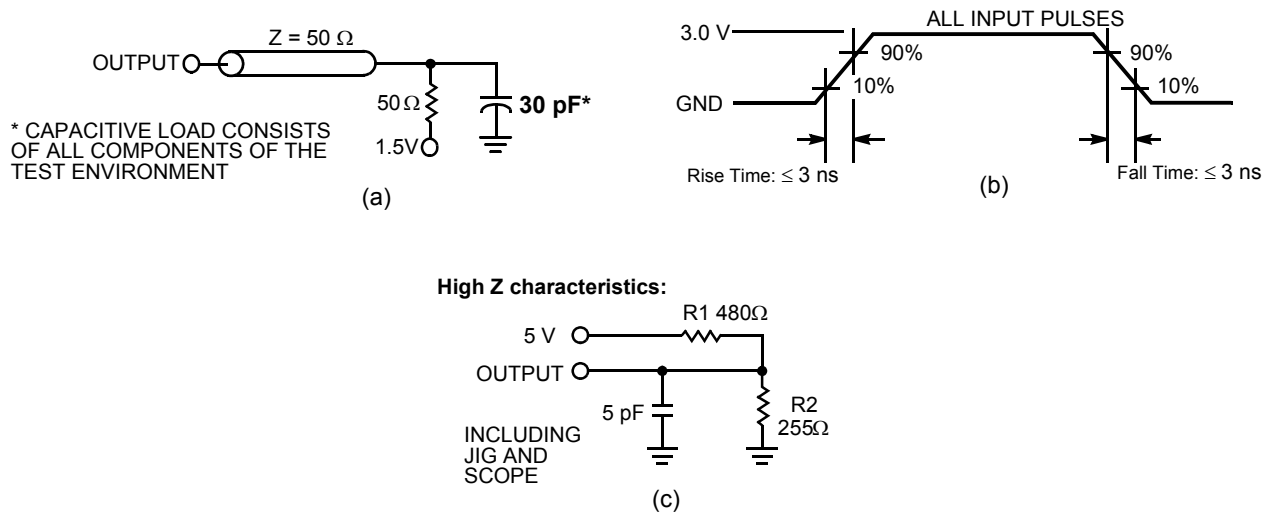

**Notes**

- 4. Tested initially and after any design or process changes that may affect these parameters.
- 5. AC characteristics (except High Z) are tested using the load conditions shown in Figure 2 (a). High Z characteristics are tested for all speeds using the test load shown in Figure 2 (c).


## Data Retention Characteristics

Over the Operating Range

| Parameter       | Description                          | Conditions   | Min      | Max | Unit |
|-----------------|--------------------------------------|--|----------|-----|------|
| $V_{DR}$        | $V_{CC}$ for Data Retention          |  | 2.0      | –   | V    |
| $I_{CCDR}$      | Data Retention Current               | $V_{CC} = V_{DR} = 2.0\text{ V}$ , $\overline{CE} \geq V_{CC} - 0.3\text{ V}$ ,<br>$V_{IN} \geq V_{CC} - 0.3\text{ V}$ or $V_{IN} \leq 0.3\text{ V}$ | –        | 3   | mA   |
| $t_{CDR}^{[6]}$ | Chip Deselect to Data Retention Time |  | 0        | –   | ns   |
| $t_R^{[7]}$     | Operation Recovery Time              |  | $t_{RC}$ | –   | ns   |

## Data Retention Waveform

Figure 3. Data Retention Waveform

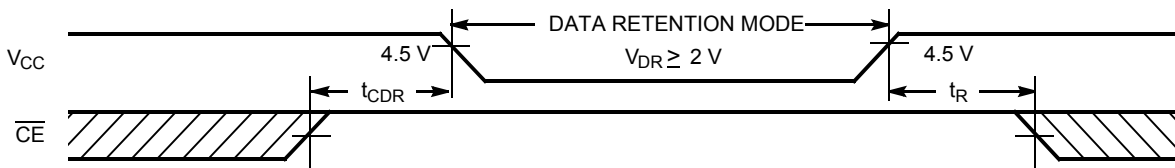

### Notes

6. Tested initially and after any design or process changes that may affect these parameters.
7. Full device operation requires linear  $V_{CC}$  ramp from  $V_{DR}$  to  $V_{CC(min)} \geq 50\ \mu\text{s}$  or stable at  $V_{CC(min)} \geq 50\ \mu\text{s}$ .

## Switching Characteristics

Over the Operating Range

| Parameter <sup>[8]</sup>               | Description   | -10 (Industrial) |     | Unit          |
|--|---|------------------|-----|---------------|
|  |   | Min              | Max |               |
| <b>Read Cycle</b>                      |   |                  |     |               |
| $t_{\text{power}}^{[9]}$               | $V_{\text{CC}}$ (typical) to the first access             | 100              | –   | $\mu\text{s}$ |
| $t_{\text{RC}}$                        | Read Cycle Time   | 10               | –   | ns            |
| $t_{\text{AA}}$                        | Address to Data Valid                                     | –                | 10  | ns            |
| $t_{\text{OHA}}$                       | Data Hold from Address Change                             | 3                | –   | ns            |
| $t_{\text{ACE}}$                       | $\overline{\text{CE}}$ LOW to Data Valid                  | –                | 10  | ns            |
| $t_{\text{DOE}}$                       | $\overline{\text{OE}}$ LOW to Data Valid                  | –                | 5   | ns            |
| $t_{\text{LZOE}}$                      | $\overline{\text{OE}}$ LOW to Low Z                       | 0                | –   | ns            |
| $t_{\text{HZOE}}$                      | $\overline{\text{OE}}$ HIGH to High Z <sup>[10, 11]</sup> | –                | 5   | ns            |
| $t_{\text{LZCE}}$                      | $\overline{\text{CE}}$ LOW to Low Z <sup>[11]</sup>       | 3                | –   | ns            |
| $t_{\text{HZCE}}$                      | $\overline{\text{CE}}$ HIGH to High Z <sup>[10, 11]</sup> | –                | 5   | ns            |
| $t_{\text{PU}}^{[12]}$                 | $\overline{\text{CE}}$ LOW to Power-Up                    | 0                | –   | ns            |
| $t_{\text{PD}}^{[12]}$                 | $\overline{\text{CE}}$ HIGH to Power-Down                 | –                | 10  | ns            |
| <b>Write Cycle <sup>[13, 14]</sup></b> |   |                  |     |               |
| $t_{\text{WC}}$                        | Write Cycle Time  | 10               | –   | ns            |
| $t_{\text{SCE}}$                       | $\overline{\text{CE}}$ LOW to Write End                   | 7                | –   | ns            |
| $t_{\text{AW}}$                        | Address Set-Up to Write End                               | 7                | –   | ns            |
| $t_{\text{HA}}$                        | Address Hold from Write End                               | 0                | –   | ns            |
| $t_{\text{SA}}$                        | Address Set-Up to Write Start                             | 0                | –   | ns            |
| $t_{\text{PWE}}$                       | $\overline{\text{WE}}$ Pulse Width                        | 7                | –   | ns            |
| $t_{\text{SD}}$                        | Data Set-Up to Write End                                  | 6                | –   | ns            |
| $t_{\text{HD}}$                        | Data Hold from Write End                                  | 0                | –   | ns            |
| $t_{\text{LZWE}}$                      | $\overline{\text{WE}}$ HIGH to Low Z <sup>[11]</sup>      | 3                | –   | ns            |
| $t_{\text{HZWE}}$                      | $\overline{\text{WE}}$ LOW to High Z <sup>[10, 11]</sup>  | –                | 5   | ns            |

### Notes

8. Test conditions assume signal transition time of 3 ns or less, timing reference levels of 1.5 V, input pulse levels of 0 to 3.0 V, and output loading of the specified  $I_{\text{OL}}/I_{\text{OH}}$  and 30-pF load capacitance.
9.  $t_{\text{POWER}}$  gives the minimum amount of time that the power supply should be at typical  $V_{\text{CC}}$  values until the first memory access can be performed.
10.  $t_{\text{HZOE}}$ ,  $t_{\text{HZCE}}$ , and  $t_{\text{HZWE}}$  are specified with a load capacitance of 5 pF as in (c) of Figure 2 on page 5. Transition is measured when the outputs enter a high impedance state.
11. At any given temperature and voltage condition,  $t_{\text{HZCE}}$  is less than  $t_{\text{LZCE}}$ ,  $t_{\text{HZOE}}$  is less than  $t_{\text{LZOE}}$ , and  $t_{\text{HZWE}}$  is less than  $t_{\text{LZWE}}$  for any given device.
12. This parameter is guaranteed by design and is not tested.
13. The internal write time of the memory is defined by the overlap of  $\overline{\text{CE}}$  LOW and  $\overline{\text{WE}}$  LOW.  $\overline{\text{CE}}$  and  $\overline{\text{WE}}$  must be LOW to initiate a write, and the transition of any of these signals can terminate the write. The input data set-up and hold timing should be referenced to the leading edge of the signal that terminates the write.
14. The minimum write cycle time for Write Cycle no. 3 ( $\overline{\text{WE}}$  controlled,  $\overline{\text{OE}}$  LOW) is the sum of  $t_{\text{HZWE}}$  and  $t_{\text{SD}}$ .

### Switching Waveforms

Figure 4. Read Cycle No. 1 (Address Transition Controlled) [15, 16]


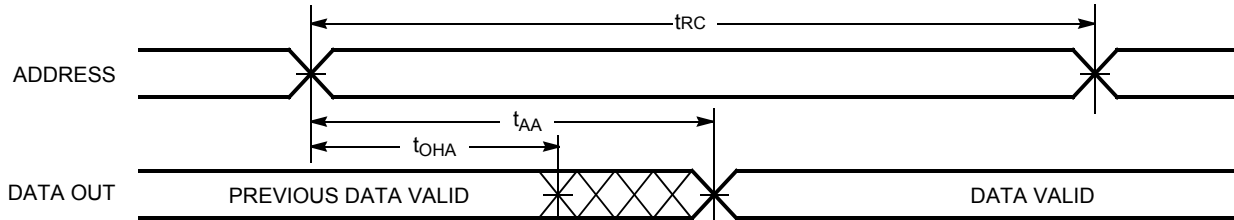


Figure 5. Read Cycle No. 2 ( $\overline{OE}$  Controlled) [16, 17]



**Notes**

- 15. Device is continuously selected.  $\overline{OE}, \overline{CE} = V_{IL}$ .
- 16.  $\overline{WE}$  is HIGH for Read cycle.
- 17. Address valid prior to or coincident with  $\overline{CE}$  transition LOW..

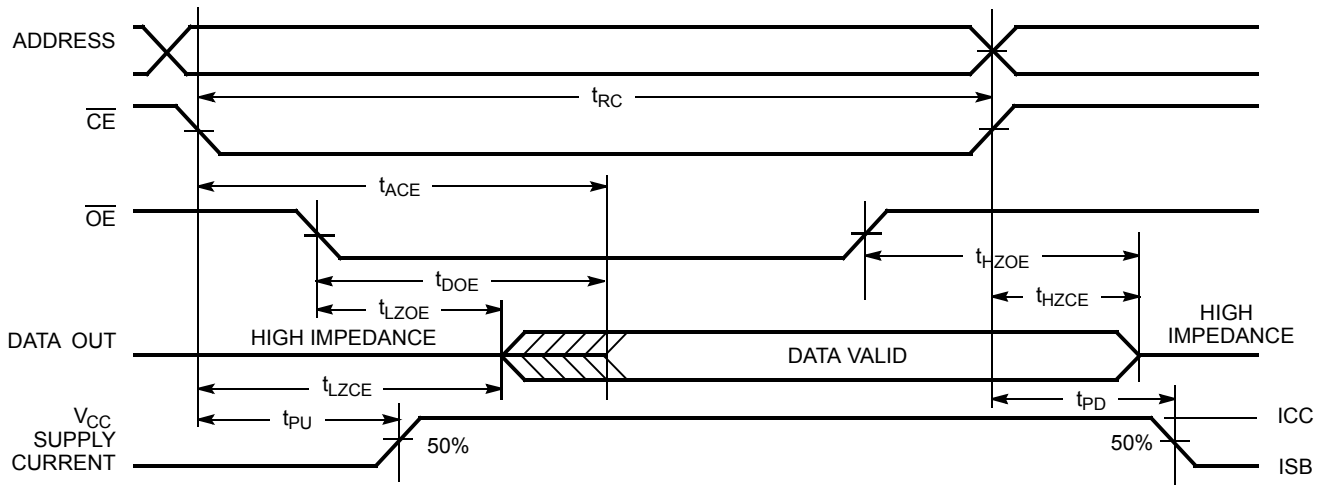

Switching Waveforms (continued)

Figure 6. Write Cycle No. 1 ( $\overline{CE}$  Controlled) [18, 19]


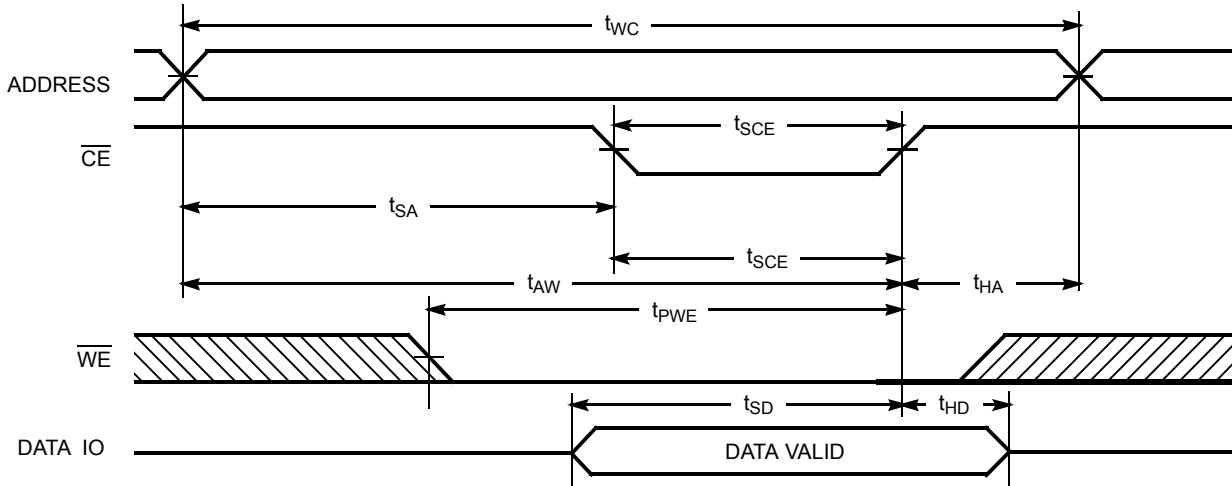


Figure 7. Write Cycle No. 2 ( $\overline{WE}$  Controlled,  $\overline{OE}$  HIGH During Write) [18, 19]

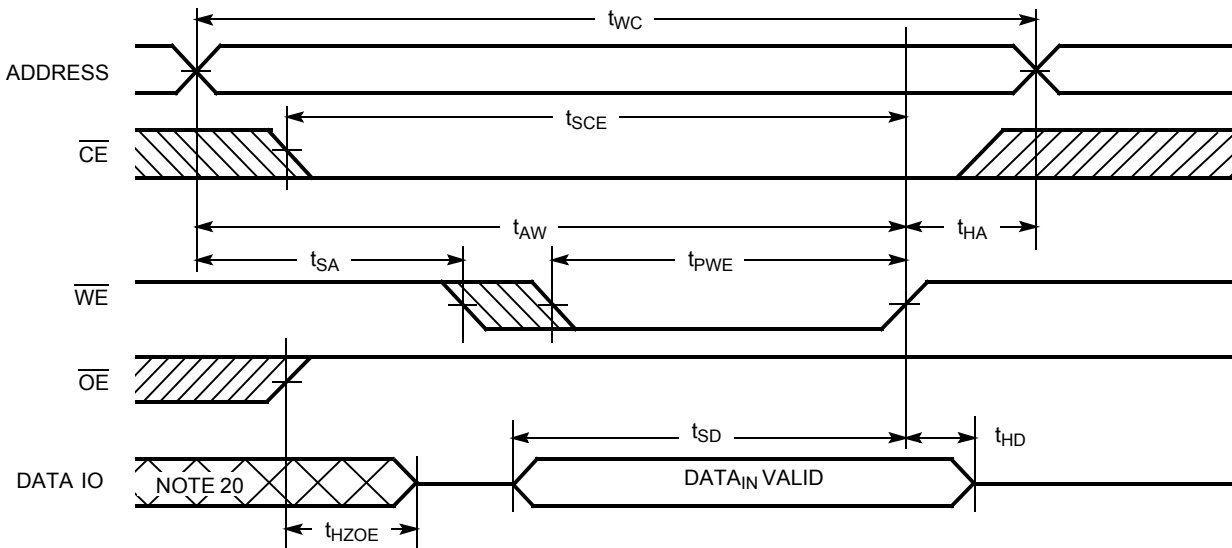


Notes

- 18. Data IO is high impedance if  $\overline{OE} = V_{IH}$ .
- 19. If CE goes HIGH simultaneously with WE going HIGH, the output remains in a high-impedance state.
- 20. During this period the IOs are in the output state and input signals should not be applied.

Switching Waveforms (continued)

Figure 8. Write Cycle No. 3 ( $\overline{WE}$  Controlled,  $\overline{OE}$  LOW) [21, 22]

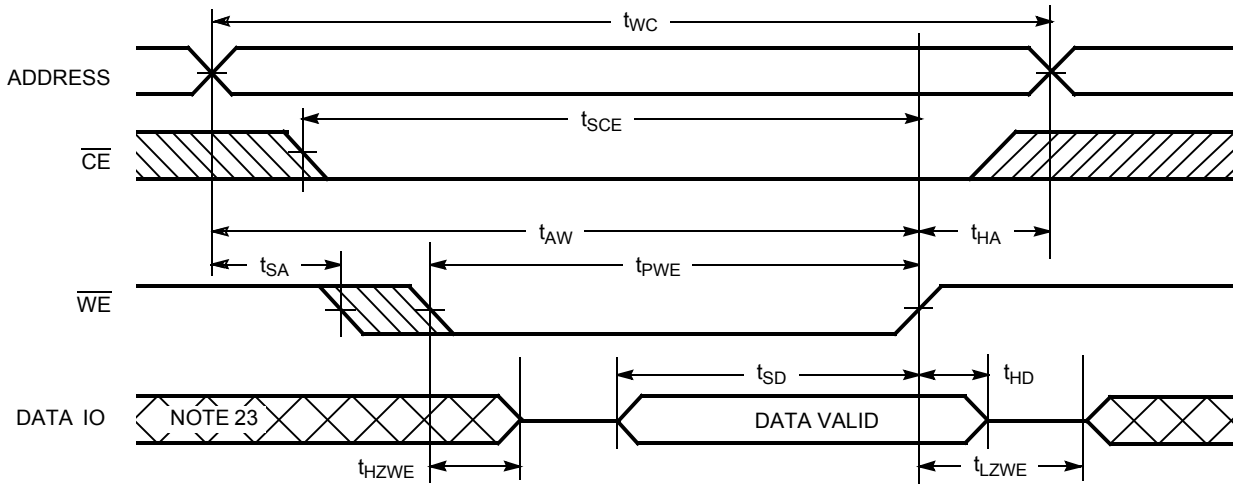

Notes

21. The minimum write cycle time for Write Cycle no. 3 ( $\overline{WE}$  controlled,  $\overline{OE}$  LOW) is the sum of  $t_{HZWE}$  and  $t_{SD}$ .

22. If  $\overline{CE}$  goes HIGH simultaneously with  $\overline{WE}$  going HIGH, the output remains in a high-impedance state.

23. During this period the IOs are in the output state and input signals should not be applied.


**Truth Table**

| $\overline{CE}$ | $\overline{OE}$ | $\overline{WE}$ | IO <sub>0</sub> -IO <sub>7</sub> | Mode                       | Power                      |
|-----------------|-----------------|-----------------|----------------------------------|----------------------------|----------------------------|
| H               | X               | X               | High Z                           | Power-Down                 | Standby (I <sub>SB</sub> ) |
| L               | L               | H               | Data Out                         | Read                       | Active (I <sub>CC</sub> )  |
| L               | X               | L               | Data In                          | Write                      | Active (I <sub>CC</sub> )  |
| L               | H               | H               | High Z                           | Selected, Outputs Disabled | Active (I <sub>CC</sub> )  |

**Ordering Information**


| Speed (ns) | Ordering Code    | Package Diagram | Package Type                  | Operating Range |
|------------|------------------|-----------------|-------------------------------|-----------------|
| 10         | CY7C1019D-10VXI  | 51-85033        | 32-pin SOJ (400 Mils) Pb-free | Industrial      |
|            | CY7C1019D-10ZSXI | 51-85095        | 32-pin TSOP (Type II) Pb-free |                 |

Please contact your local Cypress sales representative for availability of these parts.

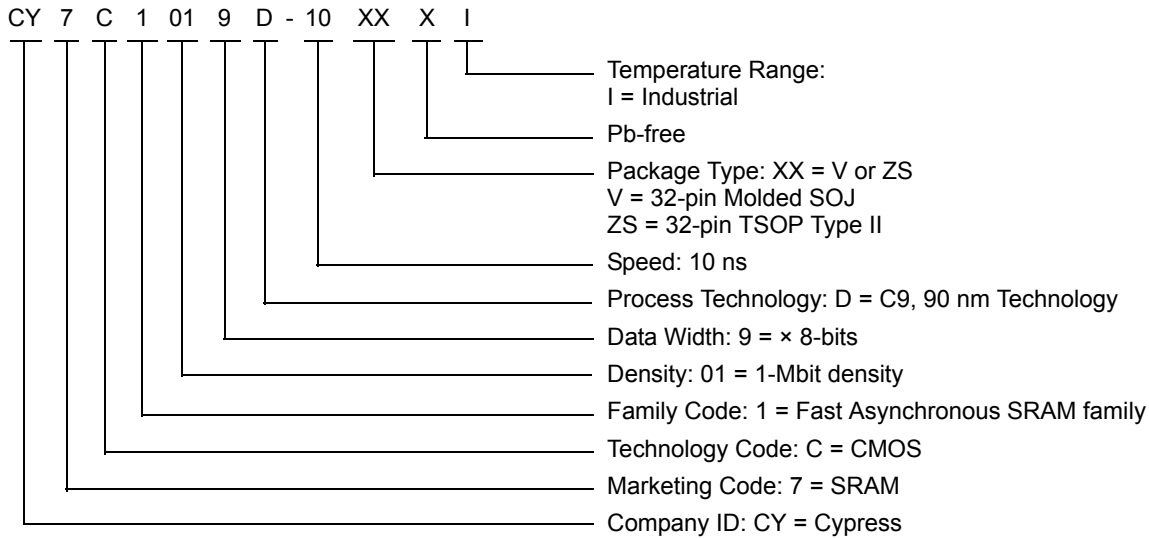**Ordering Code Definitions**


Package Diagrams


Figure 9. 32-pin SOJ (400 Mils) V32.4 (Molded SOJ V33) Package Outline, 51-85033

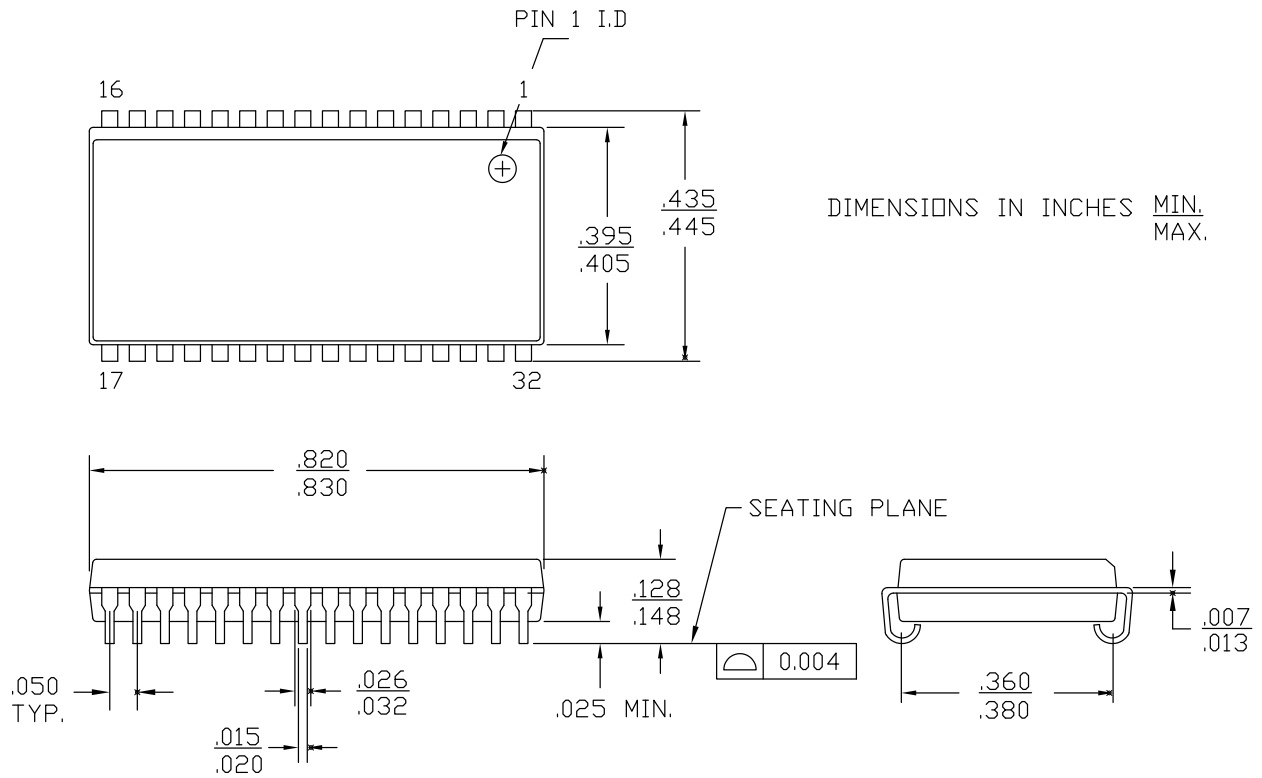

51-85033 \*E

Package Diagrams (continued)

Figure 10. 32-pin TSOP Type II (20.95 × 11.76 × 1.0 mm) ZS32 Package Outline, 51-85095

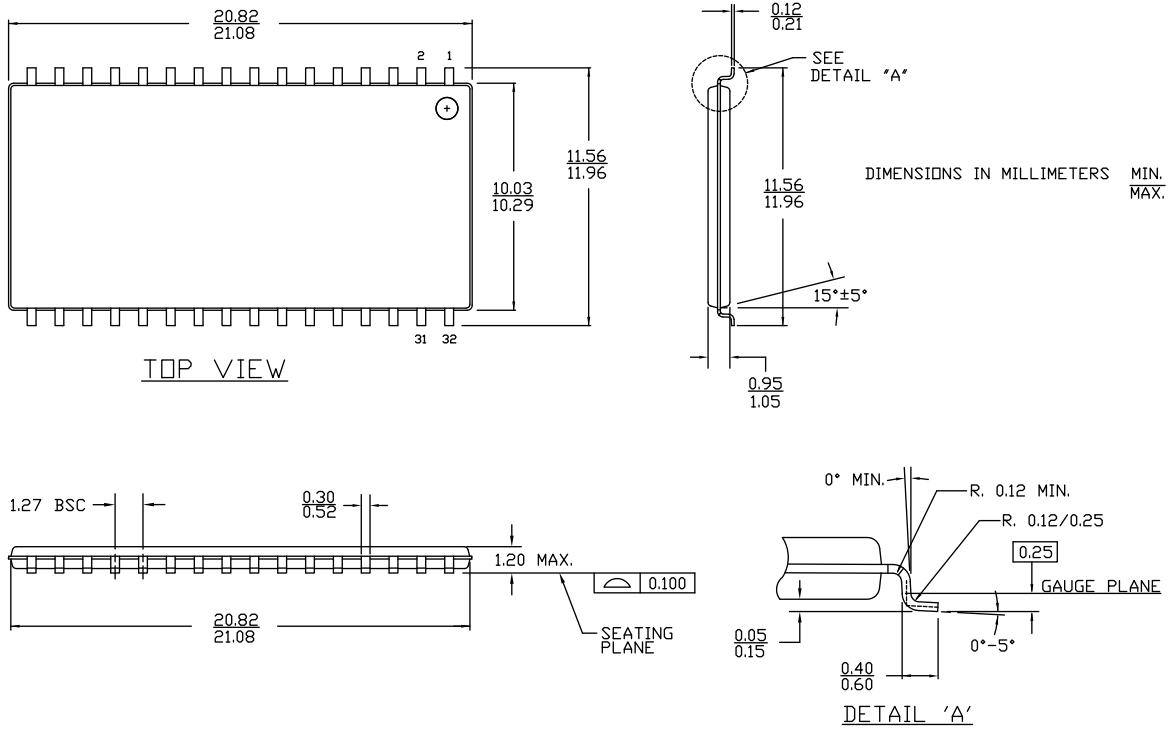

51-85095 \*B

**Acronyms**

| Acronym         | Description                             |
|-----------------|---|
| $\overline{CE}$ | Chip Enable                             |
| CMOS            | Complementary Metal Oxide Semiconductor |
| I/O             | Input/Output                            |
| $\overline{OE}$ | Output Enable                           |
| SOJ             | Small Outline J-lead                    |
| SRAM            | Static Random Access Memory             |
| TSOP            | Thin Small Outline Package              |
| TTL             | Transistor-Transistor Logic             |
| $\overline{WE}$ | Write Enable                            |

**Document Conventions**

**Units of Measure**

| Symbol | Unit of Measure |
|--------|-----------------|
| °C     | degree Celsius  |
| MHz    | megahertz       |
| μA     | microampere     |
| μs     | microsecond     |
| mA     | milliampere     |
| ms     | millisecond     |
| mm     | millimeter      |
| ns     | nanosecond      |
| Ω      | ohm             |
| %      | percent         |
| pF     | picofarad       |
| V      | volt            |
| W      | watt            |

Document History Page

| Document Title: CY7C1019D, 1-Mbit (128 K × 8) Static RAM<br>Document Number: 38-05464 |         |            |                 |  |
|---|---------|------------|-----------------|--|
| Rev.  | ECN No. | Issue Date | Orig. of Change | Description of Change  |
| **  | 201560  | See ECN    | SWI             | Advance Information data sheet for C9 IPP  |
| *A  | 233715  | See ECN    | RKF             | DC parameters are modified as per EROS (Spec # 01-2165)<br>Pb-free offering in the Ordering Information  |
| *B  | 262950  | See ECN    | RKF             | Added T <sub>power</sub> Spec in Switching Characteristics table<br>Added Data Retention Characteristics table and waveforms<br>Shaded Ordering Information  |
| *C  | 307598  | See ECN    | RKF             | Reduced Speed bins to -10 and -12 ns   |
| *D  | 520647  | See ECN    | VKN             | Converted from Preliminary to Final<br>Removed Commercial Operating range<br>Removed 12 ns speed bin<br>Added I <sub>CC</sub> values for the frequencies 83MHz, 66MHz and 40MHz<br>Updated Thermal Resistance table<br>Updated Ordering Information Table<br>Changed Overshoot spec from V <sub>CC</sub> +2V to V <sub>CC</sub> +1V in footnote #2   |
| *E  | 802877  | See ECN    | VKN             | Changed I <sub>CC</sub> spec from 60 mA to 80 mA for 100MHz, 55 mA to 72 mA for 83MHz, 45 mA to 58 mA for 66MHz, 30 mA to 37 mA for 40MHz  |
| *F  | 3110052 | 12/14/2010 | AJU             | Added <a href="#">Ordering Code Definitions</a> .<br>Updated <a href="#">Package Diagrams</a> .  |
| *G  | 3245896 | 05/02/2011 | PRAS            | Updated <a href="#">Package Diagrams</a> .<br>Added <a href="#">Acronyms</a> and <a href="#">Units of Measure</a> .<br>Updated in new template.  |
| *H  | 4038234 | 06/24/2013 | MEMJ            | Updated <a href="#">Functional Description</a> .<br>Updated <a href="#">Electrical Characteristics</a> :<br>Added one more Test Condition "I <sub>OH</sub> = -0.1 mA" for V <sub>OH</sub> parameter and added maximum value corresponding to that Test Condition.<br>Added Note 3 and referred the same note in maximum value for V <sub>OH</sub> parameter corresponding to Test Condition "I <sub>OH</sub> = -0.1 mA".<br>Updated in new template. |
| *I  | 4385827 | 05/21/2014 | MEMJ            | Updated <a href="#">Package Diagrams</a> :<br>spec 51-85033 – Changed revision from *D to *E.<br>Completing Sunset Review.   |
| *J  | 4579569 | 11/26/2014 | MEMJ            | Added related documentation hyperlink in page 1.   |

## Sales, Solutions, and Legal Information

### Worldwide Sales and Design Support

Cypress maintains a worldwide network of offices, solution centers, manufacturer's representatives, and distributors. To find the office closest to you, visit us at [cypress.com/sales](http://cypress.com/sales).

#### Products

|                          |  |
|--------------------------|--|
| Automotive               | <a href="http://cypress.com/go/automotive">cypress.com/go/automotive</a>   |
| Clocks & Buffers         | <a href="http://cypress.com/go/clocks">cypress.com/go/clocks</a>   |
| Interface                | <a href="http://cypress.com/go/interface">cypress.com/go/interface</a>   |
| Lighting & Power Control | <a href="http://cypress.com/go/powerpsoc">cypress.com/go/powerpsoc</a><br><a href="http://cypress.com/go/plc">cypress.com/go/plc</a> |
| Memory                   | <a href="http://cypress.com/go/memory">cypress.com/go/memory</a>   |
| PSoC                     | <a href="http://cypress.com/go/psoc">cypress.com/go/psoc</a>   |
| Touch Sensing            | <a href="http://cypress.com/go/touch">cypress.com/go/touch</a>   |
| USB Controllers          | <a href="http://cypress.com/go/USB">cypress.com/go/USB</a>   |
| Wireless/RF              | <a href="http://cypress.com/go/wireless">cypress.com/go/wireless</a>   |

#### PSoC<sup>®</sup> Solutions

[psoc.cypress.com/solutions](http://psoc.cypress.com/solutions)  
PSoC 1 | PSoC 3 | PSoC 4 | PSoC 5LP

#### Cypress Developer Community

[Community](#) | [Forums](#) | [Blogs](#) | [Video](#) | [Training](#)

#### Technical Support

[cypress.com/go/support](http://cypress.com/go/support)

---

© Cypress Semiconductor Corporation, 2004-2014. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Any Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.