

FEATURES

- 16-bit resolution and monotonicity
- Dynamic power control for thermal management
- Current and voltage output pins connectable to a single terminal
- Current output ranges: 0 mA to 20 mA, 4 mA to 20 mA, or 0 mA to 24 mA
- $\pm 0.05\%$ total unadjusted error (TUE) maximum
- Voltage output ranges (with 20% overrange): 0 V to 5 V, 0 V to 10 V, ± 5 V, and ± 10 V
- $\pm 0.04\%$ total unadjusted error (TUE) maximum
- User programmable offset and gain
- On-chip diagnostics
- On-chip reference (± 10 ppm/ $^{\circ}$ C maximum)
- -40° C to $+105^{\circ}$ C temperature range

APPLICATIONS

- Process control
- Actuator control
- PLCs
- HART network connectivity

GENERAL DESCRIPTION

The AD5755-1 is a quad, voltage and current output DAC that operates with a power supply range from -26.4 V to $+33$ V. On-chip dynamic power control minimizes package power dissipation

in current mode. This is achieved by regulating the voltage on the output driver from 7.4 V to 29.5 V using a dc-to-dc boost converter optimized for minimum on-chip power dissipation. Each channel has a corresponding CHART pin so that HART signals can be coupled onto the current output of the AD5755-1. The part uses a versatile 3-wire serial interface that operates at clock rates of up to 30 MHz and is compatible with standard SPI, QSPI[™], MICROWIRE[™], DSP, and microcontroller interface standards. The interface also features optional CRC-8 packet error checking, as well as a watchdog timer that monitors activity on the interface.


PRODUCT HIGHLIGHTS

1. Dynamic power control for thermal management.
2. 16-bit performance.
3. Multichannel.
4. HART compliant.

COMPANION PRODUCTS

- Product Family: [AD5755](#), [AD5757](#)
- HART Modem: [AD5700](#), [AD5700-1](#)
- External References: [ADR445](#), [ADR02](#)
- Digital Isolators: [ADuM1410](#), [ADuM1411](#)
- Power: [ADP2302](#), [ADP2303](#)
- Additional companion products on the [AD5755-1 product page](#)

FUNCTIONAL BLOCK DIAGRAM

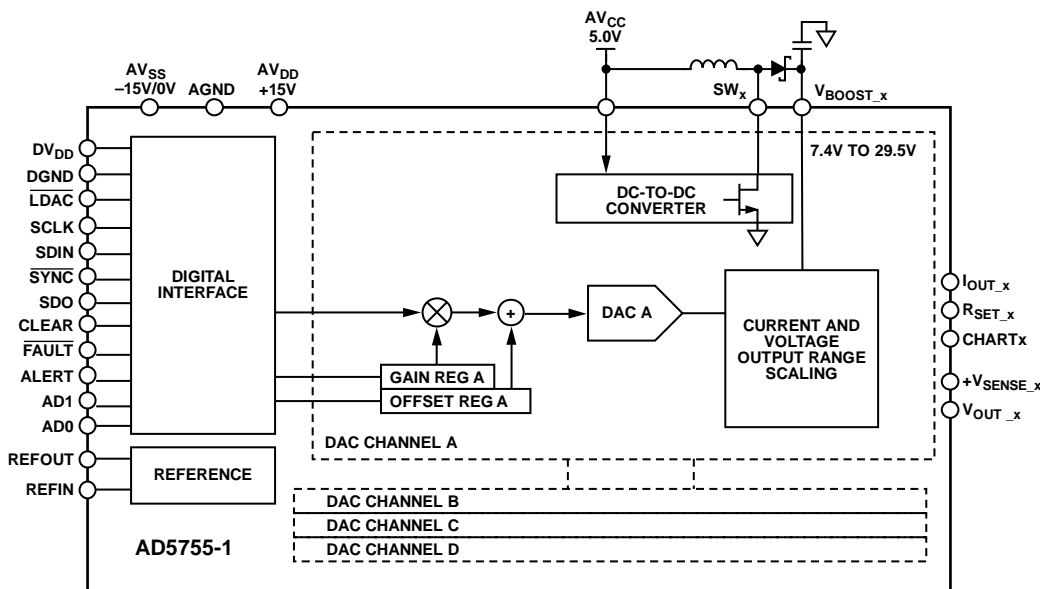

NOTES
1. x = A, B, C, AND D.

Figure 1.

Rev. E

[Document Feedback](#)

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

| | | | |
|--|----|---|----|
| Features | 1 | Device Features..... | 40 |
| Applications..... | 1 | Output Fault..... | 40 |
| General Description | 1 | Voltage Output Short-Circuit Protection..... | 40 |
| Product Highlights | 1 | Digital Offset and Gain Control..... | 40 |
| Companion Products | 1 | Status Readback During a Write | 40 |
| Functional Block Diagram | 1 | Asynchronous Clear..... | 41 |
| Revision History | 3 | Packet Error Checking..... | 41 |
| Detailed Functional Block Diagram | 4 | Watchdog Timer..... | 41 |
| Specifications..... | 5 | Output Alert..... | 41 |
| AC Performance Characteristics | 8 | Internal Reference | 41 |
| Timing Characteristics | 9 | External Current Setting Resistor | 41 |
| Absolute Maximum Ratings..... | 12 | HART | 42 |
| ESD Caution..... | 12 | Digital Slew Rate Control..... | 42 |
| Pin Configuration and Function Descriptions..... | 13 | Power Dissipation control..... | 43 |
| Typical Performance Characteristics | 16 | DC-to-DC Converters | 43 |
| Voltage Outputs | 16 | AI _{CC} Supply Requirements—Static | 44 |
| Current Outputs | 20 | AI _{CC} Supply Requirements—Slewing | 44 |
| DC-to-DC Block..... | 24 | Applications Information | 46 |
| Reference | 25 | Voltage and Current Output Ranges on the Same | |
| General..... | 26 | Terminal | 46 |
| Terminology | 27 | Current Output Mode with Internal R _{SET} | 46 |
| Theory of Operation | 29 | Precision Voltage Reference Selection..... | 46 |
| DAC Architecture..... | 29 | Driving Inductive Loads..... | 47 |
| Power-On State of the AD5755-1 | 29 | Transient Voltage Protection | 47 |
| Serial Interface | 30 | Microprocessor Interfacing..... | 47 |
| Transfer Function | 30 | Layout Guidelines..... | 47 |
| Registers..... | 31 | Galvanically Isolated Interface | 48 |
| Programming Sequence to Write/Enable the Output | | Industrial HART Capable Analog Output Application— | |
| Correctly..... | 32 | Shared V _{OUT_x} and I _{OUT_x} Pin..... | 49 |
| Changing and Reprogramming the Range | 32 | Outline Dimensions | 50 |
| Data Registers | 33 | Ordering Guide | 50 |
| Control Registers..... | 35 | | |
| Readback Operation..... | 38 | | |

REVISION HISTORY**11/12—Rev. D to Rev. E**

| | |
|---|----|
| Changes to Figure 2..... | 4 |
| Changed Thermal Impedance from 20°C/W to 28°C/W | 12 |
| Changes to Pin 6 Description | 13 |
| Changes to Pin 27 Description | 14 |
| Changes to Figure 26 | 19 |
| Changes to DUT_AD1, DUT_AD0 Description, Table 9 | 33 |
| Changes to Packet Error Checking Section and Internal Reference Section | 41 |
| Changes to Figure 81 | 43 |
| Changes to Figure 86 | 47 |
| Changes to Figure 89 | 49 |

7/12—Rev. C to Rev. D

| | |
|---------------------------------|----|
| Changes to Figure 89 | 49 |
| Updated Outline Dimensions..... | 50 |

5/12—Rev. B to Rev. C

| | |
|---|----|
| Changes to Companion Products Section | 1 |
| Changes to Figure 2..... | 3 |
| Changes to Table 5 | 15 |
| Changes to Figure 22 | 18 |
| Added Industrial HART Capable Analog Output Application—Shared V_{OUT_X} and I_{OUT_X} Pin Section and Figure 89, Renumbered Sequentially | 49 |
| Updated Outline Dimensions..... | 50 |

11/11—Rev. A to Rev. B

| | |
|---|----|
| Removed Voltage Output Test Conditions/Comments, Table 1.... | 5 |
| Changed Headroom and Footroom Test Conditions/Comments, Table 1 | 5 |
| Changes to Figure 4 | 10 |
| Changes to Figure 5 | 11 |
| Changes to SCLK Description, Table 5 | 13 |
| Changes to Figure 12 | 16 |
| Changes to Figure 21 | 18 |
| Changes to Figure 37 | 20 |
| Changes to Figure 44 | 22 |
| Changes to Figure 71 | 29 |
| Changes to Power-On State of the AD5755-1 Section..... | 30 |
| Changes to Table 17 | 35 |
| Changes to Readback Operation section and Table 26..... | 38 |
| Changes to Voltage Output Short-Circuit Protection Section .. | 40 |
| Changes to Figure 78 | 41 |
| Changes to Figure 82 | 44 |
| Changes to Figure 83, Figure 84, and Figure 85 | 45 |
| Changes to Transient Voltage Protection Section and Figure 86 ... | 47 |
| Changes to Galvanically Isolated Interface Section..... | 48 |

5/11—Rev. 0 to Rev. A

| | |
|--|----|
| Removed Endnote 6 (Table 1) | 6 |
| Changed AV_{DD} Minimum Value from 10.8 V to 9 V | 6 |
| Changed AI_{SS} Minimum Value from -1.4 mA to -1.7 mA..... | 7 |
| Changed AV_{DD} Voltage in Pin 19 Description | 13 |
| Changes to Ordering Guide..... | 48 |

4/11—Revision 0: Initial Version

DETAILED FUNCTIONAL BLOCK DIAGRAM

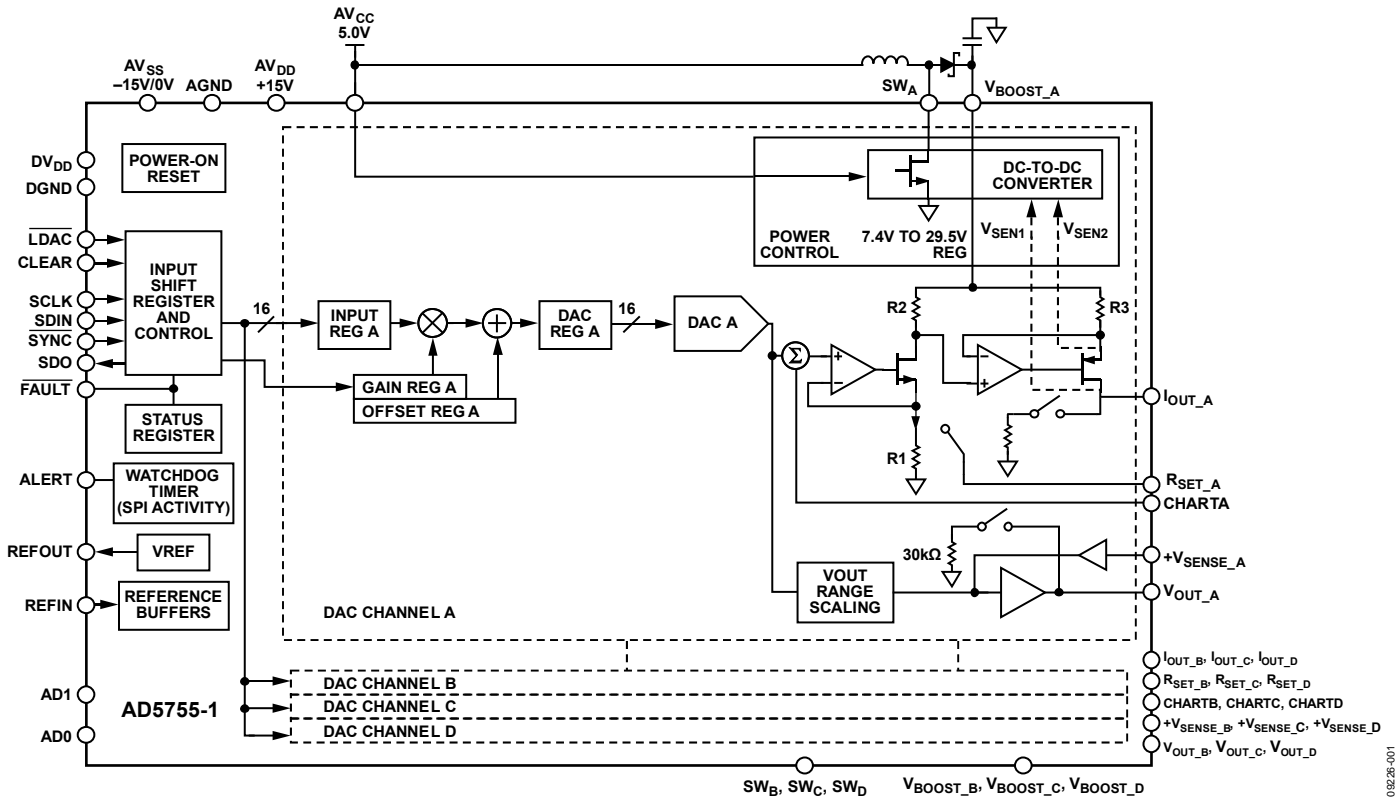


Figure 2.

0 9226-001

SPECIFICATIONS

$AV_{DD} = V_{BOOST_X} = 15\text{ V}$; $AV_{SS} = -15\text{ V}/0\text{ V}$; $DV_{DD} = 2.7\text{ V}$ to 5.5 V ; $AV_{CC} = 4.5\text{ V}$ to 5.5 V ; dc-to-dc converter disabled; $AGND = DGND = GND_{SW_X} = 0\text{ V}$; $REFIN = 5\text{ V}$; voltage outputs: $R_L = 1\text{ k}\Omega$, $C_L = 220\text{ pF}$; current outputs: $R_L = 300\ \Omega$; all specifications T_{MIN} to T_{MAX} , unless otherwise noted.

Table 1.

| Parameter ¹ | Min | Typ | Max | Unit | Test Conditions/Comments |
|---|--------|--------------|--------|---------------------------|--|
| VOLTAGE OUTPUT | | | | | |
| Output Voltage Ranges | 0 | | 5 | V | |
| | 0 | | 10 | V | |
| | -5 | | +5 | V | |
| | -10 | | +10 | V | |
| | 0 | | 6 | V | |
| | 0 | | 12 | V | |
| | -6 | | +6 | V | |
| | -12 | | +12 | V | |
| ACCURACY BIPOLAR SUPPLY | | | | | |
| Resolution | 16 | | | Bits | $AV_{SS} = -15\text{ V}$, loaded and unloaded |
| Total Unadjusted Error (TUE) | -0.04 | | +0.04 | % FSR | |
| | -0.03 | ± 0.0032 | +0.03 | % FSR | $T_A = 25^\circ\text{C}$ |
| TUE Long-Term Stability | | 35 | | ppm FSR | Drift after 1000 hours, $T_J = 150^\circ\text{C}$ |
| Relative Accuracy (INL) | -0.006 | ± 0.0012 | +0.006 | % FSR | 0 V to 5 V, 0 V to 10 V, $\pm 5\text{ V}$, $\pm 10\text{ V}$ ranges |
| | -0.008 | ± 0.0012 | +0.008 | % FSR | On overranges |
| Differential Nonlinearity (DNL) | -1 | | +1 | LSB | Guaranteed monotonic |
| Zero-Scale Error | -0.03 | ± 0.002 | +0.03 | % FSR | |
| Zero-Scale TC^2 | | ± 2 | | ppm FSR/ $^\circ\text{C}$ | |
| Bipolar Zero Error | -0.03 | ± 0.002 | +0.03 | % FSR | |
| Bipolar Zero TC^2 | | ± 1 | | ppm FSR/ $^\circ\text{C}$ | |
| Offset Error | -0.03 | ± 0.002 | +0.03 | % FSR | |
| Offset TC^2 | | ± 2 | | ppm FSR/ $^\circ\text{C}$ | |
| Gain Error | -0.03 | ± 0.004 | +0.03 | % FSR | |
| Gain TC^2 | | ± 3 | | ppm FSR/ $^\circ\text{C}$ | |
| Full-Scale Error | -0.03 | ± 0.002 | +0.03 | % FSR | |
| Full-Scale TC^2 | | ± 2 | | ppm FSR/ $^\circ\text{C}$ | |
| ACCURACY UNIPOLAR SUPPLY² | | | | | |
| Total Unadjusted Error (TUE) | -0.06 | ± 0.025 | +0.06 | % FSR | $AV_{SS} = 0\text{ V}$ |
| Relative Accuracy (INL) ³ | -0.009 | | +0.009 | % FSR | |
| Differential Nonlinearity (DNL) | -1 | | +1 | LSB | Guaranteed monotonic |
| Zero-Scale Error | | +0.22 | | % FSR | |
| Offset Error | -0.07 | ± 0.025 | +0.07 | % FSR | |
| Gain Error | -0.07 | ± 0.015 | +0.07 | % FSR | |
| Full-Scale Error | -0.06 | ± 0.015 | +0.06 | % FSR | |
| OUTPUT CHARACTERISTICS² | | | | | |
| Headroom | | 1 | 2.2 | V | With respect to V_{BOOST} supply |
| Footroom | | 0.7 | 1.4 | V | With respect to the AV_{SS} supply, bipolar output ranges |
| Output Voltage Drift vs. Time | | 20 | | ppm FSR | Drift after 1000 hours, $\frac{3}{4}$ scale output, $T_J = 150^\circ\text{C}$, $AV_{SS} = -15\text{ V}$ |
| Short-Circuit Current | 12/6 | 16/8 | | mA | Programmable by user, defaults to 16 mA typical level |
| Load | 1 | | | k Ω | For specified performance |
| Capacitive Load Stability | | | 10 | nF | |
| | | | 2 | μF | External compensation capacitor of 220 pF connected |
| DC Output Impedance | | 0.06 | | Ω | |
| DC PSRR | | 50 | | $\mu\text{V}/\text{V}$ | |
| DC Crosstalk | | 24 | | μV | |

| Parameter ¹ | Min | Typ | Max | Unit | Test Conditions/Comments |
|---|--------|----------------------------|----------------------------|------------|---|
| CURRENT OUTPUT | | | | | |
| Output Current Ranges | 0 | | 24 | mA | |
| | 0 | | 20 | mA | |
| | 4 | | 20 | mA | |
| Resolution | 16 | | | Bits | |
| ACCURACY (EXTERNAL R_{SET}) | | | | | |
| Total Unadjusted Error (TUE) | -0.05 | ±0.009 | +0.05 | % FSR | Assumes ideal resistor, see the External Current Setting Resistor section for more information |
| TUE Long-Term Stability | | 100 | | ppm FSR | Drift after 1000 hours, T _J = 150°C |
| Relative Accuracy (INL) | -0.006 | | +0.006 | % FSR | |
| Differential Nonlinearity (DNL) | -1 | | +1 | LSB | Guaranteed monotonic |
| Offset Error | -0.05 | ±0.005 | +0.05 | % FSR | |
| Offset Error Drift ² | | ±4 | | ppm FSR/°C | |
| Gain Error | -0.05 | ±0.004 | +0.05 | % FSR | |
| Gain TC ² | | ±3 | | ppm FSR/°C | |
| Full-Scale Error | -0.05 | ±0.008 | +0.05 | % FSR | |
| Full-Scale TC ² | | ±5 | | ppm FSR/°C | |
| DC Crosstalk | | 0.0005 | | % FSR | External R _{SET} |
| ACCURACY (INTERNAL R_{SET}) | | | | | |
| Total Unadjusted Error (TUE) ^{4,5} | -0.14 | | +0.14 | % FSR | |
| | -0.11 | ±0.009 | +0.11 | % FSR | T _A = 25°C |
| TUE Long-Term Stability | | 180 | | ppm FSR | Drift after 1000 hours, T _J = 150°C |
| Relative Accuracy (INL) | -0.006 | | +0.006 | % FSR | |
| Relative Accuracy (INL) | -0.004 | | +0.004 | % FSR | T _A = 25°C |
| Differential Nonlinearity (DNL) | -1 | | +1 | LSB | Guaranteed monotonic |
| Offset Error ^{4,5} | -0.05 | | +0.05 | % FSR | |
| | -0.04 | ±0.007 | +0.04 | % FSR | T _A = 25°C |
| Offset Error Drift ² | | ±6 | | ppm FSR/°C | |
| Gain Error | -0.12 | | +0.12 | % FSR | |
| | -0.06 | ±0.002 | +0.06 | % FSR | T _A = 25°C |
| Gain TC ² | | ±9 | | ppm FSR/°C | |
| Full-Scale Error ^{4,5} | -0.14 | | +0.14 | % FSR | |
| | -0.1 | ±0.007 | +0.1 | % FSR | T _A = 25°C |
| Full-Scale TC ² | | ±14 | | ppm FSR/°C | |
| DC Crosstalk ⁵ | | -0.011 | | % FSR | Internal R _{SET} |
| OUTPUT CHARACTERISTICS² | | | | | |
| Current Loop Compliance Voltage | | V _{BOOST_X} - 2.4 | V _{BOOST_X} - 2.7 | V | |
| Output Current Drift vs. Time | | 90 | | ppm FSR | Drift after 1000 hours, ¾ scale output, T _J = 150°C |
| | | 140 | | ppm FSR | External R _{SET} |
| Resistive Load | | | 1000 | Ω | Internal R _{SET} |
| | | | | | The dc-to-dc converter has been characterized with a maximum load of 1 kΩ, chosen such that compliance is not exceeded; see Figure 53 and DC-DC MaxV bits in Table 25 |
| Output Impedance | | 100 | | MΩ | |
| DC PSRR | | 0.02 | 1 | μA/V | |

| Parameter ¹ | Min | Typ | Max | Unit | Test Conditions/Comments |
|---|------------------------|-------|---------|--------|--|
| REFERENCE INPUT/OUTPUT | | | | | |
| Reference Input ² | | | | | |
| Reference Input Voltage | 4.95 | 5 | 5.05 | V | For specified performance |
| DC Input Impedance | 45 | 150 | | MΩ | |
| Reference Output | | | | | |
| Output Voltage | 4.995 | 5 | 5.005 | V | T _A = 25°C |
| Reference TC ² | -10 | ±5 | +10 | ppm/°C | |
| Output Noise (0.1 Hz to 10 Hz) ² | | 7 | | μV p-p | |
| Noise Spectral Density ² | | 100 | | nV/√Hz | At 10 kHz |
| Output Voltage Drift vs. Time ² | | 180 | | ppm | Drift after 1000 hours, T _J = 150°C |
| Capacitive Load ² | | 1000 | | nF | |
| Load Current | | 9 | | mA | See Figure 64 |
| Short-Circuit Current | | 10 | | mA | |
| Line Regulation ² | | 3 | | ppm/V | See Figure 65 |
| Load Regulation ² | | 95 | | ppm/mA | See Figure 64 |
| Thermal Hysteresis ² | | 160 | | ppm | First temperature cycle |
| | | 5 | | ppm | Second temperature cycle |
| DC-TO-DC | | | | | |
| Switch | | | | | |
| Switch On Resistance | | 0.425 | | Ω | |
| Switch Leakage Current | | 10 | | nA | |
| Peak Current Limit | | 0.8 | | A | |
| Oscillator | | | | | |
| Oscillator Frequency | 11.5 | 13 | 14.5 | MHz | This oscillator is divided down to give the dc-to-dc converter switching frequency |
| Maximum Duty Cycle | | 89.6 | | % | At 410 kHz dc-to-dc switching frequency |
| DIGITAL INPUTS² | | | | | |
| V _{I(H)} Input High Voltage | 2 | | | V | JEDEC compliant |
| V _{I(L)} Input Low Voltage | | | 0.8 | V | |
| Input Current | -1 | | +1 | μA | Per pin |
| Pin Capacitance | | 2.6 | | pF | Per pin |
| DIGITAL OUTPUTS² | | | | | |
| SDO, ALERT | | | | | |
| V _{OL} Output Low Voltage | | | 0.4 | V | Sinking 200 μA |
| V _{OH} Output High Voltage | DV _{DD} - 0.5 | | | V | Sourcing 200 μA |
| High Impedance Leakage Current | -1 | | +1 | μA | |
| High Impedance Output Capacitance | | 2.5 | | pF | |
| FAULT | | | | | |
| V _{OL} Output Low Voltage | | | 0.4 | V | 10 kΩ pull-up resistor to DV _{DD} |
| V _{OL} Output Low Voltage | | 0.6 | | V | At 2.5 mA |
| V _{OH} Output High Voltage | 3.6 | | | V | 10 kΩ pull-up resistor to DV _{DD} |
| POWER REQUIREMENTS | | | | | |
| AV _{DD} | 9 | | 33 | V | |
| AV _{SS} | -26.4 | | -10.8/0 | V | |
| DV _{DD} | 2.7 | | 5.5 | V | |
| AV _{CC} | 4.5 | | 5.5 | V | |

| Parameter ¹ | Min | Typ | Max | Unit | Test Conditions/Comments |
|------------------------|-----|------|------|------|---|
| I_{DD} | | 8.6 | 10.5 | mA | Voltage output mode on all channels, output unloaded, over supplies |
| I_{SS} | -11 | 7 | 7.5 | mA | Current output mode on all channels |
| | | -1.7 | | mA | Voltage output mode on all channels, output unloaded, over supplies |
| $D_{I_{CC}}$ | | 9.2 | 11 | mA | Current output mode on all channels |
| I_{CC} | | | 1 | mA | $V_{IH} = DV_{DD}$, $V_{IL} = DGND$, internal oscillator running, over supplies |
| I_{BOOST} | | | 2.7 | mA | Output unloaded, over supplies |
| I_{BOOST}^6 | | | 1 | mA | Per channel, voltage output mode, output unloaded, over supplies |
| Power Dissipation | | 173 | | mW | Per channel, current output mode, 0 mA output $AV_{DD} = +15\text{ V}$, $AV_{SS} = -15\text{ V}$, dc-to-dc converter enable, current output mode, outputs disabled |

¹Temperature range: -40°C to $+105^{\circ}\text{C}$; typical at $+25^{\circ}\text{C}$.

²Guaranteed by design and characterization; not production tested.

³For voltage output ranges in unipolar supply mode, the INL and TUE are measured beginning from Code 4096.

⁴For current outputs with internal R_{SET} , the offset, full-scale, and TUE measurements exclude dc crosstalk. The measurements are made with all four channels enabled loaded with the same code.

⁵See the Current Output Mode with Internal R_{SET} section for more explanation of the dc crosstalk.

⁶Efficiency plots in Figure 55, Figure 56, Figure 57, and Figure 58 include the I_{BOOST} quiescent current

AC PERFORMANCE CHARACTERISTICS

$AV_{DD} = V_{BOOST_x} = 15\text{ V}$; $AV_{SS} = -15\text{ V}$; $DV_{DD} = 2.7\text{ V}$ to 5.5 V ; $AV_{CC} = 4.5\text{ V}$ to 5.5 V ; dc-to-dc converter disabled; $AGND = DGND = GND$; $SW_x = 0\text{ V}$; $REFIN = 5\text{ V}$; voltage outputs: $R_L = 2\text{ k}\Omega$, $C_L = 220\text{ pF}$; current outputs: $R_L = 300\ \Omega$; all specifications T_{MIN} to T_{MAX} , unless otherwise noted.

Table 2.

| Parameter ¹ | Min | Typ | Max | Unit | Test Conditions/Comments |
|--|-----|----------------------------------|-----|------------------------|---|
| DYNAMIC PERFORMANCE | | | | | |
| Voltage Output | | | | | |
| Output Voltage Settling Time | | 11 | | μs | 5 V step to $\pm 0.03\%$ FSR, 0 V to 5 V range |
| | | | 18 | μs | 10 V step to $\pm 0.03\%$ FSR, 0 V to 10 V range |
| | | | 13 | μs | 100 mV step to 1 LSB (16-bit LSB), 0 V to 10 V range |
| Slew Rate | | 1.9 | | V/ μs | 0 V to 10 V range |
| Power-On Glitch Energy | | 150 | | nV-sec | |
| Digital-to-Analog Glitch Energy | | 6 | | nV-sec | |
| Glitch Impulse Peak Amplitude | | 25 | | mV | |
| Digital Feedthrough | | 1 | | nV-sec | |
| DAC to DAC Crosstalk | | 2 | | nV-sec | 0 V to 10 V range |
| Output Noise (0.1 Hz to 10 Hz Bandwidth) | | 0.15 | | LSB p-p | 16-bit LSB, 0 V to 10 V range |
| Output Noise Spectral Density | | 150 | | nV/ $\sqrt{\text{Hz}}$ | Measured at 10 kHz, midscale output, 0 V to 10 V range |
| AC PSRR | | 83 | | dB | 200 mV 50 Hz/60 Hz sine wave superimposed on power supply voltage |
| Current Output | | | | | |
| Output Current Settling Time | | 15 | | μs | To 0.1% FSR (0 mA to 24 mA) |
| | | See test conditions/ comments | | ms | See Figure 49, Figure 50, and Figure 51 |
| Output Noise (0.1 Hz to 10 Hz Bandwidth) | | 0.15 | | LSB p-p | 16-bit LSB, 0 mA to 24 mA range |
| Output Noise Spectral Density | | 0.5 | | nA/ $\sqrt{\text{Hz}}$ | Measured at 10 kHz, midscale output, 0 mA to 24 mA range |

¹Guaranteed by design and characterization; not production tested.

TIMING CHARACTERISTICS

$AV_{DD} = V_{BOOST_X} = 15\text{ V}$; $AV_{SS} = -15\text{ V}$; $DV_{DD} = 2.7\text{ V to }5.5\text{ V}$; $AV_{CC} = 4.5\text{ V to }5.5\text{ V}$; dc-to-dc converter disabled; $AGND = DGND = GND_{SW_X} = 0\text{ V}$; $REFIN = 5\text{ V}$; voltage outputs: $R_L = 1\text{ k}\Omega$, $C_L = 220\text{ pF}$; current outputs: $R_L = 300\ \Omega$; all specifications T_{MIN} to T_{MAX} , unless otherwise noted.

Table 3.

| Parameter ^{1, 2, 3} | Limit at T_{MIN} , T_{MAX} | Unit | Description |
|------------------------------|--|-------------------|---|
| t_1 | 33 | ns min | SCLK cycle time |
| t_2 | 13 | ns min | SCLK high time |
| t_3 | 13 | ns min | SCLK low time |
| t_4 | 13 | ns min | $\overline{\text{SYNC}}$ falling edge to SCLK falling edge setup time |
| t_5 | 13 | ns min | 24 th /32 nd SCLK falling edge to $\overline{\text{SYNC}}$ rising edge (see Figure 78) |
| t_6 | 198 | ns min | $\overline{\text{SYNC}}$ high time |
| t_7 | 5 | ns min | Data setup time |
| t_8 | 5 | ns min | Data hold time |
| t_9 | 20 | μs min | $\overline{\text{SYNC}}$ rising edge to $\overline{\text{LDAC}}$ falling edge (all DACs updated or any channel has digital slew rate control enabled) |
| | 5 | μs min | $\overline{\text{SYNC}}$ rising edge to $\overline{\text{LDAC}}$ falling edge (single DAC updated) |
| t_{10} | 10 | ns min | $\overline{\text{LDAC}}$ pulse width low |
| t_{11} | 500 | ns max | $\overline{\text{LDAC}}$ falling edge to DAC output response time |
| t_{12} | See the AC Performance Characteristics section | μs max | DAC output settling time |
| t_{13} | 10 | ns min | CLEAR high time |
| t_{14} | 5 | μs max | CLEAR activation time |
| t_{15} | 40 | ns max | SCLK rising edge to SDO valid |
| t_{16} | 21 | μs min | $\overline{\text{SYNC}}$ rising edge to DAC output response time ($\overline{\text{LDAC}} = 0$) (all DACs updated) |
| | 5 | μs min | $\overline{\text{SYNC}}$ rising edge to DAC output response time ($\overline{\text{LDAC}} = 0$) (single DAC updated) |
| t_{17} | 500 | ns min | $\overline{\text{LDAC}}$ falling edge to $\overline{\text{SYNC}}$ rising edge |
| t_{18} | 800 | ns min | $\overline{\text{RESET}}$ pulse width |
| t_{19}^4 | 20 | μs min | $\overline{\text{SYNC}}$ high to next $\overline{\text{SYNC}}$ low (digital slew rate control enabled) (all DACs updated) |
| | 5 | μs min | $\overline{\text{SYNC}}$ high to next $\overline{\text{SYNC}}$ low (digital slew rate control disabled) (single DAC updated) |

¹ Guaranteed by design and characterization; not production tested.

² All input signals are specified with $t_r = t_f = 5\text{ ns}$ (10% to 90% of DV_{DD}) and timed from a voltage level of 1.2 V.

³ See Figure 3, Figure 4, Figure 5, and Figure 6.

⁴ This specification applies if $\overline{\text{LDAC}}$ is held low during the write cycle; otherwise, see t_9 .

Timing Diagrams

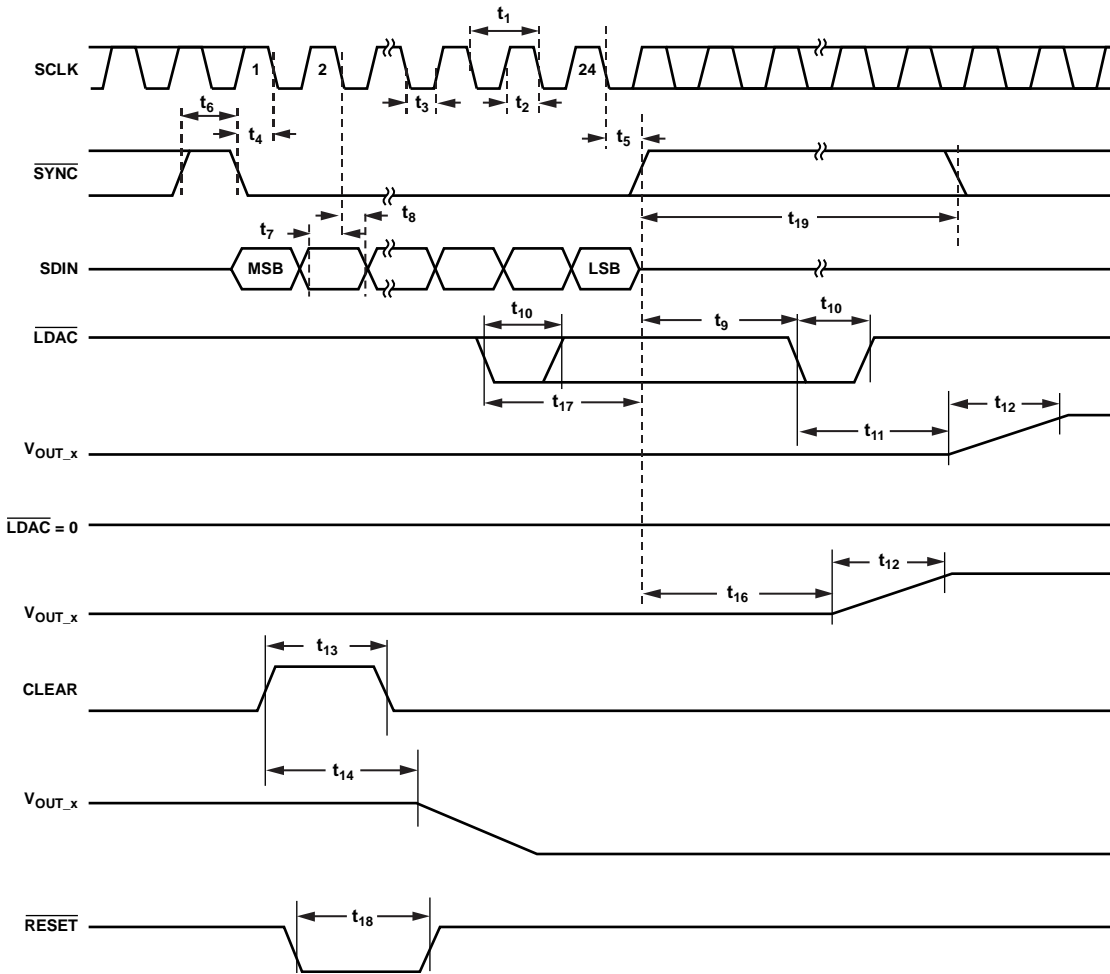


Figure 3. Serial Interface Timing Diagram

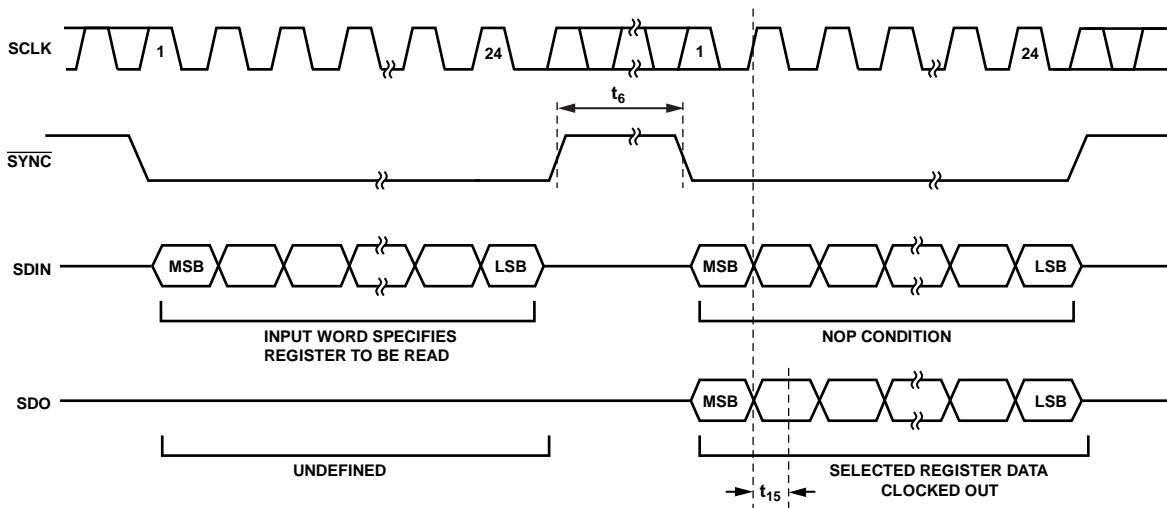


Figure 4. Readback Timing Diagram

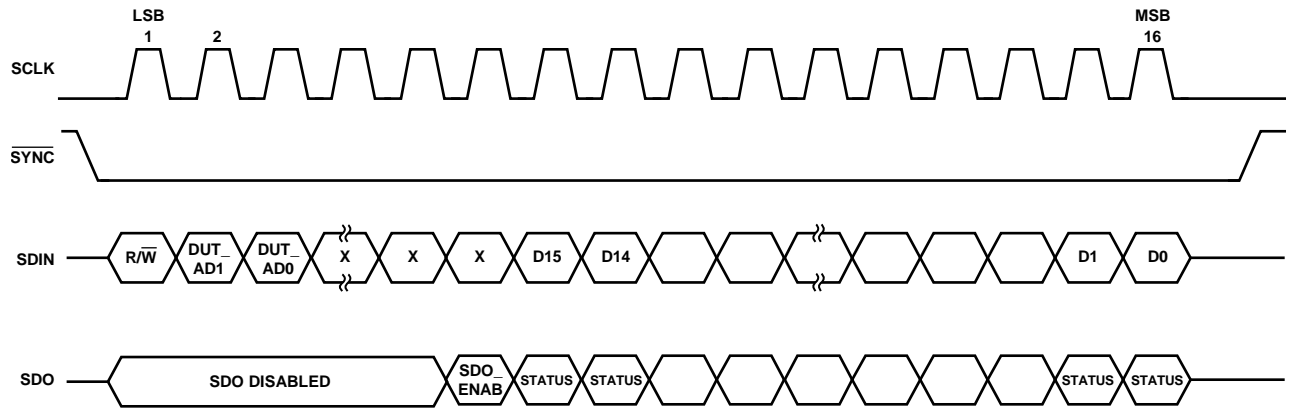


Figure 5. Status Readback During Write

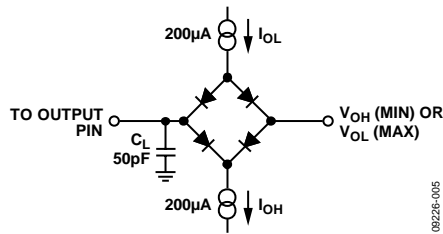


Figure 6. Load Circuit for SDO Timing Diagram

ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$, unless otherwise noted. Transient currents of up to 100 mA do not cause SCR latch-up.

Table 4.

| Parameter | Rating |
|--|---|
| AV_{DD} , V_{BOOST_x} to AGND, DGND | -0.3 V to +33 V |
| AV_{SS} to AGND, DGND | +0.3 V to -28 V |
| AV_{DD} to AV_{SS} | -0.3 V to +60 V |
| AV_{CC} to AGND | -0.3 V to +7 V |
| DV_{DD} to DGND | -0.3 V to +7 V |
| Digital Inputs to DGND | -0.3 V to $DV_{DD} + 0.3$ V or +7 V (whichever is less) |
| Digital Outputs to DGND | -0.3 V to $DV_{DD} + 0.3$ V or +7 V (whichever is less) |
| REFIN, REFOUT to AGND | -0.3 V to $AV_{DD} + 0.3$ V or +7 V (whichever is less) |
| V_{OUT_x} to AGND | AV_{SS} to V_{BOOST_x} or 33 V if using the dc-to-dc circuitry |
| $+V_{SENSE_x}$ to AGND | AV_{SS} to V_{BOOST_x} or 33 V if using the dc-to-dc circuitry |
| I_{OUT_x} to AGND | AV_{SS} to V_{BOOST_x} or 33 V if using the dc-to-dc circuitry |
| SW_x to AGND | -0.3 to +33 V |
| AGND, GNDSW _x to DGND | -0.3 V to +0.3 V |
| Operating Temperature Range (T_A) | |
| Industrial ¹ | -40°C to +105°C |
| Storage Temperature Range | -65°C to +150°C |
| Junction Temperature (T_J max) | 125°C |
| 64-Lead LFCSP | |
| θ_{JA} Thermal Impedance ² | 28°C/W |
| Power Dissipation | $(T_J \text{ max} - T_A)/\theta_{JA}$ |
| Lead Temperature | JEDEC industry standard |
| Soldering | J-STD-020 |

¹ Power dissipated on chip must be derated to keep the junction temperature below 125°C.

² Based on a JEDEC 4-layer test board.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.


ESD CAUTION



ESD (electrostatic discharge) sensitive device.

Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATION AND FUNCTION DESCRIPTIONS

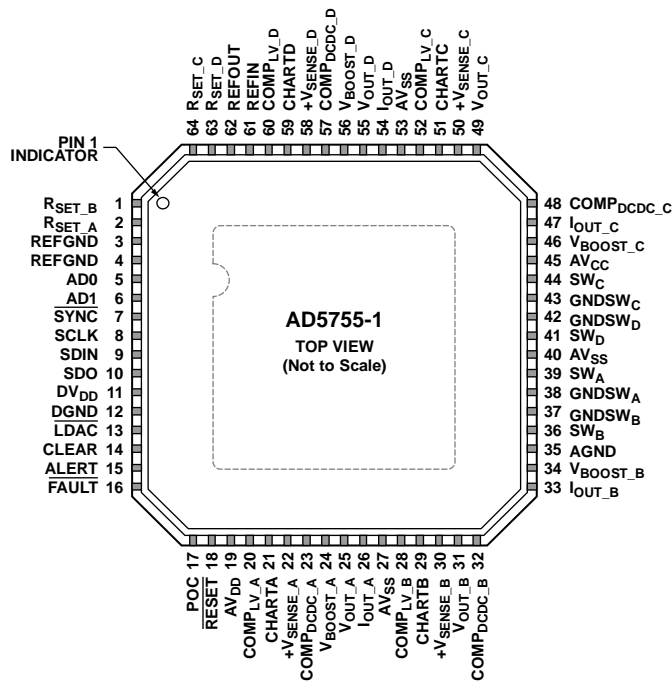

NOTES
 1. THE EXPOSED PAD SHOULD BE CONNECTED TO THE POTENTIAL OF THE AV_{SS} PIN, OR, ALTERNATIVELY, IT CAN BE LEFT ELECTRICALLY UNCONNECTED. IT IS RECOMMENDED THAT THE PAD BE THERMALLY CONNECTED TO A COPPER PLANE FOR ENHANCED THERMAL PERFORMANCE.

Figure 7. Pin Configuration

Table 5. Pin Function Descriptions

| Pin No. | Mnemonic | Description |
|---------|--------------------------|--|
| 1 | RSET_B | An external, precision, low drift 15 kΩ current setting resistor can be connected to this pin to improve the I _{OUT_B} temperature drift performance. See the Device Features section. |
| 2 | RSET_A | An external, precision, low drift 15 kΩ current setting resistor can be connected to this pin to improve the I _{OUT_A} temperature drift performance. See the Device Features section. |
| 3, 4 | REFGND | Ground Reference Point for Internal Reference. |
| 5 | ADO | Address Decode for the Device Under Test (DUT) on the Board. |
| 6 | AD1 | Address Decode for the DUT on the Board. It is not recommended to tie both AD1 and ADO low when using PEC, see the Packet Error Checking section. |
| 7 | $\overline{\text{SYNC}}$ | Active Low Input. This is the frame synchronization signal for the serial interface. While $\overline{\text{SYNC}}$ is low, data is transferred in on the falling edge of SCLK. |
| 8 | SCLK | Serial Clock Input. Data is clocked into the input shift register on the falling edge of SCLK. This operates at clock speeds of up to 30 MHz. |
| 9 | SDIN | Serial Data Input. Data must be valid on the falling edge of SCLK. |
| 10 | SDO | Serial Data Output. Used to clock data from the serial register in readback mode. See Figure 4 and Figure 5. |
| 11 | DV _{DD} | Digital Supply. The voltage range is from 2.7 V to 5.5 V. |
| 12 | DGND | Digital Ground. |
| 13 | $\overline{\text{LDAC}}$ | Load DAC, Active Low Input. This is used to update the DAC register and consequently the DAC outputs. When tied permanently low, the addressed DAC data register is updated on the rising edge of SYNC. If LDAC is held high during the write cycle, the DAC input register is updated, but the DAC output update only takes place at the falling edge of $\overline{\text{LDAC}}$ (see Figure 3). Using this mode, all analog outputs can be updated simultaneously. The $\overline{\text{LDAC}}$ pin must not be left unconnected. |
| 14 | CLEAR | Active High, Edge Sensitive Input. Asserting this pin sets the output current and voltage to the preprogrammed clear code bit setting. Only channels enabled to be cleared are cleared. See the Device Features section for more information. When CLEAR is active, the DAC output register cannot be written to. |

| Pin No. | Mnemonic | Description |
|---------|---------------------------|---|
| 15 | ALERT | Active High Output. This pin is asserted when there has been no SPI activity on the interface pins for a predetermined time. See the Device Features section for more information. |
| 16 | $\overline{\text{FAULT}}$ | Active Low Output. This pin is asserted low when an open circuit in current mode is detected, a short circuit in voltage mode is detected, a PEC error is detected, or an overtemperature is detected (see the Device Features section). Open-drain output. |
| 17 | POC | Power-On Condition. This pin determines the power-on condition and is read during power-on or, alternatively, after a device reset. If POC = 0, the device is powered up with the voltage and current channels in tristate mode. If POC = 1, the device is powered up with a 30 k Ω pull-down resistor to ground on the voltage output channel, and the current channel is in tristate mode. |
| 18 | $\overline{\text{RESET}}$ | Hardware Reset, Active Low Input. |
| 19 | AV _{DD} | Positive Analog Supply. The voltage range is from 9 V to 33 V. |
| 20 | COMP _{LV_A} | Optional Compensation Capacitor Connection for V _{OUT_A} Output Buffer. Connecting a 220 pF capacitor between this pin and the V _{OUT_A} pin allows the voltage output to drive up to 2 μ F. Note that the addition of this capacitor reduces the bandwidth of the output amplifier, increasing the settling time. |
| 21 | CHARTA | HART Input Connection for DAC Channel A. |
| 22 | +V _{SENSE_A} | Sense Connection for the Positive Voltage Output Load Connection for V _{OUT_A} . |
| 23 | COMP _{DCDC_A} | DC-to-DC Compensation Capacitor. Connect a 10 nF capacitor from this pin to ground. Used to regulate the feedback loop of the Channel A dc-to-dc converter. Alternatively, if using an external compensation resistor, place a resistor in series with a capacitor to ground from this pin (see the DC-to-DC Converter Compensation Capacitors and the A _I CC Supply Requirements—Slewing sections in the Device Features section for more information). |
| 24 | V _{BOOST_A} | Supply for Channel A Current Output Stage (see Figure 73). This is also the supply for the V _{OUT_x} stage, which is regulated to 15 V by the dc-to-dc converter. To use the dc-to-dc feature of the device, connect as shown in Figure 80. |
| 25 | V _{OUT_A} | Buffered Analog Output Voltage for DAC Channel A. |
| 26 | I _{OUT_A} | Current Output Pin for DAC Channel A. |
| 27 | AV _{SS} | Negative Analog Supply. Voltage range is from 0 V to –26.4 V. |
| 28 | COMP _{LV_B} | Optional Compensation Capacitor Connection for V _{OUT_B} Output Buffer. Connecting a 220 pF capacitor between this pin and the V _{OUT_B} pin allows the voltage output to drive up to 2 μ F. Note that the addition of this capacitor reduces the bandwidth of the output amplifier, increasing the settling time. |
| 29 | CHARTB | HART Input Connection for DAC Channel B. |
| 30 | +V _{SENSE_B} | Sense Connection for the Positive Voltage Output Load Connection for V _{OUT_B} . |
| 31 | V _{OUT_B} | Buffered Analog Output Voltage for DAC Channel B. |
| 32 | COMP _{DCDC_B} | DC-to-DC Compensation Capacitor. Connect a 10 nF capacitor from this pin to ground. Used to regulate the feedback loop of the Channel B dc-to-dc converter. Alternatively, if using an external compensation resistor, place a resistor in series with a capacitor to ground from this pin (see the DC-to-DC Converter Compensation Capacitors and A _I CC Supply Requirements—Slewing sections in the Device Features section for more information). |
| 33 | I _{OUT_B} | Current Output Pin for DAC Channel B. |
| 34 | V _{BOOST_B} | Supply for Channel B Current Output Stage (see Figure 73). This is also the supply for the V _{OUT_x} stage, which is regulated to 15 V by the dc-to-dc converter. To use the dc-to-dc feature of the device, connect as shown in Figure 80. |
| 35 | AGND | Ground Reference Point for Analog Circuitry. This must be connected to 0 V. |
| 36 | SW _B | Switching Output for Channel B DC-to-DC Circuitry. To use the dc-to-dc feature of the device, connect as shown in Figure 80. |
| 37 | GND _{SW_B} | Ground Connection for DC-to-DC Switching Circuit. This pin should always be connected to ground. |
| 38 | GND _{SW_A} | Ground Connection for DC-to-DC Switching Circuit. This pin should always be connected to ground. |
| 39 | SW _A | Switching Output for Channel A DC-to-DC Circuitry. To use the dc-to-dc feature of the device, connect as shown in Figure 80. |
| 40 | AV _{SS} | Negative Analog Supply Pin. The voltage range is from –10.8 V to –26.4 V. This pin can be connected to 0 V if using the device in unipolar supply mode. |
| 41 | SW _D | Switching Output for Channel D DC-DC Circuitry. To use the dc-to-dc feature of the device, connect as shown in Figure 80. |
| 42 | GND _{SW_D} | Ground Connections for DC-to-DC Switching Circuit. This pin should always be connected to ground. |
| 43 | GND _{SW_C} | Ground Connections for DC-to-DC Switching Circuit. This pin should always be connected to ground. |
| 44 | SW _C | Switching Output for Channel C DC-to-DC Circuitry. To use the dc-to-dc feature of the device, connect as shown in Figure 80. |
| 45 | AV _{CC} | Supply for DC-to-DC Circuitry. |

| Pin No. | Mnemonic | Description |
|---------|------------------------|---|
| 46 | V _{BOOST_C} | Supply for Channel C Current Output Stage (see Figure 73). This is also the supply for the V _{OUT_X} stage, which is regulated to 15 V by the dc-to-dc converter. To use the dc-to-dc feature of the device, connect as shown in Figure 80. |
| 47 | I _{OUT_C} | Current Output Pin for DAC Channel C. |
| 48 | COMP _{DCDC_C} | DC-to-DC Compensation Capacitor. Connect a 10 nF capacitor from this pin to ground. Used to regulate the feedback loop of the Channel C dc-to-dc converter. Alternatively, if using an external compensation resistor, place a resistor in series with a capacitor to ground from this pin (see the DC-to-DC Converter Compensation Capacitors and A _{I_{CC}} Supply Requirements—Slewing sections in the Device Features section for more information). |
| 49 | V _{OUT_C} | Buffered Analog Output Voltage for DAC Channel C. |
| 50 | +V _{SENSE_C} | Sense Connection for the Positive Voltage Output Load Connection for V _{OUT_C} . |
| 51 | CHARTC | HART Input Connection for DAC Channel C. |
| 52 | COMP _{LV_C} | Optional Compensation Capacitor Connection for V _{OUT_C} Output Buffer. Connecting a 220 pF capacitor between this pin and the V _{OUT_C} pin allows the voltage output to drive up to 2 μF. Note that the addition of this capacitor reduces the bandwidth of the output amplifier, increasing the settling time. |
| 53 | AV _{SS} | Negative Analog Supply Pin. |
| 54 | I _{OUT_D} | Current Output Pin for DAC Channel D. |
| 55 | V _{OUT_D} | Buffered Analog Output Voltage for DAC Channel D. |
| 56 | V _{BOOST_D} | Supply for Channel D Current Output Stage (see Figure 73). This is also the supply for the V _{OUT_X} stage, which is regulated to 15 V by the dc-to-dc converter. To use the dc-to-dc feature of the device, connect as shown in Figure 80. |
| 57 | COMP _{DCDC_D} | DC-to-DC Compensation Capacitor. Connect a 10 nF capacitor from this pin to ground. Used to regulate the feedback loop of the Channel D dc-to-dc converter. Alternatively, if using an external compensation resistor, place a resistor in series with a capacitor to ground from this pin (see the DC-to-DC Converter Compensation Capacitors and A _{I_{CC}} Supply Requirements—Slewing sections in the Device Features section for more information). |
| 58 | +V _{SENSE_D} | Sense Connection for the Positive Voltage Output Load Connection for V _{OUT_D} . |
| 59 | CHARTD | HART Input Connection for DAC Channel D. |
| 60 | COMP _{LV_D} | Optional Compensation Capacitor Connection for V _{OUT_D} Output Buffer. Connecting a 220 pF capacitor between this pin and the V _{OUT_D} pin allows the voltage output to drive up to 2 μF. Note that the addition of this capacitor reduces the bandwidth of the output amplifier, increasing the settling time. |
| 61 | REFIN | External Reference Voltage Input. |
| 62 | REFOUT | Internal Reference Voltage Output. It is recommended to place a 0.1 μF capacitor between REFOUT and REF _{GND} . REFOUT must be connected to REFIN to use the internal reference. |
| 63 | R _{SET_D} | An external, precision, low drift 15 kΩ current setting resistor can be connected to this pin to improve the I _{OUT_D} temperature drift performance. See the Device Features section. |
| 64 | R _{SET_C} | An external, precision, low drift 15 kΩ current setting resistor can be connected to this pin to improve the I _{OUT_C} temperature drift performance. See the Device Features section. |
| | EPAD | Exposed Pad. This exposed pad should be connected to the potential of the AV _{SS} pin, or, alternatively, it can be left electrically unconnected. It is recommended that the pad be thermally connected to a copper plane for enhanced thermal performance. |

TYPICAL PERFORMANCE CHARACTERISTICS

VOLTAGE OUTPUTS

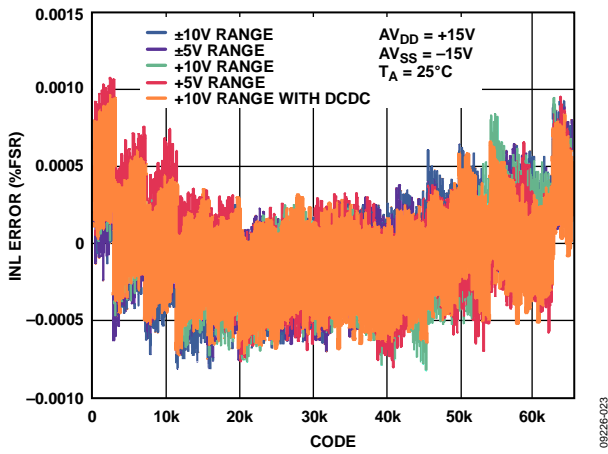


Figure 8. Integral Nonlinearity Error vs. DAC Code

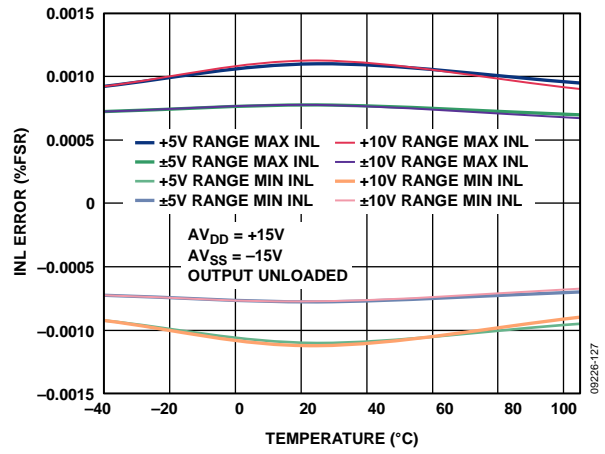


Figure 11. Integral Nonlinearity Error vs. Temperature

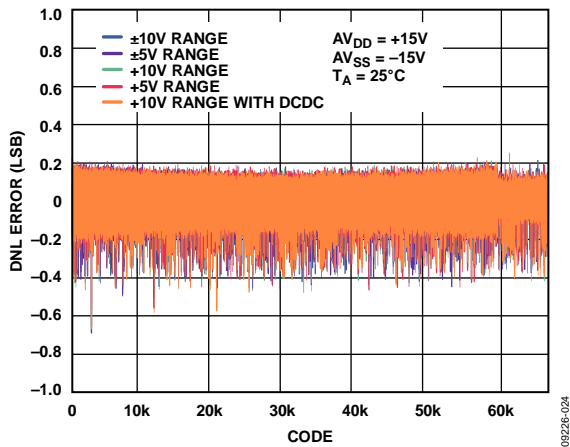


Figure 9. Differential Nonlinearity Error vs. DAC Code

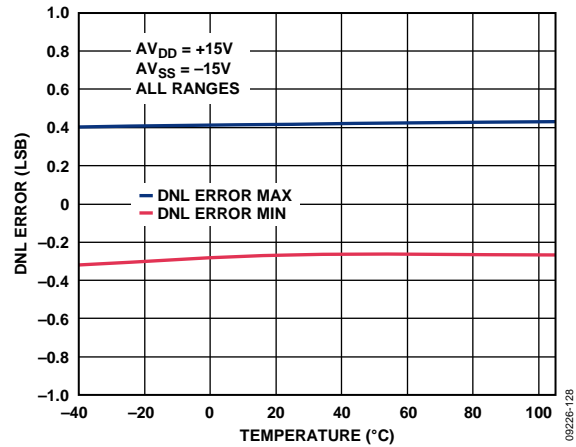


Figure 12. Differential Nonlinearity Error vs. Temperature

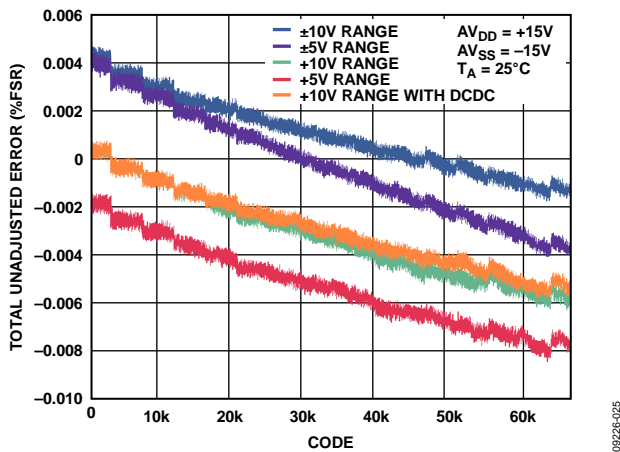


Figure 10. Total Unadjusted Error vs. DAC Code

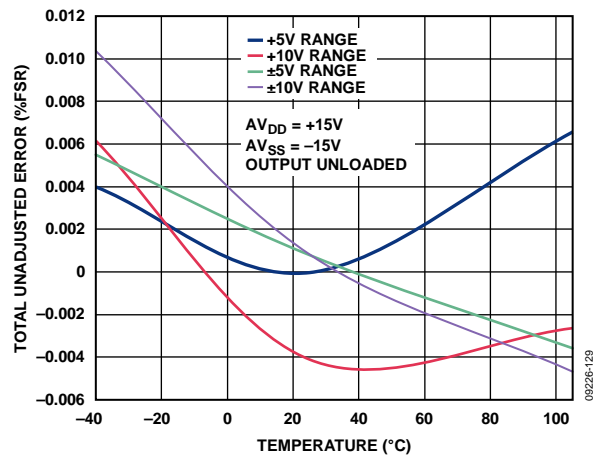


Figure 13. Total Unadjusted Error vs. Temperature

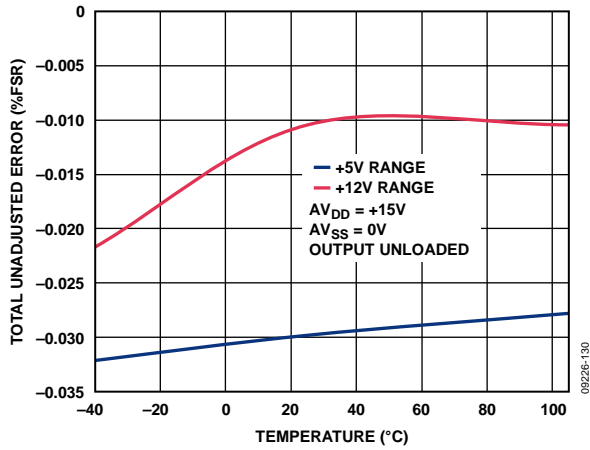


Figure 14. Total Unadjusted Error vs. Temperature, Single Supply

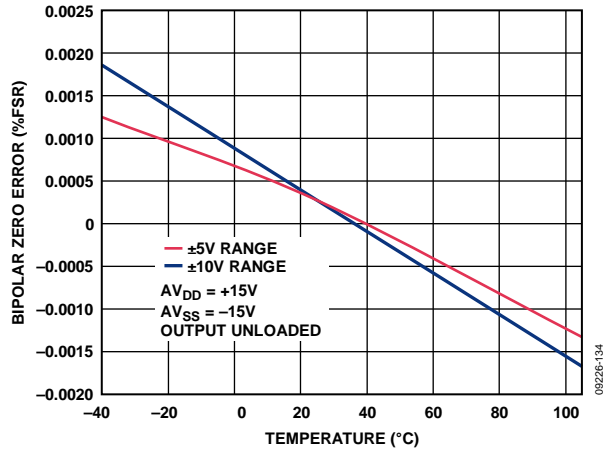


Figure 17. Bipolar Zero Error vs. Temperature

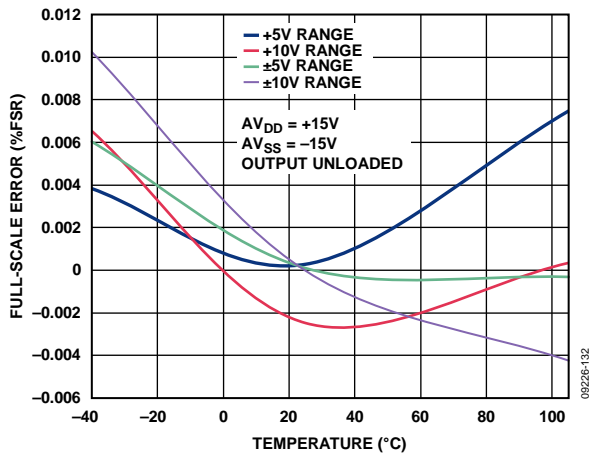


Figure 15. Full-Scale Error vs. Temperature

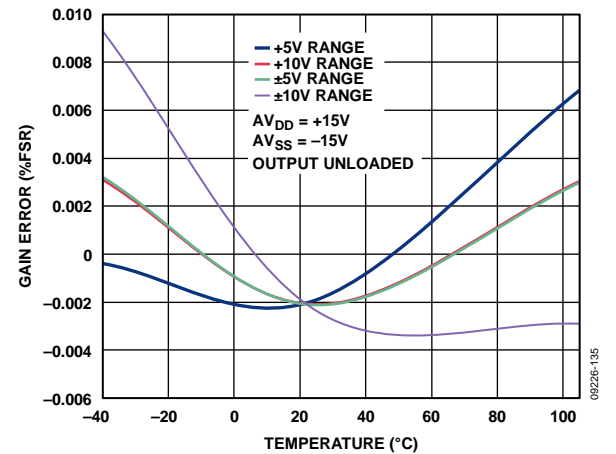


Figure 18. Gain Error vs. Temperature

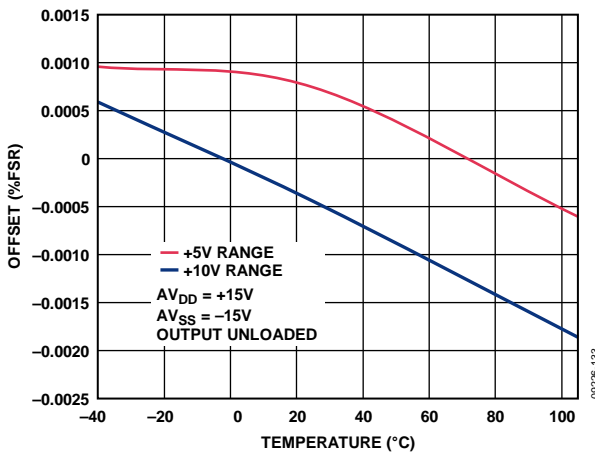


Figure 16. Offset Error vs. Temperature

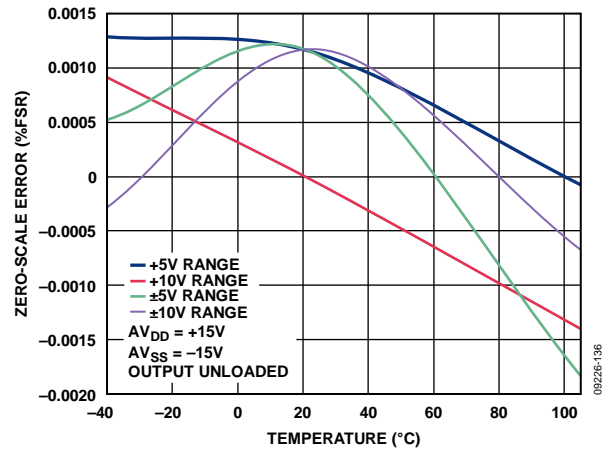


Figure 19. Zero-Scale Error vs. Temperature

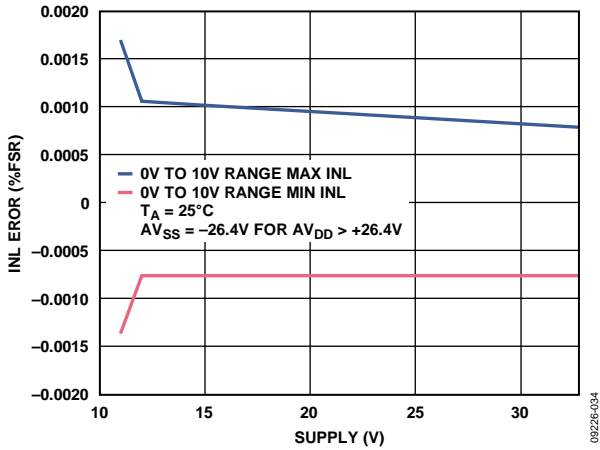


Figure 20. Integral Nonlinearity Error vs. $AV_{DD}/|AV_{SS}|$

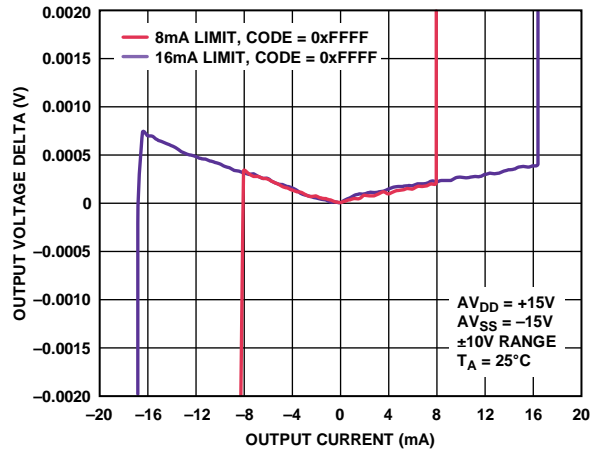


Figure 23. Source and Sink Capability of Output Amplifier

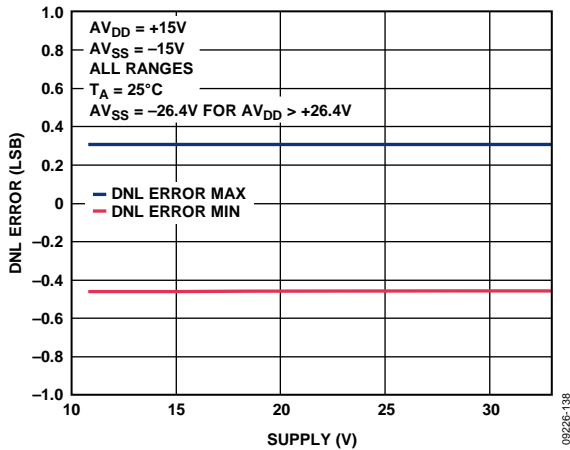


Figure 21. Differential Nonlinearity Error vs. $AV_{DD}/|AV_{SS}|$

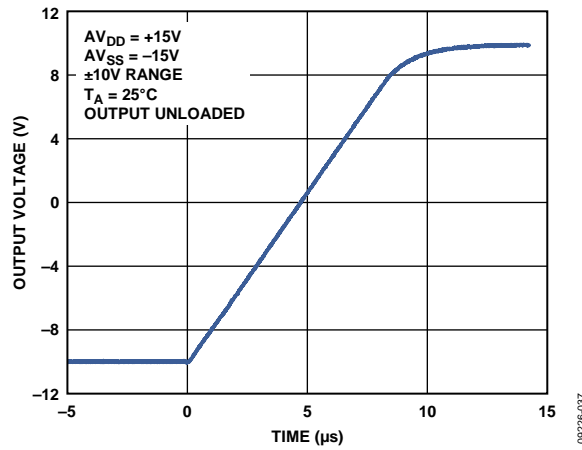


Figure 24. Full-Scale Positive Step

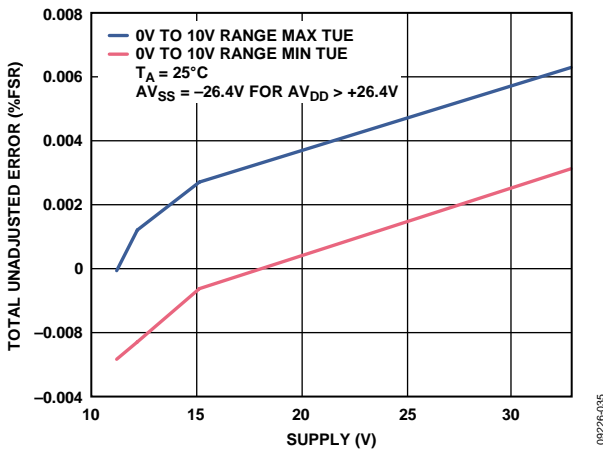


Figure 22. Total Unadjusted Error vs. $AV_{DD}/|AV_{SS}|$

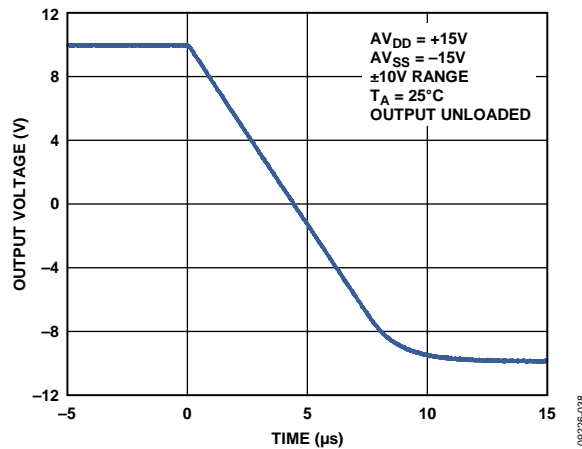


Figure 25. Full-Scale Negative Step

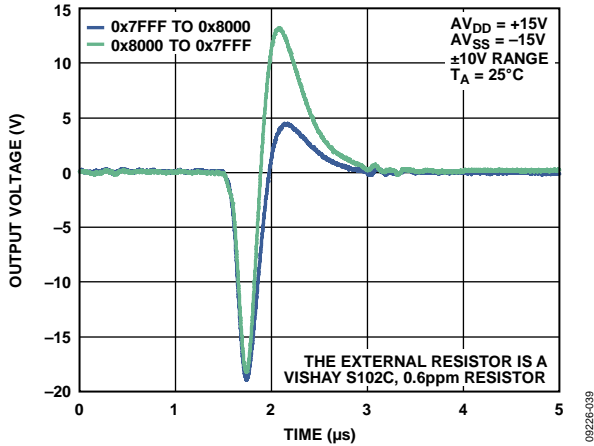


Figure 26. Digital-to-Analog Glitch

09226-039

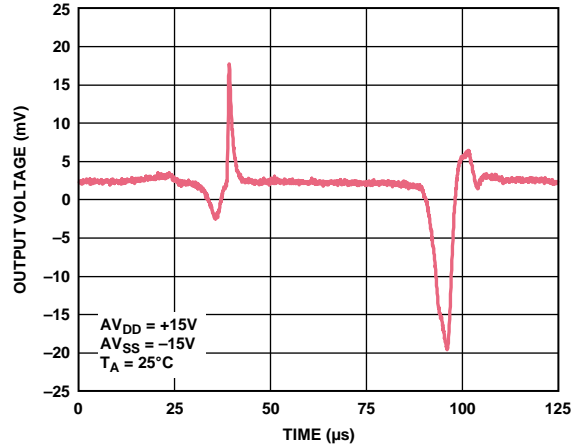


Figure 29. V_{OUT_x} vs. Time on Power-Up

09226-043

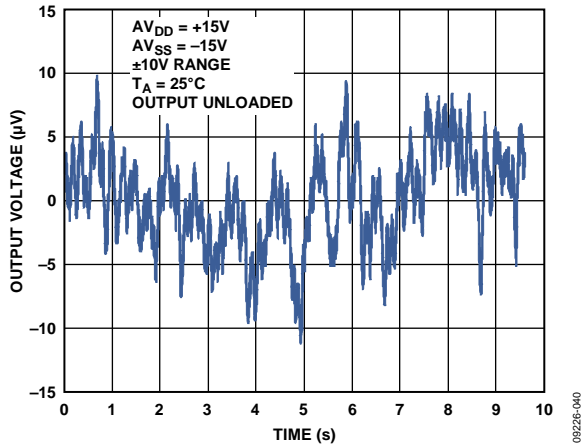


Figure 27. Peak-to-Peak Noise (0.1 Hz to 10 Hz Bandwidth)

09226-040

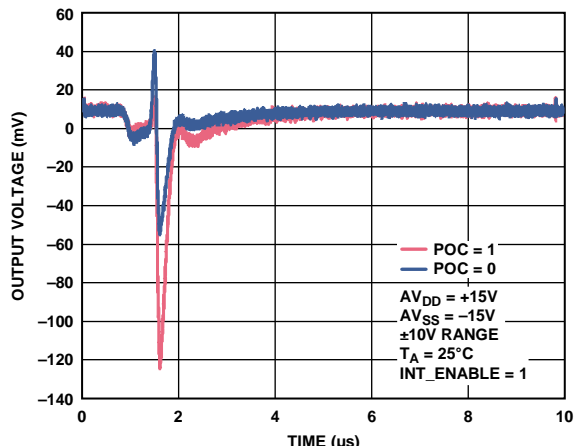


Figure 30. V_{OUT_x} vs. Time on Output Enable

09226-044

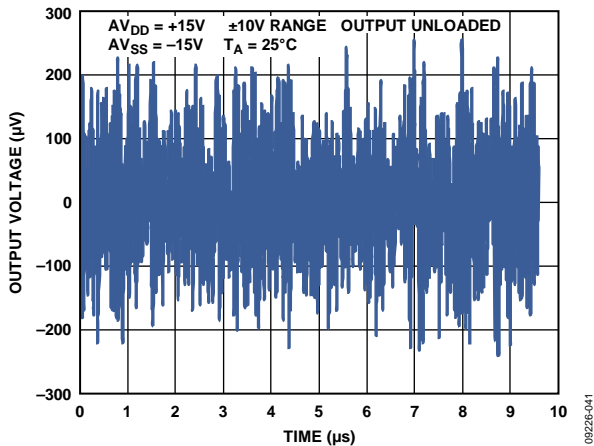


Figure 28. Peak-to-Peak Noise (100 kHz Bandwidth)

09226-041

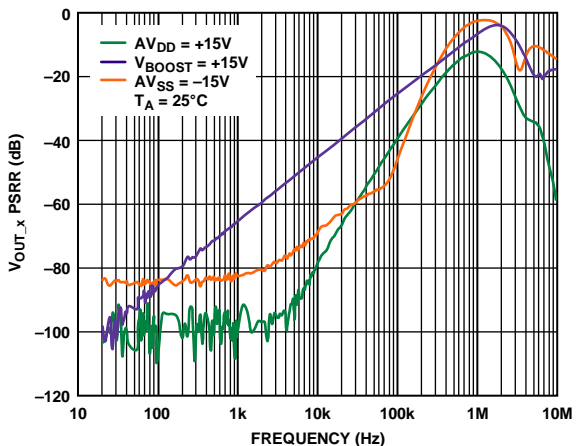


Figure 31. V_{OUT_x} PSRR vs. Frequency

09226-045

CURRENT OUTPUTS

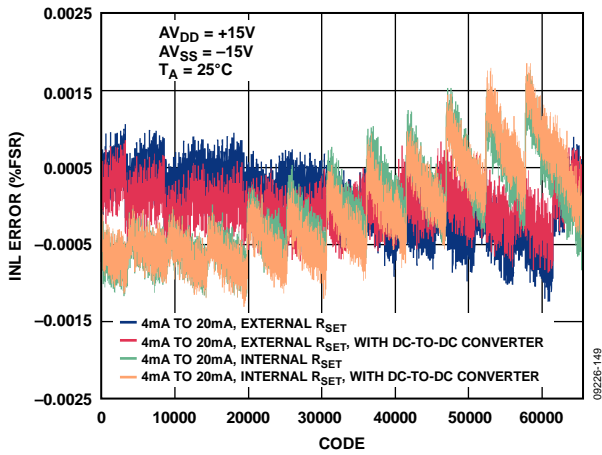


Figure 32. Integral Nonlinearity vs. Code

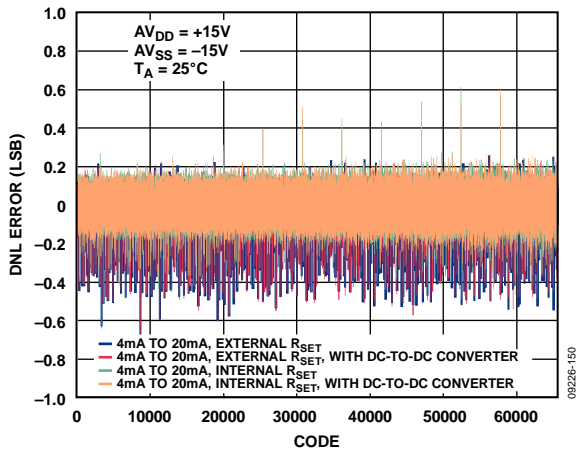


Figure 33. Differential Nonlinearity vs. Code

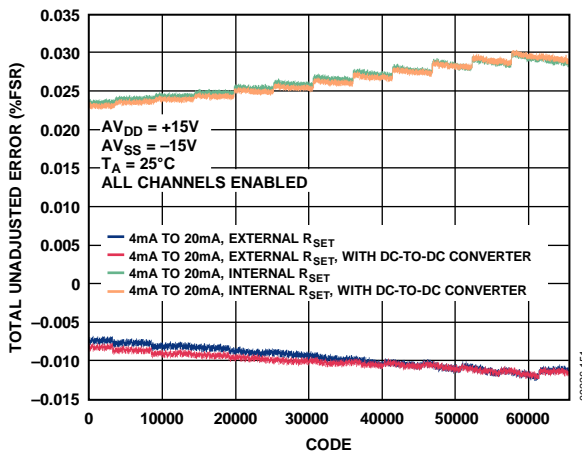


Figure 34. Total Unadjusted Error vs. Code

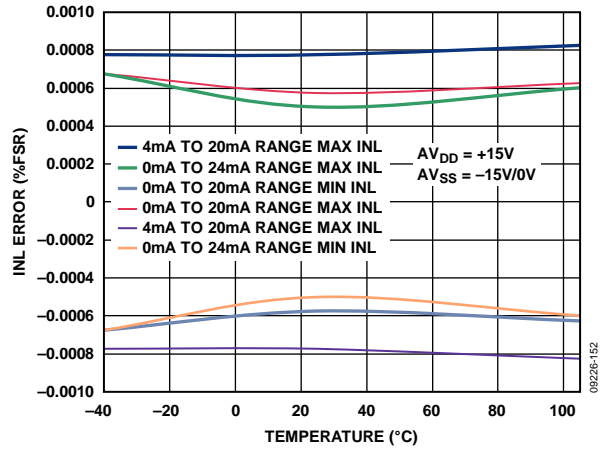


Figure 35. Integral Nonlinearity vs. Temperature, Internal R_{SET}

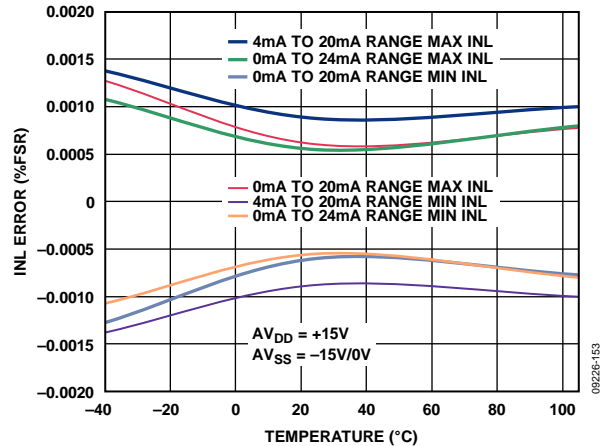


Figure 36. Integral Nonlinearity vs. Temperature, External R_{SET}

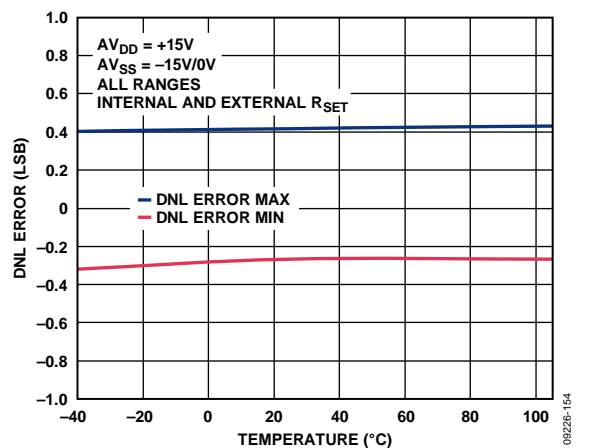


Figure 37. Differential Nonlinearity vs. Temperature

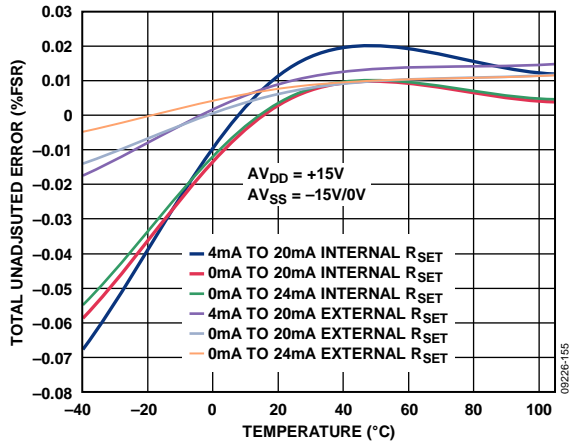


Figure 38. Total Unadjusted Error vs. Temperature

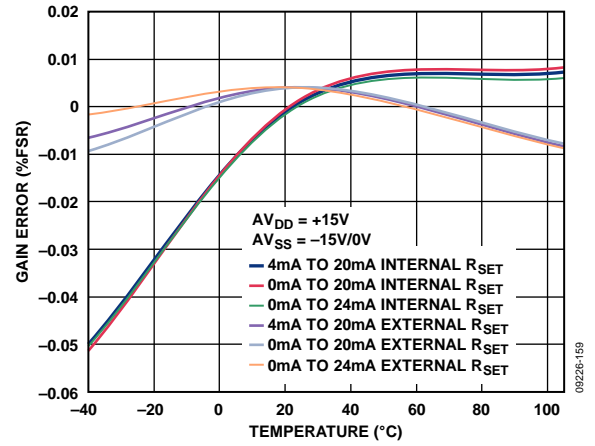


Figure 41. Gain Error vs. Temperature

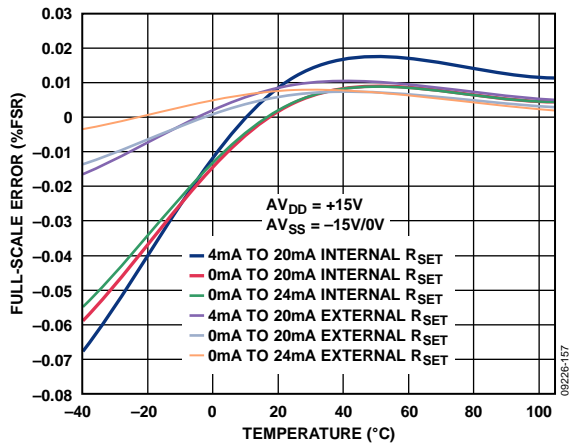


Figure 39. Full Scale Error vs. Temperature

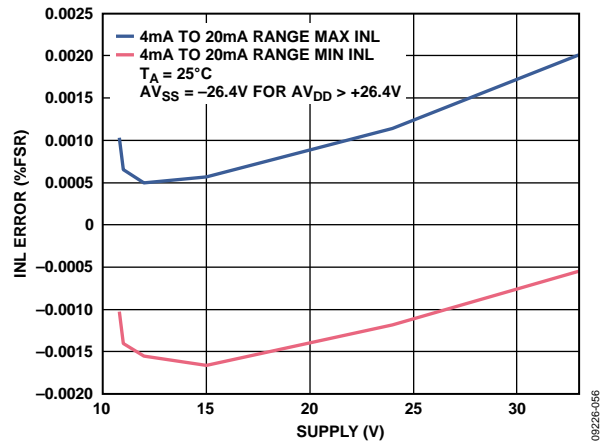


Figure 42. Integral Nonlinearity Error vs. AV_{DD}/AV_{SS} Over Supply, External R_{SET}

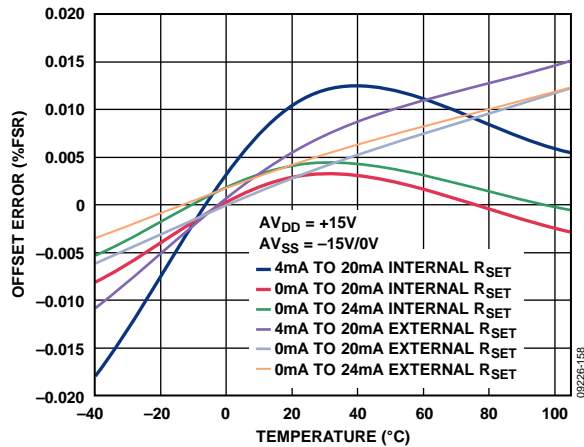


Figure 40. Offset Error vs. Temperature

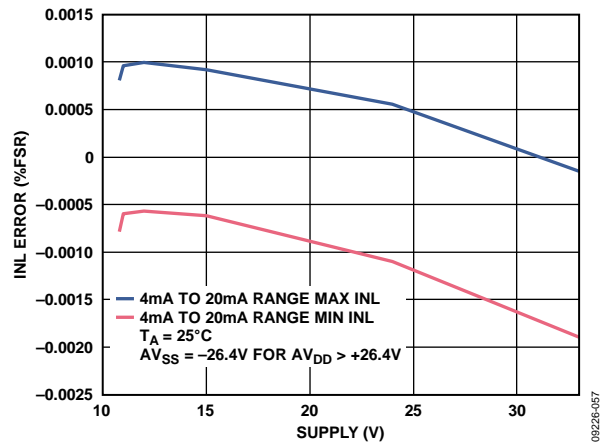


Figure 43. Integral Nonlinearity Error vs. AV_{DD}/AV_{SS} Over Supply, Internal R_{SET}

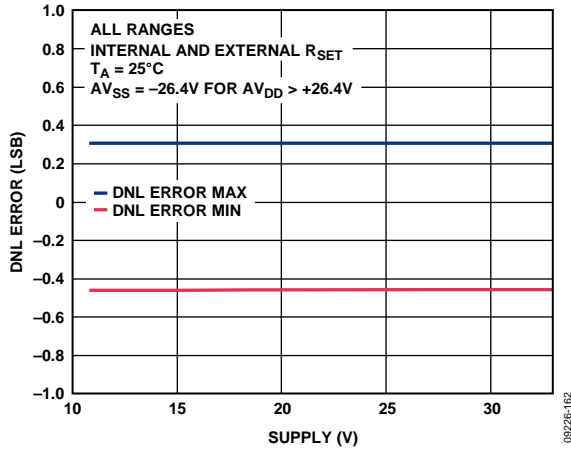


Figure 44. Differential Nonlinearity Error vs. AV_{DD}

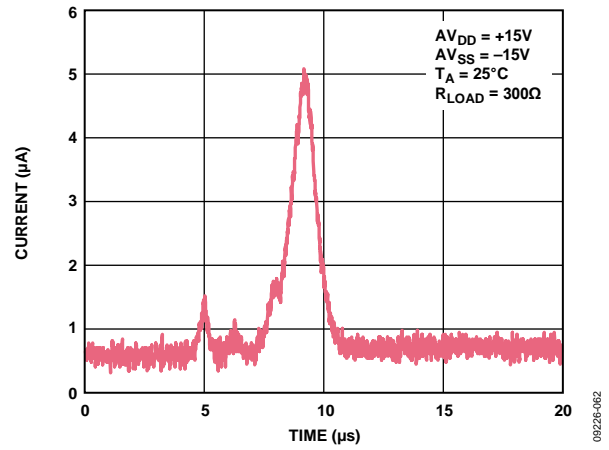


Figure 47. Output Current vs. Time on Power-Up

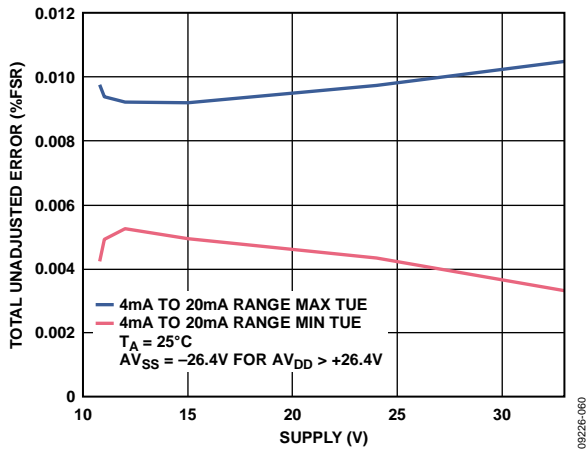


Figure 45. Total Unadjusted Error vs. AV_{DD} , External R_{SET}

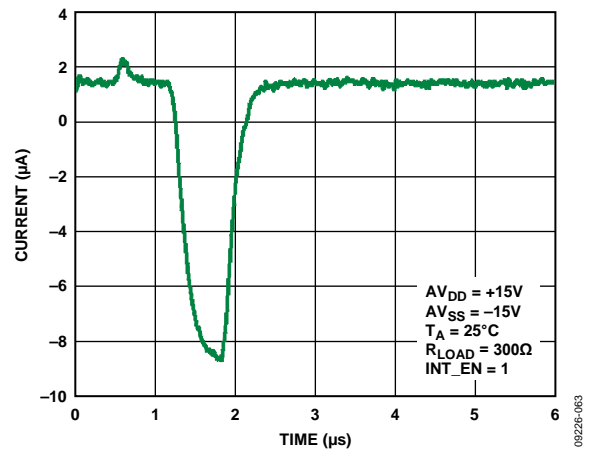


Figure 48. Output Current vs. Time on Output Enable

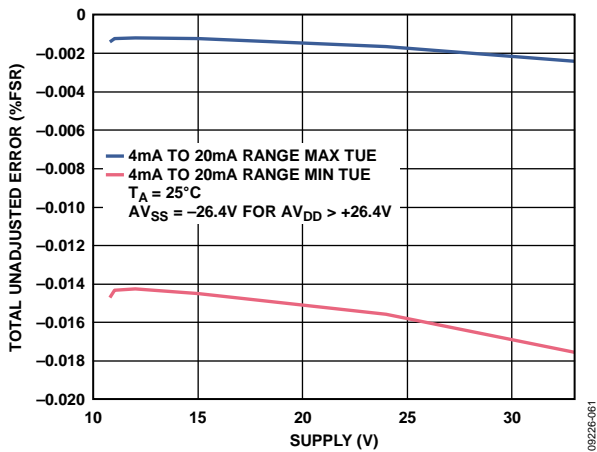


Figure 46. Total Unadjusted Error vs. AV_{DD} , Internal R_{SET}

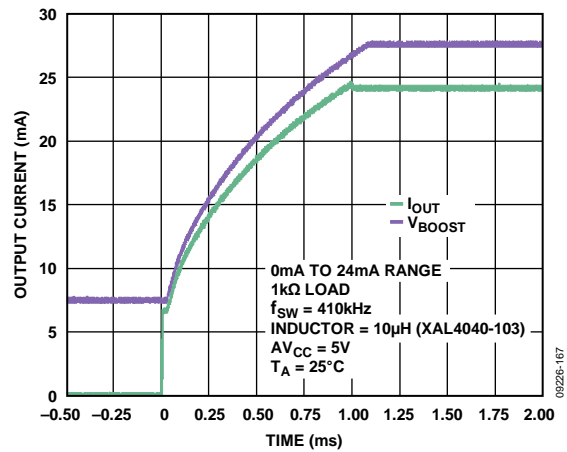


Figure 49. Output Current and V_{BOOST_X} Settling Time with DC-to-DC Converter (See Figure 80)

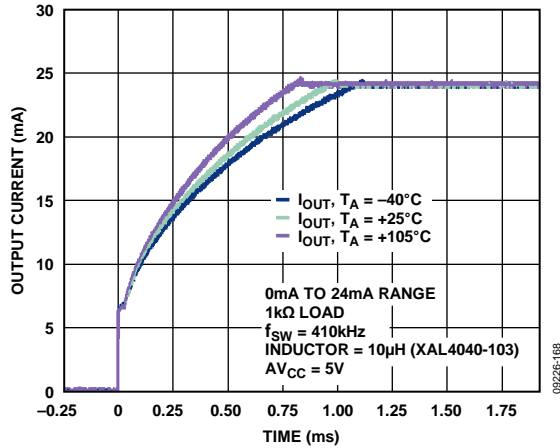


Figure 50. Output Current Settling with DC-to-DC Converter vs. Time and Temperature (See Figure 80)

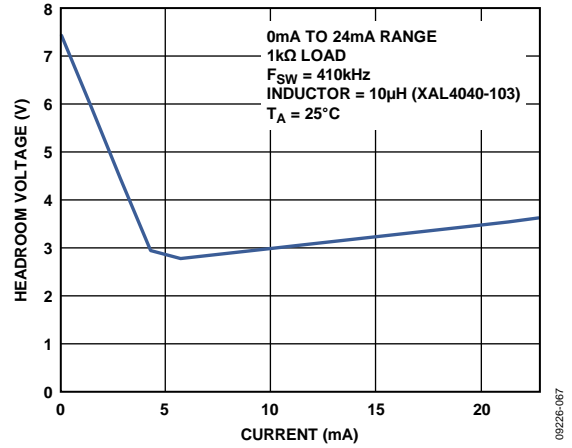


Figure 53. DC-to-DC Converter Headroom vs. Output Current (See Figure 80)

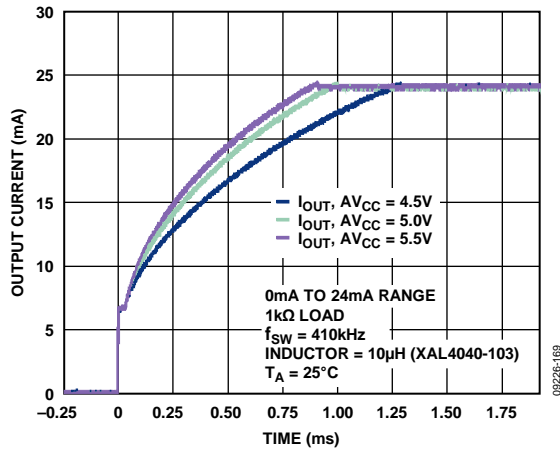


Figure 51. Output Current Settling with DC-to-DC Converter vs. Time and AVCC (See Figure 80)

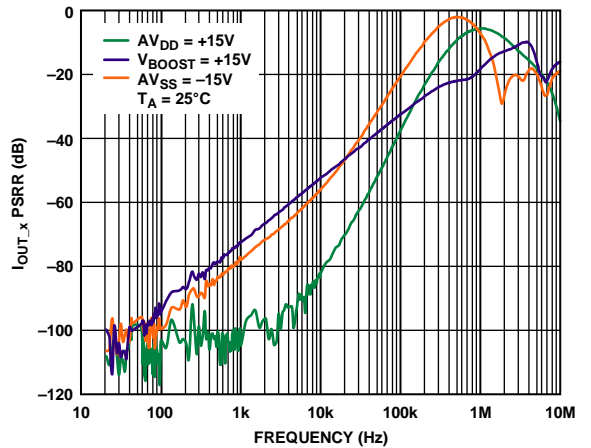


Figure 54. IOUT,x PSRR vs. Frequency

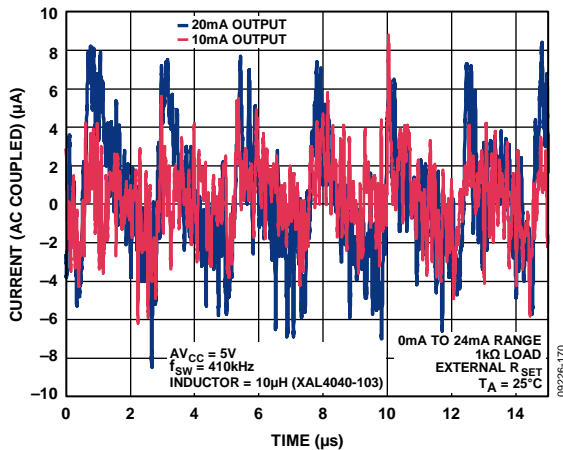


Figure 52. Output Current vs. Time with DC-to-DC Converter (See Figure 80)

DC-TO-DC BLOCK

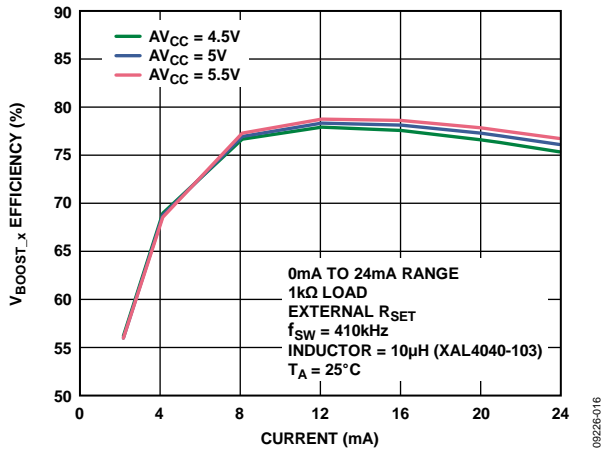


Figure 55. Efficiency at V_{BOOST_X} vs. Output Current (See Figure 80)

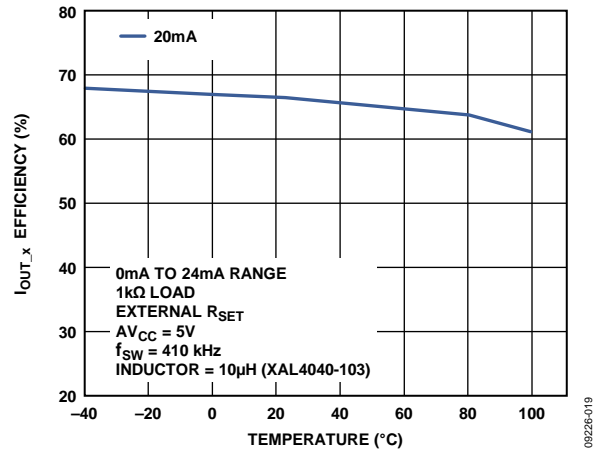


Figure 58. Output Efficiency vs. Temperature (See Figure 80)

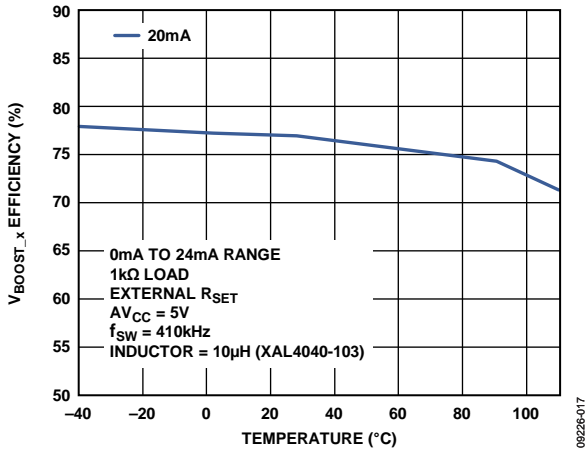


Figure 56. Efficiency at V_{BOOST_X} vs. Temperature (See Figure 80)

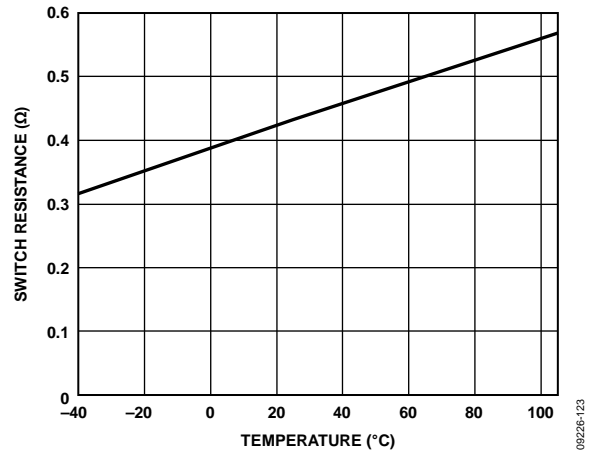


Figure 59. Switch Resistance vs. Temperature

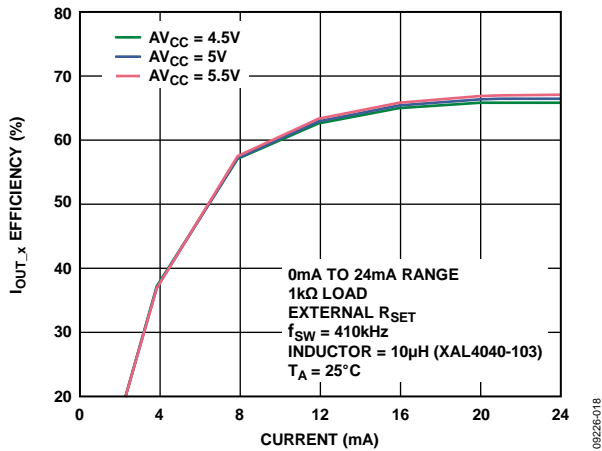


Figure 57. Output Efficiency vs. Output Current (See Figure 80)

09226-016

09226-019

09226-017

09226-123

09226-018

REFERENCE

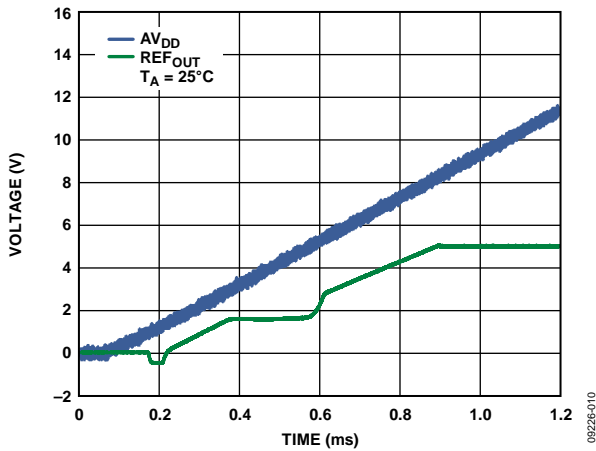


Figure 60. REFOUT Turn-On Transient

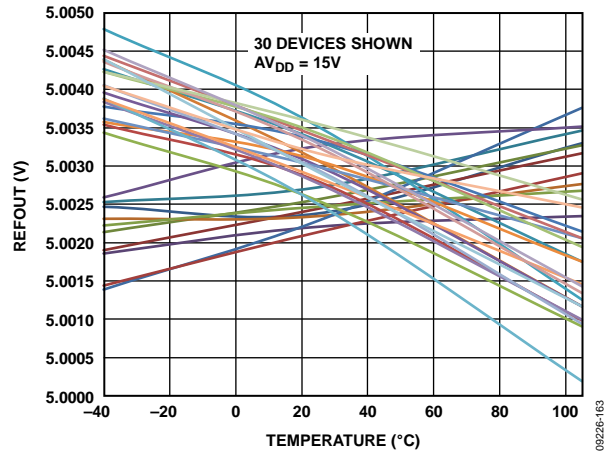


Figure 63. REFOUT vs. Temperature (When the AD5755-1 is soldered onto a PCB, the reference shifts due to thermal shock on the package. The average output voltage shift is -4 mV. Measurement of these parts after seven days shows that the outputs typically shift back 2 mV toward their initial values. This second shift is due to the relaxation of stress incurred during soldering.)

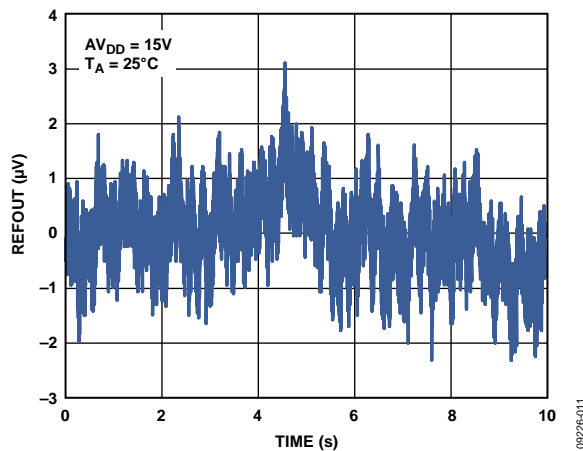


Figure 61. REFOUT Output Noise (0.1 Hz to 10 Hz Bandwidth)

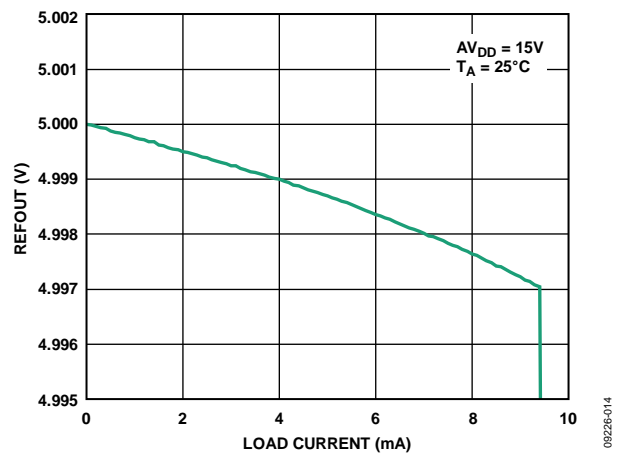


Figure 64. REFOUT vs. Load Current

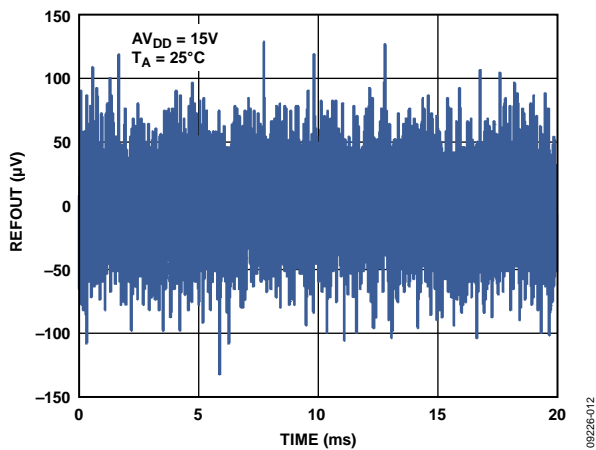


Figure 62. REFOUT Output Noise (100 kHz Bandwidth)

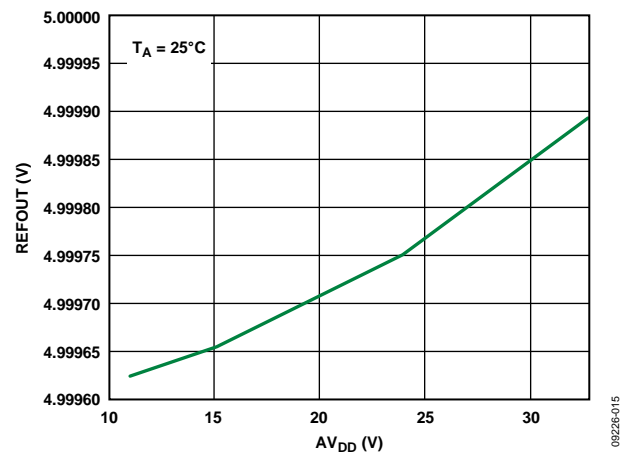


Figure 65. REFOUT vs. Supply

GENERAL

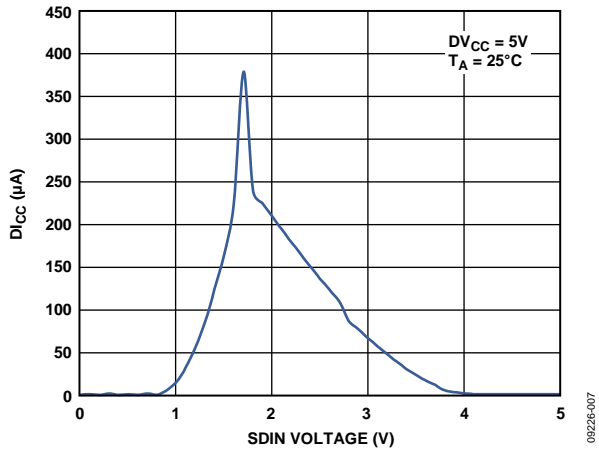


Figure 66. $D_{I_{CC}}$ vs. Logic Input Voltage

09226-007

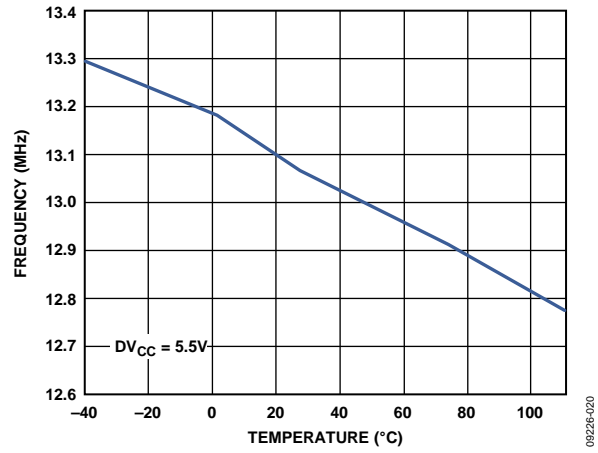


Figure 69. Internal Oscillator Frequency vs. Temperature

09226-020

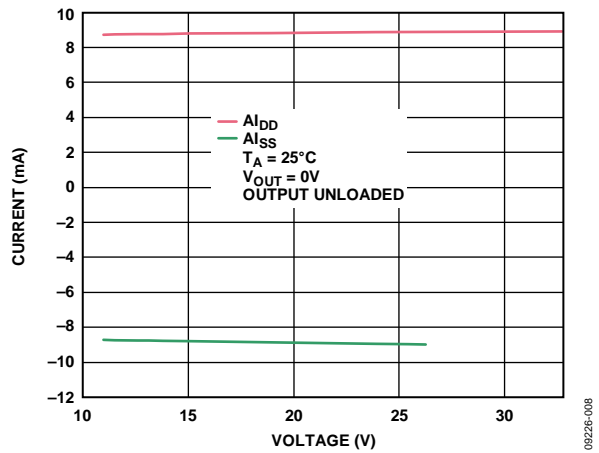


Figure 67. $A_{I_{DD}}/A_{I_{SS}}$ vs. $A_{V_{DD}}/A_{V_{SS}}$

09226-008

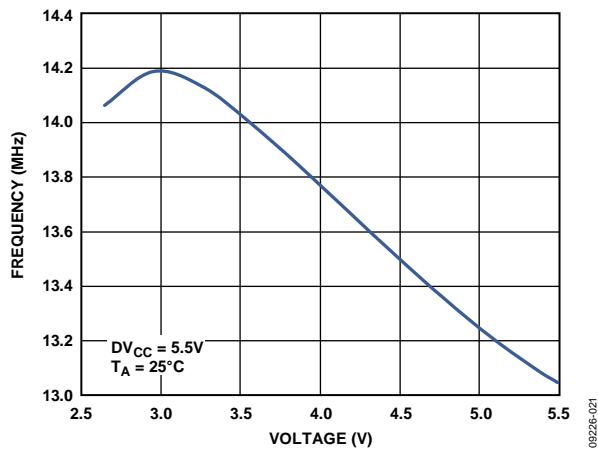


Figure 70. Internal Oscillator Frequency vs. $D_{V_{CC}}$ Supply Voltage

09226-021

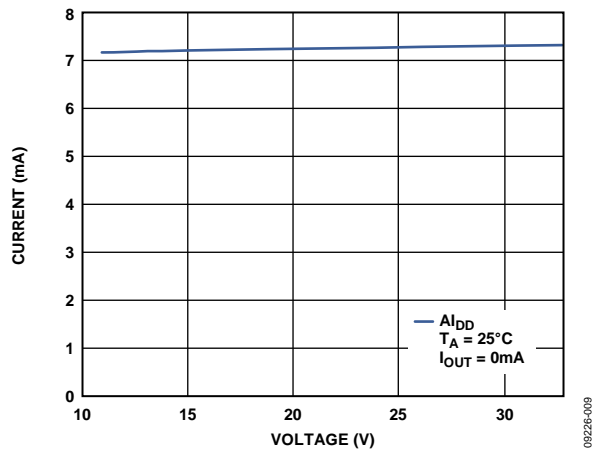


Figure 68. $A_{I_{DD}}$ vs. $A_{V_{DD}}$

09226-009

TERMINOLOGY

Relative Accuracy or Integral Nonlinearity (INL)

For the DAC, relative accuracy, or integral nonlinearity, is a measure of the maximum deviation, in LSBs, from the best fit line through the DAC transfer function. A typical INL vs. code plot is shown in Figure 8.

Differential Nonlinearity (DNL)

Differential nonlinearity (DNL) is the difference between the measured change and the ideal 1 LSB change between any two adjacent codes. A specified differential nonlinearity of ± 1 LSB maximum ensures monotonicity. This DAC is guaranteed monotonic by design. A typical DNL vs. code plot is shown in Figure 9.

Monotonicity

A DAC is monotonic if the output either increases or remains constant for increasing digital input code. The AD5755-1 is monotonic over its full operating temperature range.

Negative Full-Scale Error/Zero-Scale Error

Negative full-scale error is the error in the DAC output voltage when 0x0000 (straight binary coding) is loaded to the DAC register.

Zero-Scale TC

This is a measure of the change in zero-scale error with a change in temperature. Zero-scale error TC is expressed in ppm FSR/ $^{\circ}$ C.

Bipolar Zero Error

Bipolar zero error is the deviation of the analog output from the ideal half-scale output of 0 V when the DAC register is loaded with 0x8000 (straight binary coding).

Bipolar Zero TC

Bipolar zero TC is a measure of the change in the bipolar zero error with a change in temperature. It is expressed in ppm FSR/ $^{\circ}$ C.

Offset Error

In voltage output mode, offset error is the deviation of the analog output from the ideal quarter-scale output when in bipolar output ranges and the DAC register is loaded with 0x4000 (straight binary coding).

In current output mode, offset error is the deviation of the analog output from the ideal zero-scale output when all DAC registers are loaded with 0x0000.

Gain Error

This is a measure of the span error of the DAC. It is the deviation in slope of the DAC transfer characteristic from the ideal, expressed in % FSR.

Gain TC

This is a measure of the change in gain error with changes in temperature. Gain TC is expressed in ppm FSR/ $^{\circ}$ C.

Full-Scale Error

Full-scale error is a measure of the output error when full-scale code is loaded to the DAC register. Ideally, the output should be full-scale $- 1$ LSB. Full-scale error is expressed in percent of full-scale range (% FSR).

Full-Scale TC

Full-scale TC is a measure of the change in full-scale error with changes in temperature and is expressed in ppm FSR/ $^{\circ}$ C.

Total Unadjusted Error

Total unadjusted error (TUE) is a measure of the output error taking all the various errors into account, including INL error, offset error, gain error, temperature, and time. TUE is expressed in % FSR.

DC Crosstalk

This is the dc change in the output level of one DAC in response to a change in the output of another DAC. It is measured with a full-scale output change on one DAC while monitoring another DAC, which is at midscale.

Current Loop Compliance Voltage

The maximum voltage at the I_{OUT_X} pin for which the output current is equal to the programmed value.

Voltage Reference Thermal Hysteresis

Voltage reference thermal hysteresis is the difference in output voltage measured at $+25^{\circ}$ C compared to the output voltage measured at $+25^{\circ}$ C after cycling the temperature from $+25^{\circ}$ C to -40° C to $+105^{\circ}$ C and back to $+25^{\circ}$ C. The hysteresis is specified for the first and second temperature cycles and is expressed in ppm.

Output Voltage Settling Time

Output voltage settling time is the amount of time it takes for the output to settle to a specified level for a full-scale input change. A plot of settling time is shown in Figure 24, Figure 50, and Figure 51.

Slew Rate

The slew rate of a device is a limitation in the rate of change of the output voltage. The output slewing speed of a voltage-output digital-to-analog converter is usually limited by the slew rate of the amplifier used at its output. Slew rate is measured from 10% to 90% of the output signal and is given in V/ μ s.

Power-On Glitch Energy

Power-on glitch energy is the impulse injected into the analog output when the AD5755-1 is powered-on. It is specified as the area of the glitch in nV-sec. See Figure 29 and Figure 47.

Digital-to-Analog Glitch Impulse

Digital-to-analog glitch impulse is the impulse injected into the analog output when the input code in the DAC register changes state, but the output voltage remains constant. It is normally specified as the area of the glitch in nV-sec and is measured when the digital input code is changed by 1 LSB at the major carry transition ($\sim 0x7FFF$ to $0x8000$). See Figure 26.

Glitch Impulse Peak Amplitude

Glitch impulse peak amplitude is the peak amplitude of the impulse injected into the analog output when the input code in the DAC register changes state. It is specified as the amplitude of the glitch in mV and is measured when the digital input code is changed by 1 LSB at the major carry transition (~0x7FFF to 0x8000). See Figure 26.

Digital Feedthrough

Digital feedthrough is a measure of the impulse injected into the analog output of the DAC from the digital inputs of the DAC but is measured when the DAC output is not updated. It is specified in nV-sec and measured with a full-scale code change on the data bus.

DAC-to-DAC Crosstalk

DAC-to-DAC crosstalk is the glitch impulse transferred to the output of one DAC due to a digital code change and a subsequent output change of another DAC. This includes both digital and analog crosstalk. It is measured by loading one of the DACs with a full-scale code change (all 0s to all 1s and vice versa) with LDAC low and monitoring the output of another DAC. The energy of the glitch is expressed in nV-sec.

Power Supply Rejection Ratio (PSRR)

PSRR indicates how the output of the DAC is affected by changes in the power supply voltage.

Reference TC

Reference TC is a measure of the change in the reference output voltage with a change in temperature. It is expressed in ppm/°C.

Line Regulation

Line regulation is the change in reference output voltage due to a specified change in supply voltage. It is expressed in ppm/V.

Load Regulation

Load regulation is the change in reference output voltage due to a specified change in load current. It is expressed in ppm/mA.

DC-to-DC Converter Headroom

This is the difference between the voltage required at the current output and the voltage supplied by the dc-to-dc converter. See Figure 53.

Output Efficiency

$$\frac{I_{OUT}^2 \times R_{LOAD}}{AV_{CC} \times AI_{CC}}$$

This is defined as the power delivered to a channel's load vs. the power delivered to the channel's dc-to-dc input.

Efficiency at V_{BOOST_x}

$$\frac{I_{OUT} \times V_{BOOST_x}}{AV_{CC} \times AI_{CC}}$$

This is defined as the power delivered to a channel's V_{BOOST_x} supply vs. the power delivered to the channel's dc-to-dc input. The V_{BOOST_x} quiescent current is considered part of the dc-to-dc converter's losses.

THEORY OF OPERATION

The AD5755-1 is a quad, precision digital-to-current loop and voltage output converter designed to meet the requirements of industrial process control applications. It provides a high precision, fully integrated, low cost, single-chip solution for generating current loop and unipolar/bipolar voltage outputs. The current ranges available are 0 mA to 20 mA, 0 mA to 24 mA, and 4 mA to 20 mA. The voltage ranges available are 0 V to 5 V, ± 5 V, 0 V to 10 V, and ± 10 V. The current and voltage outputs are available on separate pins, and only one is active at any one time. The desired output configuration is user selectable via the DAC control register.

On-chip dynamic power control minimizes package power dissipation in current mode.

DAC ARCHITECTURE

The DAC core architecture of the AD5755-1 consists of two matched DAC sections. A simplified circuit diagram is shown in Figure 71. The four MSBs of the 16-bit data-word are decoded to drive 15 switches, E1 to E15. Each of these switches connects one of 15 matched resistors to either ground or the reference buffer output. The remaining 12 bits of the data-word drive Switch S0 to Switch S11 of a 12-bit voltage mode R-2R ladder network.

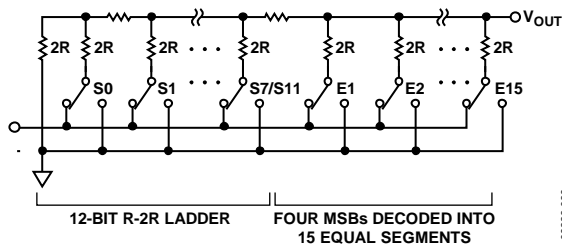


Figure 71. DAC Ladder Structure

The voltage output from the DAC core is either converted to a current (see Figure 73), which is then mirrored to the supply rail so that the application simply sees a current source output, or it is buffered and scaled to output a software selectable unipolar or bipolar voltage range (see Figure 72). Both the voltage and current outputs are supplied by V_{BOOST_x} . The current and voltage are output on separate pins and cannot be output simultaneously. A channel's current and voltage output pins can be tied together.

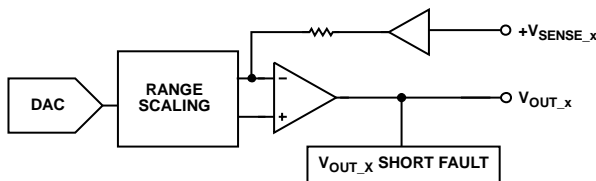


Figure 72. Voltage Output

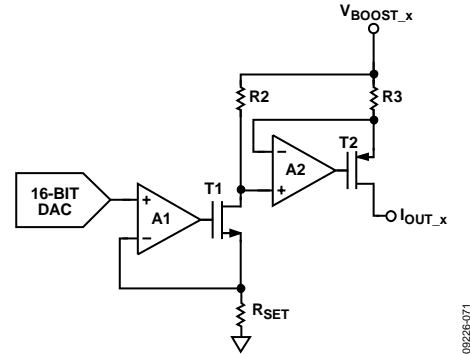


Figure 73. Voltage-to-Current Conversion Circuitry

Voltage Output Amplifier

The voltage output amplifier is capable of generating both unipolar and bipolar output voltages. It is capable of driving a load of 1 k Ω in parallel with 1 μ F (with an external compensation capacitor) to AGND. The source and sink capabilities of the output amplifier are shown in Figure 23. The slew rate is 1.9 V/ μ s with a full-scale settling time of 16 μ s (10 V step). If remote sensing of the load is not required, connect $+V_{SENSE_x}$ directly to V_{OUT_x} . $+V_{SENSE_x}$ must stay within ± 3.0 V of V_{OUT_x} for correct operation.

Driving Large Capacitive Loads

The voltage output amplifier is capable of driving capacitive loads of up to 2 μ F with the addition of a 220 pF nonpolarized compensation capacitor on each channel. Care should be taken to choose an appropriate value of compensation capacitor. This capacitor, while allowing the AD5755-1 to drive higher capacitive loads and reduce overshoot, increases the settling time of the part and, therefore, affects the bandwidth of the system. Without the compensation capacitor, up to 10 nF capacitive loads can be driven. See Table 5 for information on connecting compensation capacitors.

Reference Buffers

The AD5755-1 can operate with either an external or internal reference. The reference input requires a 5 V reference for specified performance. This input voltage is then buffered before it is applied to the DAC.

POWER-ON STATE OF THE AD5755-1

On initial power-up of the AD5755-1, the power-on reset circuit powers up in a state that is dependent on the power-on condition (POC) pin.

If POC = 0, the voltage output and current output channels power up in tristate mode.

If POC = 1, the voltage output channel powers up with a 30 k Ω pull-down resistor to ground, and the current output channel powers up to tristate.

Even though the output ranges are not enabled, the default output range is 0 V to 5 V, and the clear code register is loaded

with all zeros. This means that if the user clears the part after power-up, the output is actively driven to 0 V (if the channel has been enabled for clear).

After a device power on, or a device reset, it is recommended to wait 100 μs or more before writing to the device to allow time for internal calibrations to take place.

SERIAL INTERFACE

The AD5755-1 is controlled over a versatile 3-wire serial interface that operates at clock rates of up to 30 MHz and is compatible with SPI, QSPI, MICROWIRE, and DSP standards. Data coding is always straight binary.

Input Shift Register

The input shift register is 24 bits wide. Data is loaded into the device MSB first as a 24-bit word under the control of a serial clock input, SCLK. Data is clocked in on the falling edge of SCLK.

If packet error checking, or PEC (see the Device Features section), is enabled, an additional eight bits must be written to the AD5755-1, creating a 32-bit serial interface.

There are two ways in which the DAC outputs can be updated: individual updating or simultaneous updating of all DACs.

Individual DAC Updating

In this mode, LDAC is held low while data is being clocked into the DAC data register. The addressed DAC output is updated on the rising edge of SYNC. See Table 3 and Figure 3 for timing information.

Simultaneous Updating of All DACs

In this mode, LDAC is held high while data is being clocked into the DAC data register. Only the first write to each channel's DAC data register is valid after LDAC is brought high. Any subsequent writes while LDAC is still held high are ignored, though they are loaded into the DAC data register. All the DAC outputs are updated by taking LDAC low after SYNC is taken high.

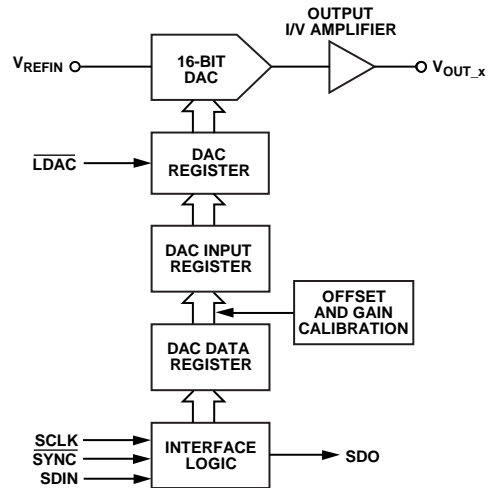


Figure 74. Simplified Serial Interface of Input Loading Circuitry for One DAC Channel

TRANSFER FUNCTION

Table 6 shows the input code to ideal output voltage relationship for the AD5755-1 for straight binary data coding of the ±10 V output range.

Table 6. Ideal Output Voltage to Input Code Relationship

| Digital Input | | | | Analog Output V _{OUT} |
|-----------------------------|------|------|------|---------------------------------------|
| Straight Binary Data Coding | | | | |
| MSB | LSB | | | |
| 1111 | 1111 | 1111 | 1111 | +2 V _{REF} × (32,767/32,768) |
| 1111 | 1111 | 1111 | 1110 | +2 V _{REF} × (32,766/32,768) |
| 1000 | 0000 | 0000 | 0000 | 0 V |
| 0000 | 0000 | 0000 | 0001 | -2 V _{REF} × (32,767/32,768) |
| 0000 | 0000 | 0000 | 0000 | -2 V _{REF} |

REGISTERS

Table 7 shows an overview of the registers for the AD5755-1.

Table 7. Data, Control, and Readback Registers for the AD5755-1

| Register | Description |
|---------------------------------|--|
| Data | |
| DAC Data Register (×4) | Used to write a DAC code to each DAC channel. AD5755-1 data bits = D15 to D0. There are four DAC data registers, one per DAC channel. |
| Gain Register (×4) | Used to program gain trim, on a per channel basis. AD5755-1 data bits = D15 to D0. There are four gain registers, one per DAC channel. |
| Offset Register (×4) | Used to program offset trim, on a per channel basis. AD5755-1 data bits = D15 to D0. There are four offset registers, one per DAC channel. |
| Clear Code Register (×4) | Used to program clear code on a per channel basis. AD5755-1 data bits = D15 to D0. There are four clear code registers, one per DAC channel. |
| Control | |
| Main Control Register | Used to configure the part for main operation. Sets functions such as status readback during write, enables output on all channels simultaneously, powers on all dc-to-dc converter blocks simultaneously, and enables and sets conditions of the watchdog timer. See the Device Features section for more details. |
| Software Register | Has three functions. Used to perform a reset, to toggle the user bit, and, as part of the watchdog timer feature, to verify correct data communication operation. |
| Slew Rate Control Register (×4) | Used to program the slew rate of the output. There are four slew rate control registers, one per channel. |
| DAC Control Register (×4) | These registers are used to control the following: Set the output range, for example, 4 mA to 20 mA, 0 V to 10 V. Set whether an internal/external sense resistor is used. Enable/disable a channel for CLEAR. Enable/disable overrange. Enable/disable internal circuitry on a per channel basis. Enable/disable output on a per channel basis. Power on dc-to-dc converters on a per channel basis. There are four DAC control registers, one per DAC channel. |
| DC-to-DC Control Register | Use to set the dc-to-dc control parameters. Can control dc-to-dc maximum voltage, phase, and frequency. |
| Readback | |
| Status Register | This contains any fault information, as well as a user toggle bit. |

PROGRAMMING SEQUENCE TO WRITE/ENABLE THE OUTPUT CORRECTLY

To correctly write to and set up the part from a power-on condition, use the following sequence:

1. Perform a hardware or software reset after initial power-on.
2. The dc-to-dc converter supply block must be configured. Set the dc-to-dc switching frequency, maximum output voltage allowed, and the phase that the four dc-to-dc channels clock at.
3. Configure the DAC control register on a per channel basis. The output range is selected, and the dc-to-dc converter block is enabled (DC_DC bit). Other control bits can be configured at this point. Set the INT_ENABLE bit; however, the output enable bit (OUTEN) should not be set.
4. Write the required code to the DAC data register. This implements a full DAC calibration internally. Allow at least 200 μ s before Step 5 for reduced output glitch.
5. Write to the DAC control register again to enable the output (set the OUTEN bit).

A flowchart of this sequence is shown in Figure 75.

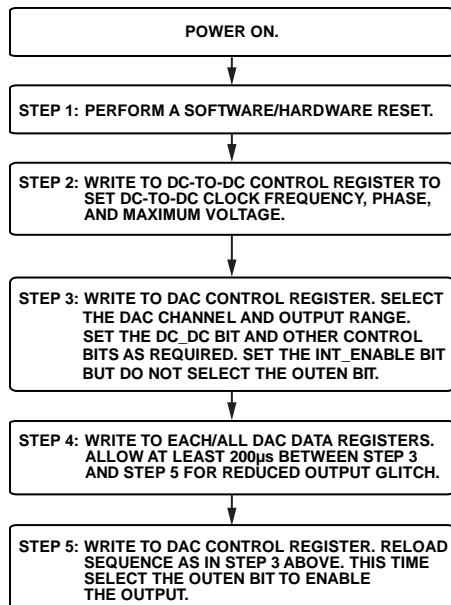


Figure 75. Programming Sequence for Enabling the Output Correctly

CHANGING AND REPROGRAMMING THE RANGE

When changing between ranges, the same sequence as described in the Programming Sequence to Write/Enable the Output Correctly section should be used. It is recommended to set the range to its zero point (can be midscale or zero scale) prior to disabling the output. Because the dc-to-dc switching frequency, maximum voltage, and phase have already been selected, there is no need to reprogram these. A flowchart of this sequence is shown in Figure 76.

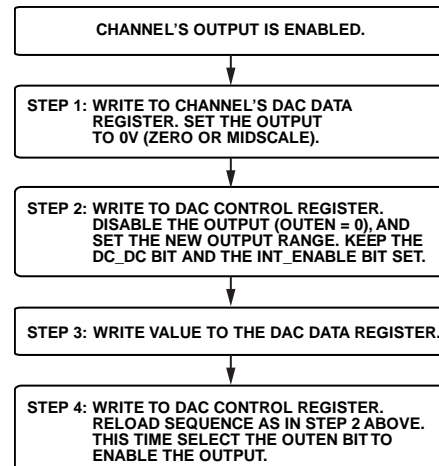


Figure 76. Steps for Changing the Output Range

DATA REGISTERS

The input register is 24 bits wide. When PEC is enabled, the input register is 32 bits wide, with the last eight bits corresponding to the PEC code (see the Packet Error Checking section for more information on PEC). When writing to a data register, the format in Table 8 must be used.

DAC Data Register

When writing to the AD5755-1 DAC data registers, D15 to D0 are used for DAC data bits. Table 10 shows the register format and Table 9 describes the function of Bit D23 to Bit D16.

Table 8. Writing to a Data Register

| MSB | | | | | | | LSB | |
|-----|---------|---------|-------|-------|-------|---------|---------|-----------|
| D23 | D22 | D21 | D20 | D19 | D18 | D17 | D16 | D15 to D0 |
| R/W | DUT_AD1 | DUT_AD0 | DREG2 | DREG1 | DREG0 | DAC_AD1 | DAC_AD0 | Data |

Table 9. Input Register Decode

| Bit | Description | | | |
|---------------------|---|---------|--|---|
| R/W | Indicates a read from or a write to the addressed register. | | | |
| DUT_AD1, DUT_AD0 | Used in association with the external pins, AD1 and AD0, to determine which AD5755-1 device is being addressed by the system controller. It is not recommended to tie both AD1 and AD0 low when using PEC, see the Packet Error Checking section. | | | |
| | DUT_AD1 | DUT_AD0 | Function | |
| | 0 | 0 | Addresses part with Pin AD1 = 0, Pin AD0 = 0 | |
| | 0 | 1 | Addresses part with Pin AD1 = 0, Pin AD0 = 1 | |
| | 1 | 0 | Addresses part with Pin AD1 = 1, Pin AD0 = 0 | |
| | 1 | 1 | Addresses part with Pin AD1 = 1, Pin AD0 = 1 | |
| DREG2, DREG1, DREG0 | Selects whether a data register or a control register is written to. If a control register is selected, a further decode of CREG bits (see Table 17) is required to select the particular control register, as follows. | | | |
| | DREG2 | DREG1 | DREG0 | Function |
| | 0 | 0 | 0 | Write to DAC data register (individual channel write) |
| | 0 | 1 | 0 | Write to gain register |
| | 0 | 1 | 1 | Write to gain register (all DACs) |
| | 1 | 0 | 0 | Write to offset register |
| | 1 | 0 | 1 | Write to offset register (all DACs) |
| | 1 | 1 | 0 | Write to clear code register |
| | 1 | 1 | 1 | Write to a control register |
| DAC_AD1, DAC_AD0 | These bits are used to decode the DAC channel. | | | |
| | DAC_AD1 | DAC_AD0 | DAC Channel/Register Address | |
| | 0 | 0 | DAC A | |
| | 0 | 1 | DAC B | |
| | 1 | 0 | DAC C | |
| | 1 | 1 | DAC D | |
| | X | X | These are don't cares if they are not relevant to the operation being performed. | |

Table 10. Programming the DAC Data Registers

| MSB | | | | | | | LSB | |
|-----|---------|---------|-------|-------|-------|---------|---------|-----------|
| D23 | D22 | D21 | D20 | D19 | D18 | D17 | D16 | D15 to D0 |
| R/W | DUT_AD1 | DUT_AD0 | DREG2 | DREG1 | DREG0 | DAC_AD1 | DAC_AD0 | DAC data |

Gain Register

The 16-bit gain register, as shown in Table 11, allows the user to adjust the gain of each channel in steps of 1 LSB. This is done by setting the DREG[2:0] bits to 010. It is possible to write the same gain code to all four DAC channels at the same time by setting the DREG[2:0] bits to 011. The gain register coding is straight binary as shown in Table 12. The default code in the gain register is 0xFFFF. In theory, the gain can be tuned across the full range of the output. In practice, the maximum recommended gain trim is about 50% of programmed range to maintain accuracy. See the Digital Offset and Gain Control section for more information.

Offset Register

The 16-bit offset register, as shown in Table 13, allows the user to adjust the offset of each channel by $-32,768$ LSBs to $+32,767$ LSBs

in steps of 1 LSB. This is done by setting the DREG[2:0] bits to 100. It is possible to write the same offset code to all four DAC channels at the same time by setting the DREG[2:0] bits to 101. The offset register coding is straight binary as shown in Table 14. The default code in the offset register is 0x8000, which results in zero offset programmed to the output. See the Digital Offset and Gain Control section for more information.

Clear Code Register

The 16-bit clear code register allows the user to set the clear value of each channel as shown in Table 15. It is possible, via software, to enable or disable on a per channel basis which channels are cleared when the CLEAR pin is activated. The default clear code is 0x0000. See the Asynchronous Clear section for more information.

Table 11. Programming the Gain Register

| R/W | DUT_AD1 | DUT_AD0 | DREG2 | DREG1 | DREG0 | DAC_AD1 | DAC_AD0 | D15 to D0 |
|-----|----------------|---------|-------|-------|-------|---------------------|---------|-----------------|
| 0 | Device address | | 0 | 1 | 0 | DAC channel address | | Gain adjustment |

Table 12. Gain Register

| Gain Adjustment | G15 | G14 | G13 | G12 to G4 | G3 | G2 | G1 | G0 |
|-----------------|-----|-----|-----|-----------|-----|-----|-----|-----|
| +65,535 LSBs | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| +65,534 LSBs | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 |
| ... | ... | ... | ... | ... | ... | ... | ... | ... |
| 1 LSB | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 1 |
| 0 LSBs | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Table 13. Programming the Offset Register

| R/W | DUT_AD1 | DUT_AD0 | DREG2 | DREG1 | DREG0 | DAC_AD1 | DAC_AD0 | D15 to D0 |
|-----|----------------|---------|-------|-------|-------|---------------------|---------|-------------------|
| 0 | Device address | | 1 | 0 | 0 | DAC channel address | | Offset adjustment |

Table 14. Offset Register Options

| Offset Adjustment | OF15 | OF14 | OF13 | OF12 to OF4 | OF3 | OF2 | OF1 | OF0 |
|-------------------------|------|------|------|-------------|-----|-----|-----|-----|
| +32,767 LSBs | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| +32,766 LSBs | 1 | 1 | 1 | 1 | 1 | 1 | 0 | 0 |
| ... | ... | ... | ... | ... | ... | ... | ... | ... |
| No Adjustment (Default) | 1 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| ... | ... | ... | ... | ... | ... | ... | ... | ... |
| -32,767 LSBs | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |
| -32,768 LSBs | 0 | 0 | 0 | 0 | 0 | 0 | 0 | 0 |

Table 15. Programming the Clear Code Register

| R/W | DUT_AD1 | DUT_AD0 | DREG2 | DREG1 | DREG0 | DAC_AD1 | DAC_AD0 | D15 to D0 |
|-----|----------------|---------|-------|-------|-------|---------------------|---------|------------|
| 0 | Device address | | 1 | 1 | 0 | DAC channel address | | Clear code |

CONTROL REGISTERS

When writing to a control register, the format shown in Table 16 must be used. See Table 9 for information on the configuration of Bit D23 to Bit D16. The control registers are addressed by setting the DREG[2:0] bits to 111 and then setting the CREG[2:0] bits to the appropriate decode address for that register, according to Table 17. These CREG bits select among the various control registers.

Main Control Register

The main control register options are shown in Table 18 and Table 19. See the Device Features section for more information on the features controlled by the main control register.

Table 16. Writing to a Control Register

| MSB | | | | | | | | | | LSB | |
|-----|---------|---------|-----|-----|-----|---------|---------|-------|-------|-------|-----------|
| D23 | D22 | D21 | D20 | D19 | D18 | D17 | D16 | D15 | D14 | D13 | D12 to D0 |
| R/W | DUT_AD1 | DUT_AD0 | 1 | 1 | 1 | DAC_AD1 | DAC_AD0 | CREG2 | CREG1 | CREG0 | Data |

Table 17. Register Access Decode

| CREG2 (D15) | CREG1 (D14) | CREG0 (D13) | Function |
|-------------|-------------|-------------|--|
| 0 | 0 | 0 | Slew rate control register (one per channel) |
| 0 | 0 | 1 | Main control register |
| 0 | 1 | 0 | DAC control register (one per channel) |
| 0 | 1 | 1 | DC-to-dc control register |
| 1 | 0 | 0 | Software register |

Table 18. Programming the Main Control Register

| MSB | | | | | | | | | | | | LSB |
|-----|-----|-----|-----|----------|-----|-----|-----|----------------|-----------|-----------|----------|----------------|
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 to D0 |
| 0 | 0 | 1 | POC | STATREAD | EWD | WD1 | WD0 | X ¹ | ShtCctLim | OUTEN_ALL | DCDC_ALL | X ¹ |

¹X = don't care.

Table 19. Main Control Register Functions

| Bit | Description | | | | | | | | | | | | | | | |
|-----------|---|---------------------|-----|---------------------|---|---|---|---|---|----|---|---|-----|---|---|-----|
| POC | The POC bit determines the state of the voltage output channels during normal operation. Its default value is 0. POC = 0. The output goes to the value set by the POC hardware pin when the voltage output is not enabled (default). POC = 1. The output goes to the opposite value of the POC hardware pin if the voltage output is not enabled. | | | | | | | | | | | | | | | |
| STATREAD | Enable status readback during a write. See the Device Features section. STATREAD = 1, enable. STATREAD = 0, disable (default). | | | | | | | | | | | | | | | |
| EWD | Enable watchdog timer. See the Device Features section for more information. EWD = 1, enable watchdog. EWD = 0, disable watchdog (default). | | | | | | | | | | | | | | | |
| WD1, WD0 | Timeout select bits. Used to select the timeout period for the watchdog timer. | | | | | | | | | | | | | | | |
| | <table border="1"> <thead> <tr> <th>WD1</th> <th>WD0</th> <th>Timeout Period (ms)</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>5</td> </tr> <tr> <td>0</td> <td>1</td> <td>10</td> </tr> <tr> <td>1</td> <td>0</td> <td>100</td> </tr> <tr> <td>1</td> <td>1</td> <td>200</td> </tr> </tbody> </table> | WD1 | WD0 | Timeout Period (ms) | 0 | 0 | 5 | 0 | 1 | 10 | 1 | 0 | 100 | 1 | 1 | 200 |
| WD1 | WD0 | Timeout Period (ms) | | | | | | | | | | | | | | |
| 0 | 0 | 5 | | | | | | | | | | | | | | |
| 0 | 1 | 10 | | | | | | | | | | | | | | |
| 1 | 0 | 100 | | | | | | | | | | | | | | |
| 1 | 1 | 200 | | | | | | | | | | | | | | |
| ShtCctLim | Programmable short-circuit limit on the V _{OUT_x} pin in the event of a short-circuit condition. 0 = 16 mA (default). 1 = 8 mA. | | | | | | | | | | | | | | | |
| OUTEN_ALL | Enables the output on all four DACs simultaneously. Do not use the OUTEN_ALL bit when using the OUTEN bit in the DAC control register. | | | | | | | | | | | | | | | |
| DCDC_ALL | When set, powers up the dc-to-dc converter on all four channels simultaneously. To power down the dc-to-dc converters, all channel outputs must first be disabled. Do not use the DCDC_ALL bit when using the DC_DC bit in the DAC control register. | | | | | | | | | | | | | | | |

DAC Control Register

The DAC control register is used to configure each DAC channel. The DAC control register options are shown in Table 20 and Table 21.

Table 20. Programming DAC Control Register

| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
|-----|-----|-----|----------------|----------------|----------------|----------------|------------|--------|-------|------|-------|-------|----|----|----|
| 0 | 1 | 0 | X ¹ | X ¹ | X ¹ | X ¹ | INT_ENABLE | CLR_EN | OUTEN | RSET | DC_DC | OVRNG | R2 | R1 | R0 |

¹X = don't care.

Table 21. DAC Control Register Functions

| Bit | Description | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------|--|----|-------------------------------------|----|-----------------------|---|---|---|-------------------------------------|---|---|---|----------------------------|---|---|---|---------------------|---|---|---|----------------------|---|---|---|------------------------------|---|---|---|------------------------------|---|---|---|------------------------------|
| INT_ENABLE | Powers up the dc-to-dc converter, DAC, and internal amplifiers for the selected channel. Does not enable the output. Can only be done on a per channel basis. It is recommended to set this bit and allow a >200 μs delay before enabling the output because this results in a reduced output enable glitch. See Figure 30 and Figure 48 for plots of this glitch. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| CLR_EN | Per channel clear enable bit. Selects if this channel clears when the CLEAR pin is activated. CLR_EN = 1, channel clears when the part is cleared. CLR_EN = 0, channel does not clear when the part is cleared (default). | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| OUTEN | Enables/disables the selected output channel. OUTEN = 1, enables the channel. OUTEN = 0, disables the channel (default). | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| RSET | Selects an internal or external current sense resistor for the selected DAC channel. RSET = 0, selects the external resistor (default). RSET = 1, selects the internal resistor. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| DC_DC | Powers the dc-to-dc converter on the selected channel. DC_DC = 1, power up the dc-to-dc converter. DC_DC = 0, power down the dc-to-dc converter (default). This allows per channel dc-to-dc converter power-up/power-down. To power down the dc-to-dc converter, the OUTEN and INT_ENABLE bits must also be set to 0. All dc-to-dc converters can also be powered up simultaneously using the DCDC_ALL bit in the main control register. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| OVRNG | Enables 20% overrange on voltage output channel only. No current output overrange available. OVRNG = 1, enabled. OVRNG = 0, disabled (default). | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| R2, R1, R0 | Selects the output range to be enabled. <table border="1" data-bbox="240 1213 1497 1474"> <thead> <tr> <th>R2</th> <th>R1</th> <th>R0</th> <th>Output Range Selected</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>0</td> <td>0 V to 5 V voltage range (default).</td> </tr> <tr> <td>0</td> <td>0</td> <td>1</td> <td>0 V to 10 V voltage range.</td> </tr> <tr> <td>0</td> <td>1</td> <td>0</td> <td>±5 V voltage range.</td> </tr> <tr> <td>0</td> <td>1</td> <td>1</td> <td>±10 V voltage range.</td> </tr> <tr> <td>1</td> <td>0</td> <td>0</td> <td>4 mA to 20 mA current range.</td> </tr> <tr> <td>1</td> <td>0</td> <td>1</td> <td>0 mA to 20 mA current range.</td> </tr> <tr> <td>1</td> <td>1</td> <td>0</td> <td>0 mA to 24 mA current range.</td> </tr> </tbody> </table> | R2 | R1 | R0 | Output Range Selected | 0 | 0 | 0 | 0 V to 5 V voltage range (default). | 0 | 0 | 1 | 0 V to 10 V voltage range. | 0 | 1 | 0 | ±5 V voltage range. | 0 | 1 | 1 | ±10 V voltage range. | 1 | 0 | 0 | 4 mA to 20 mA current range. | 1 | 0 | 1 | 0 mA to 20 mA current range. | 1 | 1 | 0 | 0 mA to 24 mA current range. |
| R2 | R1 | R0 | Output Range Selected | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 0 | 0 V to 5 V voltage range (default). | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 0 | 1 | 0 V to 10 V voltage range. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 1 | 0 | ±5 V voltage range. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 0 | 1 | 1 | ±10 V voltage range. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 0 | 4 mA to 20 mA current range. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 0 | 1 | 0 mA to 20 mA current range. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 1 | 1 | 0 | 0 mA to 24 mA current range. | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |

Software Register

The software register has three functions. It allows the user to perform a software reset to the part. It can be used to set the user toggle bit, D11, in the status register. It is also used as part of the watchdog feature when it is enabled. This feature is useful to ensure that communication has not been lost between the MCU and the AD5755-1 and that the datapath lines are working properly (that is, SDIN, SCLK, and SYNC).

When the watchdog feature is enabled, the user must write 0x195 to the software register within the timeout period. If this command is not received within the timeout period, the ALERT pin signals a fault condition. This is only required when the watchdog timer function is enabled.

DC-to-DC Control Register

The dc-to-dc control register allows the user control over the dc-to-dc switching frequency and phase, as well as the maximum allowable dc-to-dc output voltage. The dc-to-dc control register options are shown in Table 24 and Table 25.

Table 22. Programming the Software Register

| MSB | | | | LSB |
|-----|-----|-----|--------------|---------------------|
| D15 | D14 | D13 | D12 | D11 to D0 |
| 1 | 0 | 0 | User program | Reset code/SPI code |

Table 23. Software Register Functions

| Bit | Description | |
|---------------------|--|--|
| User Program | This bit is mapped to Bit D11 of the status register. When this bit is set to 1, Bit D11 of the status register is set to 1. Likewise, when D12 is set to 0, Bit D11 of the status register is also set to zero. This feature can be used to ensure that the SPI pins are working correctly by writing a known bit value to this register and reading back the corresponding bit from the status register. | |
| Reset Code/SPI Code | Option | Description |
| | Reset code SPI code | Writing 0x555 to D[11:0] performs a reset of the AD5755-1. If the watchdog timer feature is enabled, 0x195 must be written to the software register (D11 to D0) within the programmed timeout period. |

Table 24. Programming the DC-to-DC Control Register

| MSB | | | | | | LSB | |
|-----|-----|-----|----------------|------------|-------------|------------|------------|
| D15 | D14 | D13 | D12 to D7 | D6 | D5 to D4 | D3 to D2 | D1 to D0 |
| 0 | 1 | 1 | X ¹ | DC-DC Comp | DC-DC phase | DC-DC Freq | DC-DC MaxV |

¹X = don't care.

Table 25. DC-to-DC Control Register Options

| Bit | Description |
|-------------|--|
| DC-DC Comp | Selects between an internal and external compensation resistor for the dc-to-dc converter. See the DC-to-DC Converter Compensation Capacitors and AI _{CC} Supply Requirements—Slewing sections in the Device Features section for more information. 0 = selects the internal 150 kΩ compensation resistor (default). 1 = bypasses the internal compensation resistor for the dc-to-dc converter. In this mode, an external dc-to-dc compensation resistor must be used; this is placed at the COMP _{DCDC_x} pin in series with the 10 nF dc-to-dc compensation capacitor to ground. Typically, a ~50 kΩ resistor is recommended. |
| DC-DC Phase | User programmable dc-to-dc converter phase (between channels). 00 = all dc-to-dc converters clock on the same edge (default). 01 = Channel A and Channel B clock on the same edge, Channel C and Channel D clock on opposite edges. 10 = Channel A and Channel C clock on the same edge, Channel B and Channel D clock on opposite edges. 11 = Channel A, Channel B, Channel C, and Channel D clock 90° out of phase from each other. |
| DC-DC Freq | DC-to-dc switching frequency; these are divided down from the internal 13 MHz oscillator (see Figure 69 and Figure 70). 00 = 250 ± 10% kHz. 01 = 410 ± 10% kHz (default). 10 = 650 ± 10% kHz. |
| DC-DC MaxV | Maximum allowed V _{BOOST_x} voltage supplied by the dc-to-dc converter. 00 = 23 V + 1 V/−1.5 V (default). 01 = 24.5 V ± 1 V. 10 = 27 V ± 1 V. 11 = 29.5 V ± 1 V. |

Slew Rate Control Register

This register is used to program the slew rate control for the selected DAC channel. This feature is available on both the current and voltage outputs. The slew rate control is enabled/disabled and programmed on a per channel basis. See Table 26 and the Digital Slew Rate Control section for more information.

READBACK OPERATION

Readback mode is invoked by setting the R/\overline{W} bit = 1 in the serial input register write. See Table 27 for the bits associated with a readback operation. The DUT_AD1 and DUT_AD0 bits, in association with Bits RD[4:0], select the register to be read. The remaining data bits in the write sequence are don't cares. During the next SPI transfer (see Figure 4), the data appearing on the SDO output contains the data from the previously addressed register. This second SPI transfer should either be a

request to read yet another register on a third data transfer or a no operation command. The no operation command for DUT Address 00 is 0x1CE000, for other DUT addresses, Bits D22 and D21 are set accordingly.

Readback Example

To read back the gain register of Device 1, Channel A on the AD5755-1, implement the following sequence:

1. Write 0xA80000 to the AD5755-1 input register. This configures the AD5755-1 Device Address 1 for read mode with the gain register of Channel A selected. All the data bits, D15 to D0, are don't cares.
2. Follow with another read command or a no operation command (0x3CE000). During this command, the data from the Channel A gain register is clocked out on the SDO line.

Table 26. Programming the Slew Rate Control Register

| D15 | D14 | D13 | D12 | D11 to D7 | D6 to D3 | D2 to D0 |
|-----|-----|-----|------|----------------|----------|----------|
| 0 | 0 | 0 | SREN | X ¹ | SR_CLOCK | SR_STEP |

¹X = don't care.

Table 27. Input Shift Register Contents for a Read Operation

| D23 | D22 | D21 | D20 | D19 | D18 | D17 | D16 | D15 to D0 |
|------------------|---------|---------|-----|-----|-----|-----|-----|----------------|
| R/\overline{W} | DUT_AD1 | DUT_AD0 | RD4 | RD3 | RD2 | RD1 | RD0 | X ¹ |

¹X = don't care.

Table 28. Read Address Decoding

| RD4 | RD3 | RD2 | RD1 | RD0 | Function |
|-----|-----|-----|-----|-----|----------------------------------|
| 0 | 0 | 0 | 0 | 0 | Read DAC A data register |
| 0 | 0 | 0 | 0 | 1 | Read DAC B data register |
| 0 | 0 | 0 | 1 | 0 | Read DAC C data register |
| 0 | 0 | 0 | 1 | 1 | Read DAC D data register |
| 0 | 0 | 1 | 0 | 0 | Read DAC A control register |
| 0 | 0 | 1 | 0 | 1 | Read DAC B control register |
| 0 | 0 | 1 | 1 | 0 | Read DAC C control register |
| 0 | 0 | 1 | 1 | 1 | Read DAC D control register |
| 0 | 1 | 0 | 0 | 0 | Read DAC A gain register |
| 0 | 1 | 0 | 0 | 1 | Read DAC B gain register |
| 0 | 1 | 0 | 1 | 0 | Read DAC C gain register |
| 0 | 1 | 0 | 1 | 1 | Read DAC D gain register |
| 0 | 1 | 1 | 0 | 0 | Read DACA offset register |
| 0 | 1 | 1 | 0 | 1 | Read DAC B offset register |
| 0 | 1 | 1 | 1 | 0 | Read DAC C offset register |
| 0 | 1 | 1 | 1 | 1 | Read DAC D offset register |
| 1 | 0 | 0 | 0 | 0 | Clear DAC A code register |
| 1 | 0 | 0 | 0 | 1 | Clear DAC B code register |
| 1 | 0 | 0 | 1 | 0 | Clear DAC C code register |
| 1 | 0 | 0 | 1 | 1 | Clear DAC D code register |
| 1 | 0 | 1 | 0 | 0 | DAC A slew rate control register |
| 1 | 0 | 1 | 0 | 1 | DAC B slew rate control register |
| 1 | 0 | 1 | 1 | 0 | DAC C slew rate control register |
| 1 | 0 | 1 | 1 | 1 | DAC D slew rate control register |
| 1 | 1 | 0 | 0 | 0 | Read status register |
| 1 | 1 | 0 | 0 | 1 | Read main control register |
| 1 | 1 | 0 | 1 | 0 | Read dc-to-dc control register |

Status Register

The status register is a read only register. This register contains any fault information as well as a ramp active bit and a user toggle bit. When the STATREAD bit in the main control register is set, the status register contents can be read back on

the SDO pin during every write sequence. Alternatively, if the STATREAD bit is not set, the status register can be read using the normal readback operation.

Table 29. Decoding the Status Register

| MSB | | | | | | | | | | | | | LSB | | |
|--------|--------|--------|--------|-------------|-----------|-------------|-----------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| D15 | D14 | D13 | D12 | D11 | D10 | D9 | D8 | D7 | D6 | D5 | D4 | D3 | D2 | D1 | D0 |
| DC-DCD | DC-DCC | DC-DCB | DC-DCA | User toggle | PEC error | Ramp active | Over TEMP | V _{OUT,D} fault | V _{OUT,C} fault | V _{OUT,B} fault | V _{OUT,A} fault | I _{OUT,D} fault | I _{OUT,C} fault | I _{OUT,B} fault | I _{OUT,A} fault |

Table 30. Status Register Options

| Bit | Description |
|--------------------------|--|
| DC-DCD | In current output mode, this bit is set on Channel D if the dc-to-dc converter cannot maintain compliance (it may be reaching its V _{MAX} voltage). In this case, the I _{OUT,D} fault bit is also set. See the DC-to-DC Converter V _{MAX} Functionality section for more information on this bit's operation under this condition. In voltage output mode, this bit is set if, on Channel D, the dc-to-dc converter is unable to regulate to 15 V as expected. When this bit is set, it does not result in the FAULT pin going high. |
| DC-DCC | In current output mode, this bit is set on Channel C if the dc-to-dc converter cannot maintain compliance (it may be reaching its V _{MAX} voltage). In this case, the I _{OUT,C} fault bit is also set. See the DC-to-DC Converter V _{MAX} Functionality section for more information on this bit's operation under this condition. In voltage output mode, this bit is set if, on Channel C, the dc-to-dc converter is unable to regulate to 15 V as expected. When this bit is set, it does not result in the FAULT pin going high. |
| DC-DCB | In current output mode, this bit is set on Channel B if the dc-to-dc converter cannot maintain compliance (it may be reaching its V _{MAX} voltage). In this case, the I _{OUT,B} fault bit is also set. See the DC-to-DC Converter V _{MAX} Functionality section for more information on this bit's operation under this condition. In voltage output mode, this bit is set if, on Channel B, the dc-to-dc converter is unable to regulate to 15 V as expected. When this bit is set, it does not result in the FAULT pin going high. |
| DC-DCA | In current output mode, this bit is set on Channel A if the dc-to-dc converter cannot maintain compliance (it may be reaching its V _{MAX} voltage). In this case, the I _{OUT,A} fault bit is also set. See the DC-to-DC Converter V _{MAX} Functionality section for more information on this bit's operation under this condition. In voltage output mode, this bit is set if, on Channel A, the dc-to-dc converter is unable to regulate to 15 V as expected. When this bit is set, it does not result in the FAULT pin going high. |
| User Toggle | User toggle bit. This bit is set or cleared via the software register. This can be used to verify data communications if needed. |
| PEC Error | Denotes a PEC error on the last data-word received over the SPI interface. |
| Ramp Active | This bit is set while any one of the output channels is slewing (slew rate control is enabled on at least one channel). |
| Over TEMP | This bit is set if the AD5755-1 core temperature exceeds approximately 150°C. |
| V _{OUT,D} Fault | This bit is set if a fault is detected on the V _{OUT,D} pin. |
| V _{OUT,C} Fault | This bit is set if a fault is detected on the V _{OUT,C} pin. |
| V _{OUT,B} Fault | This bit is set if a fault is detected on the V _{OUT,B} pin. |
| V _{OUT,A} Fault | This bit is set if a fault is detected on the V _{OUT,A} pin. |
| I _{OUT,D} Fault | This bit is set if a fault is detected on the I _{OUT,D} pin. |
| I _{OUT,C} Fault | This bit is set if a fault is detected on the I _{OUT,C} pin. |
| I _{OUT,B} Fault | This bit is set if a fault is detected on the I _{OUT,B} pin. |
| I _{OUT,A} Fault | This bit is set if a fault is detected on the I _{OUT,A} pin. |

DEVICE FEATURES

OUTPUT FAULT

The AD5755-1 is equipped with a $\overline{\text{FAULT}}$ pin, an active low open-drain output allowing several AD5755-1 devices to be connected together to one pull-up resistor for global fault detection. The $\overline{\text{FAULT}}$ pin is forced active by any one of the following fault scenarios:

- The voltage at I_{OUT_x} attempts to rise above the compliance range due to an open-loop circuit or insufficient power supply voltage. The internal circuitry that develops the fault output avoids using a comparator with windowed limits because this requires an actual output error before the $\overline{\text{FAULT}}$ output becomes active. Instead, the signal is generated when the internal amplifier in the output stage has less than approximately 1 V of remaining drive capability. Thus, the $\overline{\text{FAULT}}$ output activates slightly before the compliance limit is reached.
- A short is detected on a voltage output pin. The short-circuit current is limited to 16 mA or 8 mA, which is programmable by the user. If using the AD5755-1 in unipolar supply mode, a short-circuit fault may be generated if the output voltage is below 50 mV.
- An interface error is detected due to a PEC failure. See the Packet Error Checking section.
- If the core temperature of the AD5755-1 exceeds approximately 150°C.

The V_{OUT_x} fault, I_{OUT_x} fault, PEC error, and over TEMP bits of the status register are used in conjunction with the $\overline{\text{FAULT}}$ output to inform the user which one of the fault conditions caused the $\overline{\text{FAULT}}$ output to be activated.

VOLTAGE OUTPUT SHORT-CIRCUIT PROTECTION

Under normal operation, the voltage output sinks/sources up to 12 mA and maintains specified operation. The maximum output current or short-circuit current is programmable by the user and can be set to 16 mA or 8 mA. If a short circuit is detected, the $\overline{\text{FAULT}}$ goes low and the relevant V_{OUT_x} fault bit in the status register is set.

DIGITAL OFFSET AND GAIN CONTROL

Each DAC channel has a gain (M) and offset (C) register, which allow trimming out of the gain and offset errors of the entire signal chain. Data from the DAC data register is operated on by a digital multiplier and adder controlled by the contents of the M and C registers. The calibrated DAC data is then stored in the DAC input register.

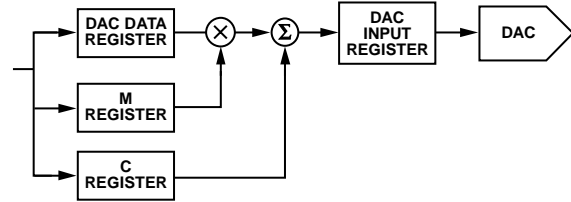


Figure 77. Digital Offset and Gain control

Although Figure 77 indicates a multiplier and adder for each channel, there is only one multiplier and one adder in the device, and they are shared among all four channels. This has implications for the update speed when several channels are updated at once (see Table 3).

Each time data is written to the M or C register, the output is not automatically updated. Instead, the next write to the DAC channel uses these M and C values to perform a new calibration and automatically updates the channel.

The output data from the calibration is routed to the DAC input register. This is then loaded to the DAC as described in the Theory of Operation section. Both the gain register and the offset register have 16 bits of resolution. The correct method to calibrate the gain/offset is to first calibrate out the gain and then calibrate the offset.

The value (in decimal) that is written to the DAC input register can be calculated by

$$\text{Code}_{\text{DACRegister}} = D \times \frac{(M + 1)}{2^{16}} + C - 2^{15} \quad (1)$$

where:

D is the code loaded to the DAC channel's input register.

M is the code in the gain register (default code = $2^{16} - 1$).

C is the code in the offset register (default code = 2^{15}).

STATUS READBACK DURING A WRITE

The AD5755-1 has the ability to read back the status register contents during every write sequence. This feature is enabled via the STATREAD bit in the main control register. This allows the user to continuously monitor the status register and act quickly in the case of a fault.

When status readback during a write is enabled, the contents of the 16-bit status register (see Table 30) are output on the SDO pin, as shown in Figure 5.

The AD5755-1 powers up with this feature disabled. When this is enabled, the normal readback feature is not available, except for the status register. To read back any other register, clear the STATREAD bit first before following the readback sequence. STATREAD can be set high again after the register read.

ASYNCHRONOUS CLEAR

CLEAR is an active high, edge-sensitive input that allows the output to be cleared to a preprogrammed 16-bit code. This code is user programmable via a per channel 16-bit clear code register.

For a channel to clear, that channel must be enabled to be cleared via the CLR_EN bit in the channel's DAC control register. If the channel is not enabled to be cleared, then the output remains in its current state independent of the CLEAR pin level.

When the CLEAR signal is returned low, the relevant outputs remain cleared until a new value is programmed.

PACKET ERROR CHECKING

To verify that data has been received correctly in noisy environments, the AD5755-1 offers the option of packet error checking based on an 8-bit cyclic redundancy check (CRC-8). The device controlling the AD5755-1 should generate an 8-bit frame check sequence using the polynomial

$$C(x) = x_8 + x_2 + x_1 + 1$$

This is added to the end of the data-word, and 32 bits are sent to the AD5755-1 before taking SYNC high. If the AD5755-1 sees a 32-bit frame, it performs the error check when SYNC goes high. If the check is valid, the data is written to the selected register. If the error check fails, the FAULT pin goes low and the PEC error bit in the status register is set. After reading the status register, FAULT returns high (assuming there are no other faults), and the PEC error bit is cleared automatically. It is not recommended to tie both AD1 and AD0 low as a short low on SDIN could possibly lead to a zero-scale update for DAC A.

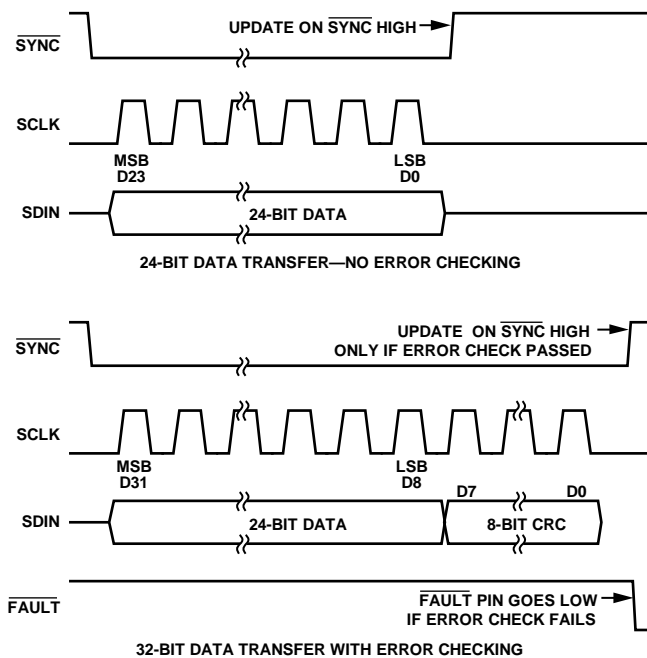


Figure 78. PEC Timing

The PEC can be used for both transmit and receive of data packets. If status readback during a write is enabled, the PEC

values returned during the status readback during a write operation should be ignored. If status readback during a write is disabled, the user can still use the normal readback operation to monitor status register activity with PEC.

WATCHDOG TIMER

When enabled, an on-chip watchdog timer generates an alert signal if 0x195 has not been written to the software register within the programmed timeout period. This feature is useful to ensure that communication has not been lost between the MCU and the AD5755-1 and that these datapath lines are working properly (that is, SDIN, SCLK, and SYNC). If 0x195 is not received by the software register within the timeout period, the ALERT pin signals a fault condition. The ALERT signal is active high and can be connected directly to the CLEAR pin to enable a clear in the event that communication from the MCU is lost.

The watchdog timer is enabled, and the timeout period (5 ms, 10 ms, 100 ms, or 200 ms) is set in the main control register (see Table 18 and Table 19).

OUTPUT ALERT

The AD5755-1 is equipped with an ALERT pin. This is an active high CMOS output. The AD5755-1 also has an internal watchdog timer. When enabled, it monitors SPI communications. If 0x195 is not received by the software register within the timeout period, the ALERT pin goes active.

INTERNAL REFERENCE

The AD5755-1 contains an integrated +5 V voltage reference with initial accuracy of ± 5 mV maximum and a temperature drift coefficient of ± 10 ppm maximum. The reference voltage is buffered and externally available for use elsewhere within the system. REFOUT must be connected to REFIN to use the internal reference.

EXTERNAL CURRENT SETTING RESISTOR

Referring to Figure 73, R_{SET} is an internal sense resistor as part of the voltage-to-current conversion circuitry. The stability of the output current value over temperature is dependent on the stability of the value of R_{SET} . As a method of improving the stability of the output current over temperature, an external 15 k Ω low drift resistor can be connected to the $R_{SET,x}$ pin of the AD5755-1 to be used instead of the internal resistor, R1. The external resistor is selected via the DAC control register (see Table 20).

Table 1 outlines the performance specifications of the AD5755-1 with both the internal R_{SET} resistor and an external, 15 k Ω R_{SET} resistor. Using an external R_{SET} resistor allows for improved performance over the internal R_{SET} resistor option. The external R_{SET} resistor specification assumes an ideal resistor; the actual performance depends on the absolute value and temperature coefficient of the resistor used. This directly affects the gain error of the output, and thus the total unadjusted error. To arrive at the gain/TUE error of the output with a particular external R_{SET} resistor, add the percentage absolute error of the R_{SET} resistor

directly to the gain/TUE error of the AD5755-1 with the external R_{SET} resistor, shown in Table 1 (expressed in % FSR).

HART

The AD5755-1 has four CHART pins, one corresponding to each output channels. A HART signal can be coupled into these pins. The HART signal appears on the corresponding current output, if the output is enabled. Table 31 shows the recommended input voltages for the HART signal at the CHART pin. If these voltages are used, the current output should meet the HART amplitude specifications. Figure 79 shows the recommended circuit for attenuating and coupling in the HART signal.

Table 31. CHART Input Voltage to HART Output Current

| R_{SET} | CHART Input Voltage | Current Output (HART) |
|--------------------|---------------------|-----------------------|
| Internal R_{SET} | 150 mV p-p | 1 mA p-p |
| External R_{SET} | 170 mV p-p | 1 mA p-p |




Figure 79. Coupling HART Signal

A minimum capacitance of $C1 + C2$ is required to ensure that the 1.2 kHz and 2.2 kHz HART frequencies are not significantly attenuated at the output. The recommended values are $C1 = 22$ nF, $C2 = 47$ nF.

Digitally controlling the slew rate of the output is necessary to meet the analog rate of change requirements for HART.

DIGITAL SLEW RATE CONTROL

The slew rate control feature of the AD5755-1 allows the user to control the rate at which the output value changes. This feature is available on both the current and voltage outputs. With the slew rate control feature disabled, the output value changes at a rate limited by the output drive circuitry and the attached load. To reduce the slew rate, this can be achieved by enabling the slew rate control feature. With the feature enabled via the SREN bit of the slew rate control register (see Table 26), the output, instead of slewing directly between two values, steps digitally at a rate defined by two parameters accessible via the slew rate control register, as shown in Table 26.

The parameters are SR_CLOCK and SR_STEP. SR_CLOCK defines the rate at which the digital slew is updated, for example, if the selected update rate is 8 kHz, the output updates every 125 μ s. In conjunction with this, SR_STEP defines by how much the output value changes at each update. Together, both parameters define the rate of change of the output value. Table 32 and Table 33 outline the range of values for both the SR_CLOCK and SR_STEP parameters.

Table 32. Slew Rate Update Clock Options

| SR_CLOCK | Update Clock Frequency (Hz) ¹ |
|----------|--|
| 0000 | 64 k |
| 0001 | 32 k |
| 0010 | 16 k |
| 0011 | 8 k |
| 0100 | 4 k |
| 0101 | 2 k |
| 0110 | 1 k |
| 0111 | 500 |
| 1000 | 250 |
| 1001 | 125 |
| 1010 | 64 |
| 1011 | 32 |
| 1100 | 16 |
| 1101 | 8 |
| 1110 | 4 |
| 1111 | 0.5 |

¹ These clock frequencies are divided down from the 13 MHz internal oscillator. See Table 1, Figure 69, and Figure 70.

Table 33. Slew Rate Step Size Options

| SR_STEP | Step Size (LSBs) |
|---------|------------------|
| 000 | 1 |
| 001 | 2 |
| 010 | 4 |
| 011 | 16 |
| 100 | 32 |
| 101 | 64 |
| 110 | 128 |
| 111 | 256 |

The following equation describes the slew rate as a function of the step size, the update clock frequency, and the LSB size:

$$\text{Slew Time} = \frac{\text{Output Change}}{\text{Step Size} \times \text{Update Clock Frequency} \times \text{LSB Size}}$$

where:

Slew Time is expressed in seconds.

Output Change is expressed in amps for $I_{OUT,x}$ or volts for $V_{OUT,x}$.

When the slew rate control feature is enabled, all output changes occur at the programmed slew rate (see the DC-to-DC Converter Settling Time section for additional information). For example, if the CLEAR pin is asserted, the output slews to the clear value at the programmed slew rate (assuming that the clear channel is enabled to be cleared). If a number of channels are enabled for slew, care must be taken when asserting the CLEAR pin. If one of the channels is slewing when CLEAR is asserted, other channels may change directly to their clear values not under slew rate control. The update clock frequency for any given value is the same for all output ranges. The step size, however, varies across output ranges for a given value of step size because the LSB size is different for each output range.

POWER DISSIPATION CONTROL

The AD5755-1 contains integrated dynamic power control using a dc-to-dc boost converter circuit, allowing reductions in power consumption from standard designs when using the part in current output mode.

In standard current input module designs, the load resistor values can range from typically 50 Ω to 750 Ω. Output module systems must source enough voltage to meet the compliance voltage requirement across the full range of load resistor values. For example, in a 4 mA to 20 mA loop when driving 20 mA, a compliance voltage of >15 V is required. When driving 20 mA into a 50 Ω load, only 1 V compliance is required.

The AD5755-1 circuitry senses the output voltage and regulates this voltage to meet compliance requirements plus a small headroom voltage. The AD5755-1 is capable of driving up to 24 mA through a 1 kΩ load.

DC-TO-DC CONVERTERS

The AD5755-1 contains four independent dc-to-dc converters. These are used to provide dynamic control of the V_{BOOST} supply voltage for each channel (see Figure 73). Figure 80 shows the discrete components needed for the dc-to-dc circuitry, and the following sections describe component selection and operation of this circuitry.




Figure 80. DC-to-DC Circuit

Table 34. Recommended DC-to-DC Components

| Symbol | Component | Value | Manufacturer |
|------------|--------------------|---------------------|--------------|
| L_{DCDC} | XAL4040-103 | 10 µH | Coilcraft® |
| C_{DCDC} | GRM32ER71H475KA88L | 4.7 µF | Murata |
| D_{DCDC} | PMEG3010BEA | 0.38 V _F | NXP |

It is recommended to place a 10 Ω, 100 nF low-pass RC filter after C_{DCDC} . This consumes a small amount of power but reduces the amount of ripple on the $V_{BOOST,x}$ supply.

DC-to-DC Converter Operation

The on-board dc-to-dc converters use a constant frequency, peak current mode control scheme to step up an AV_{CC} input of 4.5 V to 5.5 V to drive the AD5755-1 output channel. These are designed to operate in discontinuous conduction mode (DCM) with a duty cycle of <90% typical. Discontinuous conduction mode refers to a mode of operation where the inductor current goes to zero for an appreciable percentage of the switching cycle. The dc-to-dc converters are nonsynchronous; that is, they require an external Schottky diode.

DC-to-DC Converter Output Voltage

When a channel current output is enabled, the converter regulates the $V_{BOOST,x}$ supply to 7.4 V (±5%) or ($I_{OUT} \times R_{LOAD} + \text{Headroom}$), whichever is greater (see Figure 53 for a plot of headroom supplied vs. output current). In voltage output mode with the

output disabled, the converter regulates the $V_{BOOST,x}$ supply to +15 V (±5%). In current output mode with the output disabled, the converter regulates the $V_{BOOST,x}$ supply to 7.4 V (±5%).

Within a channel, the $V_{OUT,x}$ and $I_{OUT,x}$ stages share a common $V_{BOOST,x}$ supply so that the outputs of the $I_{OUT,x}$ and $V_{OUT,x}$ stages can be tied together.

DC-to-DC Converter Settling Time

When in current output mode, the settling time for a step greater than ~1 V ($I_{OUT} \times R_{LOAD}$) is dominated by the settling time of the dc-to-dc converter. The exception to this is when the required voltage at the $I_{OUT,x}$ pin plus the compliance voltage is below 7.4 V (±5%). A typical plot of the output settling time can be found in Figure 49. This plot is for a 1 kΩ load. The settling time for smaller loads is faster. The settling time for current steps less than 24 mA is also faster.

DC-to-DC Converter V_{MAX} Functionality

The maximum $V_{BOOST,x}$ voltage is set in the dc-to-dc control register (23 V, 24.5 V, 27 V, or 29.5 V; see Table 25). On reaching this maximum voltage, the dc-to-dc converter is disabled, and the $V_{BOOST,x}$ voltage is allowed to decay by ~0.4 V. After the $V_{BOOST,x}$ voltage has decayed by ~0.4 V, the dc-to-dc converter is reenabled, and the voltage ramps up again to V_{MAX} , if still required. This operation is shown in Figure 81.

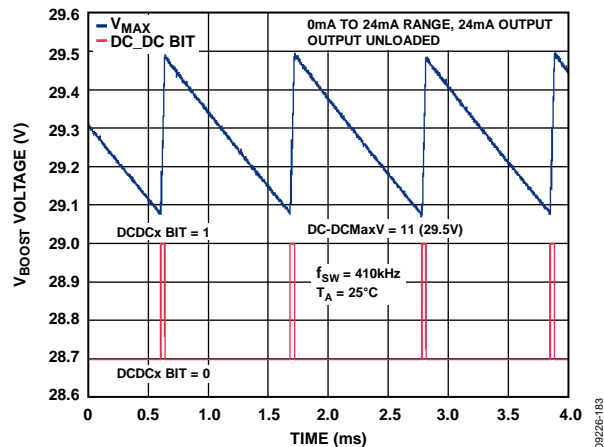


Figure 81. Operation on Reaching V_{MAX}

As can be seen in Figure 81, the DC-DCx bit in the status register asserts when the AD5755-1 is ramping to the V_{MAX} value but deasserts when the voltage is decaying to $V_{MAX} - \sim 0.4$ V.

DC-to-DC Converter On-Board Switch

The AD5755-1 contains a 0.425 Ω internal switch. The switch current is monitored on a pulse by pulse basis and is limited to 0.8 A peak current.

DC-to-DC Converter Switching Frequency and Phase

The AD5755-1 dc-to-dc converter switching frequency can be selected from the dc-to-dc control register. The phasing of the channels can also be adjusted so that the dc-to-dc converter can clock on different edges (see Table 25). For typical applications, a 410 kHz frequency is recommended. At light loads (low output

current and small load resistor), the dc-to-dc converter enters a pulse-skipping mode to minimize switching power dissipation.

DC-to-DC Converter Inductor Selection

For typical 4 mA to 20 mA applications, a 10 μH inductor (such as the XAL4040-103 from Coilcraft), combined with a switching frequency of 410 kHz, allows up to 24 mA to be driven into a load resistance of up to 1 k Ω with an AV_{CC} supply of 4.5 V to 5.5 V. It is important to ensure that the inductor is able to handle the peak current without saturating, especially at the maximum ambient temperature. If the inductor enters into saturation mode, it results in a decrease in efficiency. The inductance value also drops during saturation and may result in the dc-to-dc converter circuit not being able to supply the required output power.

DC-to-DC Converter External Schottky Selection

The AD5755-1 requires an external Schottky for correct operation. Ensure that the Schottky is rated to handle the maximum reverse breakdown expected in operation and that the rectifier maximum junction temperature is not exceeded. The diode average current is approximately equal to the I_{LOAD} current. Diodes with larger forward voltage drops result in a decrease in efficiency.

DC-to-DC Converter Compensation Capacitors

As the dc-to-dc converter operates in DCM, the uncompensated transfer function is essentially a single-pole transfer function. The pole frequency of the transfer function is determined by the dc-to-dc converter's output capacitance, input and output voltage, and output load. The AD5755-1 uses an external capacitor in conjunction with an internal 150 k Ω resistor to compensate the regulator loop. Alternatively, an external compensation resistor can be used in series with the compensation capacitor, by setting the DC-DC Comp bit in the dc-to-dc control register. In this case, a ~50 k Ω resistor is recommended. A description of the advantages of this can be found in the AI_{CC} Supply Requirements—Slewing section. For typical applications, a 10 nF dc-to-dc compensation capacitor is recommended.

DC-to-DC Converter Input and Output Capacitor Selection

The output capacitor affects ripple voltage of the dc-to-dc converter and indirectly limits the maximum slew rate at which the channel output current can rise. The ripple voltage is caused by a combination of the capacitance and equivalent series resistance (ESR) of the capacitor. For the AD5755-1, a ceramic capacitor of 4.7 μF is recommended for typical applications. Larger capacitors or paralleled capacitors improve the ripple at the expense of reduced slew rate. Larger capacitors also impact the AV_{CC} supplies current requirements while slewing (see the AI_{CC} Supply Requirements—Slewing section). This capacitance at the output of the dc-to-dc converter should be >3 μF under all operating conditions.

The input capacitor provides much of the dynamic current required for the dc-to-dc converter and should be a low ESR

component. For the AD5755-1, a low ESR tantalum or ceramic capacitor of 10 μF is recommended for typical applications. Ceramic capacitors must be chosen carefully because they can exhibit a large sensitivity to dc bias voltages and temperature. X5R or X7R dielectrics are preferred because these capacitors remain stable over wider operating voltage and temperature ranges. Care must be taken if selecting a tantalum capacitor to ensure a low ESR value.

AI_{CC} SUPPLY REQUIREMENTS—STATIC

The dc-to-dc converter is designed to supply a V_{BOOST_x} voltage of

$$V_{BOOST} = I_{OUT} \times R_{LOAD} + \text{Headroom} \quad (2)$$

See Figure 53 for a plot of headroom supplied vs. output voltage. This means that, for a fixed load and output voltage, the dc-to-dc converter output current can be calculated by the following formula:

$$AI_{CC} = \frac{\text{Power Out}}{\text{Efficiency} \times AV_{CC}} = \frac{I_{OUT} \times V_{BOOST}}{\eta_{V_{BOOST}} \times AV_{CC}} \quad (3)$$

where:

I_{OUT} is the output current from I_{OUT_x} in amps.

$\eta_{V_{BOOST}}$ is the efficiency at V_{BOOST_x} as a fraction (see Figure 55 and Figure 56).

AI_{CC} SUPPLY REQUIREMENTS—SLEWING

The AI_{CC} current requirement while slewing is greater than in static operation because the output power increases to charge the output capacitance of the dc-to-dc converter. This transient current can be quite large (see Figure 82), although the methods described in the Reducing AI_{CC} Current Requirements section can reduce the requirements on the AV_{CC} supply. If not enough AI_{CC} current can be provided, the AV_{CC} voltage drops. Due to this AV_{CC} drop, the AI_{CC} current required to slew increases further. This means that the voltage at AV_{CC} drops further (see Equation 3) and the V_{BOOST_x} voltage, and thus the output voltage, may never reach its intended value. Because this AV_{CC} voltage is common to all channels, this may also affect other channels.

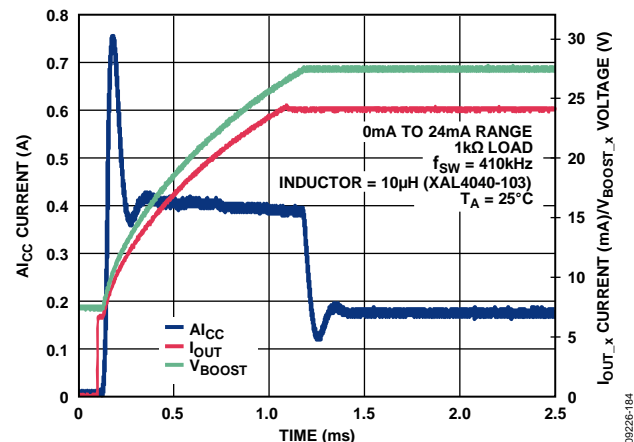


Figure 82. AI_{CC} Current vs. Time for 24 mA Step Through 1 k Ω Load with Internal Compensation Resistor

Reducing $A_{I_{CC}}$ Current Requirements

There are two main methods that can be used to reduce the $A_{I_{CC}}$ current requirements. One method is to add an external compensation resistor, and the other is to use slew rate control. Both of these methods can be used in conjunction.

A compensation resistor can be placed at the $COMP_{DCDC_x}$ pin in series with the 10 nF compensation capacitor. A 51 k Ω external compensation resistor is recommended. This compensation increases the slew time of the current output but eases the $A_{I_{CC}}$ transient current requirements. Figure 83 shows a plot of $A_{I_{CC}}$ current for a 24 mA step through a 1 k Ω load when using a 51 k Ω compensation resistor. This method eases the current requirements through smaller loads even further, as shown in Figure 84.

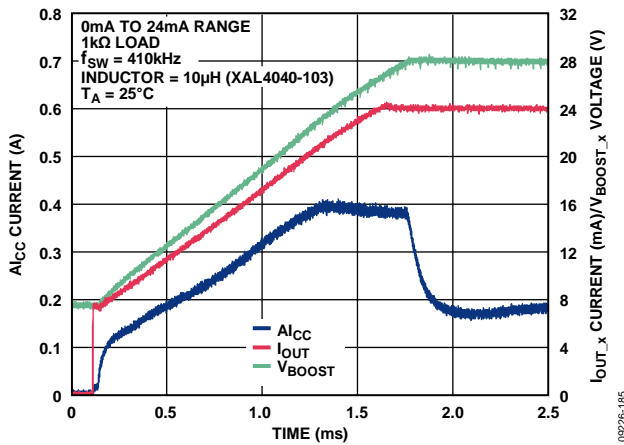


Figure 83. $A_{I_{CC}}$ Current vs. Time for 24 mA Step Through 1 k Ω Load with External 51 k Ω Compensation Resistor

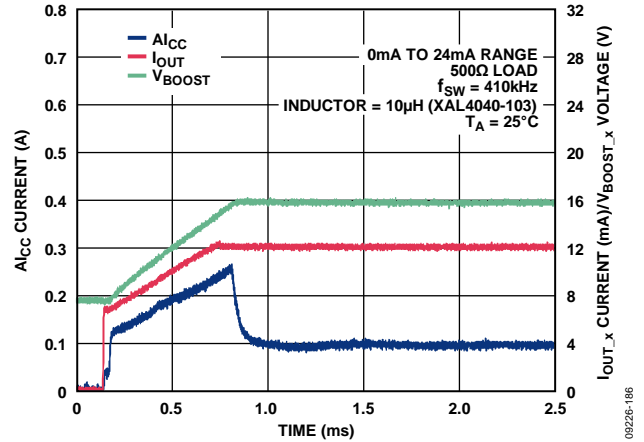


Figure 84. $A_{I_{CC}}$ Current vs. Time for 24 mA Step Through 500 Ω Load with External 51 k Ω Compensation Resistor

Using slew rate control can greatly reduce the $A_{V_{CC}}$ supplies current requirements, as shown in Figure 85. When using slew rate control, attention should be paid to the fact that the output cannot slew faster than the dc-to-dc converter. The dc-to-dc converter slews slowest at higher currents through large (for example, 1 k Ω) loads. This slew rate is also dependent on the configuration of the dc-to-dc converter. Two examples of the dc-to-dc converter output slew are shown in Figure 83 and Figure 84 (V_{BOOST} corresponds to the dc-to-dc converter's output voltage).

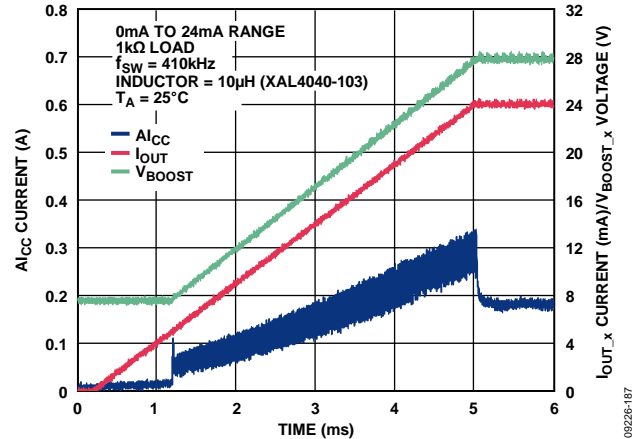


Figure 85. $A_{I_{CC}}$ Current vs. Time for 24 mA Step Through 1 k Ω Load with Slew Rate Control

APPLICATIONS INFORMATION

VOLTAGE AND CURRENT OUTPUT RANGES ON THE SAME TERMINAL

When using a channel of the AD5755-1, the current and voltage output pins can be connected to two separate terminals or tied together and connected to a single terminal. There is no conflict with tying the two output pins together because only the voltage output or the current output can be enabled at any one time. When the current output is enabled, the voltage output is in tristate mode, and when the voltage output is enabled, the current output is in tristate mode. For this operation, the POC pin must be tied low and the POC bit in the main control register set to 0, or, if the POC pin is tied high, the POC bit in the main control register must be set to 1 before the current output is enabled.

As shown in the Absolute Maximum Ratings section, the output tolerances are the same for both the voltage and current output pins. The $+V_{SENSE_x}$ connections are buffered so that current leakage into these pins is negligible when in current output mode.

CURRENT OUTPUT MODE WITH INTERNAL R_{SET}

When using the internal R_{SET} resistor in current output mode, the output is significantly affected by how many other channels using the internal R_{SET} are enabled and by the dc crosstalk from these channels. The internal R_{SET} specifications in Table 1 are for all channels enabled with the internal R_{SET} selected and outputting the same code.

For every channel enabled with the internal R_{SET} , the offset error decreases. For example, with one current output enabled using the internal R_{SET} , the offset error is 0.075% FSR. This value decreases proportionally as more current channels are enabled; the offset error is 0.056% FSR on each of two channels, 0.029% on each of three channels, and 0.01% on each of four channels.

Similarly, the dc crosstalk when using the internal R_{SET} is proportional to the number of current output channels enabled with the internal R_{SET} . For example, with the measured channel at 0x8000 and one channel going from zero to full scale, the dc crosstalk is -0.011% FSR. With two channels going from zero to full scale, it is -0.019% FSR, and with all three other channels going from zero to full scale, it is -0.025% FSR.

For the full-scale error measurement in Table 1, all channels are at 0xFFFF. This means that, as any channel goes to zero scale, the full-scale error increases due to the dc crosstalk. For example, with the measured channel at 0xFFFF and three

channels at zero scale, the full-scale error is 0.025%. Similarly, if only one channel is enabled in current output mode with the internal R_{SET} , the full-scale error is $0.025\% \text{ FSR} + 0.075\% \text{ FSR} = 0.1\% \text{ FSR}$.

PRECISION VOLTAGE REFERENCE SELECTION

To achieve the optimum performance from the AD5755-1 over its full operating temperature range, a precision voltage reference must be used. Thought should be given to the selection of a precision voltage reference. The voltage applied to the reference inputs is used to provide a buffered reference for the DAC cores. Therefore, any error in the voltage reference is reflected in the outputs of the device.

There are four possible sources of error to consider when choosing a voltage reference for high accuracy applications: initial accuracy, temperature coefficient of the output voltage, long term drift, and output voltage noise.

Initial accuracy error on the output voltage of an external reference can lead to a full-scale error in the DAC. Therefore, to minimize these errors, a reference with low initial accuracy error specification is preferred. Choosing a reference with an output trim adjustment, such as the ADR425, allows a system designer to trim system errors out by setting the reference voltage to a voltage other than the nominal. The trim adjustment can be used at any temperature to trim out any error.

Long-term drift is a measure of how much the reference output voltage drifts over time. A reference with a tight long-term drift specification ensures that the overall solution remains relatively stable over its entire lifetime.

The temperature coefficient of a reference's output voltage affects INL, DNL, and TUE. A reference with a tight temperature coefficient specification should be chosen to reduce the dependence of the DAC output voltage to ambient temperature.

In high accuracy applications, which have a relatively low noise budget, reference output voltage noise must be considered. Choosing a reference with as low an output noise voltage as practical for the system resolution required is important. Precision voltage references such as the ADR435 (XFET design) produce low output noise in the 0.1 Hz to 10 Hz region. However, as the circuit bandwidth increases, filtering the output of the reference may be required to minimize the output noise.

Table 35. Recommended Precision References

| Part No. | Initial Accuracy (mV Maximum) | Long-Term Drift (ppm Typical) | Temperature Drift (ppm/°C Maximum) | 0.1 Hz to 10 Hz Noise ($\mu\text{V p-p}$ Typical) |
|----------|-------------------------------|-------------------------------|------------------------------------|--|
| ADR445 | ± 2 | 50 | 3 | 2.25 |
| ADR02 | ± 3 | 50 | 3 | 10 |
| ADR435 | ± 2 | 40 | 3 | 8 |
| ADR395 | ± 5 | 50 | 9 | 8 |
| AD586 | ± 2.5 | 15 | 10 | 4 |

DRIVING INDUCTIVE LOADS

When driving inductive or poorly defined loads, a capacitor may be required between I_{OUT_x} and AGND to ensure stability. A 0.01 μF capacitor between I_{OUT_x} and AGND ensures stability of a load of 50 mH. The capacitive component of the load may cause slower settling, although this may be masked by the settling time of the AD5755-1. There is no maximum capacitance limit for the current output of the AD5755-1.

TRANSIENT VOLTAGE PROTECTION

The AD5755-1 contains ESD protection diodes that prevent damage from normal handling. The industrial control environment can, however, subject I/O circuits to much higher transients. To protect the AD5755-1 from excessively high voltage transients, external power diodes and a surge current limiting resistor (R_p) are required, as shown in Figure 86. A typical value for R_p is 10 Ω . The two protection diodes and the resistor (R_p) must have appropriate power ratings.

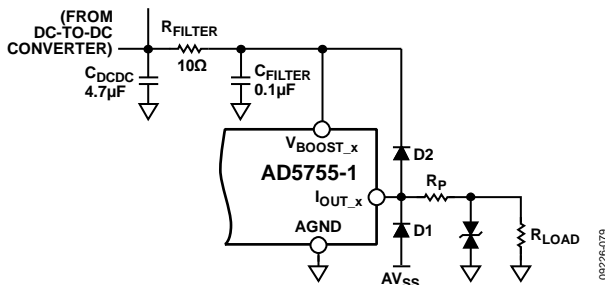


Figure 86. Output Transient Voltage Protection

Further protection can be provided using transient voltage suppressors (TVSs), also referred to as transorbs. These components are available as unidirectional suppressors, which protect against positive high voltage transients, and as bidirectional suppressors, which protect against both positive and negative high voltage transients. Transient voltage suppressors are available in a wide range of standoff and breakdown voltage ratings. The TVS should be sized with the lowest breakdown voltage possible while not conducting in the functional range of the current output.

It is recommended that all field connected nodes be protected. The voltage output node can be protected with a similar circuit, where D2 and the transorb are connected to AV_{SS} . For the voltage output node, the $+V_{SENSE_x}$ pin should also be protected with a large value series resistance to the transorb, such as 5 k Ω . In this way, the I_{OUT_x} and V_{OUT_x} pins can also be tied together and share the same protection circuitry.

MICROPROCESSOR INTERFACING

Microprocessor interfacing to the AD5755-1 is via a serial bus that uses a protocol compatible with microcontrollers and DSP processors. The communications channel is a 3-wire minimum interface consisting of a clock signal, a data signal, and a latch signal. The AD5755-1 requires a 24-bit data-word with data valid on the falling edge of SCLK.

The DAC output update is initiated on either the rising edge of LDAC or, if LDAC is held low, on the rising edge of SYNC. The contents of the registers can be read using the readback function.

AD5755-1-TO-ADSP-BF527 INTERFACE

The AD5755-1 can be connected directly to the SPORT interface of the ADSP-BF527, an Analog Devices, Inc., Blackfin[®] DSP. Figure 87 shows how the SPORT interface can be connected to control the AD5755-1.

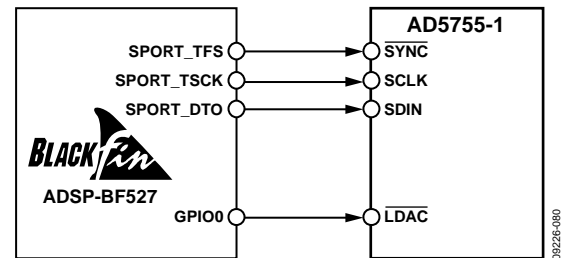


Figure 87. AD5755-1-to-ADSP-BF527 SPORT Interface

LAYOUT GUIDELINES

Grounding

In any circuit where accuracy is important, careful consideration of the power supply and ground return layout helps to ensure the rated performance. The printed circuit board on which the AD5755-1 is mounted should be designed so that the analog and digital sections are separated and confined to certain areas of the board. If the AD5755-1 is in a system where multiple devices require an AGND-to-DGND connection, the connection should be made at one point only. The star ground point should be established as close as possible to the device.

The $GNDSW_x$ and ground connection for the AV_{CC} supply are referred to as PGND. PGND should be confined to certain areas of the board, and the PGND-to-AGND connection should be made at one point only.

Supply Decoupling

The AD5755-1 should have ample supply bypassing of 10 μF in parallel with 0.1 μF on each supply located as close to the package as possible, ideally right up against the device. The 10 μF capacitors are the tantalum bead type. The 0.1 μF capacitor should have low effective series resistance (ESR) and low effective series inductance (ESL), such as the common ceramic types, which provide a low impedance path to ground at high frequencies to handle transient currents due to internal logic switching.

Traces

The power supply lines of the AD5755-1 should use as large a trace as possible to provide low impedance paths and reduce the effects of glitches on the power supply line. Fast switching signals such as clocks should be shielded with digital ground to prevent radiating noise to other parts of the board and should never be run near the reference inputs. A ground line routed between the SDIN and SCLK lines helps reduce crosstalk between them (not required on a multilayer board that has a separate ground plane, but separating the lines helps). It is essential to minimize noise on the REFIN line because it couples through to the DAC output.

Avoid crossover of digital and analog signals. Traces on opposite sides of the board should run at right angles to each other. This reduces the effects of feedthrough on the board. A microstrip technique is by far the best but not always possible with a double-sided board. In this technique, the component side of the board is dedicated to ground plane, whereas signal traces are placed on the solder side.

DC-to-DC Converters

To achieve high efficiency, good regulation, and stability, a well-designed printed circuit board layout is required.

Follow these guidelines when designing printed circuit boards (see Figure 80):

- Keep the low ESR input capacitor, C_{IN} , close to AV_{CC} and PGND.
- Keep the high current path from C_{IN} through the inductor, L_{DCDC} , to SW_X and PGND as short as possible.
- Keep the high current path from C_{IN} through L_{DCDC} and the rectifier, D_{DCDC} , to the output capacitor, C_{DCDC} , as short as possible.
- Keep high current traces as short and as wide as possible. The path from C_{IN} through the inductor, L_{DCDC} , to SW_X and PGND should be able to handle a minimum of 1 A.
- Place the compensation components as close as possible to $COMP_{DCDC_x}$.
- Avoid routing high impedance traces near any node connected to SW_X or near the inductor to prevent radiated noise injection.

GALVANICALLY ISOLATED INTERFACE

In many process control applications, it is necessary to provide an isolation barrier between the controller and the unit being controlled to protect and isolate the controlling circuitry from any hazardous common-mode voltages that may occur. The Analog Devices *iCoupler*® products can provide voltage isolation in excess of 2.5 kV. The serial loading structure of the AD5755-1 makes it ideal for isolated interfaces because the number of interface lines is kept to a minimum. Figure 88 shows a 4-channel isolated interface to the AD5755-1 using an ADuM1400. For more information, visit www.analog.com.

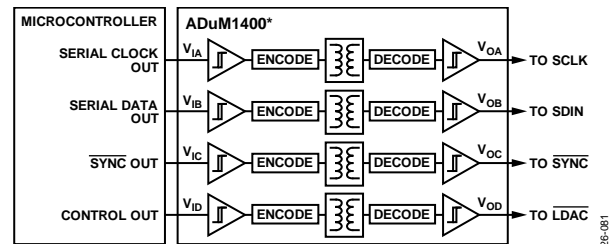


Figure 88. Isolated Interface

INDUSTRIAL HART CAPABLE ANALOG OUTPUT APPLICATION—SHARED V_{OUT_X} AND I_{OUT_X} PIN

Many industrial control applications have requirements for accurately controlled current output signals, and the AD5755-1 is ideal for such applications. Figure 89 shows the AD5755-1 in a circuit design for a HART-enabled output module, specifically for use in an industrial control application in which both the voltage output and current output are available—one at a time—on one pin, thus reducing the number of screw connections required. There is no conflict with tying the two output pins together because only the voltage output or the current output can be enabled at any one time.

The design provides for a HART-enabled current output, with the HART capability provided by the AD5700/AD5700-1 HART modem, the industry's lowest power and smallest footprint HART-compliant IC modem. For additional space-savings, the AD5700-1 offers a 0.5% precision internal oscillator. The HART_OUT signal from the AD5700 is attenuated and ac-coupled into the

CHARTx pin of the AD5755-1. Such a configuration results in the AD5700 HART modem output modulating the 4 mA to 20 mA analog current without affecting the dc level of the current. This circuit adheres to the HART physical layer specifications as defined by the HART Communication Foundation.

For transient overvoltage protection, a 24 V transient voltage suppressor (TVS) is placed on the I_{OUT_X}/V_{OUT_X} connection. For added protection, clamping diodes are connected from the I_{OUT_X}/V_{OUT_X} pin to the AV_{DD} and AV_{SS} power supply pins. A 5 kΩ current limiting resistor is also placed in series with the $+V_{SENSE_X}$ input. This is to limit the current to an acceptable level during a transient event. The recommended external band-pass filter for the AD5700 HART modem includes a 150 kΩ resistor, which limits current to a sufficiently low level to adhere to intrinsic safety requirements. In this case, the input has higher transient voltage protection and should, therefore, not require additional protection circuitry, even in the most demanding of industrial environments.


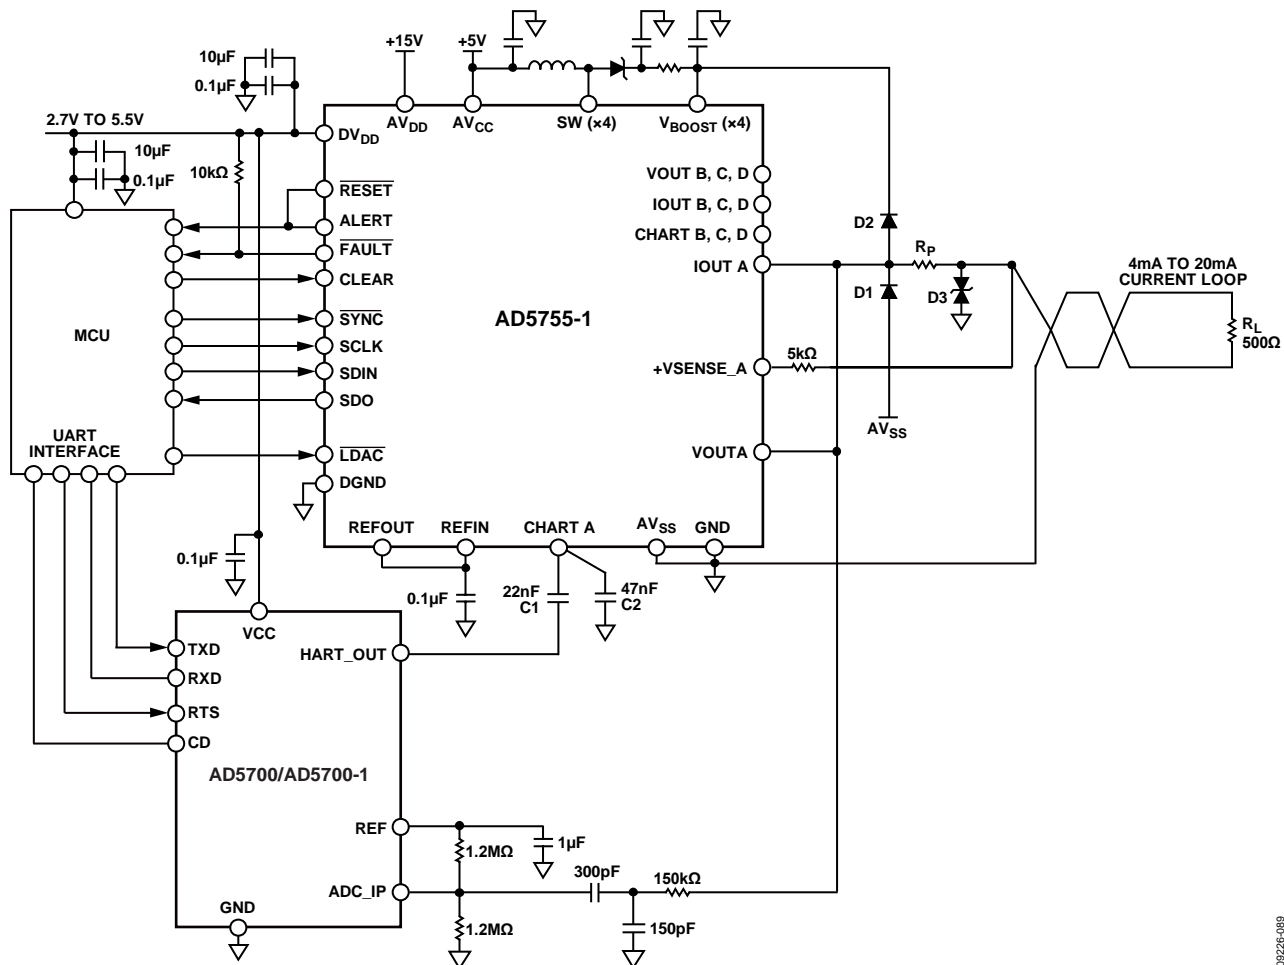


Figure 89. AD5755-1 in HART Configuration

00226-089

OUTLINE DIMENSIONS

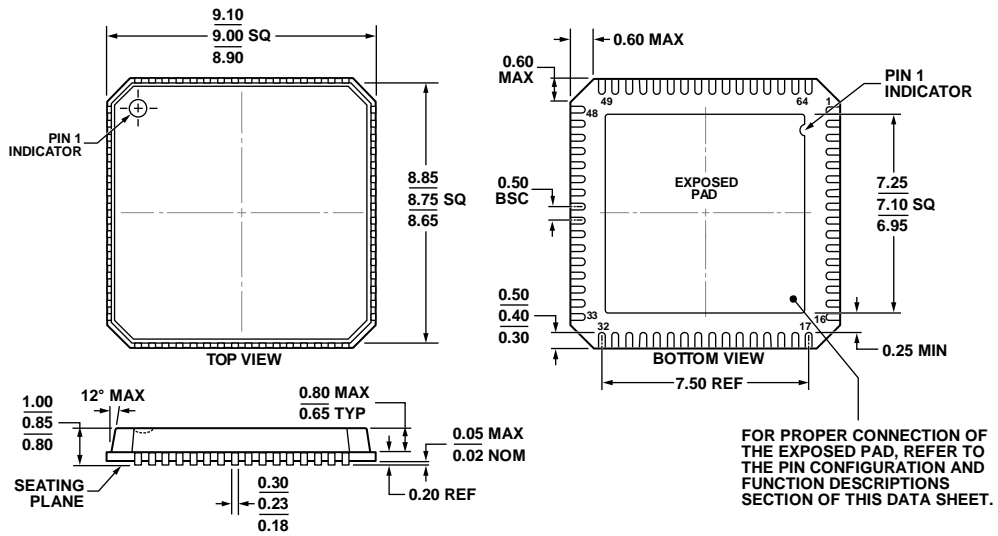

COMPLIANT TO JEDEC STANDARDS MO-220-VMM4
 Figure 90. 64-Lead Lead Frame Chip Scale Package [LFCSP_VQ]
 9 mm × 9 mm Body, Very Thin Quad
 (CP-64-3)
 Dimensions shown in millimeters

ORDERING GUIDE

| Model ¹ | Resolution (Bits) | Temperature Range | Package Description | Package Option |
|--------------------|-------------------|-------------------|---------------------|----------------|
| AD5755-1ACPZ | 16 | -40°C to +105°C | 64-lead LFCSP_VQ | CP-64-3 |
| AD5755-1ACPZ-REEL7 | 16 | -40°C to +105°C | 64-lead LFCSP_VQ | CP-64-3 |
| EVAL-AD5755-1SDZ | | | Evaluation Board | |

¹ Z = RoHS Compliant Part.

NOTES

NOTES



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.