

High Precision Bulk Metal® Foil Surface Mount Voltage Divider, TCR Tracking of $< 0.5 \text{ ppm/}^\circ\text{C}$, Tolerance Match of 0.01% and Stability of $\pm 0.005 \%$ (50 ppm)



Bottom View

INTRODUCTION

Bulk Metal® Z-Foil (BMZF) technology out-performs all other resistor technologies available today for applications that require ultra high precision and ultra high stability.

The new Z-Foil technology provides a significant reduction of the resistive element's sensitivity to changes of temperature due to ambient temperature variations (TCR) and to self heating when power is applied (power coefficient).

Model **VFCD1505** offers low TCR (both absolute and tracking), excellent load life stability, tight tolerance, excellent ratio stability, low thermal EMF and low current noise, all in one package. $0.05 \text{ ppm/}^\circ\text{C}$ absolute TCR removes errors due to temperature gradients.

The **VFCD1505** surface mount divider provides tight tolerance matching and TCR tracking between 2 resistors simultaneously etched on one piece of foil on a common substrate. The electrical specifications of this integrated construction offers improved performances and better real estate utilization over discrete resistors and matched pairs.

Our application engineering department is available to advise and make recommendations for non-standard technical requirements and special applications, please contact us.

FIGURE 1 - POWER DERATING CURVE

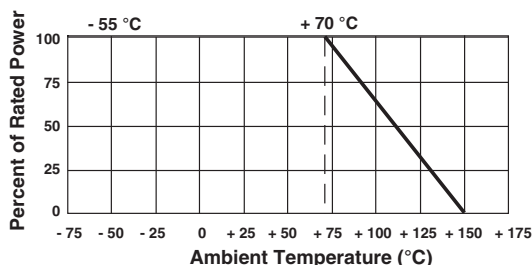


FIGURE 2 - SCHEMATIC



FEATURES


- Temperature coefficient of resistance (TCR): absolute: (table 1)
 $\pm 0.05 \text{ ppm/}^\circ\text{C}$ (typical 0°C to $+60^\circ\text{C}$)
 $\pm 0.2 \text{ ppm/}^\circ\text{C}$ (typical -55°C to $+125^\circ\text{C}$, $+25^\circ\text{C}$ ref.)
Tracking: (table 1)
 $0.1 \text{ ppm/}^\circ\text{C}$ typical
- Resistance range: 1K to 10K
- Foil resistors are not restricted to standard values/ ratios, specific "as required" values/ratios may be supplied at no extra cost or delivery (e.g 2K234/5K456)
- Power coefficient tracking: " ΔR due to self heating"
5 ppm at rated power
- Short time overload: $\pm 0.005 \%$
- Tolerance: absolute and resistance ratio: to 0.01%
- Load life stability (0.1 W at 70°C , 2000 h)
Absolute: 0.01%
Ratio: 0.005%
- Electrostatic discharge (ESD) up to 25 000 V
- Power rating at 70°C : entire package: 0.1 W , divided between the two resistors proportionally to their value
- Non-inductive, non-capacitive design
- Thermal EMF: $0.05 \mu\text{V/}^\circ\text{C}$ typical
- Current noise: $< -40 \text{ dB}$
- Rise time: 1 ns effectively no ringing
- Non inductive: $< 0.08 \mu\text{H}$
- Voltage coefficient: $< 0.1 \text{ ppm/V}$
- Non hot spot design
- Compliant to RoHS directive 2002/95/EC
- Terminal finish: lead (Pb)-free or tin/lead alloy
- For better performances please contact us
- Prototypes quantities available in just 5 working days or sooner. For more information, please contact foil@vishaypg.com



RoHS*
COMPLIANT

APPLICATIONS

- Instrumentation amplifiers
- Bridge networks
- Differential amplifiers
- Ratio arms in bridge circuits
- Medical and test equipment
- Military
- Airborne etc.



* Pb containing terminations are not RoHS compliant, exemptions may apply

TABLE 1 - RESISTANCE VALUES/RATIO AND TCR CHARACTERISTICS

POPULAR VALUES	VCODES	ABSOLUTE TCR (- 55 °C TO + 125 °C, + 25 °C REF.)		TCR TRACKING		TOLERANCE MATCHING
		TYPICAL	MAXIMUM	TYPICAL	MAXIMUM	
10K/10K	V0001	± 0.2 ppm/°C	± 1 ppm/°C	0.1 ppm/°C	0.5 ppm/°C	0.01 %
5K/5K	V0002					
1K/1K	V0004					
2K/2K	V0059					
5K/10K	V0005	± 0.2 ppm/°C	± 1 ppm/°C	0.4 ppm/°C	1.0 ppm/°C	0.01 %
2.5K/10K	V0060					
1K/9K	V0056	± 0.2 ppm/°C	± 1 ppm/°C	0.4 ppm/°C	1.0 ppm/°C	0.02 %
1K/10K	V0064					

Note

- Additional ratios are available. For the relevant VCODES for ordering, please contact application engineering using the footer below



TABLE 2 - TYPICAL PERFORMANCE SPECIFICATIONS

TEST	MIL-PRF-55342H CHARACTERISTIC E ΔR LIMITS ⁽¹⁾	VFCD1505 ΔRATIO
Thermal shock	0.10 %	0.005 % (50 ppm)
Low temperature operation	0.10 %	0.005 % (50 ppm)
Short time overload	0.10 %	0.005 % (50 ppm)
High temperature exposure	0.10 %	0.01 % (100 ppm)
Resistance to soldering heat	0.20 %	0.01 % (100 ppm)
Moisture resistance	0.20 %	0.005 % (50 ppm)
Load life (ratio stability)	-	0.005 % (50 ppm)
Maximum working voltage for each element	22 V	
Weight	10 mg	
Packaging	Waffle pack standard, tape and reel available	

Note

- ⁽¹⁾ ΔR's plus additional 0.01 Ω for measurement error

FIGURE 3 - MODEL VFCD1505 DIMENSIONS AND LAND PATTERN in inches (millimeters)

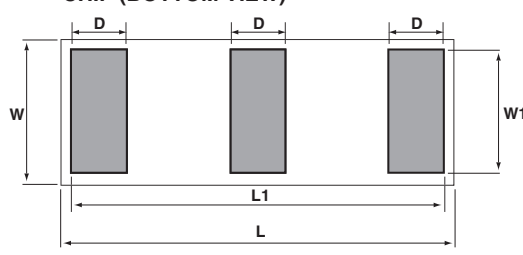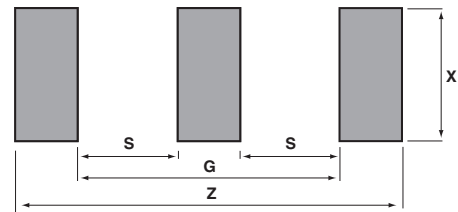CHIP (BOTTOM VIEW)					RECOMMENDED LAND PATTERN				
									
L	W	D	L1	W1	THICKNESS MAXIMUM	Z	G	S	X
± 0.005 (0.13)	± 0.005 (0.13)	± 0.003 (0.08)	± 0.003 (0.08)	± 0.005 (0.13)		± 0.003 (0.08)	± 0.003 (0.08)	± 0.003 (0.08)	± 0.003 (0.08)
0.150 (3.81)	0.050 (1.27)	0.015 (0.38)	0.144 (3.66)	0.043 (1.09)	0.025 (0.64)	0.147 (3.73)	0.111 (2.82)	0.046 (1.17)	0.046 (1.17)

Notes

- Avoid the use of cleaning agents which could attack epoxy resins, which form part of the resistor construction
- Vacuum pick up is recommended for handling
- Soldering iron is not applicable

FIGURE 4 - TRIMMING TO VALUES
(conceptual illustration)

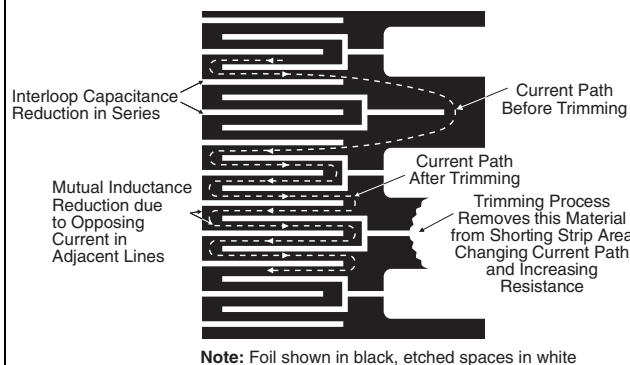


FIGURE 5 - TYPICAL RESISTANCE/TEMPERATURE CURVE
(for more details see table 1)


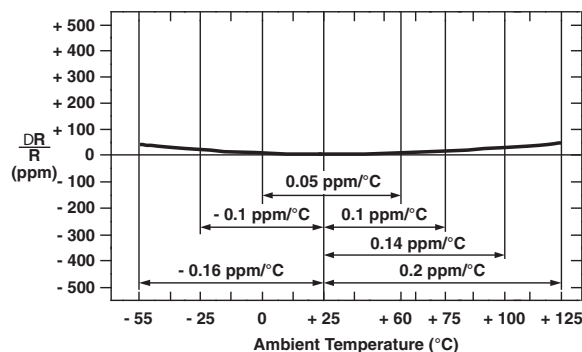


TABLE 3 - GLOBAL PART NUMBER INFORMATION (1)

NEW GLOBAL PART NUMBER: Y1685V0001QQ9R (preferred part number format)

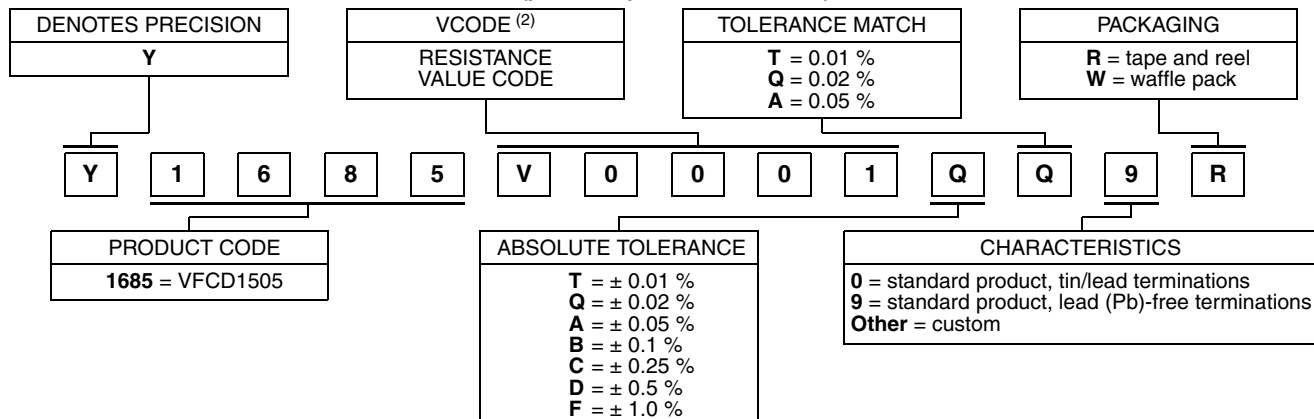

FOR EXAMPLE: ABOVE GLOBAL ORDER Y1685 V0001 Q Q 9 R:

TYPE: VFCD1505
VALUES: 10K/10K
ABSOLUTE TOLERANCE: ± 0.02 %
TOLERANCE MATCH: 0.02 %
TERMINATION: lead (Pb)-free
PACKAGING: tape and reel

HISTORICAL PART NUMBER: VFCD1505 10K/10K TCR0.2 Q Q S T (will continue to be used)

VFCD1505	10K/10K	TCR0.2	Q	Q	S	T
MODEL	OHMIC VALUE	TCR CHARACTERISTIC	ABSOLUTE TOLERANCE	TOLERANCE MATCH	TERMINATION	PACKAGING
VFCD1505	R ₁ = 10 kΩ R ₂ = 10 kΩ		T = ± 0.01 % Q = ± 0.02 % A = ± 0.05 % B = ± 0.1 % C = ± 0.25 % D = ± 0.5 % F = ± 1.0 %	T = 0.01 % Q = 0.02 % A = 0.05 %	S = lead (Pb)-free B = tin/lead alloy	T = tape and reel W = waffle pack

Notes

(1) Application engineering release: for non-standard requests, please contact application engineering

(2) For examples of VCODES see table 1

Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase.

To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.