

## Sensor/Actuator cable - SAC-8P-M12MS/ 2,0-28X/M12FS OD - 1407277

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Sensor/Actuator cable, 8-position, PE-X halogen-free, black-gray RAL 7021, Plug straight M12, A-coded, on Socket straight M12, A-coded, Cable length: 2 m, for outdoor applications, with high-grade steel knurl

### Why buy this product

- Easy and safe: 100% electrically tested plug-in components
- Corrosion protection for all exposed metal parts, thanks to the use of stainless steel type 1.4404
- Robust throughout: resistant to oil, UV, and ozone, withstands temperatures from -40°C to +105°C

### Key Commercial Data

|                                      |                                                                                                         |
|--------------------------------------|---------------------------------------------------------------------------------------------------------|
| Packing unit                         | 1 STK                                                                                                   |
| GTIN                                 | <br>4 046356 773959 |
| Weight per Piece (excluding packing) | 147.8 g                                                                                                 |
| Weight per piece (including packing) | 147.8 g                                                                                                 |
| Country of origin                    | Poland                                                                                                  |
| Note                                 | Made to Order (non-returnable)                                                                          |

### Technical data

#### Dimensions

|                 |     |
|-----------------|-----|
| Length of cable | 2 m |
|-----------------|-----|

#### Ambient conditions

|                                 |                                                                                   |
|---------------------------------|-----------------------------------------------------------------------------------|
| Ambient temperature (operation) | -40 °C ... 105 °C (Plug / socket)                                                 |
|                                 | -40 °C ... 85 °C (On sudden changes in temperature (according to IEC 60512-11-4)) |
| Degree of protection            | IP65                                                                              |
|                                 | IP67                                                                              |
|                                 | IP68                                                                              |
|                                 | IP69K                                                                             |

#### General

|                       |      |
|-----------------------|------|
| Rated current at 40°C | 2 A  |
| Rated voltage         | 30 V |
| Number of positions   | 8    |

# Sensor/Actuator cable - SAC-8P-M12MS/ 2,0-28X/M12FS OD - 1407277

## Technical data

### General

|                              |                               |
|------------------------------|-------------------------------|
| Insulation resistance        | $\geq 100 \text{ M}\Omega$    |
| Coding                       | A - standard                  |
| Standards/regulations        | M12 connector IEC 61076-2-101 |
| Status display               | No                            |
| Protective circuit/component | Unwired                       |
| Degree of pollution          | 3                             |
| Insertion/withdrawal cycles  | $\geq 100$                    |
| Torque                       | 0.4 Nm (M12 connector)        |

### Material

|                                        |                 |
|----------------------------------------|-----------------|
| Flammability rating according to UL 94 | V0              |
| Contact material                       | CuSn            |
| Contact surface material               | Ni/Au           |
| Contact carrier material               | PP              |
| Material of grip body                  | PP              |
| Material, knurls                       | Stainless steel |
| Sealing material                       | FPM             |

### Standards and Regulations

|                                        |                 |
|----------------------------------------|-----------------|
| Standard designation                   | M12 connector   |
| Standards/regulations                  | IEC 61076-2-101 |
| Flammability rating according to UL 94 | V0              |

### Cable

|                                                 |                                                    |
|-------------------------------------------------|----------------------------------------------------|
| Cable type                                      | PE-X black                                         |
| Cable type (abbreviation)                       | 28X                                                |
| Cable abbreviation                              | Li2X2X                                             |
| Conductor cross section                         | 8x 0.25 mm <sup>2</sup>                            |
| AWG signal line                                 | 24                                                 |
| Conductor structure signal line                 | 32x 0.10 mm                                        |
| Core diameter including insulation              | 1.17 mm $\pm$ 0.02 mm                              |
| Thickness, insulation                           | approx. 0.25 mm (Core insulation)                  |
| Wire colors                                     | white, brown, green, yellow, gray, pink, blue, red |
| Overall twist                                   | 8 wires around filler to the core                  |
| Length of twist, overall twist                  | 67 mm                                              |
| External sheath, color                          | black-gray RAL 7021                                |
| Outer sheath thickness                          | approx. 1.3 mm                                     |
| External cable diameter D                       | 6.8 mm $\pm$ 0.2 mm                                |
| Minimum bending radius, fixed installation      | 5 x D                                              |
| Minimum bending radius, flexible installation   | 10 x D                                             |
| Number of bending cycles                        | 2000000                                            |
| Minimum bending radius, drag chain applications | 10 x D                                             |

# Sensor/Actuator cable - SAC-8P-M12MS/ 2,0-28X/M12FS OD - 1407277

## Technical data

### Cable

|                                 |                                                           |
|---------------------------------|-----------------------------------------------------------|
| Traversing path                 | 10 m                                                      |
| Traversing rate                 | 3 m/s                                                     |
| Acceleration                    | 10 m/s <sup>2</sup>                                       |
| Cable weight                    | 65 kg/km                                                  |
| Outer sheath, material          | PE-X                                                      |
| Material, filler                | PP yarn                                                   |
| Material conductor insulation   | PE-X                                                      |
| Conductor material              | Bare Cu litz wires                                        |
| Insulation resistance           | ≥ 100 MΩ*km (at 20 °C)                                    |
| Conductor resistance            | ≤ 78 Ω/km (at 20 °C)                                      |
| Nominal voltage, cable          | ≤ 300 V AC                                                |
| Test voltage, cable             | ≥ 3000 V AC (Spark test)                                  |
| Flame resistance                | According to DIN EN 60332-1-2                             |
|                                 | According to DIN EN 50266-2-5                             |
| Halogen-free                    | in accordance with DIN VDE 0472 part 815                  |
|                                 | in accordance with DIN EN 50267-2-1                       |
| Resistance to oil               | According to DIN EN 60811-2-1, 168 h at 100°C             |
|                                 | According to DIN EN 50306                                 |
| Other resistance                | Resistance to fuels according to IEC 60811, 168 h at 70°C |
|                                 | UV resistant According to DIN VDE 0276-605                |
| Ambient temperature (operation) | -40 °C ... 105 °C (cable, fixed installation)             |
|                                 | -15 °C ... 105 °C (cable, flexible installation)          |
|                                 | 20 °C ±5°C (cable, drag chain applications)               |

## Classifications

### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27060306 |
| eCl@ss 4.1 | 27060306 |
| eCl@ss 5.0 | 27061801 |
| eCl@ss 5.1 | 27061801 |
| eCl@ss 6.0 | 27061801 |
| eCl@ss 7.0 | 27061801 |
| eCl@ss 8.0 | 27279218 |
| eCl@ss 9.0 | 27060311 |

### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC001855 |
| ETIM 4.0 | EC001855 |
| ETIM 5.0 | EC001855 |

# Sensor/Actuator cable - SAC-8P-M12MS/ 2,0-28X/M12FS OD - 1407277

## Classifications

### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 31251501 |
| UNSPSC 7.0901 | 31251501 |
| UNSPSC 11     | 31251501 |
| UNSPSC 12.01  | 31251501 |
| UNSPSC 13.2   | 31251501 |

## Approvals

### Approvals

Approvals

GL

Ex Approvals


Approvals submitted

### Approval details

|    |
|----|
| GL |
|----|


## Drawings

Schematic diagram



Pin assignment M12 plug, 8-pos., A-coded, view plug side


Schematic diagram




Pin assignment M12 socket, 8-pos., A-coded, view female side

## Sensor/Actuator cable - SAC-8P-M12MS/ 2,0-28X/M12FS OD - 1407277

Cable cross section




Dimensional drawing



PE-X black [28X]


M12 x 1 plug, straight

Dimensional drawing



M12 x 1 socket, straight

Circuit diagram

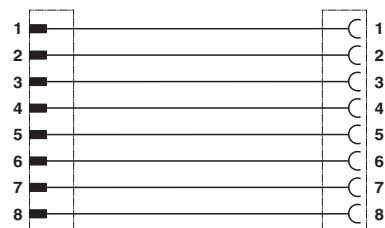

Contact assignment of the M12 connector and the M12 socket

Phoenix Contact 2016 © - all rights reserved  
<http://www.phoenixcontact.com>

**PHOENIX CONTACT GmbH & Co. KG**  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.