


**1500 WATT UNIDIRECTIONAL  
TRANSIENT VOLTAGE SUPPRESSOR**
**DESCRIPTION**

This Transient Voltage Suppressor (TVS) series for 1N5555 thru 1N5558 are JEDEC registered selections for unidirectional devices. All have the same high Peak Pulse Power rating of 1500 W with extremely fast response times. They are also available in military qualified selections as described in the Features section herein. They are most often used for protecting against transients from inductive switching environments, induced RF effects, or induced secondary lightning effects as found in lower surge levels of IEC61000-4-5. They are also very successful in protecting airborne avionics and electrical systems. Since their response time is virtually instantaneous, they can also protect from ESD and EFT per IEC61000-4-2 and IEC61000-4-4.

**IMPORTANT:** For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

**APPEARANCE**


**DO-13  
(DO-202AA)**

**FEATURES**

- Unidirectional TVS series for thru-hole mounting
- Working voltage ( $V_{WM}$ ) range 30.5 V to 175 V
- Hermetic sealed DO-13 metal package
- JAN/TX/TXV military qualifications also available per MIL-PRF-19500/500 by adding the JAN, JANTX, or JANTXV prefix, e.g. JANTXV1N5555, etc.
- For bidirectional TVS in the same DO-13 package, see separate data sheet for the 1N6036 – 1N6072A series (also military qualified)
- Surface mount equivalent packages also available from the SMCJ5.0 - SMCJ170CA or SMCG5.0 – SMCG170C series in separate data sheet (consult factory for other surface mount options)
- Plastic axial-leaded equivalents available from the 1N6267 – 1N6303A series in separate data sheet

**MAXIMUM RATINGS**

- 1500 Watts for 10/1000  $\mu$ s with repetition rate of 0.01% or less\* at lead temperature ( $T_L$ ) 25°C (see Figs 1, 2, & 4)
- Operating & Storage Temperatures: -65° to +175°C
- THERMAL RESISTANCE: 50°C/W junction to lead at 0.375 inches (10 mm) from body or 110°C/W junction to ambient when mounted on FR4 PC board with 4 mm<sup>2</sup> copper pads (1oz) and track width 1 mm, length 25 mm
- DC Power Dissipation\*: 1 Watt at  $T_L = +25^\circ\text{C}$  3/8" (10 mm) from body (see derating in Fig 3)
- Forward surge current: 200 Amps for 8.3ms half-sine wave at  $T_A = +25^\circ\text{C}$
- Solder Temperatures: 260 °C for 10 s (maximum)

**APPLICATIONS / BENEFITS**

- Suppresses transients up to 1500 watts @ 10/1000  $\mu$ s (see Figure 1)
- Clamps transient in less than 100 pico seconds
- Protection from switching transients and induced RF
- Protection from ESD and EFT per IEC 61000-4-2 and IEC 61000-4-4
- Secondary lightning protection per IEC61000-4-5 with 42 Ohms source impedance:
  - Class 1: 1N5555 to 1N5558
  - Class 2 & 3: 1N5555 to 1N5557
  - Class 4: 1N5555 to 1N5556
- Secondary lightning protection per IEC61000-4-5 with 12 Ohms source impedance:
  - Class 1: 1N5555 to 1N5557
  - Class 2: 1N5555 to 1N5557
- Inherently radiation hard as described in Microsemi MicroNote 050

**MECHANICAL AND PACKAGING**

- CASE: DO-13 (DO-202AA), welded, hermetically sealed metal and glass
- FINISH: All external metal surfaces are Tin-Lead plated and solderable per MIL-STD-750 method 2026
- POLARITY: Cathode connected to case and polarity indicated by diode symbol
- MARKING: Part number and polarity diode symbol
- WEIGHT: 1.4 grams. (Approx)
- TAPE & REEL option: Standard per EIA-296 (add "TR" suffix to part number)
- See package dimension on last page

\* TVS devices are not typically used for dc power dissipation and are instead operated at or less than their rated standoff voltage ( $V_{WM}$ ) except for transients that briefly drive the device into avalanche breakdown ( $V_{BR}$  to  $V_C$  region).

## ELECTRICAL CHARACTERISTICS

| JEDEC<br>Type<br>Number<br>(Notes<br>1&2) | Minimum<br>Breakdown<br>Voltage<br>$V_{(BR)} @ I_{(BR)}$ | Test<br>Current<br>$I_{(BR)}$ | Rated<br>Standoff<br>Voltage<br>$V_{WM}$ | Maximum<br>(RMS)<br>Reverse<br>Voltage<br>$V_{WM(RMS)}$ | Maximum<br>Standby<br>Current<br>$I_D @ V_{WM}$ | Maximum<br>Peak<br>Reverse<br>Voltage<br>$V_C @ I_{PP}$ | Maximum<br>Peak Pulse<br>Current<br>$I_{PP}$ | Maximum<br>Temperature<br>Coefficient of $V_{(BR)}$<br>$\alpha V_{(BR)}$<br>@ 1.0 mA |
|-------------------------------------------|----------------------------------------------------------|-------------------------------|------------------------------------------|---------------------------------------------------------|-------------------------------------------------|---------------------------------------------------------|----------------------------------------------|--------------------------------------------------------------------------------------|
|                                           | V                                                        | mA                            | V                                        | V                                                       | $\mu A$                                         | V                                                       | A                                            | %/°C                                                                                 |
| 1N5555                                    | 33.0                                                     | 1.0                           | 30.5                                     | 21.5                                                    | 5                                               | 47.5                                                    | 32                                           | +0.093                                                                               |
| 1N5556                                    | 43.7                                                     | 1.0                           | 40.3                                     | 28.5                                                    | 5                                               | 63.5                                                    | 24                                           | +0.094                                                                               |
| 1N5557                                    | 54.0                                                     | 1.0                           | 49.3                                     | 34.5                                                    | 5                                               | 78.5                                                    | 19                                           | +0.096                                                                               |
| 1N5558                                    | 191.0                                                    | 1.0                           | 175.0                                    | 124.0                                                   | 5                                               | 265.0                                                   | 5.7                                          | +0.100                                                                               |


NOTE 1: A TVS is normally selected according to the rated "Standoff Voltage"  $V_{WM}$  that should be equal to or greater than the dc or continuous peak operating voltage level.

NOTE 2: Also available in military qualified types with a JAN, JANTX, or JANTXV prefix.


## SYMBOLS & DEFINITIONS

| Symbol     | Definition                                                                                                                                                                                                                                                                                                                       |
|------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| $V_{WM}$   | Standoff Voltage: Applied Reverse Voltage to assure a nonconductive condition. (See Note 1 above.)                                                                                                                                                                                                                               |
| $V_{(BR)}$ | Breakdown Voltage: This is the Breakdown Voltage the device will exhibit at 25°C                                                                                                                                                                                                                                                 |
| $V_C$      | Maximum Clamping Voltage: The maximum peak voltage appearing across the TVS when subjected to the peak pulse current in a one millisecond time interval. The peak pulse voltage is the combination of voltage rise due to both the series resistance and thermal rise and positive temperature coefficient ( $\alpha V_{(BR)}$ ) |
| $I_{PP}$   | Peak Pulse Current: The peak current during the impulse (See Figure 2)                                                                                                                                                                                                                                                           |
| $P_{PP}$   | Peak Pulse Power: The pulse power as determined by the product of $V_C$ and $I_{PP}$                                                                                                                                                                                                                                             |
| $I_D$      | Standby Current: The current at the standoff voltage ( $V_{WM}$ )                                                                                                                                                                                                                                                                |
| $I_{(BR)}$ | Breakdown Current: The current used for measuring Breakdown Voltage ( $V_{(BR)}$ )                                                                                                                                                                                                                                               |

## GRAPHS

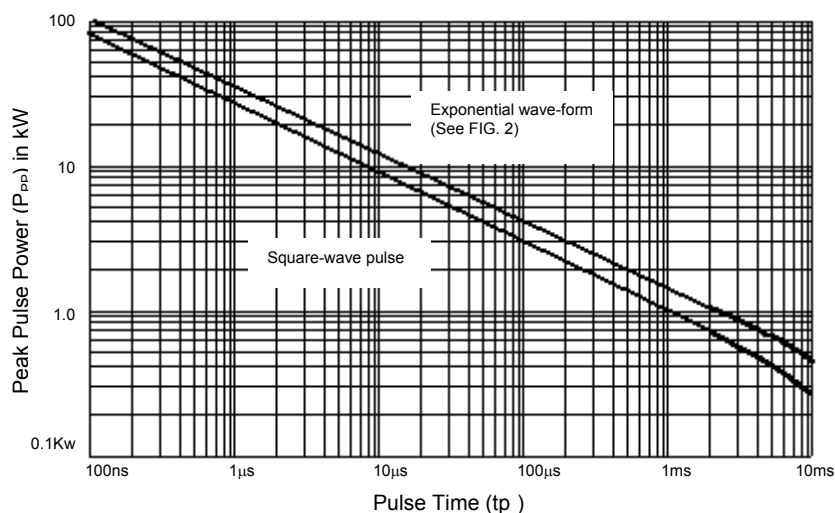


**FIG. 1 – Non-repetitive peak pulse power rating curve**  
NOTE: Peak power defined as peak voltage times peak current

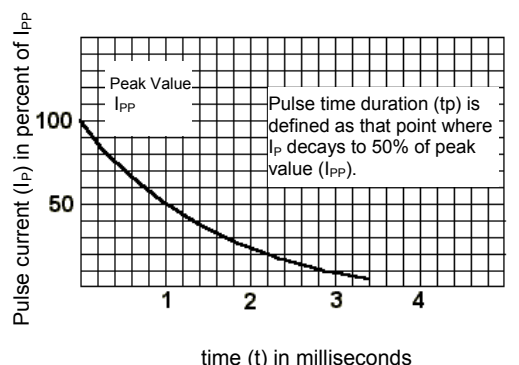


**FIG. 2 Pulse wave form for exponential surge**

**1500 WATT UNIDIRECTIONAL  
TRANSIENT VOLTAGE SUPPRESSOR**

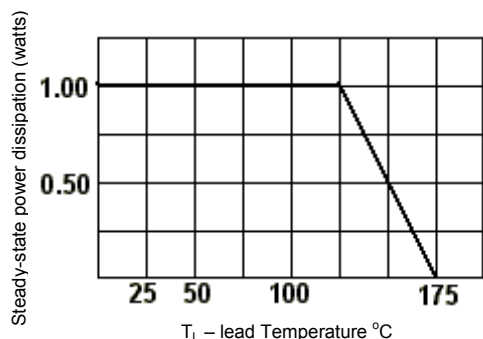


**FIG. 3** Steady-state power derating curve

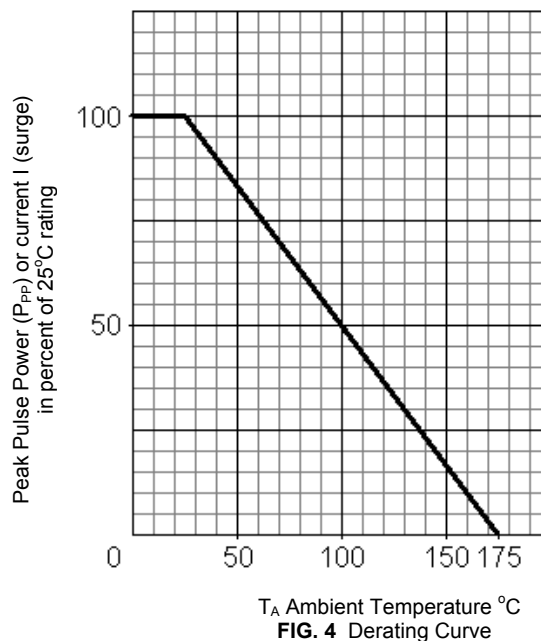

**FIG. 4** Derating Curve

**PACKAGE DIMENSIONS**

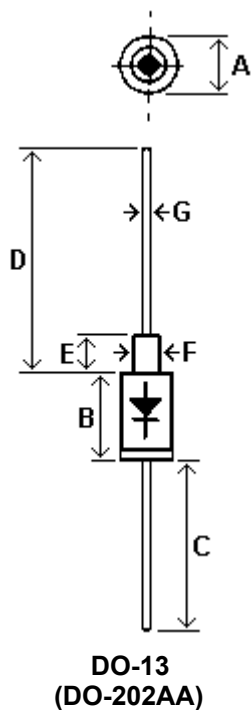

| DIM      | INCHES |      | MILLIMETERS |       |
|----------|--------|------|-------------|-------|
|          | MIN    | MAX  | MIN         | MAX   |
| <b>A</b> | --     | .235 | --          | 5.97  |
| <b>B</b> | .315   | .350 | 8.001       | 8.890 |
| <b>C</b> | 1.250  | --   | 31.750      | --    |
| <b>D</b> | 1.250  | --   | 31.750      | --    |
| <b>E</b> | --     | .210 | --          | 5.334 |
| <b>F</b> | --     | .090 | --          | 2.286 |
| <b>G</b> | .026   | .035 | .660        | .889  |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[1N5557/TR](#) [1N5555/TR](#) [1N5556/TR](#) [1N5558/TR](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.