

FEATURES

256 positions
AD5260: 1 channel
AD5262: 2 channels (independently programmable)
Potentiometer replacement
 20 k Ω , 50 k Ω , 200 k Ω
Low temperature coefficient: 35 ppm/ $^{\circ}$ C
4-wire, SPI-compatible serial data input
5 V to 15 V single-supply; \pm 5.5 V dual-supply operation
Power on midscale preset

APPLICATIONS

Mechanical potentiometer replacement
Instrumentation: gain, offset adjustment
Stereo channel audio level control
Programmable voltage-to-current conversion
Programmable filters, delays, time constants
Line impedance matching
Low resolution DAC replacement

GENERAL DESCRIPTION

The AD5260/AD5262 provide a single- or dual-channel, 256-position, digitally controlled variable resistor (VR) device.¹ These devices perform the same electronic adjustment function as a potentiometer or variable resistor. Each channel of the AD5260/AD5262 contains a fixed resistor with a wiper contact that taps the fixed resistor value at a point determined by a digital code loaded into the SPI-compatible serial-input register. The resistance between the wiper and either end point of the fixed resistor varies linearly with respect to the digital code transferred into the VR latch. The variable resistor offers a completely programmable value of resistance, between the A terminal and the wiper or the B terminal and the wiper. The fixed A-to-B terminal resistance of 20 Ω , 50 Ω , or 200 Ω has a nominal temperature coefficient of 35 ppm/ $^{\circ}$ C. Unlike the majority of the digital potentiometers in the market, these devices can operate up to 15 V or \pm 5.5 V provided proper supply voltages are furnished.

Each VR has its own VR latch that holds its programmed resistance value. These VR latches are updated from an internal serial-to-parallel shift register, which is loaded from a standard 3-wire serial-input digital interface. The AD5260 contains an 8-bit serial register whereas the AD5262 contains a 9-bit serial register. Each bit is clocked into the register on the positive

FUNCTIONAL BLOCK DIAGRAMS

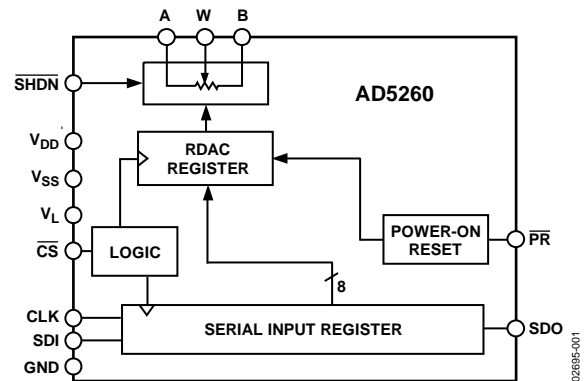


Figure 1. AD5260

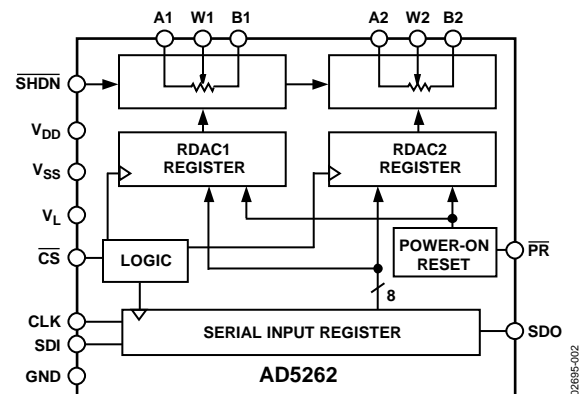


Figure 2. AD5262

edge of the CLK pin. The AD5262 address bit determines the corresponding VR latch to be loaded with the last eight bits of the data word during the positive edging of $\overline{\text{CS}}$ strobe. A serial data output pin at the opposite end of the serial register enables simple daisy-chaining in multiple VR applications without additional external decoding logic. An optional reset pin ($\overline{\text{PR}}$) forces the wiper to the midscale position by loading 0x80 into the VR latch.

The AD5260/AD5262 are available in thin surface-mount 14-lead TSSOP and 16-lead TSSOP packages. All parts are guaranteed to operate over the extended industrial temperature range of -40°C to $+85^{\circ}\text{C}$.

¹ The terms digital potentiometers, VR, and RDAC are used interchangeably.

Rev. A

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

| | | | |
|---------------------------------------------------------------------------------------|----|-------------------------------------------------------|----|
| Features | 1 | Layout and Power Supply Bypassing | 18 |
| Applications | 1 | Terminal Voltage Operating Range | 18 |
| General Description | 1 | Power-Up Sequence | 18 |
| Functional Block Diagrams | 1 | RDAC Circuit Simulation Model | 18 |
| Revision History | 2 | Macro Model Net List for RDAC | 18 |
| Specifications | 3 | Applications Information | 19 |
| Electrical Characteristics—20 k Ω , 50 k Ω , 200 k Ω Versions .. | 3 | Bipolar DC or AC Operation from Dual Supplies | 19 |
| Timing Diagrams | 5 | Gain Control Compensation | 19 |
| Absolute Maximum Ratings | 6 | Programmable Voltage Reference | 19 |
| ESD Caution | 6 | 8-Bit Bipolar DAC | 19 |
| Pin Configurations and Function Descriptions | 7 | Bipolar Programmable Gain Amplifier | 20 |
| Typical Performance Characteristics | 9 | Programmable Voltage Source with Boosted Output | 20 |
| Test Circuits | 14 | Programmable 4 mA-to-20 mA Current Source | 20 |
| Theory of Operation | 15 | Programmable Bidirectional Current Source | 21 |
| Digital Interfacing | 15 | Programmable Low-Pass Filter | 21 |
| Daisy-Chain Operation | 16 | Programmable Oscillator | 21 |
| RDAC Structure | 16 | Resistance Scaling | 22 |
| Programming the Variable Resistor | 16 | Outline Dimensions | 23 |
| Programming the Potentiometer Divider | 17 | Ordering Guide | 24 |

REVISION HISTORY

8/10—Rev. 0 to Rev. A

| | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|
| Updated Format | Universal |
| Deleted Figure 1; Renumbered Sequentially | 1 |
| Changes to General Description Section | 1 |
| Changes to Conditions of Channel Resistance Matching (AD5262 only) Parameter, Voltage Divider Temperature Coefficient Parameter, Full-Scale Error Parameter, and Zero- Scale Error Parameter, Table 1 | 3 |
| Changes to Table 2 and Table 3 | 5 |
| Changes to Table 4 | 6 |
| Changes to Table 5 | 7 |
| Changes to Table 6 | 8 |

| | |
|----------------------------------------------------------------------------|----|
| Changes to Figure 11 Caption and Figure 12 | 9 |
| Changes to Figure 31 | 12 |
| Changes to Figure 35 Caption | 13 |
| Changes to Figure 43 and Figure 46 | 14 |
| Deleted Potentiometer Family Selection Guide | 18 |
| Change to Programmable Voltage Source with Boosted Output Section | 20 |
| Changes to Figure 64 | 21 |
| Updated Outline Dimensions | 23 |
| Changes to Ordering Guide | 24 |

3/02—Revision 0: Initial Version

SPECIFICATIONS

ELECTRICAL CHARACTERISTICS—20 k Ω , 50 k Ω , 200 k Ω VERSIONS

$V_{DD} = +15\text{ V}$, $V_{SS} = 0\text{ V}$, or $V_{DD} = +5\text{ V}$, $V_{SS} = -5\text{ V}$; $V_L = +5\text{ V}$; $V_A = +5\text{ V}$, $V_B = 0\text{ V}$, $-40^\circ\text{C} < T_A < +85^\circ\text{C}$, unless otherwise noted.

The AD5260/AD5262 contain 1968 transistors. Die size: 89 mil \times 105 mil (9345 sq mil).

Table 1.

| Parameter | Symbol | Conditions | Min | Typ ¹ | Max | Unit |
|-------------------------------------------------|--------------------------|-----------------------------------------------------------------------------------------------------|-----------|------------------|-----------|-----------------------|
| DC CHARACTERISTICS RHEOSTAT MODE | | | | | | |
| Resistor Differential Nonlinearity ² | R-DNL | R_{WB} , $V_A = \text{no connect}$ | -1 | $\pm 1/4$ | +1 | LSB |
| Resistor Nonlinearity ² | R-INL | R_{WB} , $V_A = \text{no connect}$ | -1 | $\pm 1/2$ | +1 | LSB |
| Nominal Resistor Tolerance ³ | ΔR_{AB} | $T_A = 25^\circ\text{C}$ | -30 | | 30 | % |
| Resistance Temperature Coefficient | $\Delta R_{AB}/\Delta T$ | Wiper = no connect | | 35 | | ppm/ $^\circ\text{C}$ |
| Wiper Resistance | R_W | $I_W = 1\text{ V}/R_{AB}$ | | 60 | 150 | Ω |
| Channel Resistance Matching (AD5262 only) | $\Delta R_{WB}/R_{WB}$ | Channel 1 and Channel 2 R_{WB} , $D_X = 0 \times 80$ | | 0.1 | | % |
| Resistance Drift | ΔR_{AB} | | | 0.05 | | % |
| DC CHARACTERISTICS POTENTIOMETER DIVIDER MODE | | | | | | |
| Resolution | N | Specifications apply to all VRs | 8 | | | Bits |
| Differential Nonlinearity ⁴ | DNL | | -1 | $\pm 1/4$ | +1 | LSB |
| Integral Nonlinearity ⁴ | INL | | -1 | $\pm 1/2$ | +1 | LSB |
| Voltage Divider Temperature Coefficient | $\Delta V_W/\Delta T$ | Code = half scale | | 5 | | ppm/ $^\circ\text{C}$ |
| Full-Scale Error | W_{FSE} | Code = full scale | -2 | -1 | +0 | LSB |
| Zero-Scale Error | V_{WZSE} | Code = zero scale | 0 | 1 | 2 | LSB |
| RESISTOR TERMINALS | | | | | | |
| Voltage Range ⁵ | $V_{A,B,W}$ | | V_{SS} | | V_{DD} | V |
| Ax and Bx Capacitance ⁶ | $C_{A,B}$ | $f = 5\text{ MHz}$, measured to GND, code = half scale | | 25 | | pF |
| Wx Capacitance ⁶ | C_W | $f = 1\text{ MHz}$, measured to GND, code = half scale | | 55 | | pF |
| Common-Mode Leakage Current | I_{CM} | $V_A = V_B = V_{DD}/2$ | | 1 | | nA |
| Shutdown Current ⁷ | I_{SHDN} | | | | 5 | μA |
| DIGITAL INPUTS and OUTPUTS | | | | | | |
| Input Logic High | V_{IH} | | 2.4 | | | V |
| Input Logic Low | V_{IL} | | | | 0.8 | V |
| Input Logic High | V_{IH} | $V_L = 3\text{ V}$, $V_{SS} = 0\text{ V}$ | 2.1 | | | V |
| Input Logic Low | V_{IL} | $V_L = 3\text{ V}$, $V_{SS} = 0\text{ V}$ | | | 0.6 | V |
| Output Logic High (SDO) | V_{OH} | $R_{PULL-UP} = 2\text{ k}\Omega$ to 5 V | 4.9 | | | V |
| Output Logic Low (SDO) | V_{OL} | $I_{OL} = 1.6\text{ mA}$, $V_{LOGIC} = 5\text{ V}$ | | | 0.4 | V |
| Input Current ⁸ | I_{IL} | $V_{IN} = 0\text{ V}$ or 5 V | | | ± 1 | μA |
| Input Capacitance ⁶ | C_{IL} | | | 5 | | pF |
| POWER SUPPLIES | | | | | | |
| Logic Supply | V_L | | 2.7 | | 5.5 | V |
| Power Single-Supply Range | $V_{DD\text{ RANGE}}$ | $V_{SS} = 0\text{ V}$ | 4.5 | | 16.5 | V |
| Power Dual-Supply Range | $V_{DD/SS\text{ RANGE}}$ | | ± 4.5 | | ± 5.5 | V |
| Logic Supply Current | I_L | $V_L = 5\text{ V}$ | | | 60 | μA |
| Positive Supply Current | I_{DD} | $V_{IH} = 5\text{ V}$ or $V_{IL} = 0\text{ V}$ | | | 1 | μA |
| Negative Supply Current | I_{SS} | $V_{SS} = -5\text{ V}$ | | | 1 | μA |
| Power Dissipation ⁹ | P_{DISS} | $V_{IH} = 5\text{ V}$ or $V_{IL} = 0\text{ V}$, $V_{DD} = +5\text{ V}$, $V_{SS} = -5\text{ V}$ | | | 0.3 | mW |
| Power Supply Sensitivity | PSS | $\Delta V_{DD} = +5\text{ V}$, $\pm 10\%$ | | 0.003 | 0.01 | %/% |

AD5260/AD5262

| Parameter | Symbol | Conditions | Min | Typ ¹ | Max | Unit |
|---------------------------------------------------|-----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|------------------|-----|------------------------|
| DYNAMIC CHARACTERISTICS ^{6, 10} | | | | | | |
| Bandwidth –3 dB | BW | $R_{AB} = 20\text{ k}\Omega/50\text{ k}\Omega/200\text{ k}\Omega$ | | 310/130/30 | | kHz |
| Total Harmonic Distortion | THD _W | $V_A = 1\text{ V}_{RMS}$, $V_B = 0\text{ V}$, $f = 1\text{ kHz}$, $R_{AB} = 20\text{ k}\Omega$ | | 0.014 | | % |
| V _W Settling Time | t _S | $V_A = +5\text{ V}$, $V_B = -5\text{ V}$, $\pm 1\text{ LSB}$ error band, $R_{AB} = 20\text{ k}\Omega$ | | 5 | | μs |
| Crosstalk ¹¹ | C _T | $V_A = V_{DD}$, $V_B = 0\text{ V}$, measure V _W with adjacent RDAC making full-scale code change (AD5262 only) | | 1 | | nV-sec |
| Analog Crosstalk | C _{TA} | $V_{A1} = V_{DD}$, $V_{B1} = 0\text{ V}$, measure V _{W1} with V _{W2} = 5 V p-p at f = 10 kHz, $R_{AB} = 20\text{ k}\Omega/200\text{ k}\Omega$ (AD5262 only) | | –64 | | dB |
| Resistor Noise Voltage | e _{N_WB} | $R_{WB} = 20\text{ k}\Omega$, $f = 1\text{ kHz}$ | | 13 | | nV/ $\sqrt{\text{Hz}}$ |
| INTERFACE TIMING CHARACTERISTICS ^{6, 12} | | | | | | |
| Clock Frequency | f _{CLK} | Specifications apply to all parts | | | 25 | MHz |
| Input Clock Pulse Width | t _{CH} , t _{CL} | Clock level high or low | 20 | | | ns |
| Data Setup Time | t _{DS} | | 10 | | | ns |
| Data Hold Time | t _{DH} | | 10 | | | ns |
| CLK to SDO Propagation Delay ¹³ | t _{PD} | $R_L = 1\text{ k}\Omega$, $C_L < 20\text{ pF}$ | 1 | | 160 | ns |
| $\overline{\text{CS}}$ Setup Time | t _{CS_S} | | 5 | | | ns |
| $\overline{\text{CS}}$ High Pulse Width | t _{CSW} | | 20 | | | ns |
| Reset Pulse Width | t _{RS} | | 50 | | | ns |
| CLK Fall to $\overline{\text{CS}}$ Rise Hold Time | t _{CSH} | | 0 | | | ns |
| $\overline{\text{CS}}$ Rise to Clock Rise Setup | t _{CS1} | | 10 | | | ns |

¹ Typical values represent average readings at 25°C and V_{DD} = +5 V, V_{SS} = –5 V.

² Resistor position nonlinearity error (R-INL) is the deviation from an ideal value measured between the maximum resistance and the minimum resistance wiper positions. R-DNL measures the relative step change from ideal between successive tap positions. Parts are guaranteed monotonic. $I_W = V_{DD}/R$ for both V_{DD} = +5 V and V_{SS} = –5V.

³ V_{AB} = V_{DD}, wiper = no connect.

⁴ INL and DNL are measured at V_W with the RDAC configured as a potentiometer divider similar to a voltage output digital-to-analog converter. V_A = V_{DD} and V_B = 0 V. DNL specification limits of $\pm 1\text{ LSB}$ maximum are guaranteed monotonic operating conditions.

⁵ Resistor Terminal A, Terminal B, and Terminal W have no limitations on polarity with respect to each other.

⁶ Guaranteed by design and not subject to production test.

⁷ Measured at the Ax terminals. All Ax terminals are open-circuit in shutdown mode.

⁸ Worst-case supply current consumed when all logic-input levels set at 2.4 V, which is the standard characteristic of CMOS logic.

⁹ P_{DISS} is calculated from (I_{DD} × V_{DD}). CMOS logic level inputs result in minimum power dissipation.

¹⁰ All dynamic characteristics use V_{DD} = +5 V, V_{SS} = –5 V, V_L = +5 V.

¹¹ Measured at V_W where an adjacent V_W is making a full-scale voltage change.

¹² See Figure 5 for location of measured values. All input control voltages are specified with t_R = t_F = 2 ns (10% to 90% of 3 V) and timed from a voltage level of 1.5 V. Switching characteristics are measured using V_L = 5 V.

¹³ Propagation delay depends on value of V_{DD}, R_L, and C_L.

TIMING DIAGRAMS

Table 2. AD5260 8-Bit Serial Data Word Format

| Data | | | | | | | |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| B7 (MSB) | B6 | B5 | B4 | B3 | B2 | B1 | B0 (LSB) |
| D7 2^7 | D6 2^6 | D5 2^5 | D4 2^4 | D3 2^3 | D2 2^2 | D1 2^1 | D0 2^0 |

Table 3. AD5262 9-Bit Serial Data Word Format

| ADDR | Data | | | | | | | |
|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
| B8 | B7 (MSB) | B6 | B5 | B4 | B3 | B2 | B1 | B0 (LSB) |
| A0 2^8 | D7 2^7 | D6 2^6 | D5 2^5 | D4 2^4 | D3 2^3 | D2 2^2 | D1 2^1 | D0 2^0 |

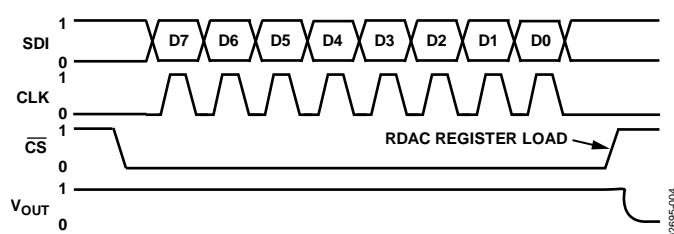


Figure 3. AD5260 Timing Diagram

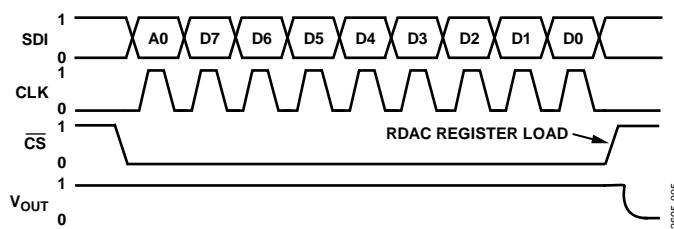


Figure 4. AD5262 Timing Diagram

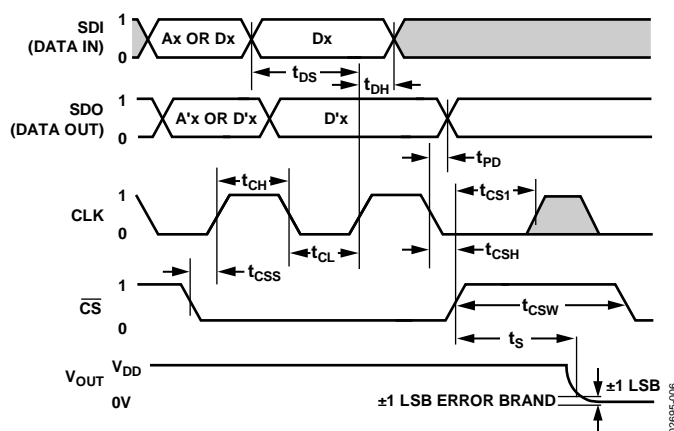


Figure 5. Detailed Timing Diagram

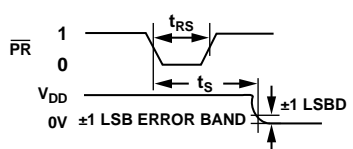


Figure 6. Preset Timing Diagram

ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ\text{C}$, unless otherwise noted.

Table 4.

| Parameter | Rating |
|-----------------------------------------------|------------------------------------------------------|
| V_{DD} to GND | −0.3 V to +17 V |
| V_{SS} to GND | 0 V to −7 V |
| V_{DD} to V_{SS} | 17 V |
| V_L to GND | 0 V to +7 V |
| V_A, V_B, V_W to GND | V_{SS}, V_{DD} |
| A_X to B_X, A_X to W_X, B_X to W_X | |
| Intermittent ¹ | ±20 mA |
| Continuous | ±5 mA |
| Digital Inputs and Output Voltage to GND | −0.3 V to $V_L + 0.3$ V, or +7 V (whichever is less) |
| Operating Temperature Range | −40°C to +85°C |
| Maximum Junction Temperature (T_{JMAX}) | 150°C |
| Storage Temperature Range | −65°C to +150°C |
| Lead Temperature (Soldering, 10 sec) | 300°C |
| Vapor Phase (60 sec) | 215°C |
| Infrared (15 sec) | 220°C |
| Thermal Resistance ² θ_{JA} | |
| 14-Lead TSSOP | 206°C/W |
| 16-Lead TSSOP | 150°C/W |

¹ Maximum terminal current is bounded by the maximum current handling of the switches, maximum power dissipation of the package, and maximum applied voltage across any two of the A, B, and W terminals at a given resistance setting.

² Package power dissipation = $(T_{JMAX} - T_A)/\theta_{JA}$.

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ESD CAUTION



ESD (electrostatic discharge) sensitive device. Charged devices and circuit boards can discharge without detection. Although this product features patented or proprietary protection circuitry, damage may occur on devices subjected to high energy ESD. Therefore, proper ESD precautions should be taken to avoid performance degradation or loss of functionality.

PIN CONFIGURATIONS AND FUNCTION DESCRIPTIONS




Figure 7. AD5260 Pin Configuration

Table 5. AD5260 Pin Function Descriptions

| Pin No. | Mnemonic | Description |
|---------|--------------------------|-----------------------------------------------------------------------------------------------------------------|
| 1 | A | A Terminal. |
| 2 | W | Wiper Terminal. |
| 3 | B | B Terminal. |
| 4 | V _{DD} | Positive Power Supply. Specified for operation at both 5 V or 15 V (sum of $ V_{DD} + V_{SS} \leq 15$ V). |
| 5 | $\overline{\text{SHDN}}$ | Active Low Input. Terminal A, open-circuit. Shutdown controls variable resistor. |
| 6 | CLK | Serial Clock Input, Positive Edge Triggered. |
| 7 | SDI | Serial Data Input. |
| 8 | $\overline{\text{CS}}$ | Chip Select Input, Active Low. When $\overline{\text{CS}}$ returns high, data is loaded into the RDAC register. |
| 9 | $\overline{\text{PR}}$ | Active Low Preset to Midscale. Sets RDAC registers to 0x80. |
| 10 | GND | Ground. |
| 11 | V _{SS} | Negative Power Supply. Specified for operation from 0 V to –5 V. |
| 12 | V _L | Logic Supply Voltage. Needs to be the same voltage as the digital logic controlling the AD5260. |
| 13 | NC | No Connect. Users should not connect anything other than a dummy pad on this pin. |
| 14 | SDO | Serial Data Output. Open-drain transistor requires a pull-up resistor. |

AD5260/AD5262




Figure 8. AD5262 Pin Configuration

Table 6. AD5262 Pin Function Descriptions

| Pin No. | Mnemonic | Description |
|---------|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1 | SDO | Serial Data Output. Open-drain transistor requires a pull-up resistor. |
| 2 | A1 | A Terminal RDAC 1. |
| 3 | W1 | Wiper RDAC 1, Address A0 = 0. |
| 4 | B1 | B Terminal RDAC 1. |
| 5 | V _{DD} | Positive Power Supply. Specified for operation at both 5 V or 15 V. (Sum of V _{DD} + V _{SS} ≤ 15 V) |
| 6 | SHDN | Active Low Input. Terminal A, open-circuit. Shutdown controls variable Resistor 1 through Resistor R2. |
| 7 | CLK | Serial Clock Input, Positive Edge Triggered. |
| 8 | SDI | Serial Data Input. |
| 9 | CS | Chip Select Input, Active Low. When CS returns high, data in the serial input register is decoded, based on the Address Bit A0, and loaded into the target RDAC register. |
| 10 | PR | Active Low Preset to Midscale. Sets RDAC registers to 0x80. |
| 11 | GND | Ground. |
| 12 | V _{SS} | Negative Power Supply. Specified for operation at either 0 V or –5 V (sum of V _{DD} + V _{SS} < 15 V). |
| 13 | V _L | Logic Supply Voltage. Needs to be same voltage as the digital logic controlling the AD5262. |
| 14 | B2 | B Terminal RDAC 2. |
| 15 | W2 | Wiper RDAC 2, Address A0 = 1. |
| 16 | A2 | A Terminal RDAC 2. |

TYPICAL PERFORMANCE CHARACTERISTICS

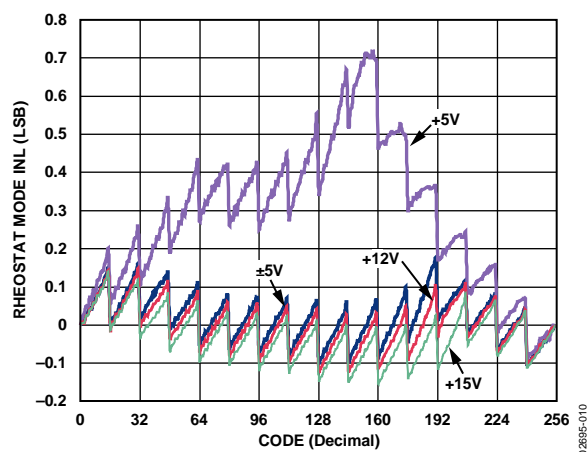


Figure 9. R-INL vs. Code vs. Supply Voltages

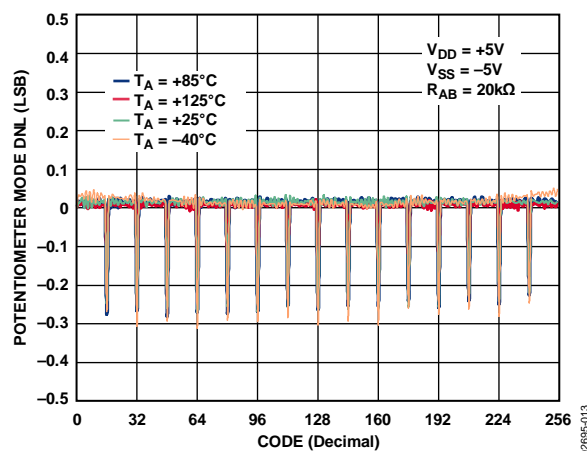


Figure 12. DNL vs. Code

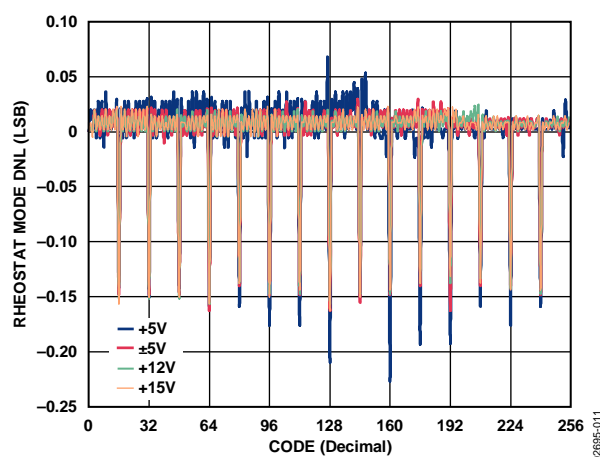


Figure 10. R-DNL vs. Code vs. Supply Voltages

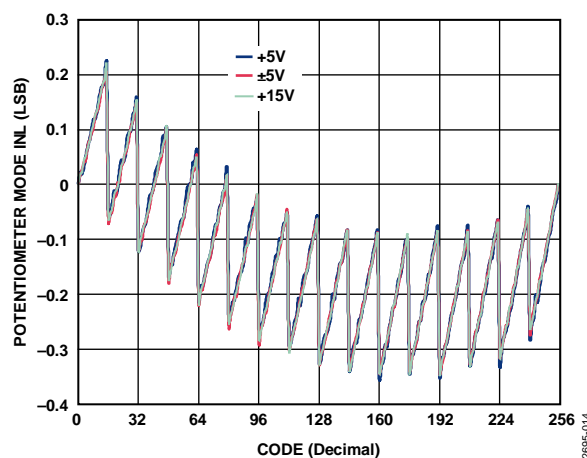


Figure 13. INL vs. Code vs. Supply Voltages

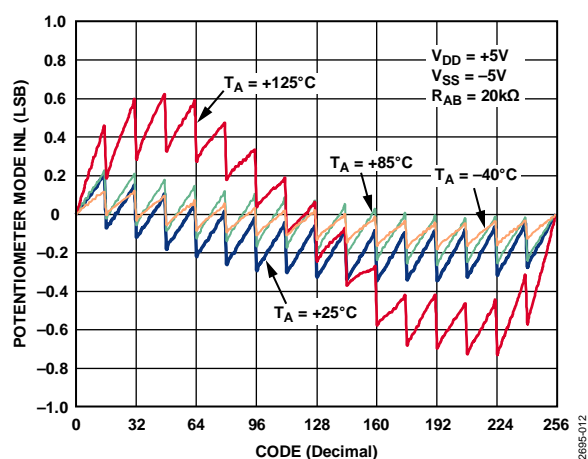


Figure 11. INL vs. Code

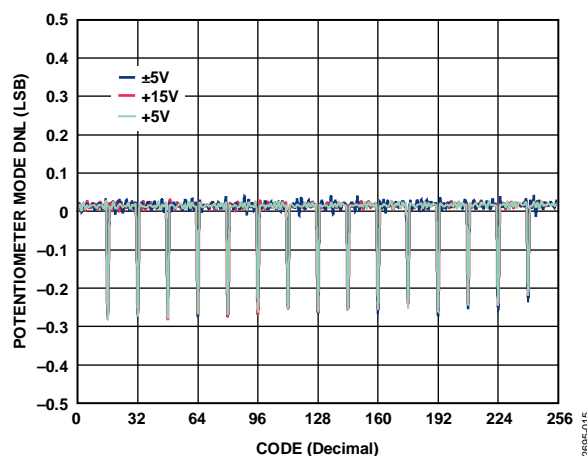


Figure 14. DNL vs. Code vs. Supply Voltages

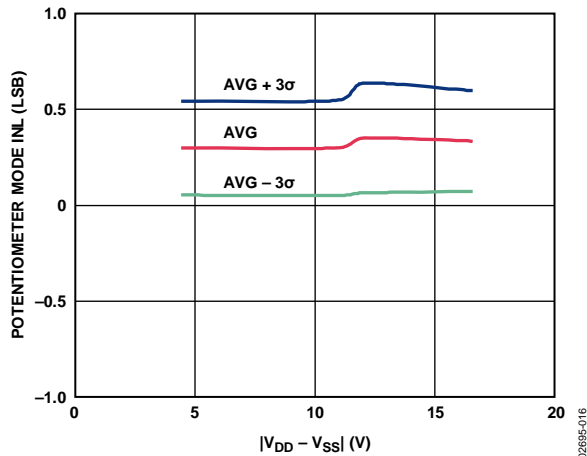


Figure 15. INL vs. Supply Voltages

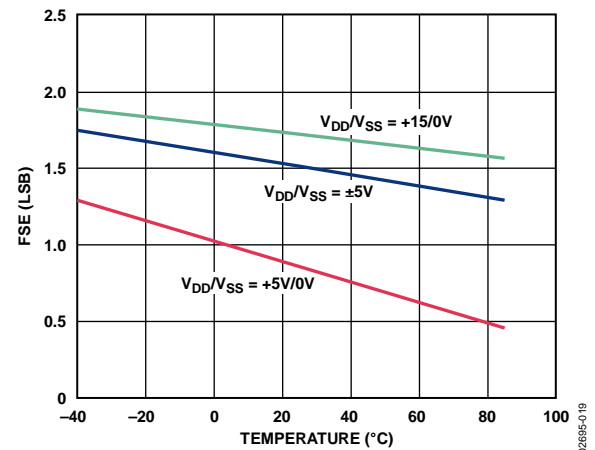


Figure 18. Full-Scale Error vs. Temperature

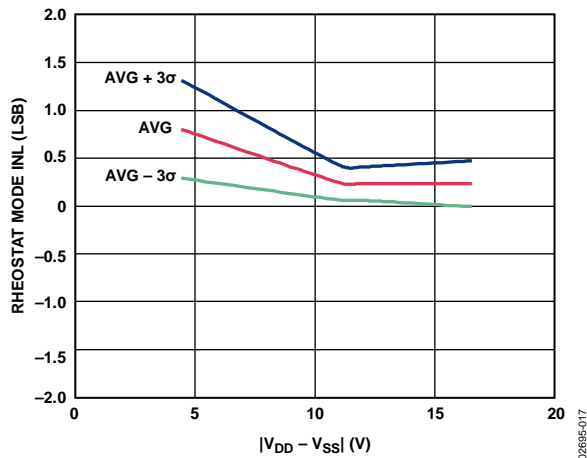


Figure 16. R-INL vs. Supply Voltages

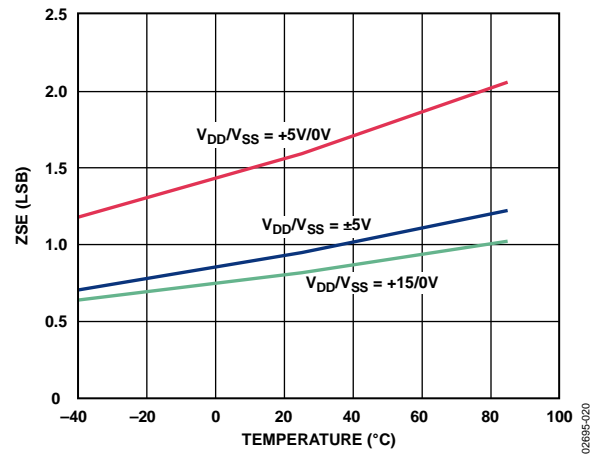


Figure 19. Zero-Scale Error vs. Temperature

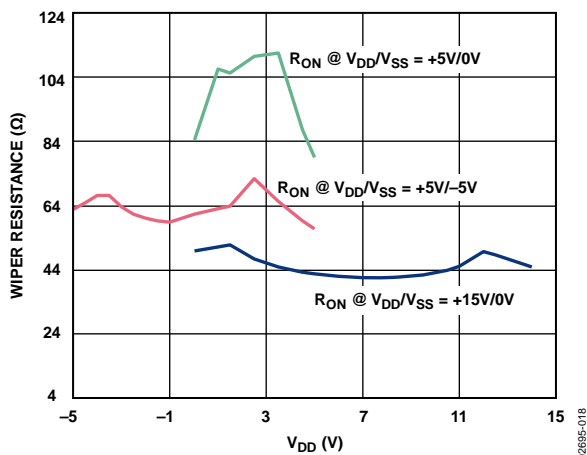


Figure 17. Wiper On Resistance vs. Bias Voltage

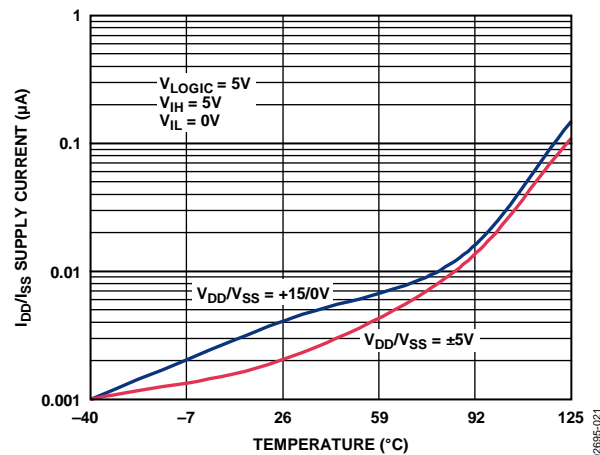


Figure 20. Supply Current vs. Temperature

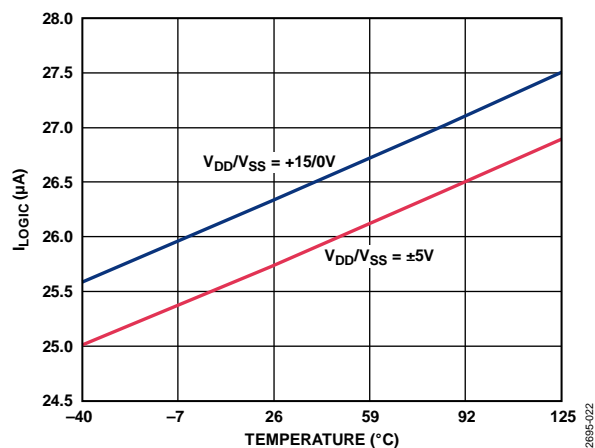


Figure 21. I_{LOGIC} vs. Temperature

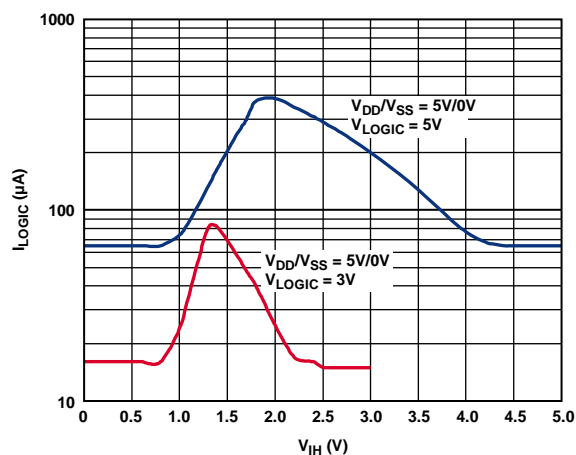


Figure 22. I_{LOGIC} vs. Digital Input Voltage

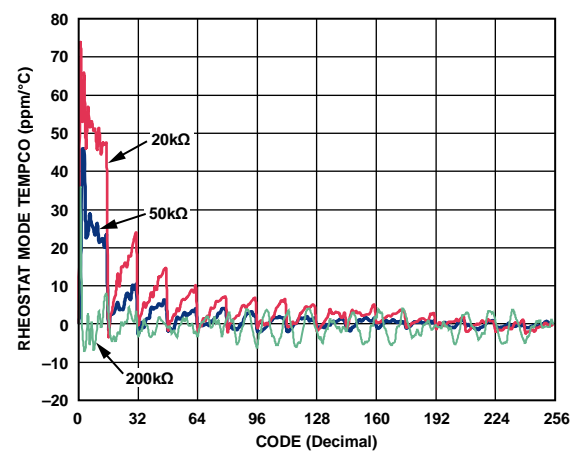


Figure 23. Rheostat Mode Tempco $\Delta R_{WB}/\Delta T$ vs. Code

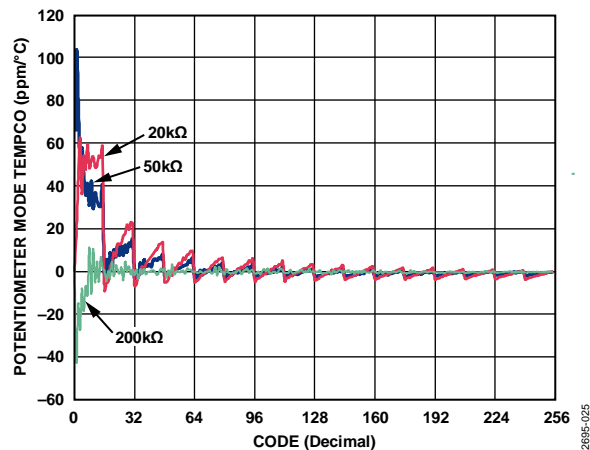


Figure 24. Potentiometer Mode Tempco $\Delta V_{WB}/\Delta T$ vs. Code

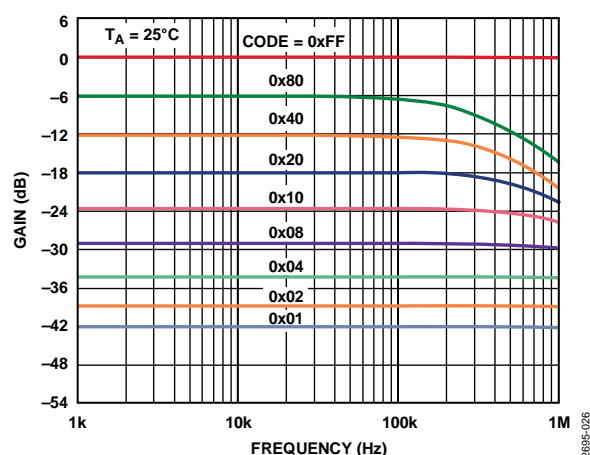


Figure 25. Gain vs. Frequency vs. Code, $R_{AB} = 20 \text{ k}\Omega$

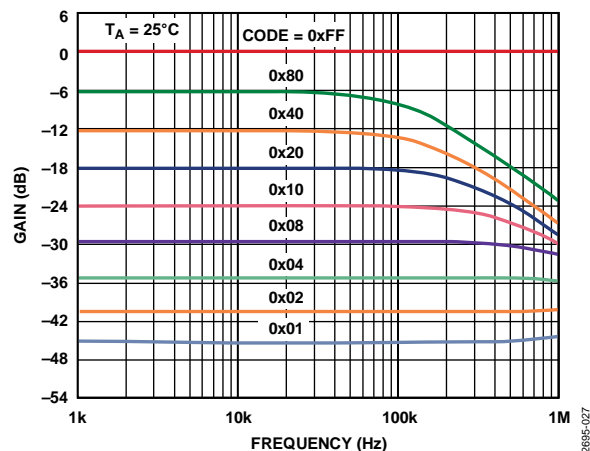


Figure 26. Gain vs. Frequency vs. Code, $R_{AB} = 50 \text{ k}\Omega$

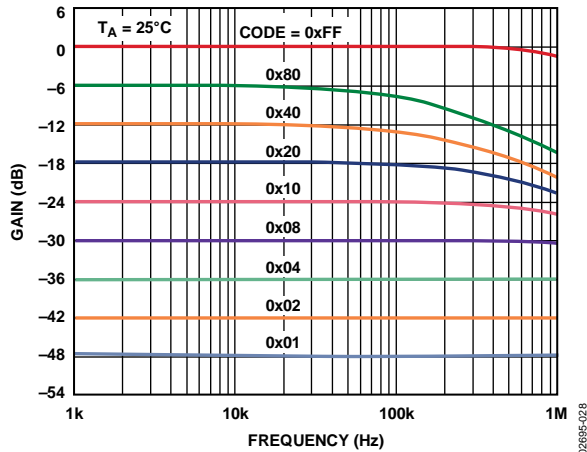


Figure 27. Gain vs. Frequency vs. Code, $R_{AB} = 200\text{ k}\Omega$

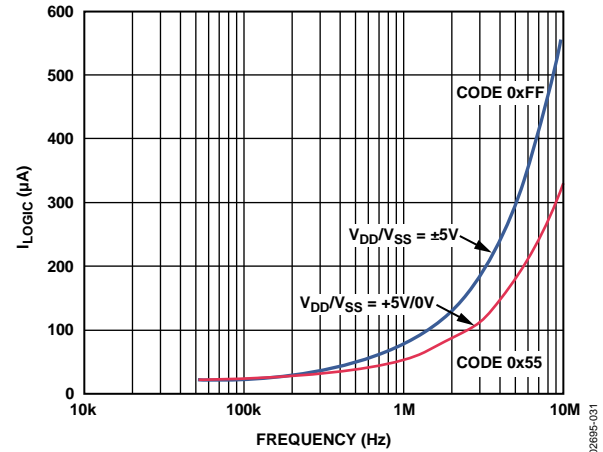


Figure 30. I_{LOGIC} vs. Frequency

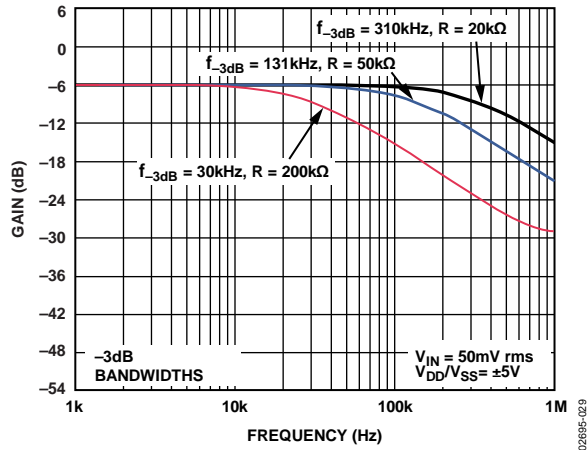


Figure 28. -3 dB Bandwidth

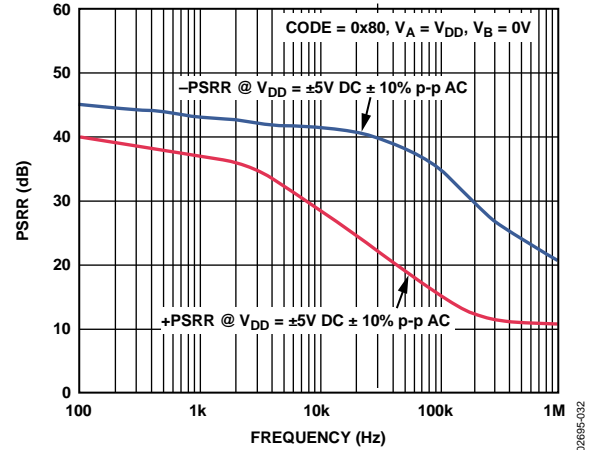


Figure 31. PSRR vs. Frequency

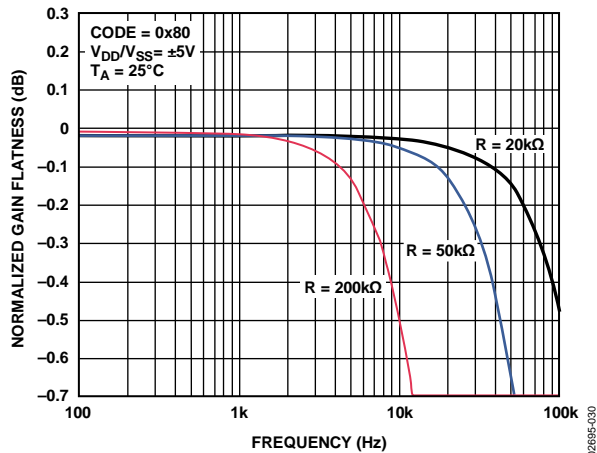


Figure 29. Normalized Gain Flatness vs. Frequency

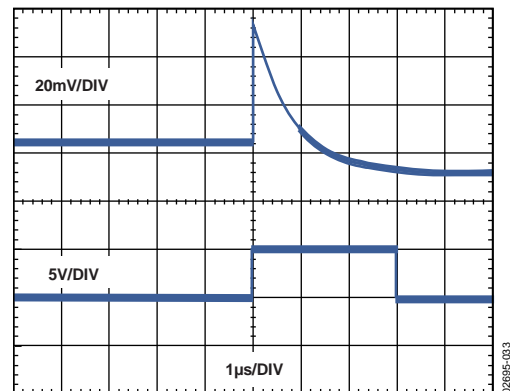


Figure 32. Midscale Glitch Energy, Code 0x80 to 0x7F

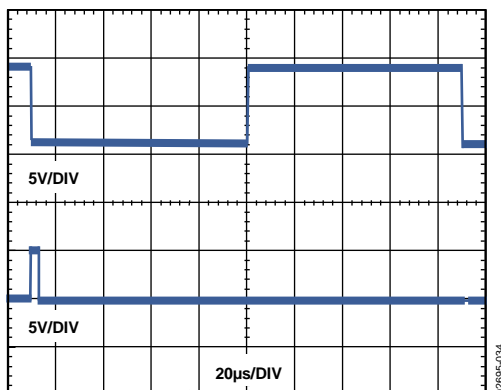


Figure 33. Large Signal Settling Time

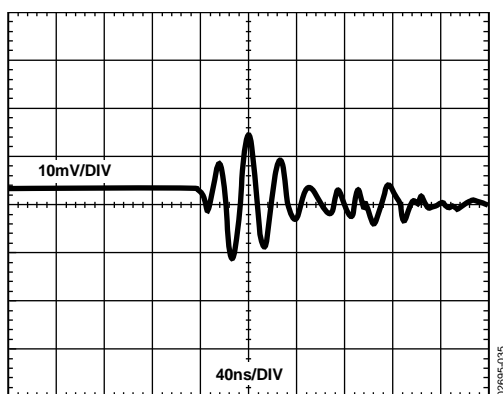


Figure 34. Digital Feedthrough vs. Time

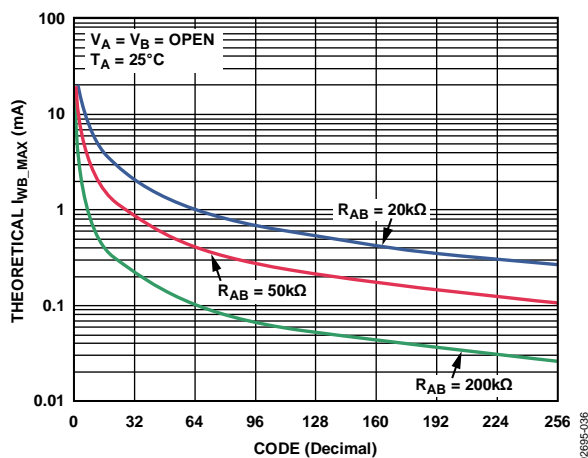


Figure 35. Theoretical Maximum Current vs. Code

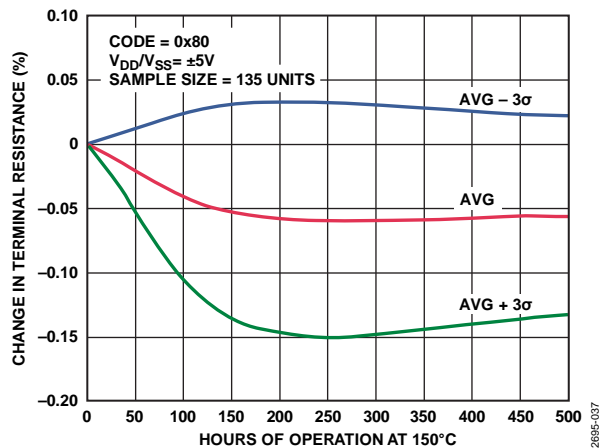


Figure 36. Long-Term Resistance Drift

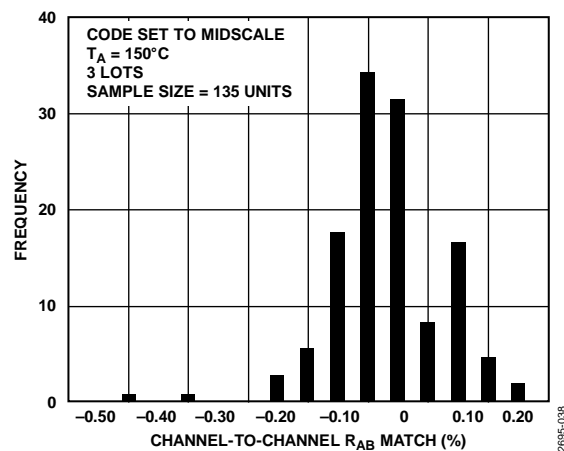


Figure 37. Channel-to-Channel Resistance Matching (AD5262)

TEST CIRCUITS

Figure 38 to Figure 46 define the test conditions used in Table 1.




Figure 38. Potentiometer Divider Nonlinearity Error (INL, DNL)




Figure 39. Resistor Position Nonlinearity Error (Rheostat Operation; R-INL, R-DNL)

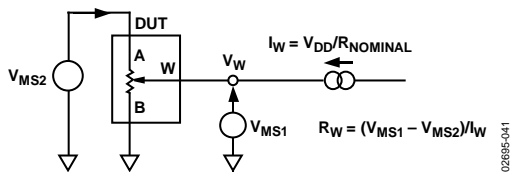


Figure 40. Wiper Resistance

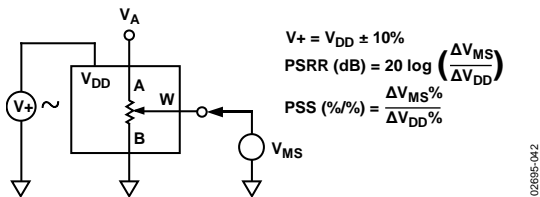


Figure 41. Power Supply Sensitivity (PSS, PSRR)

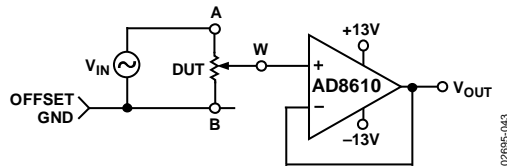


Figure 42. Gain vs. Frequency




Figure 43. Incremental On Resistance

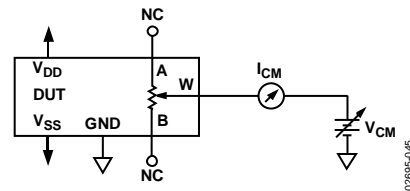


Figure 44. Common-Mode Leakage Current

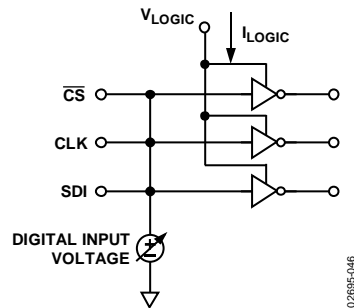


Figure 45. V_{LOGIC} Current vs. Digital Input Voltage

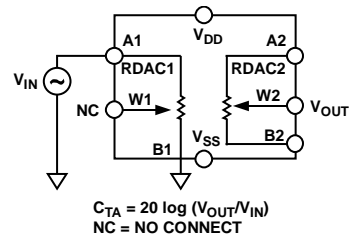


Figure 46. Analog Crosstalk

THEORY OF OPERATION

The AD5260/AD5262 provide a single- or dual-channel, 256-position, digitally controlled variable resistor (VR) device and operate up to 15 V maximum voltage. Changing the programmed VR settings is accomplished by clocking an 8-/9-bit serial data word into the SDI (serial data input) pin. For the AD5262, the format of this data word is one address bit. A0 represents the first bit, B8, followed by eight data bits, B7 to B0, with MSB first. Table 2 and Table 3 provide the serial register data word format. See Table 7 for the AD5262 address assignment to decode the location of the VR latch receiving the serial register data in Bit B7 through Bit B0. VR outputs can be changed one at a time in random sequence. The AD5260/AD5262 preset to a midscale, simplifying fault condition recovery at power-up. Midscale can also be achieved at any time by asserting the PR pin. Both parts have an internal power-on preset that places the wiper in a midscale preset condition at power-on. Operation of the power-on preset function depends only on the state of the V_L pin.

The AD5260/AD5262 contain a power shutdown $\overline{\text{SHDN}}$ pin that places the RDAC in an almost zero power consumption state where Terminals Ax are open circuited and the Wiper W is connected to B, resulting in only leakage currents being consumed in the VR structure. In the shutdown mode, the VR latch settings are maintained so that, when returning to operational mode from power shutdown, the VR settings return to their previous resistance values.

Table 7. AD5262 Address Decode Table

| A0 | Latch Loaded |
|----|--------------|
| 0 | RDAC1 |
| 1 | RDAC2 |

DIGITAL INTERFACING

The AD5260/AD5262 contain a 4-wire SPI-compatible digital interface (SDI, SDO, $\overline{\text{CS}}$, and CLK). For the AD5260, the 8-bit serial word must be loaded with the MSB first. The format of the word is shown in Table 2. For the AD5262, the 9-bit serial word must be loaded with Address Bit A0 first, then the MSB of the data. The format of the word is shown in Table 3.

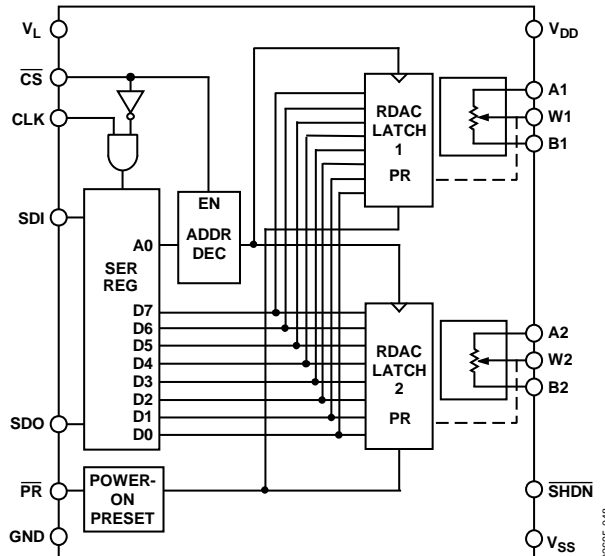


Figure 47. AD5262 Block Diagram

The positive-edge sensitive CLK input requires clean transitions to avoid clocking incorrect data into the serial input register. Standard logic families work well. If mechanical switches are used for product evaluation, they should be debounced by a flip-flop or other suitable means. Figure 47 shows more detail of the internal digital circuitry. When $\overline{\text{CS}}$ is low, the clock loads data into the serial input register on each positive clock edge (see Table 8).

Table 8. Truth Table¹

| CLK | $\overline{\text{CS}}$ | PR | $\overline{\text{SHDN}}$ | Register Activity |
|-----|------------------------|------|--------------------------|-----------------------------------------------------------------------------------------------------|
| Low | Low | High | High | No SR effect, enables SDO pin. |
| ↑ | Low | High | High | Shift one bit in from the SDI pin. The eighth previously entered bit is shifted out of the SDO pin. |
| X | ↑ | High | High | Load SR data into RDAC latch. |
| X | High | High | High | No operation. |
| X | X | Low | High | Sets all RDAC latches to half scale, wiper centered, and SDO latch cleared. |
| X | High | ↑ | High | Latches all RDAC latches to 0x80. |
| X | High | High | Low | Open circuits all Resistor A terminals, connects W to B, and turns off SDO output transistor. |

¹ ↑ = positive edge, X = don't care, SR = shift register.

The data setup and data hold times in Table 1 determine the data valid time requirements. The AD5260 uses an 8-bit serial input data register word that is transferred to the internal RDAC register when the $\overline{\text{CS}}$ line returns to logic high. For the AD5262, the last nine bits of the data word entered into the serial register are held when $\overline{\text{CS}}$ returns high. Any extra bits are ignored. At the same time $\overline{\text{CS}}$ goes high, it gates the address decoder, enabling one of two positive edge-triggered AD5262 RDAC latches (see Figure 48).

AD5260/AD5262

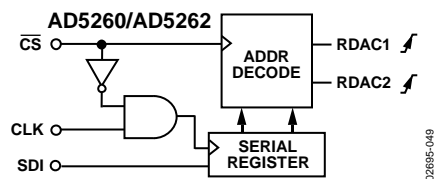


Figure 48. Equivalent Input Control Logic

The target RDAC latch is loaded with the last eight bits of the serial data word completing one RDAC update. For the AD5262, two separate 9-bit data words must be clocked in to change both VR settings.

During shutdown ($\overline{\text{SHDN}}$), the SDO output pin is forced to the off (logic high) state to disable power dissipation in the pull-up resistor. See Figure 49 for the equivalent SDO output circuit schematic.

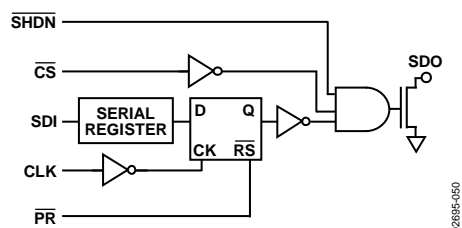


Figure 49. Detail SDO Output Schematic of the AD5260

All digital inputs are protected with a series input resistor and parallel Zener ESD structure as shown in Figure 50. This applies to the $\overline{\text{CS}}$, SDI, SDO, $\overline{\text{PR}}$, $\overline{\text{SHDN}}$, and CLK digital input pins.




Figure 50. ESD Protection of Digital Pins




Figure 51. ESD Protection of Resistor Terminals

DAISY-CHAIN OPERATION

The serial data output (SDO) pin contains an open-drain N-channel FET. This output requires a pull-up resistor to transfer data to the SDI pin of the next package. This allows for daisy-chaining several RDACs from a single processor serial data line. The pull-up resistor termination voltage can be larger than the V_{DD} supply voltage. It is recommended to increase the clock period when using a pull-up resistor to the SDI pin of the following device in series because capacitive loading at the daisy-chain node connecting SDO and SDI between devices may induce time delay to subsequent devices. Users should be aware of this potential problem to achieve data transfer successfully (see Figure 52). If two AD5260s are daisy-chained, this requires a total of 16 bits of data. The first eight bits, complying with the format shown in Table 2, go to U2, and the second eight bits with the same format go to U1. The $\overline{\text{CS}}$ pin should be kept low until all 16 bits are clocked into their respective serial

registers, and the $\overline{\text{CS}}$ pin is then pulled high to complete the operation.

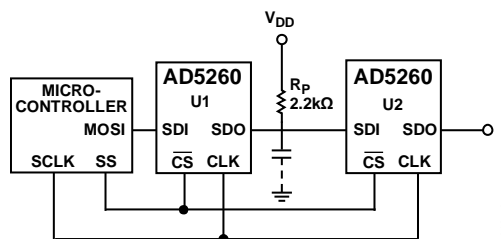


Figure 52. Daisy-Chain Configuration

RDAC STRUCTURE

The RDAC contains a string of equal resistor segments with an array of analog switches that act as the wiper connection. The number of positions is the resolution of the device. The AD5260/AD5262 have 256 connection points, allowing it to provide better than 0.4% settability resolution. Figure 53 shows an equivalent structure of the connections between the three terminals that make up one channel of the RDAC. SW_A and SW_B are always on, while one of the switches $\text{SW}(0)$ to $\text{SW}(2^N - 1)$ is on one at a time, depending on the resistance position decoded from the data bits. Because the switch is not ideal, there is a 60 Ω wiper resistance, R_W . Wiper resistance is a function of supply voltage and temperature. The lower the supply voltage is, the higher the wiper resistance becomes. Similarly, the higher the temperature is, the higher the wiper resistance becomes. Users should be aware of the contribution of the wiper resistance when accurate prediction of the output resistance is needed.

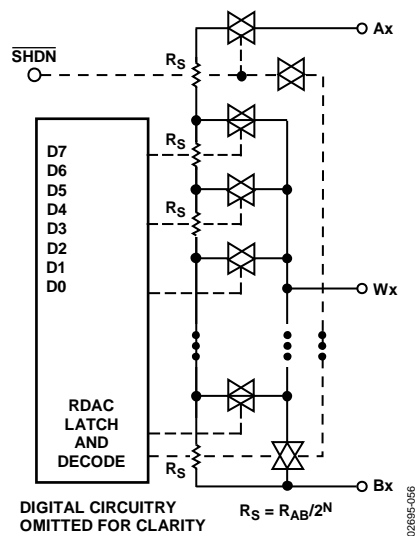


Figure 53. Simplified RDAC Architecture

PROGRAMMING THE VARIABLE RESISTOR

Rheostat Operation

The nominal resistances of the RDAC between Terminal A and Terminal B are available with values of 20 k Ω , 50 k Ω , and 200 k Ω . The final three digits of the part number determine the nominal resistance value, for example, 20 k Ω = 20, 50 k Ω = 50, 200 k Ω = 200. The nominal resistance (R_{AB}) of the VR has 256 contact points

accessed by the wiper terminal, plus the B terminal contact. The 8-bit data in the RDAC latch is decoded to select one of the 256 possible settings. Assuming a 20 kΩ part is used, the wiper's first connection starts at the B terminal for data 0x00. Because there is a 60 Ω wiper contact resistance, such a connection yields a minimum of 60 Ω resistance between Terminal W and Terminal B. The second connection is the first tap point corresponding to 138 Ω ($R_{WB} = R_{AB}/256 R_W = 78 \Omega + 60 \Omega$) for Data 0x01. The third connection is the next tap point representing 216 Ω ($78 \times 2 + 60$) for Data 0x02, and so on. Each LSB data value increase moves the wiper up the resistor ladder until the last tap point is reached at 19,982 Ω ($R_{AB} - 1 \text{ LSB} + R_W$). The wiper does not directly connect to the B terminal. See Figure 53 for a simplified diagram of the equivalent RDAC circuit.

The general equation determining the digitally programmed output resistance between W and B is

$$R_{WB}(D) = \frac{D}{256} \times R_{AB} + R_W \quad (1)$$

where D is the decimal equivalent of the binary code that is loaded in the 8-bit RDAC register and R_{AB} is the nominal end-to-end resistance.

For example, when $R_{AB} = 20 \text{ k}\Omega$, $V_B = 0 \text{ V}$, and the A terminal is open circuit, the following output resistance values of R_{WB} are set for the RDAC latch codes shown in Table 9. The result is the same if Terminal A is tied to W.

Table 9. R_{WB} vs. Code

| RDAC (Dec) | $R_{WB} (\Omega)$ | Output State |
|------------|-------------------|-----------------------------------------------|
| 256 | 19,982 | Full scale ($R_{AB} - 1 \text{ LSB} + R_W$) |
| 128 | 10,060 | Midscale |
| 1 | 138 | 1 LSB |
| 0 | 60 | Zero-scale (wiper contact resistance) |

Note that in the zero-scale condition, a finite wiper resistance of 60 Ω is present. Care should be taken to limit the current flow between W and B in this state to no more than 20 mA to avoid degradation or possible destruction of the internal switches.

Like the mechanical potentiometer the RDAC replaces, the AD5260/AD5262 are completely symmetrical. The resistance between Wiper W and Terminal A also produces a digitally controlled complementary resistance, R_{WA} . Figure 54 shows the symmetrical programmability of the various terminal connections. When R_{WA} is used, the B terminal can be left floating or tied to the wiper. Setting the resistance value for R_{WA} starts at a maximum value of resistance and decreases as the data loaded in the latch is increased in value. The general equation for this operation is

$$R_{WA}(D) = \frac{256-D}{256} \times R_{AB} + R_W \quad (2)$$

For example, when $R_{AB} = 20 \text{ k}\Omega$, $V_A = 0 \text{ V}$, and the B terminal is open circuit, the following output resistance values of R_{WA} are

set for the RDAC latch codes shown in Table 10. The result is the same if Terminal B is tied to Terminal W.

Table 10. R_{WA} vs. Code

| RDAC (Dec) | $R_{WA} (\Omega)$ | Output State |
|------------|-------------------|--------------|
| 256 | 60 | Full scale |
| 128 | 10,060 | Half scale |
| 1 | 19,982 | 1 LSB |
| 0 | 20,060 | Zero scale |

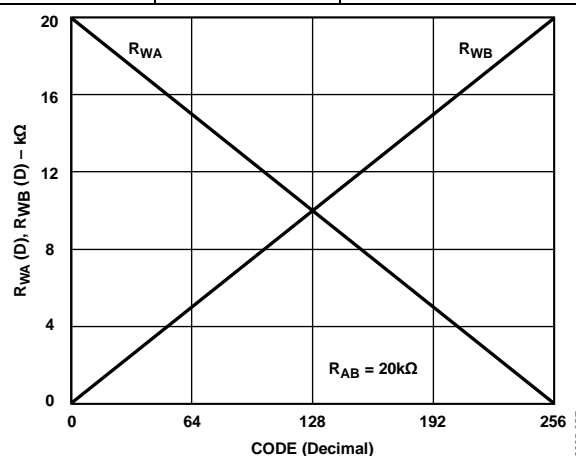


Figure 54. AD5260/AD5262 Equivalent RDAC Circuit

The typical distribution of the nominal resistance R_{AB} from channel to channel matches within $\pm 1\%$. Device-to-device matching is process lot-dependent with the worst case of $\pm 30\%$ variation. However, because the resistance element is processed in thin film technology, the change in R_{AB} with temperature has a low 35 ppm/°C temperature coefficient.

PROGRAMMING THE POTENTIOMETER DIVIDER

Voltage Output Operation

The digital potentiometer easily generates output voltages at wiper-to-B and wiper-to-A to be proportional to the input voltage at A-to-B. Ignore the effect of the wiper resistance. For example, connecting the A terminal to 5 V and the B terminal to ground produces an output voltage at W-to-B starting at 0 V up to 1 LSB less than 5 V. Each LSB of voltage is equal to the voltage applied across Terminal A and Terminal B divided by the 256 positions of the potentiometer divider. Because the AD5260/AD5262 operate from dual supplies, the general equation defining the output voltage at V_W with respect to ground for any given input voltage applied to Terminal A and Terminal B is

$$V_W(D) = \frac{D}{256} \times V_{AB} + V_B \quad (3)$$

Operation of the digital potentiometer in the divider mode results in more accurate operation over temperature. Unlike the rheostat mode, the output voltage is dependent on the ratio of the internal resistors, R_{WA} and R_{WB} , and not the absolute values; therefore, the drift reduces to 5 ppm/°C.

LAYOUT AND POWER SUPPLY BYPASSING

It is good practice to employ a compact, minimum lead length layout design. The leads to the input should be as direct as possible with a minimum conductor length. Ground paths should have low resistance and low inductance.

Similarly, it is also good practice to bypass the power supplies with quality capacitors for optimum stability. Supply leads to the device should be bypassed with 0.01 μF to 0.1 μF disc or chip ceramic capacitors. Low ESR 1 μF to 10 μF tantalum or electrolytic capacitors should also be applied at the supplies to minimize any transient disturbance (see Figure 55). Note that the digital ground should also be joined remotely to the analog ground to minimize the ground bounce.

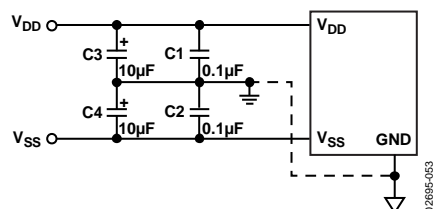


Figure 55. Power Supply Bypassing

TERMINAL VOLTAGE OPERATING RANGE

The AD5260/AD5262 positive V_{DD} and negative V_{SS} power supply defines the boundary conditions for proper 3-terminal digital potentiometer operation. Supply signals present on the A, B, and W terminals that exceed V_{DD} or V_{SS} are clamped by the internal forward-biased diodes (see Figure 56).

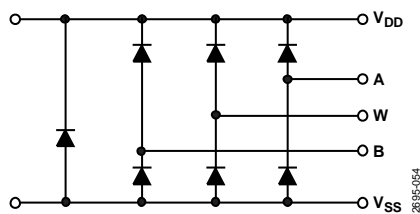


Figure 56. Maximum Terminal Voltages Set by V_{DD} and V_{SS}

The ground pin of the AD5260/AD5262 device is primarily used as a digital ground reference, which needs to be tied to the common ground of the PCB. The digital input control signals to the AD5260/AD5262 must be referenced to the device ground pin (GND), and must satisfy the logic level defined in Table 1. An internal level shift circuit ensures that the common-mode

voltage range of the three terminals extends from V_{SS} to V_{DD} regardless of the digital input level.

POWER-UP SEQUENCE

Because there are diodes to limit the voltage compliance at Terminal A, Terminal B, and Terminal W (see Figure 56), it is important to power V_{DD}/V_{SS} first before applying any voltage to the A, B, and W terminals. Otherwise, the diode becomes forward biased such that V_{DD}/V_{SS} are powered unintentionally and may affect the rest of the user's circuit. The ideal power-up sequence is in the following order: GND, V_{DD} , V_{SS} , V_L , the digital inputs, and $V_A/V_B/V_W$. The order of powering $V_A/V_B/V_W$ and the digital inputs is not important as long as they are powered after V_{DD}/V_{SS} .

RDAC CIRCUIT SIMULATION MODEL

The internal parasitic capacitances and the external capacitive loads dominate the ac characteristics of the RDACs. Configured as a potentiometer divider, the -3 dB bandwidth of the AD5260 (20 k Ω resistor) measures 310 kHz at half scale. Figure 28 provides the large signal Bode plot characteristics of the three available resistor versions 20 k Ω , 50 k Ω , and 200 k Ω . A parasitic simulation model is shown in Figure 57. The following section provides a macro model net list for the 20 k Ω RDAC.




Figure 57. RDAC Circuit Simulation Model for RDAC 20 k Ω

MACRO MODEL NET LIST FOR RDAC

```
PARAM D=256 , RDAC=20E3
*
SUBCKT DPOT (A,W,B)
*
CA      A      0      25E-12
RWA     A      W      {(1-D/256)*RDAC+60}
CW      W      0      55E-12
RWB     W      B      {D/256*RDAC+60}
CB      B      0      25E-12
*
.ENDS DPOT
```


BIPOLAR PROGRAMMABLE GAIN AMPLIFIER

For applications that require bipolar gain, Figure 62 shows one implementation. Digital Potentiometer U1 sets the adjustment range. The wiper voltage at W2 can therefore be programmed between V_i and $-KV_i$ at a given U2 setting. Configuring A2 in the noninverting mode allows linear gain and attenuation. The transfer function is

$$\frac{V_o}{V_i} = \left(1 + \frac{R_2}{R_1}\right) \times \left(\frac{D_2}{256} \times (1 + K) - K\right) \quad (5)$$

where K is the ratio of R_{WB1}/R_{WA1} set by U1.

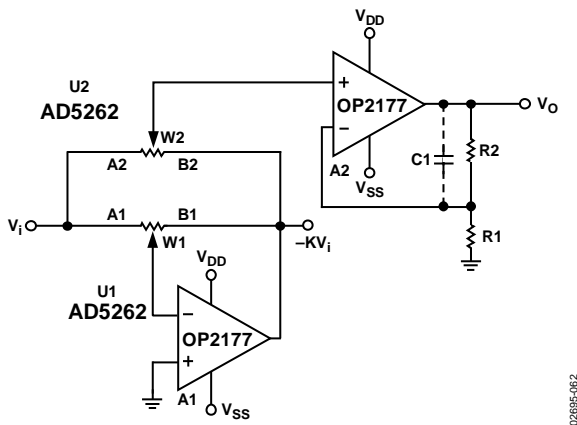


Figure 62. Bipolar Programmable Gain Amplifier

Similar to the previous example, in the simpler and more common case, where $K = 1$, with a single digital potentiometer, AD5260, U1 is replaced by a matched pair of resistors to apply V_i and $-V_i$ at the ends of the digital potentiometer. The relationship becomes

$$V_o = \left(1 + \frac{R_2}{R_1}\right) \left(\frac{2D_2}{256} - 1\right) \times V_i \quad (6)$$

If R_2 is large, a few picofarad compensation capacitors may be needed to avoid any gain peaking.

Table 11 shows the result of adjusting D , with A2 configured as a unity gain, a gain of 2, and a gain of 10. The result is a bipolar amplifier with linearly programmable gain and 256-step resolution.

Table 11. Result of Bipolar Gain Amplifier

| D | $R_1 = \infty, R_2 = 0$ | $R_1 = R_2$ | $R_2 = 9 \times R_1$ |
|-----|-------------------------|-------------|----------------------|
| 0 | -1 | -2 | -10 |
| 64 | -0.5 | -1 | -5 |
| 128 | 0 | 0 | 0 |
| 192 | +0.5 | +1 | +5 |
| 255 | +0.968 | +1.937 | +9.680 |

PROGRAMMABLE VOLTAGE SOURCE WITH BOOSTED OUTPUT

For applications that require high current adjustment such as a laser diode driver or tunable laser, a boosted voltage source can be considered (see Figure 63).

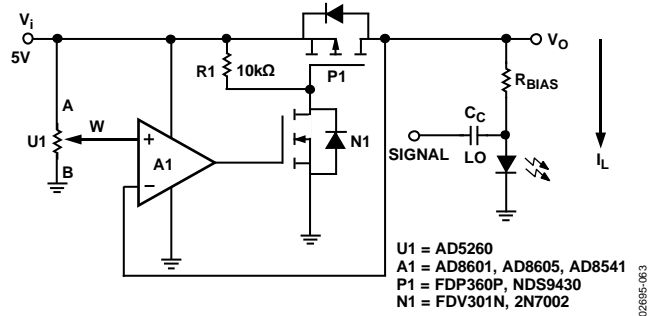


Figure 63. Programmable Boosted Voltage Source

In this circuit, the inverting input of the op amp forces V_o to be equal to the wiper voltage set by the digital potentiometer. The load current is then delivered by the supply via the P-channel FET, P1. The N-channel FET, N1, simplifies the op amp driving requirement. A1 must be the rail-to-rail input type. Resistor R1 is needed to prevent P1 from turning off once it is on. The choice of R1 is a balance between the power loss of this resistor and the output turn-off time. N1 can be any general-purpose signal FET. However, P1 is driven in the saturation state, and therefore, its power handling must be adequate to dissipate $(V_i - V_o) \times I_L$ power. This circuit can source a maximum of 100 mA at 5 V supply. Higher current can be achieved with P1 in a larger package. Note that a single N-channel FET can replace P1, N1, and R1 altogether. However, the output swing is limited unless separate power supplies are used. For a precision application, a voltage reference such as the ADR423, ADR292, or AD1584 can be applied at the input of the digital potentiometer.

PROGRAMMABLE 4 mA-TO-20 mA CURRENT SOURCE

A programmable 4 mA-to-20 mA current source can be implemented with the circuit shown in Figure 64. REF191 is a unique low supply headroom and high current handling precision reference that can deliver 20 mA at 2.048 V. The load current is simply the voltage across Terminal B to Terminal W of the digital potentiometer, divided by R_s .

$$I_L = \frac{V_{REF} \times D}{R_s} \quad (7)$$

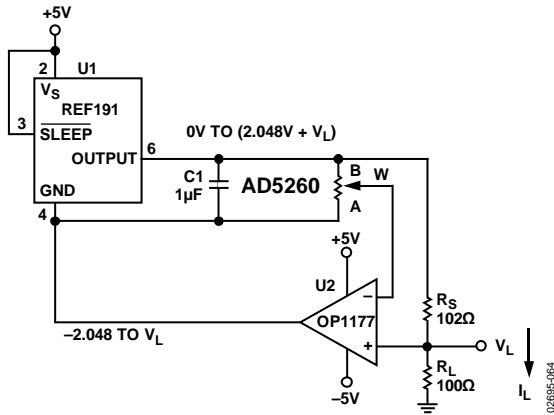


Figure 64. Programmable 4-to-20 mA Current Source

The circuit is simple, but be aware that dual-supply op amps are ideal because the ground potential of REF191 can swing from -2.048 V at zero scale to V_L at full scale of the potentiometer setting. Although the circuit works under single supply, the programmable resolution of the system is reduced.

PROGRAMMABLE BIDIRECTIONAL CURRENT SOURCE

For applications that require bidirectional current control or higher voltage compliance, a Howland current pump can be a solution (see Figure 65). If the resistors are matched, the load current is

$$I_L = \frac{(R2A + R2B)/R1}{R2B} \times V_W \quad (8)$$

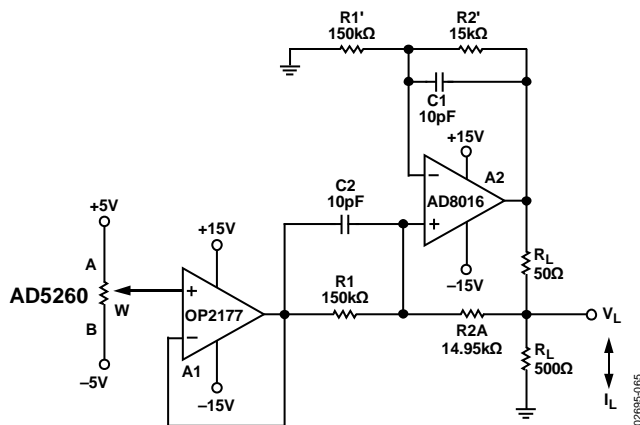


Figure 65. Programmable Bidirectional Current Source

PROGRAMMABLE LOW-PASS FILTER

Digital Potentiometer AD5262 can be used to construct a second-order, Sallen-Key low-pass filter (see Figure 66). The design equations are

$$\frac{V_O}{V_i} = \frac{\omega_o^2}{S^2 + \frac{\omega_o}{Q}S + \omega_o^2} \quad (9)$$

$$\omega_o = \sqrt{\frac{1}{R1R2C1C2}} \quad (10)$$

$$Q = \frac{1}{R1C1} + \frac{1}{R2C2} \quad (11)$$

Users can first select any convenient value for the capacitors. To achieve maximally flat bandwidth where $Q = 0.707$, let $C1$ be twice the size of $C2$ and let $R1 = R2$. As a result, users can adjust $R1$ and $R2$ to the same settings to achieve the desirable bandwidth.

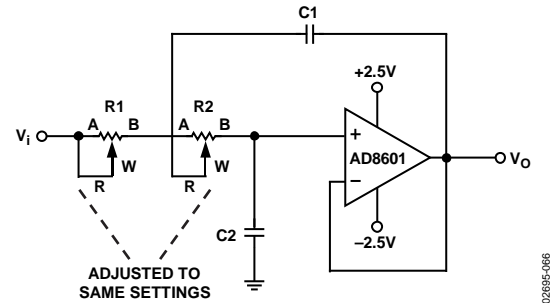


Figure 66. Sallen Key Low-Pass Filter

PROGRAMMABLE OSCILLATOR

In a classic Wien-bridge oscillator (see Figure 67), the Wien network (R, R', C, C') provides positive feedback, whereas $R1$ and $R2$ provide negative feedback. At the resonant frequency, f_o , the overall phase shift is zero, and the positive feedback causes the circuit to oscillate. With $R = R', C = C'$, and $R2 = R2A/(R2B + R_{DIODE})$, the oscillation frequency is

$$\omega_o = \frac{1}{RC} \text{ or } f_o = \frac{1}{2\pi RC} \quad (12)$$

where R is equal to R_{WA} such that

$$R = \frac{256 - D}{256} R_{AB} \quad (13)$$

At resonance, setting

$$\frac{R2}{R1} = 2 \quad (14)$$

balances the bridge. In practice, $R2/R1$ should be set slightly larger than 2 to ensure the oscillation can start. However, the alternate turn-on of the diodes, $D1$ and $D2$, ensures $R2/R1$ to be smaller than 2 momentarily and therefore stabilizes the oscillation.


When the frequency is set, the oscillation amplitude can be tuned by $R2B$ because

$$\frac{2}{3} V_O = I_D R2B + V_D \quad (15)$$

V_O , I_D , and V_D are interdependent variables. With proper selection of $R2B$, an equilibrium is reached such that V_O converges. $R2B$ can be in series with a discrete resistor to increase the amplitude, but the total resistance cannot be too large to saturate the output.

In both circuits in Figure 66 and Figure 67, the frequency tuning requires that both RDACs be adjusted to the same settings. Because the two channels are adjusted one at a time, an intermedi-


OUTLINE DIMENSIONS

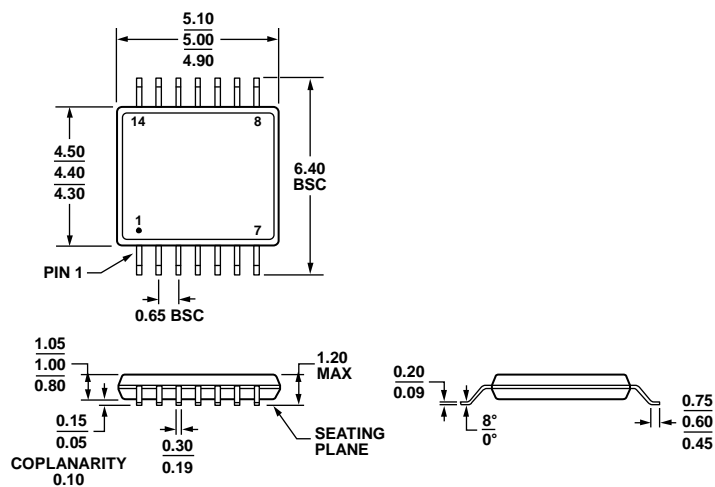

COMPLIANT TO JEDEC STANDARDS MO-153-AB-1

Figure 71. 14-Lead Thin Shrink Small Outline Package [TSSOP]
(RU-14)

Dimensions shown in millimeters

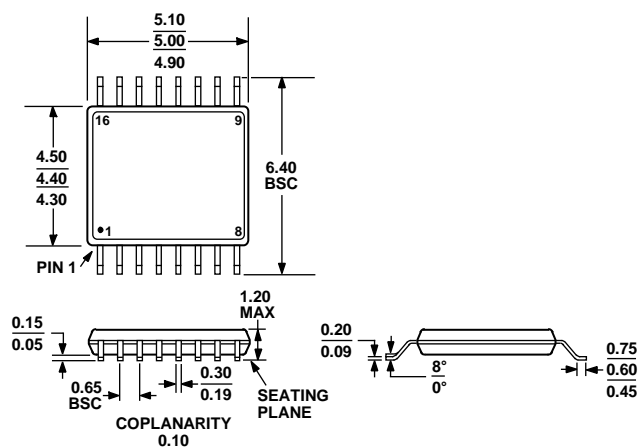

COMPLIANT TO JEDEC STANDARDS MO-153-AB

Figure 72. 16-Lead Thin Shrink Small Outline Package [TSSOP]
(RU-16)

Dimensions shown in millimeters

AD5260/AD5262

ORDERING GUIDE

| Model ¹ | RAB (kΩ) | Temperature | Package Description | Package Option | No. of Parts per Container |
|--------------------|----------|----------------|---------------------|----------------|----------------------------|
| AD5260BRUZ20 | 20 | −40°C to +85°C | 14-Lead TSSOP | RU-14 | 96 |
| AD5260BRUZ20-RL7 | 20 | −40°C to +85°C | 14-Lead TSSOP | RU-14 | 1000 |
| AD5260BRUZ50 | 50 | −40°C to +85°C | 14-Lead TSSOP | RU-14 | 96 |
| AD5260BRUZ50-REEL7 | 50 | −40°C to +85°C | 14-Lead TSSOP | RU-14 | 1000 |
| AD5260BRUZ200 | 200 | −40°C to +85°C | 14-Lead TSSOP | RU-14 | 96 |
| AD5260BRUZ200-RL7 | 200 | −40°C to +85°C | 14-Lead TSSOP | RU-14 | 1000 |
| AD5262BRU20 | 20 | −40°C to +85°C | 16-Lead TSSOP | RU-16 | 96 |
| AD5262BRU20-REEL7 | 20 | −40°C to +85°C | 16-Lead TSSOP | RU-16 | 1000 |
| AD5262BRU50 | 50 | −40°C to +85°C | 16-Lead TSSOP | RU-16 | 96 |
| AD5262BRU50-REEL7 | 50 | −40°C to +85°C | 16-Lead TSSOP | RU-16 | 1000 |
| AD5262BRU200 | 200 | −40°C to +85°C | 16-Lead TSSOP | RU-16 | 96 |
| AD5262BRU200-REEL7 | 200 | −40°C to +85°C | 16-Lead TSSOP | RU-16 | 1000 |
| AD5262BRUZ20 | 20 | −40°C to +85°C | 16-Lead TSSOP | RU-16 | 96 |
| AD5262BRUZ20-RL7 | 20 | −40°C to +85°C | 16-Lead TSSOP | RU-16 | 1000 |
| AD5262BRUZ50 | 50 | −40°C to +85°C | 16-Lead TSSOP | RU-16 | 96 |
| AD5262BRUZ50-RL7 | 50 | −40°C to +85°C | 16-Lead TSSOP | RU-16 | 1000 |
| AD5262BRUZ200 | 200 | −40°C to +85°C | 16-Lead TSSOP | RU-16 | 96 |
| AD5262BRUZ200-RL7 | 200 | −40°C to +85°C | 16-Lead TSSOP | RU-16 | 1000 |
| EVAL-AD5262EBZ | | | Evaluation Board | | |

¹ Z = RoHS Compliant Part.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.