Series 513 Lo-PRO® file Socket w/Collet Contacts & Solder Pin Tails

FEATURES

- Available with Solder Pin Tails
- Choose from Several Sizes and Plating Options
- For Wire Wrap Pins, see Data Sheet 12012

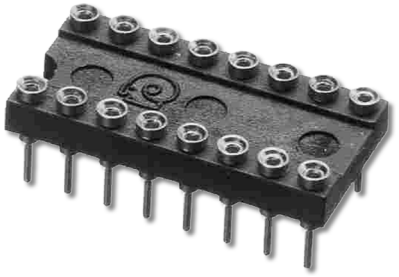

GENERAL SPECIFICATIONS

- **BODY MATERIAL**: Black UL 94V-0 glass-filled 4/6 Nylon
- **SHELL MATERIAL**: Brass 360 1/2-hard per UNS C36000 ASTM B16/B16M-05
- **SHELL PLATING**: 10µ [0.25µ] min. Au per MIL-G-45204 or 200µ [5.08µ] min. 93/7 Sn/Pb per ASTM B545 **–OR–** 200µ [5.08µ] min. Sn per ASTM B545 Type 1 over 100µ [2.54µ] min. Ni per SAE AMS-QQ-N-290B
- **4-FINGER COLLET MATERIAL**: BeCu per UNS C17200 ASTM B194-08
- COLLET **CONTACT PLATING**: 200µ [5.08µ] min. 93/7 Sn/Pb per ASTM B545 **–OR–** 200µ [5.08µ] min. Sn per ASTM B545 Type 1 **–OR–** 10µ [0.25µ] Au per MIL-G-45204 over 50µ [1.27µ] min. [1.27µ] Ni per SAE AMS-QQ-N-290 heavy 30µ [0.76µ]
- **CONTACT CURRENT RATING**: 3 amps
- **INSERTION FORCE**: 180g/pin, based on 0.018 [0.46] dia. test lead
- **WITHDRAWAL FORCE**: 90g/pin, based on 0.018 [0.46] dia. test lead
- **NORMAL FORCE**: 140g/pin, based on 0.018 [0.46] dia. test lead
- **OPERATING TEMPERATURE**: 221°F [105°C] Sn & Sn/Pb plating; 257°F [125°C] Au plating
- **ACCEPTS LEADS**: 0.015-0.025 [0.38-0.64] dia., 0.100-0.146 [2.54-3.71] long

ORDERING INFORMATION

XX-X 513-XXXX

Collet/Shell Plating Options
- 10 = Au Collet/Sn Shell
- 10H = 30µ" Au Collet/Sn Shell
- 10T = Sn Collet/Sn Shell
- 10TL = Sn/Pb Collet and Shell
- 11 = Au Collet/Au Shell
- 11H = 30µ" Au Collet/AuShell

Series

Row-to-Row Spacing (Dim. "Y")
- 2 = 0.200 [5.08]
- 3 = 0.300 [7.62]
- 4 = 0.400 [10.16]
- 6 = 0.600 [15.24]
- 9 = 0.900 [22.86]

No. of Pins
(See Table)

MOUNTING CONSIDERATIONS

- **SUGGESTED PCB HOLE SIZE**: 0.030 ±0.002 [0.76 ±0.05] dia.

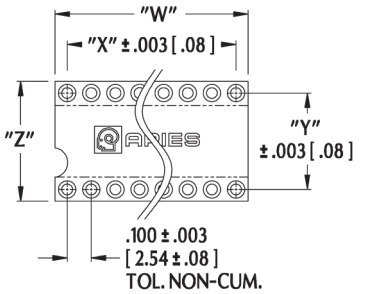

"W"= NO. OF PINS PER ROW x 0.100 [2.54]
"X"= (NO. OF PINS PER ROW -1) x 0.100 [2.54]

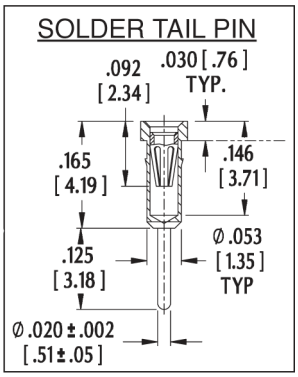

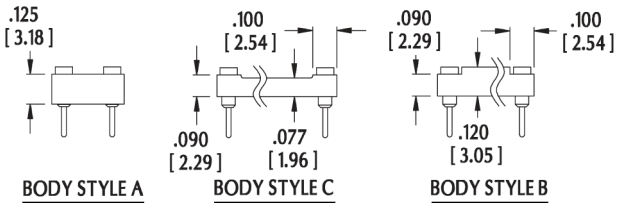

Centers "Y"	Dim. "Z"	Body Style	Available Sizes
0.200 [5.08]	0.300 [7.62]	A	2 thru 10
0.300 [7.62]	0.400 [10.16]	C, B	2 thru 20, 22 thru 40
0.400 [10.16]	0.500 [12.70]	C	2 thru 22
0.600 [15.24]	0.700 [17.78]	C, B	2 thru 40, 42 thru 48
0.900 [22.86]	1.000 [25.40]	B	2 thru 64

ALL DIMENSIONS: INCHES [MILLIMETERS]
ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED
FOR COLLET SOCKETS WITH WIRE WRAP PINS, SEE DATA SHEETS 12012
CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS

CUSTOMIZATION: ARIES SPECIALIZES IN CUSTOM DESIGN AND PRODUCTION. SPECIAL MATERIALS, PLATINGS, SIZES, AND CONFIGURATIONS CAN BE FURNISHED, DEPENDING ON QUANTITY.

ARIES RESERVES THE RIGHT TO CHANGE PRODUCT GENERAL SPECIFICATIONS WITHOUT NOTICE

PRINTOUTS OF THIS DOCUMENT MAY BE OUT-OF-DATE AND SHOULD BE CONSIDERED UNCONTROLLED

ARIES® ELECTRONICS, INC.
2609 Bartram Road • Bristol, PA 19007-6810 USA
TEL 215-781-9956 • FAX 215-781-9845
WWW.ARIESELEC.COM • INFO@ARIESELEC.COM

RoHS Compliant

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.