



5% Thick Film Chip Resistors (RoHS Compliant)

CR5-RC Series

FEATURES


- Temperature Range: -55°C ~ +125°C
- High purity alumina substrate
- Wave or flow solderable
- Excellent high frequency characteristics
- Wrap around termination
- Inner electrode protection
- Value range 0Ω ~ 10MΩ





RoHS Compliant




DERATING CURVE

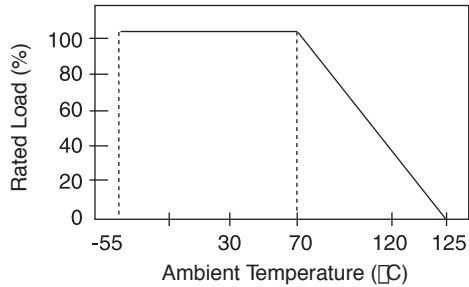

REEL DIMENSIONS (mm)

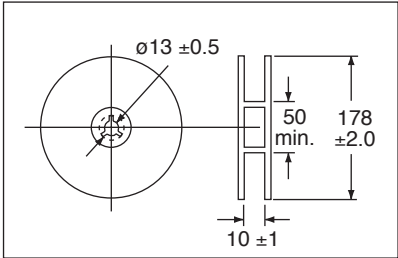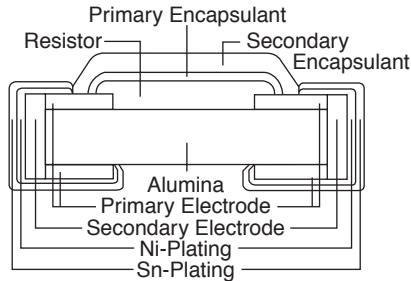


PART NUMBERING SYSTEM



SERIES, SIZE, WATTAGE, VOLTAGE, AND DIMENSIONS

| Series | Case Size | Watts | Voltage (V) (max.) |      | Dimensions (mm) |            |            |            |           |
|--------|-----------|-------|--------------------|------|-----------------|------------|------------|------------|-----------|
|        |           |       | W.V.               | O.V. | L               | W          | C          | D          | t         |
| 260    | 0805      | 1/10  | 150                | 300  | 2.0 ± 0.15      | 1.25 ± .15 | 0.4 ± 0.2  | 0.4 ± 0.2  | .55 ± .10 |
| 263    | 1206      | 1/8   | 200                | 400  | 3.1 ± 0.15      | 1.55 ± .15 | 0.45 ± 0.2 | 0.45 ± 0.2 | .55 ± .10 |
| 301    | 0603      | 1/16  | 50                 | 100  | 1.60 ± .10      | 0.8 ± .15  | 0.3 ± .20  | 0.30 ± .20 | .45 ± .10 |




STANDARD STOCKED VALUES (Ω)

|     |     |     |     |    |    |     |     |     |      |      |      |      |     |     |      |      |      |      |      |      |      |
|-----|-----|-----|-----|----|----|-----|-----|-----|------|------|------|------|-----|-----|------|------|------|------|------|------|------|
| 0   | 2.0 | 4.3 | 9.1 | 20 | 43 | 91  | 200 | 430 | 910  | 2K   | 4.3K | 9.1K | 20K | 43K | 91K  | 200K | 430K | 820K | 1.8M | 3.9M | 8.2M |
| 1.0 | 2.2 | 4.7 | 10  | 22 | 47 | 100 | 220 | 470 | 1K   | 2.2K | 4.7K | 10K  | 22K | 47K | 100K | 220K | 470K | 910K | 2M   | 4.3M | 9.1M |
| 1.1 | 2.4 | 5.1 | 11  | 24 | 51 | 110 | 240 | 510 | 1.1K | 2.4K | 5.1K | 11K  | 24K | 51K | 110K | 240K | 510K | 1M   | 2.2M | 4.7M | 10M  |
| 1.2 | 2.7 | 5.6 | 12  | 27 | 56 | 120 | 270 | 560 | 1.2K | 2.7K | 5.6K | 12K  | 27K | 56K | 120K | 270K | 560K | 1.1M | 2.4M | 5.1M |      |
| 1.3 | 3.0 | 6.2 | 13  | 30 | 62 | 130 | 300 | 620 | 1.3K | 3K   | 6.2K | 13K  | 30K | 62K | 130K | 300K | 620K | 1.2M | 2.7M | 5.6M |      |
| 1.5 | 3.3 | 6.8 | 15  | 33 | 68 | 150 | 330 | 680 | 1.5K | 3.3K | 6.8K | 15K  | 33K | 68K | 150K | 330K | 660K | 1.3M | 3M   | 6.2M |      |
| 1.6 | 3.6 | 7.5 | 16  | 36 | 75 | 160 | 360 | 750 | 1.6K | 3.6K | 7.5K | 16K  | 36K | 75K | 160K | 360K | 680K | 1.5M | 3.3M | 6.8M |      |
| 1.8 | 3.9 | 8.2 | 18  | 39 | 82 | 180 | 390 | 820 | 1.8K | 3.9K | 8.2K | 18K  | 39K | 82K | 180K | 390K | 750K | 1.6M | 3.6M | 7.5M |      |

NOTE: RoHS Compliant by Exemption

CONSTRUCTION

| No. | Part Name                                                             |
|-----|-----------------------------------------------------------------------|
| 1   | Protective coating: Epoxy                                             |
| 2   | Al <sub>2</sub> O <sub>3</sub> high purity alumina substrate: Al 96fi |
| 3   | Resistive element: metal film                                         |
| 4   | Termination (Inner): Ag/Pd                                            |
| 5   | Termination (Between): Ni plating film                                |
| 6   | Termination (Outer): Sn plating film                                  |

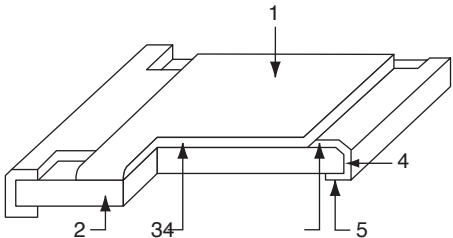



# 5% Thick Film Chip Resistors (RoHS Compliant)

# CR5-RC Series

## ■ CHARACTERISTICS

| Characteristics                 | Limits                                                                                     | Test Methods ( JIS C 5201-1 )                                                                                                                                                                                                                                                                                           |             |            |
|---------------------------------|--------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|------------|
| Temperature coefficient         | 1Ω ~ 10Ω ≤ ±400 PPM / °C<br>11Ω ~ 10MΩ ≤ ±200 PPM / °C                                     | 5.2 Natural resistance change per temp. degree centigrade.<br>R2-R1<br>————— x10 <sup>6</sup> (PPM/°C)<br>R1(t2-t1)<br>R1: Resistance value at room temperature (t1)<br>R2: Resistance value at room temp.plus 100°C (t2)                                                                                               |             |            |
| Short time overload             | Resistance change rate is ± (2.0 % + 0.1Ω) Max.                                            | 5.5 Permanent resistance change after the application of a potential of 2.5 times RCWV for 5 seconds.                                                                                                                                                                                                                   |             |            |
| Insulation resistance           | 1,000M Ω or more                                                                           | 5.6 Apply 500V DC between protective coating and termination for 1 minute                                                                                                                                                                                                                                               |             |            |
| Dielectric withstanding voltage | No evidence of flashover mechanical damage,arcing or insulation break down.                | 5.7 Apply 500V AC between protective coating and termination for 1 minute                                                                                                                                                                                                                                               |             |            |
| Terminal bending                | ±(1.0% +0.05Ω) Max.                                                                        | 6.1.4 Twist of Test Board:<br>Y/X=5/90mm for 10 seconds                                                                                                                                                                                                                                                                 |             |            |
| Temperature cycling             | ± (1.0% + 0.05Ω) Max.                                                                      | 7.4 Resistance change after continuous 5 cycles for duty shown below:                                                                                                                                                                                                                                                   |             |            |
|                                 |                                                                                            | Step                                                                                                                                                                                                                                                                                                                    | Temperature | Time       |
|                                 |                                                                                            | 1                                                                                                                                                                                                                                                                                                                       | -55°C ±3°C  | 30 mins    |
|                                 |                                                                                            | 2                                                                                                                                                                                                                                                                                                                       | Room temp.  | 10~15 mins |
|                                 |                                                                                            | 3                                                                                                                                                                                                                                                                                                                       | +155°C ±2°C | 30 mins    |
|                                 |                                                                                            | 4                                                                                                                                                                                                                                                                                                                       | Room temp.  | 10~15 mins |
| Load life in humidity           | Resistance change rate is ± (3.0% + 0.1Ω) Max.                                             | 7.9 Resistance change after 1,000 hours (1.5 hours "on", 0.5 hour "off") at RCWV in a humidity chamber controlled at 40°C ± 2°C and 90 to 95 % relative humidity                                                                                                                                                        |             |            |
| Load life                       | Resistance change rate is ± (3.0% + 0.1Ω) Max.                                             | 7.10 Permanent resistance change after 1,000 hours operating at RCWV, with duty cycle of ( 1.5 hours "on", 0.5 hour "off" ) at 70°C ± 2°C ambient                                                                                                                                                                       |             |            |
| Soldering Heat                  | Electrical characteristics shall be satisfied. Without distinct deformation in appearance. | <u>Solder bath method</u><br>Pre-Heat: 100 to 105°C, 30 ±5 sec.<br>Temperature: 265 ± 3°C, 5 +1/-0 sec<br><br><u>Reflow soldering method</u><br>Peak: 250 +5/-0°C<br>230°C or higher, 30 ±10Sec.<br><br><u>Solder iron method</u><br>Bit temperature: 350° ±10°C<br>Application time of soldering iron: 3 +1/-0 seconds |             |            |
| Solderability                   | 95% Coverage min.                                                                          | 6.5 Test temperature of solder: 245° ±3°C<br>Dipping them solder: 2~3 seconds                                                                                                                                                                                                                                           |             |            |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.