


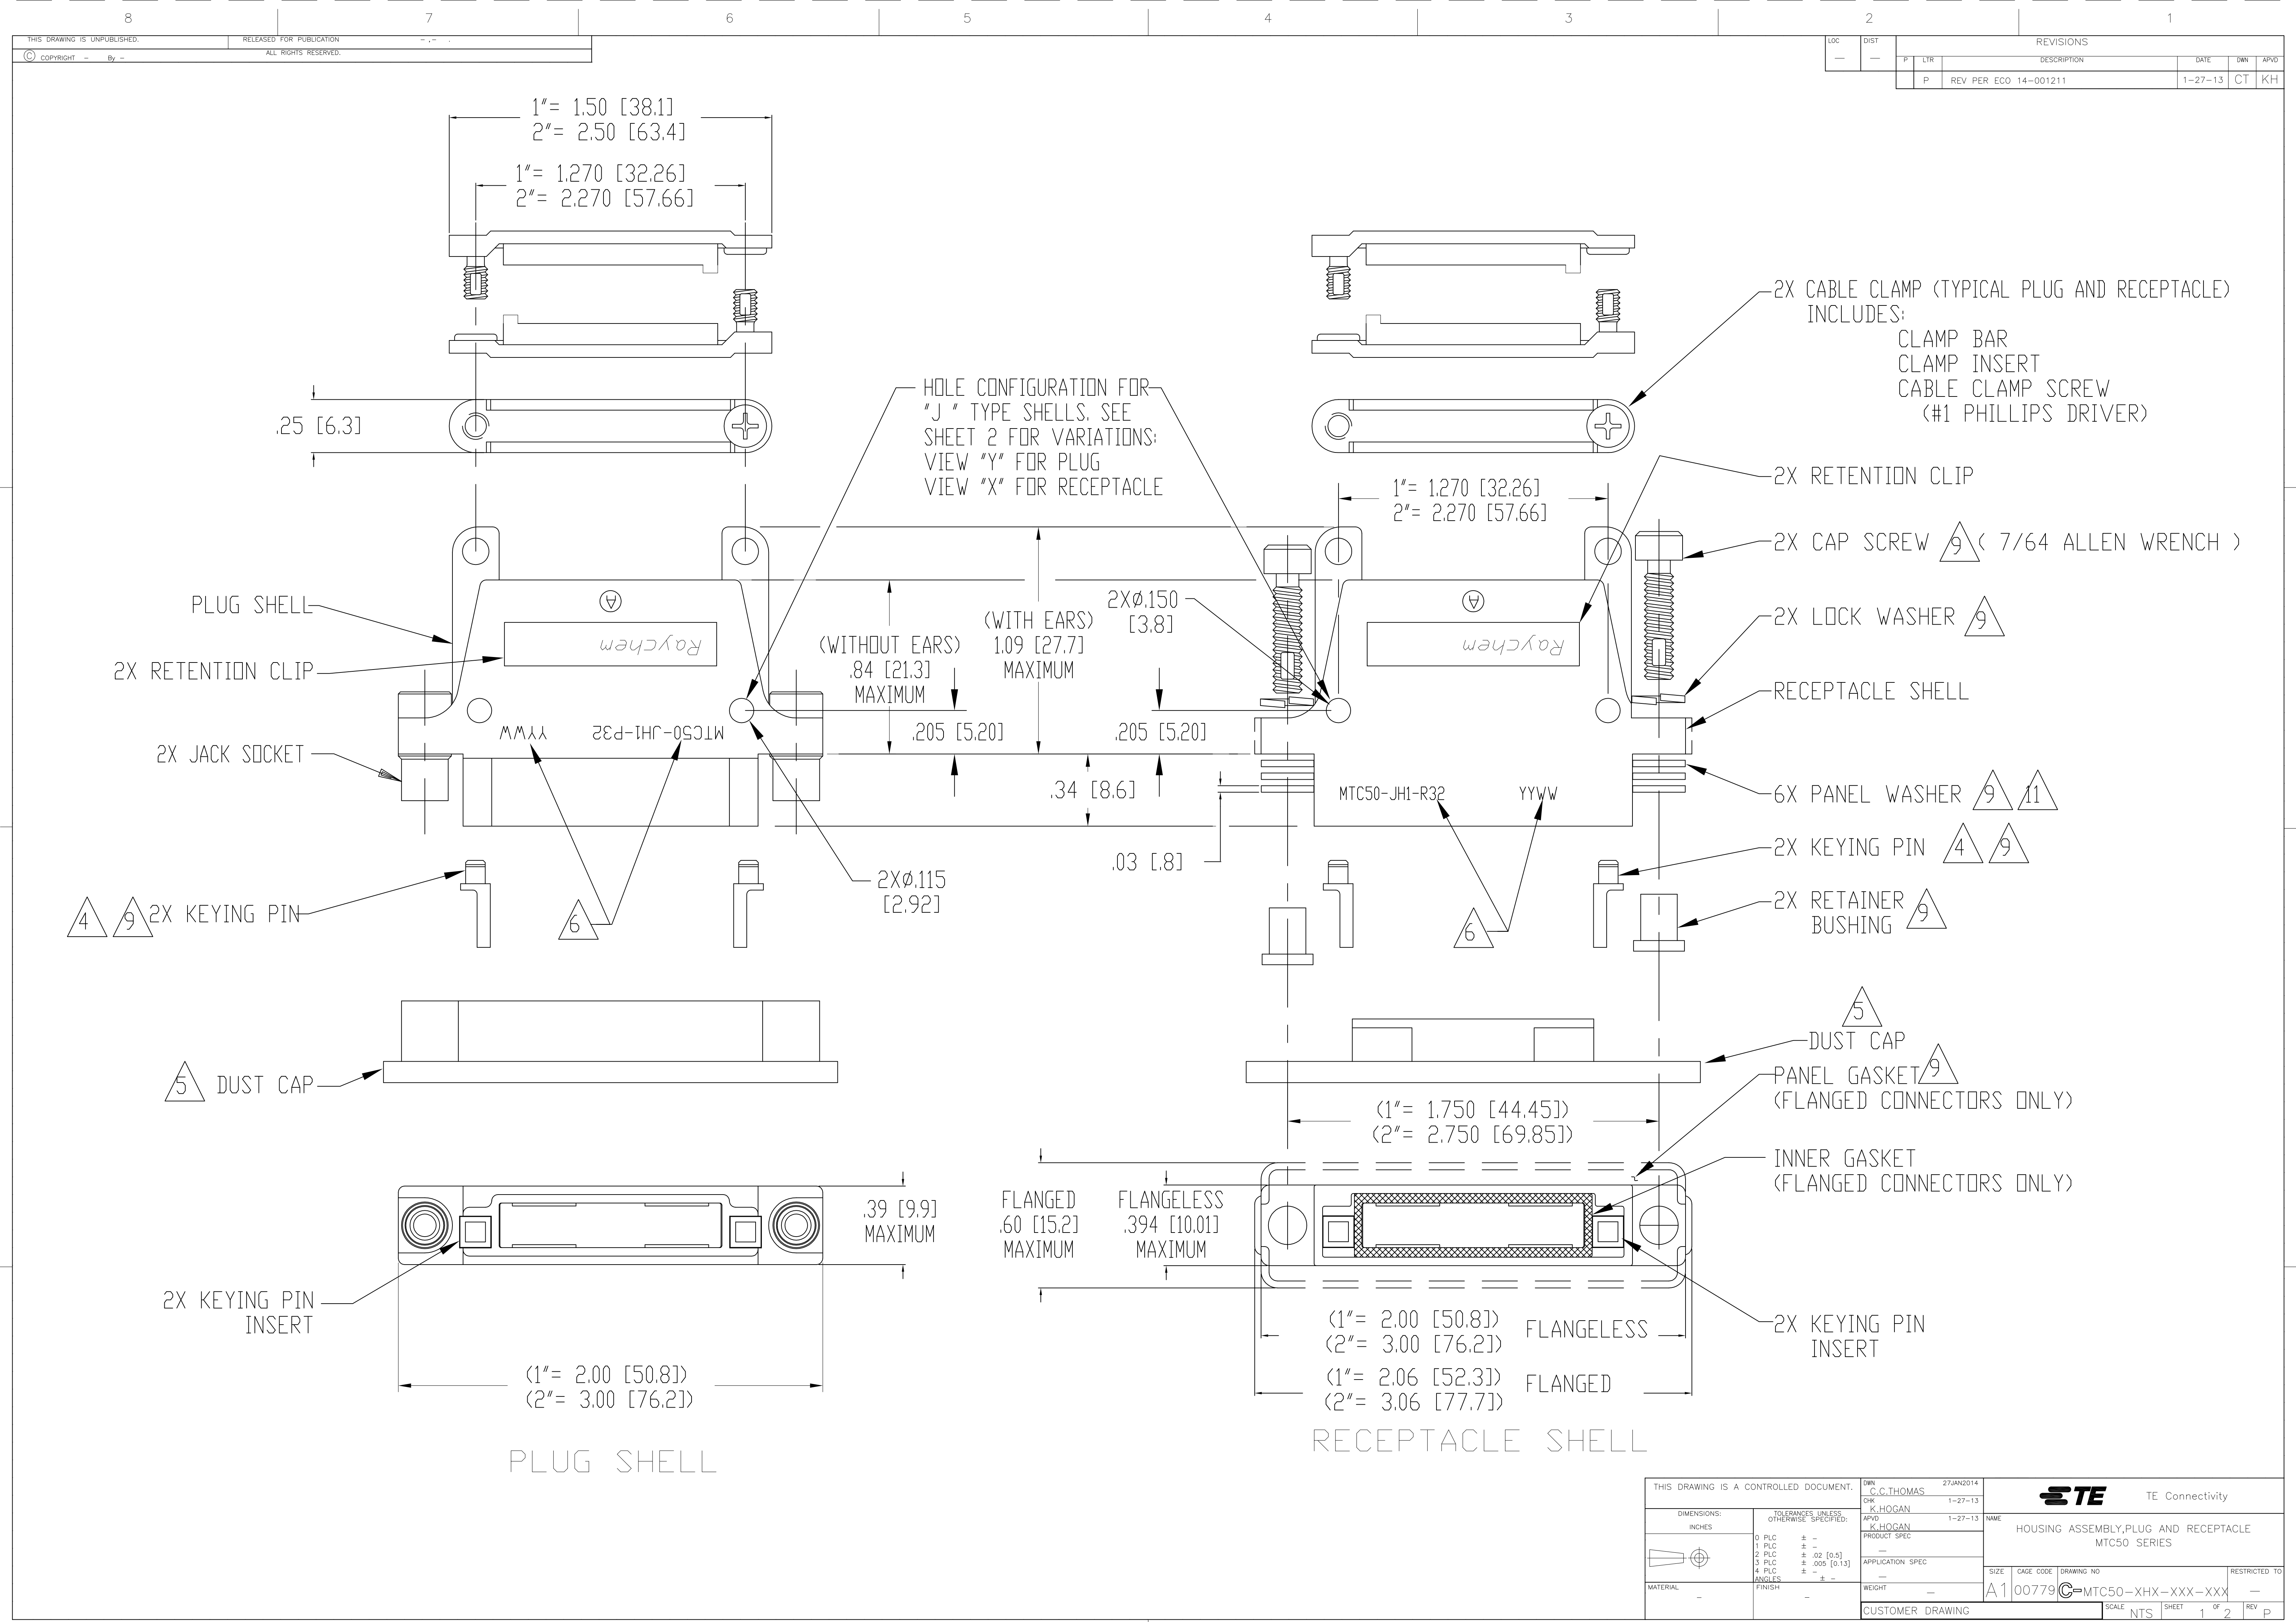

1. PART NUMBER VARIABLES: (NOT ALL POSSIBLE CONFIGURATIONS SHOWN ON THIS DRAWING ARE AVAILABLE AS STANDARD PRODUCTS. PLEASE CHECK WITH RAYCHEM TO CONFIRM AVAILABILITY.)

MTC50-XHX-XXX-XXX

-MODIFICATIONS: REFER TO APPLICABLE MOD DESCRIPTION SHEET.
(THIS SPACE BLANK IF NO MODIFICATION IS APPLICABLE)

- 1= W/O CABLE CLAMP AND W/O EARS ON SHELL
2= WITH CABLE CLAMP AND EARS ON SHELL
3= W/O CABLE CLAMP BUT WITH EARS ON SHELL
4= WITH FLAT CABLE CLAMP (SEE VIEW "V")
AND EARS ON SHELL

- 1= BLACK ANODIZED (WHITE MARKING)
2= ELECTROLESS NICKEL (BLACK MARKING)
3= CADMIUM OVER NICKEL UNDERPLATE (BLACK MARKING)

- P= PLUG
R= FLANGELESS RECEPTACLE
F= FLANGED RECEPTACLE; STANDARD ("J" TYPE) HAS FLUOROSILICONE GASKET
SHIELDED ("S" TYPE) HAS CONDUCTIVE GASKET
1= 1 INCH
2= 2 INCH

- J= STANDARD
S= SHIELDED
Y= SPECIAL; REFER TO INDIVIDUAL SPECIFICATION CONTROL DRAWINGS
FOR DESCRIPTIONS

- | 2. MATERIAL: | OR DESCRIPTION |
|------------------------------|--|
| A) SHELL | ALUMINUM ALLOY PER ASTM B85 |
| B) RETENTION CLIP | COPPER ALLOY 172 PER ASTM B194 |
| C) CAP SCREW | STAINLESS STEEL PER SAE-AMS-QQ-S-763, 300 SERIES |
| D) JACK SOCKET OR JACK SCREW | STAINLESS STEEL PER SAE-AMS-QQ-S-763, 300 SERIES |
| E) PANEL OR LOCK WASHER | STAINLESS STEEL PER SAE-AMS-QQ-S-763, 300 SERIES |
| F) KEYING PIN | POLYARYLENE THERMOPLASTIC, MOLDED |
| G) KEY PINS INSERT | POLYARYLENE THERMOPLASTIC, MOLDED |
| H) CLAMP BAR | STAINLESS STEEL PER SAE-AMS-QQ-S-763, 300 SERIES |
| J) CLAMP INSERT | SILICONE ELASTOMER PER MIL-R-25988B |
| K) CAPTIVE SCREW | STAINLESS STEEL PER SAE-AMS-QQ-S-763, 300 SERIES |

3. FINISH:

FINISH:	APPLIES TO NICKEL PLATED CONNECTORS	APPLIES TO CADMIUM PLATED CONNECTORS	APPLIES TO BLACK ANODIZED CONNECTORS
A) SHELL	NICKEL PLATED PER SAE-AMS-C-26074 CLASS 3, GRADE B	CADMIUM PLATED PER SAE-AMS-QQ-P-416 OVER NICKEL UNDERPLATE	BLACK ANODIZED PER MIL-A-8625, TYPE II, CLASS 2
B) RETENTION CLIP	NICKEL PLATED PER SAE-AMS-C-26074 CLASS 2, .00002 MINIMUM	CADMIUM PLATED PER SAE-AMS-QQ-P-416	NICKEL PLATED PER SAE-AMS-C-26074 CLASS 2, .00002 MINIMUM
C) CAP SCREW	PASSIVATED PER SAE-AMS-QQ-P-35	CADMIUM PLATED PER SAE-AMS-QQ-P-416	PASSIVATED PER SAE-AMS-QQ-P-35
D) JACK SOCKET OR JACK SCREW	PASSIVATED PER SAE-AMS-QQ-P-35	CADMIUM PLATED PER SAE-AMS-QQ-P-416	PASSIVATED PER SAE-AMS-QQ-P-35
E) PANEL OR LOCK WASHER	PASSIVATED PER SAE-AMS-QQ-P-35	CADMIUM PLATED PER SAE-AMS-QQ-P-416	PASSIVATED PER SAE-AMS-QQ-P-35
F) CLAMP BAR	PASSIVATED PER SAE-AMS-QQ-P-35	CADMIUM PLATED PER SAE-AMS-QQ-P-416	PASSIVATED PER SAE-AMS-QQ-P-35
G) CAPTIVE SCREW	PASSIVATED PER SAE-AMS-QQ-P-35	CADMIUM PLATED PER SAE-AMS-QQ-P-416	PASSIVATED PER SAE-AMS-QQ-P-35

4. APPLICATION INFORMATION:

- A) FOR RECEPTACLE MOUNTING INFORMATION, SEE RAYCHEM DRAWING D652-0012.
B) FOR CONNECTOR KEYING CODES, SEE RAYCHEM DRAWING D-659-0080.
C) RECEPTACLE CAP SCREWS ARE TO BE TORQUED TO 15 LBF-INCH (1.7 N-m).
D) PLUG JACK SOCKETS ARE TO BE TORQUED TO 9 LBF-INCH (1.0 N-m).

5. DUST CAP SUPPLIED WITH EACH PLUG AND RECEPTACLE.

6. APPROPRIATE PART NUMBER AND DATE CODE ARE STAMPED APPROXIMATELY AS SHOWN.

7. THE APPLICABLE RAYCHEM SPECIFICATION FOR THIS PART IS C6111.
THIS PART IS NOT QUALIFIED TO C6111.

8. FLANGED RECEPTACLE CONNECTORS CORRECTLEY ASSEMBLED AND THE PLUG CONNECTOR PROPERLY ASSEMBLED AND MATEDED WILL EXHIBIT AN AIR LEAK RATE NOT EXCEEDING .5 CC / SECOND AT 30 PSI AND 25° C. (APPLICABLE ONLY TO FLANGED RECEPTACLES WITH PIN INSERTS)

9. THESE ITEMS ARE SUPPLIED UNASSEMBLED.

10. SEE TABLE II FOR WEIGHTS. WEIGHTS SHOWN ARE WITHOUT DUST CAP.

11. THIS RECEPTACLE MAY BE REAR PANEL MOUNTED BY REMOVING AS MANY PANEL WASHERS AS REQUIRED TO ACCOMMODATE THE THICKNESS OF THE PANEL BEING USED. (SEE TABLE III)




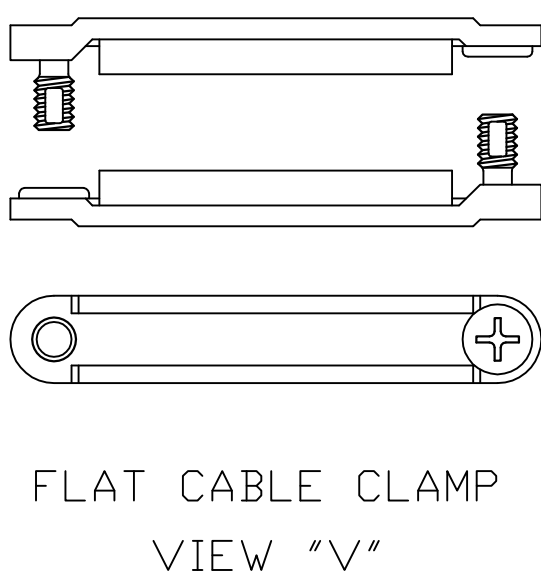


TABLE III		Δ
PANEL THICKNESS	NUMBER OF PANEL WASHERS FOR EACH FASTENER	
0.031/0.036 [0.8]/[0.9]	2	
0.062/0.067 [1.5]/[1.7]	1	
0.093/0.097 [2.3]/[2.4]	0	

TABLE II		10	WEIGHT	lbs.[gr.]	MAX.
CONNECTOR SIZE		PLUG	RECEPTACLE		
			FLANGED	FLANGELESS	
1 INCH	W/EARS	.0514 [23.315]	.0731 [33.158]	.0606 [27.488]	
	W/O EARS	.0422 [19.196]	.0555 [25.174]	.0430 [19.504]	
2 INCH	W/EARS	.0765 [34.699]	.1292 [58.604]	.1021 [46.312]	
	W/O EARS	.0494 [22.407]	.0851 [38.601]	.0580 [26.308]	

12. THE CORRECT MATING PART FOR A RAYCHEM MTC50 PLUG SHELL IS A RAYCHEM MTC50 RECEPTACLE SHELL. THE SPECIFIED PERFORMANCE OF THIS CONNECTOR IS BASED ON TEST PERFORMANCE WHEN ASSEMBLED WITH THE CORRECT MATING PART.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 27/JAN/2014 QWK K.HOGAN 1-27-13		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PL/C ± — 1 PL/C ± — 2 PL/C ± .02 [0.5] 3 PL/C ± .005 [0.13] 4 PL/C ± — ANGLES FINISH — ± —		NAME HOUSING ASSEMBLY, PLUG AND RECEPTACLE MTC50 SERIES	
		PRODUCT SPEC — APPLICATION SPEC —		SIZE CAGE CODE DRAWING NO A1 00779 C=MTC50-XXH-XXX-XXX	
MATERIAL —		WEIGHT —		RESTRICTED TO —	
SCALE —		CUSTOMER DRAWING —		SCALE NTS	
SHEET 2 OF 2		REV P		—	

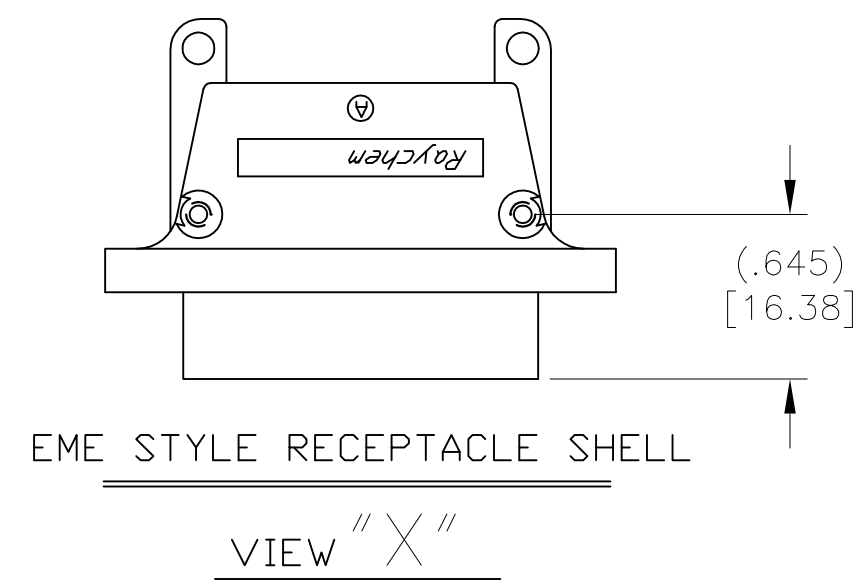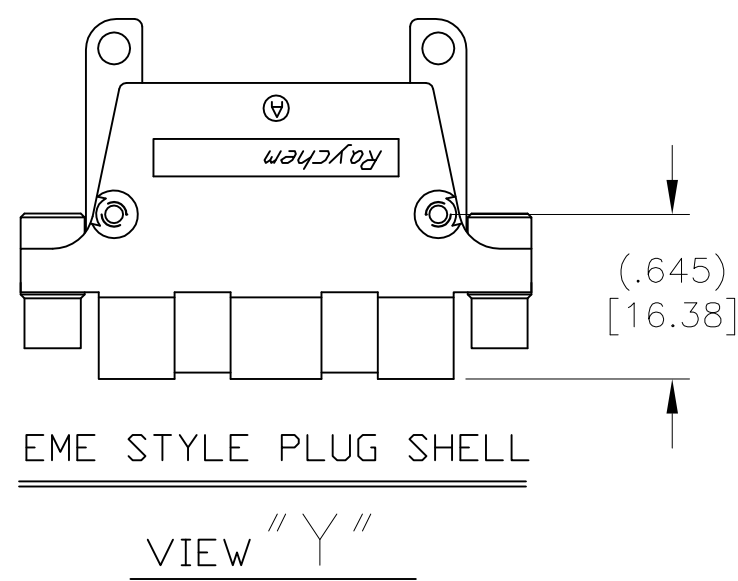

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.