

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0457190004

Status:

Active

Overview:

edge_card_connectors

Description:

12.90mm (.508") Pitch EXTreme PowerEdge™, 2.36mm (.093") Thick PC Board, Mates to a 1.57mm (.062") Thick Card Edge or Bus Bar Tab

Documents:

3D Model

Drawing (PDF)

Product Specification PS-45719-001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

TUV

R72090228

General

Product Family

Series

Component Type

MolexKits

Overview

Product Name

Edge Card Connectors

45714

Edgecard to PCB

Yes

edge_card_connectors

Bus Bar Socket, EXTreme PowerEdge™

Physical

Circuits (Loaded)

Circuits (maximum)

Circuits Detail

Color - Resin

Durability (mating cycles max)

Entry Angle

Flammability

Keying to Mating Part

Material - Metal

Material - Plating Mating

Material - Plating Termination

Material - Resin

PC Tail Length (in)

PC Tail Length (mm)

PCB Thickness Recommended (in)

PCB Thickness Recommended (mm)

Packaging Type

Pitch - Mating Interface (in)

Pitch - Mating Interface (mm)

Plating min: Mating (µin)

Plating min: Mating (µm)

Plating min: Termination (µin)

Plating min: Termination (µm)

Temperature Range - Operating

Termination Interface: Style

4

4

All Power

Black

200

Vertical (Top Entry)

94V-0

N/A

High Performance Alloy (HPA)

Gold

Tin

High Temperature Thermoplastic

0.143 In

3.63 mm

0.093 In

2.40 mm

Tray

0.508 In

12.90 mm

30

0.75

150

3.75

-40°C to +105°C

Through Hole

Electrical

Current - Maximum per Contact

Voltage - Maximum

40A

250V

Material Info

Reference - Drawing Numbers

Packaging Specification

PK-45714-001




image - Reference only

Series

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

45714Series

Mates With




1.58mm (.062") double sided card edge or bus bar tab

This document was generated on 06/04/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION


NOTES:

1. HOUSING MATL: LCP, UL94V-0, COLOR BLACK
TERMINAL MATL: COPPER ALLOY
2. FINISH: SELECT GOLD: 30 M.I. MIN IN CONTACT AREA
SELECT TIN: 150 M.I. MIN IN SOLDER AREA
OVERALL NICKEL UNDERPLATE.
3. PRODUCT SPECIFICATION: PS-45719-001.
4. PACKAGING SPECIFICATION: PK-45714-001.
5. PCB THICKNESS: SEE CHART
6. EDGE CARD THICKNESS: 1.57±0.15
7. DIMENSIONS GIVEN ACROSS CENTERLINES ARE SYMMETRICAL
ABOUT THOSE CENTERLINES WITHIN HALF TOTAL TOLERANCE.
8. VOIDED SEGMENTS DO NOT HAVE TERMINALS IN THE TOP OR BOTTOM ROW

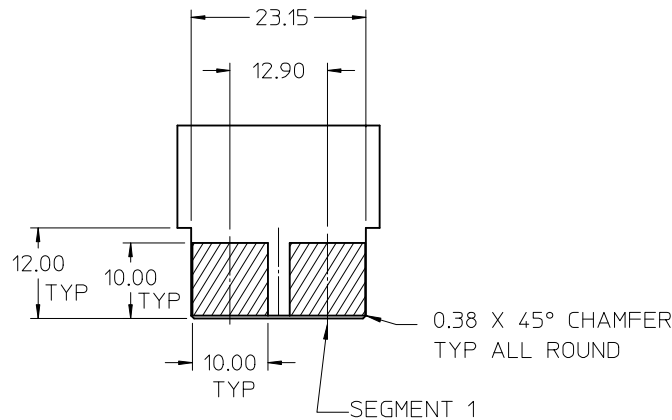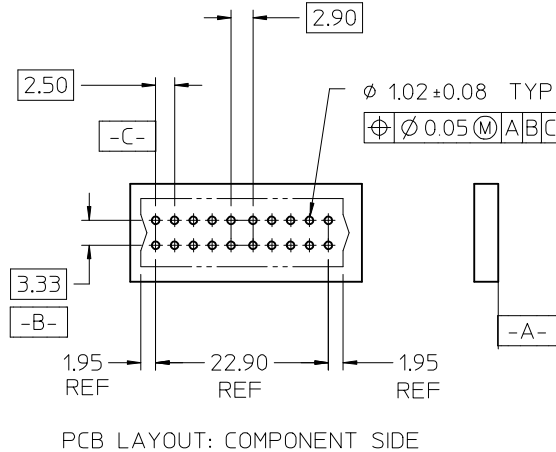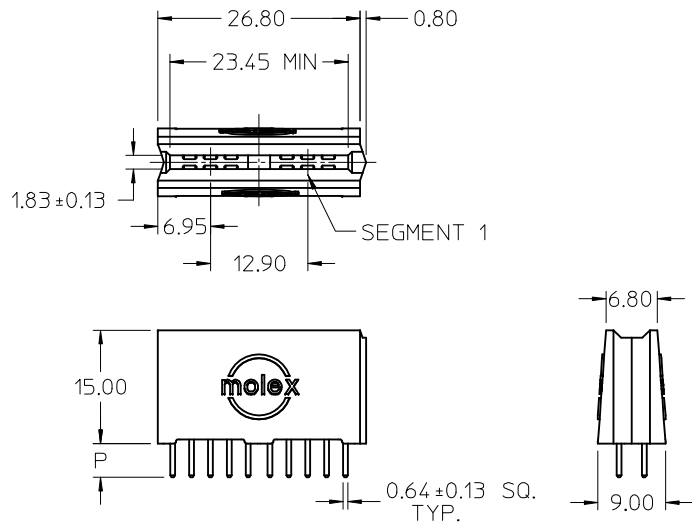

RECOMMENDED EDGE CARD LAYOUT
TOLERANCE: ±0.05

MATERIAL NUMBER	VOIDED SEGMENT	P	PCB THK
45719-0001	NONE	4.50	3.18
45719-2001	1		
45719-2002	2	3.63	2.36
45719-0004	NONE		
45719-2003	1	2.92	1.57
45719-2004	2		
45719-0007	NONE	2.92	1.57
45719-2005	1		
45719-2006	2		



ADD PIN DIM & TOL	DESCRIPTION
EC NO: UCP2009-2476	2009/04/07
DRWN: JSCHAFER	2009/04/07
CHKD: APATEL	2009/04/20
APPR: APATEL	2009/04/20
E1	REV

GENERAL TOLERANCES (UNLESS SPECIFIED)		
	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± 0.25	± ---
1 PLACE	± 0.25	± ---
ANGULAR ±1/2°		
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		

DIMENSION STYLE	
MM ONLY	
DRAWN BY	DATE
MARGULIS	2003/11/11
CHECKED BY	DATE
MARGULIS	2003/11/11
APPROVED BY	DATE
MARGULIS	2003/11/11
SIZE	A

SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
TITLE			
POWER EDGE ASSEMBLY POWER VERTICAL SOLDER TAIL			
moLEX MOLEX INCORPORATED			
DOCUMENT NO. SD-45719-001			SHEET NO. 1 OF 3
AINS INFORMATION THAT IS PROPRIETARY TO MOLEX SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			

6

5

4




3

2


1

NOTES:


1. FOR ALL OTHER DIMENSIONS AND NOTES SEE SHEET 1.

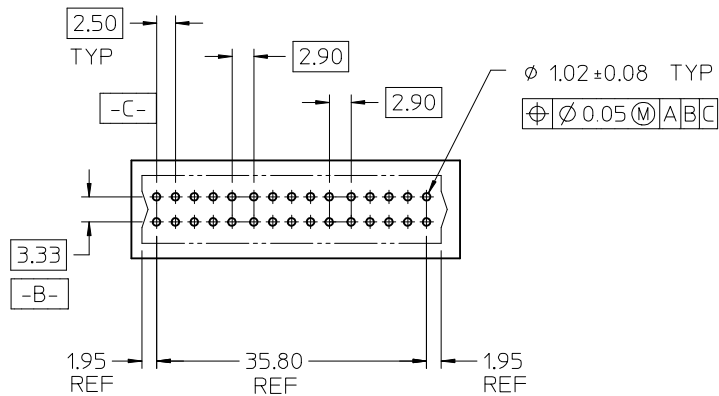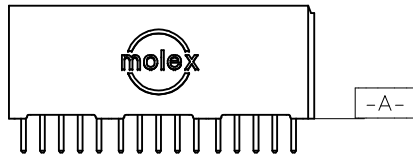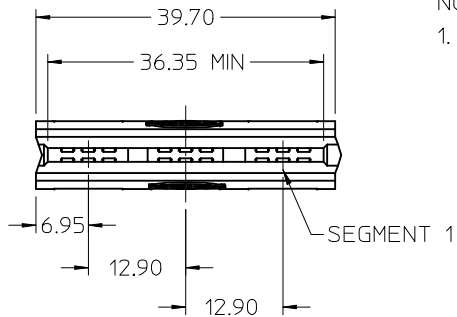

PCB LAYOUT: COMPONENT SIDE

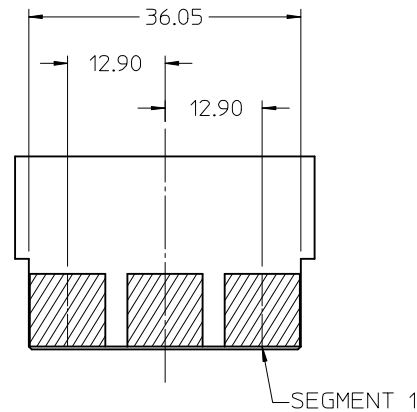RECOMMENDED EDGE CARD LAYOUT
EDGE CARD TOLERANCE: ±0.05

MATERIAL NUMBER	VOIDED SEGMENT	P	PCB THK
45719-0002	NONE	4.50	3.18
45719-3001	1		
45719-3002	2		
45719-3003	3		
45719-3004	1,2		
45719-3005	1,3		
45719-3006	2,3		
45719-0005	NONE	3.63	2.36
45719-3007	1		
45719-3008	2		
45719-3009	3		
45719-3010	1,2		
45719-3011	1,3		
45719-3012	2,3		
45719-0008	NONE	2.92	1.57
45719-3013	1		
45719-3014	2		
45719-3015	3		
45719-3016	1,2		
45719-3017	1,3		
45719-3018	2,3		

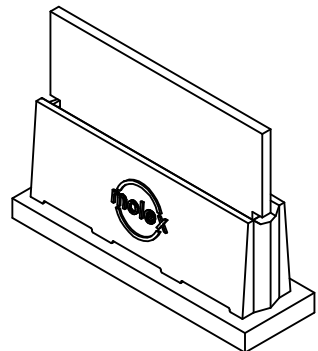

EC NO: UCP2009-2476 DRWN: JSCHAFER CHKD: APPR: APATEL	2009/04/07 2009/04/07 2009/04/20	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 1:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
				mm	INCH	DRAWN BY	DATE	TITLE POWER EDGE ASSEMBLY POWER VERTICAL SOLDER TAIL				
			4 PLACES	± ---	± ---	MARGULIS	2003/11/11					
			3 PLACES	± ---	± ---	CHECKED BY	DATE	MOLEX INCORPORATED				
			2 PLACES	± 0.25	± ---	MARGULIS	2003/11/11					
			1 PLACE	± 0.25	± ---	APPROVED BY	DATE	DOCUMENT NO. SD-45719-001				
			ANGULAR ±1/2°			MARGULIS	2003/11/11					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS												
E1	REV		SIZE A	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

6


5

4

3



2

1

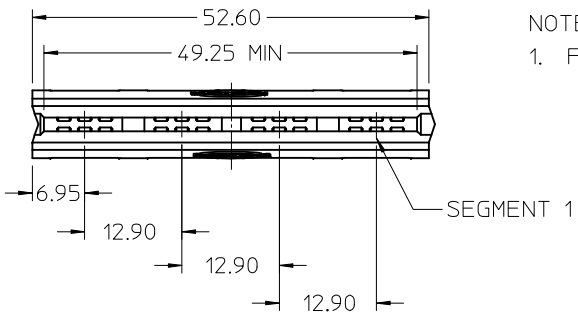


NOTES:


1. FOR ALL OTHER DIMENSIONS AND NOTES SEE SHEET 1.

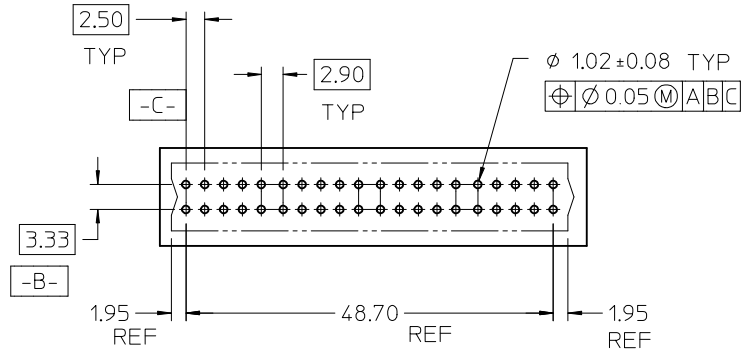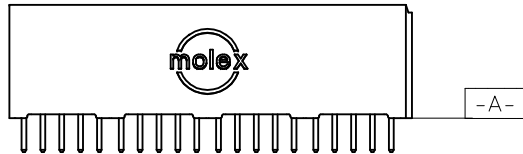

PCB LAYOUT: COMPONENT SIDE

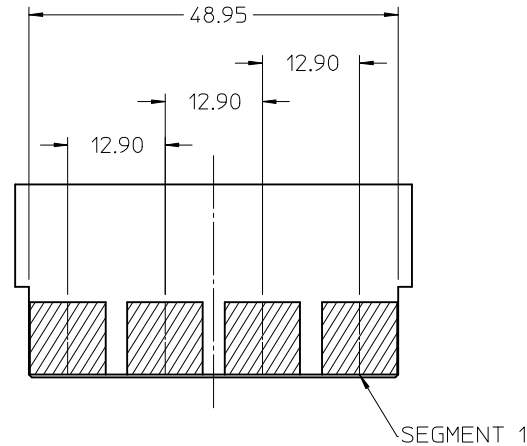RECOMMENDED EDGE CARD LAYOUT
EDGE CARD TOLERANCE: ± 0.05

MATERIAL NUMBER	VOIDED SEGMENT	P	PCB THK
45719-0003	NONE	4.50	3.18
45719-4001	1		
45719-4002	2		
45719-4003	3		
45719-4004	4		
45719-4005	1,2		
45719-4006	1,3		
45719-4007	1,4		
45719-4008	2,3		
45719-4009	2,4		
45719-4010	3,4		
45719-0006	NONE	3.63	2.36
45719-4011	1		
45719-4012	2		
45719-4013	3		
45719-4014	4		
45719-4015	1,2		
45719-4016	1,3		
45719-4017	1,4		
45719-4018	2,3		
45719-4019	2,4		
45719-4020	3,4	2.92	1.57
45719-0009	NONE		
45719-4021	1		
45719-4022	2		
45719-4023	3		
45719-4024	4		
45719-4025	1,2		
45719-4026	1,3		
45719-4027	1,4		
45719-4028	2,3		
45719-4029	2,4		
45719-4030	3,4		

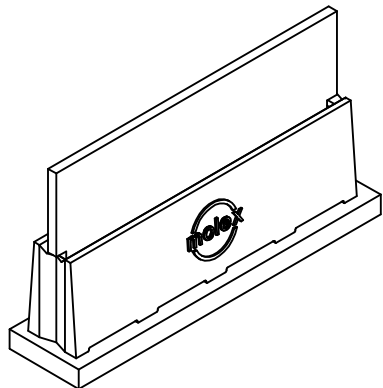

EC NO: UCP2009-2476	2009/04/07	DESCRIPTION
DRWN: JSCHAFER	2009/04/07	
CHKD: APATEL	2009/04/20	
APPR: APATEL	2009/04/20	
E1	REV	

GENERAL TOLERANCES
(UNLESS SPECIFIED)

	mm	INCH
4 PLACES	$\pm$ ---	$\pm$ ---
3 PLACES	$\pm$ ---	$\pm$ ---
2 PLACES	± 0.25	$\pm$ ---
1 PLACE	± 0.25	$\pm$ ---

ANGULAR $\pm 1/2^\circ$ DRAFT WHERE APPLICABLE
MUST REMAIN
WITHIN DIMENSIONSDIMENSION STYLE
MM ONLY

DRAWN BY	DATE
MARGULIS	2003/11/11
CHECKED BY	DATE
MARGULIS	2003/11/11
APPROVED BY	DATE
MARGULIS	2003/11/11

SCALE
1:1DESIGN UNITS
METRICTHIRD ANGLE
PROJECTIONPOWER EDGE ASSEMBLY
POWER VERTICAL
SOLDER TAIL

MOLEX INCORPORATED

DOCUMENT NO.
SD-45719-001SHEET NO.
3THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX
INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

5

4

3

2

1



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.