


Hardwire Input Models: #6AWG (13.3mm<sup>2</sup>) copper wiring with ferrules is recommended for AC input terminal connections. Each input terminal connection should be torqued to 12.2 inch-pounds.

CAUTION: Improperly sized wiring, inadequate torque or use of non-copper wiring can result in overheating of input terminal connections.

## 28.8kW 3-Phase Switched PDU, 240/230/220V Outlets (12 C13 & 12 C19), Hardwire 415/400/380V Input, 0U Vertical, TAA

MODEL NUMBER: PDU3XVSRHWA

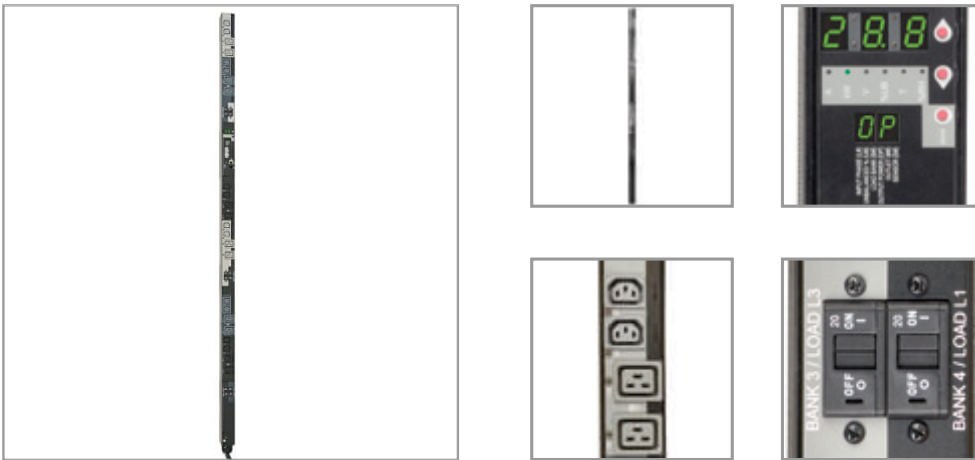

### Description

Tripp Lite 3 phase Switched PDU / Power Distribution Unit offers advanced network control and monitoring with the ability to turn on, turn off, recycle or lock-out power to each individual receptacle, monitor site electrical conditions and remotely monitor output power consumption per-phase or per-receptacle. PowerAlert interface supports remote control and custom notification of user-specified conditions via email, secure web, SNMP, Telnet or SSH interface. Individually switched outlets can be controlled in real-time to remotely reboot unresponsive network hardware, or be custom programmed for user-defined power-up and power-down sequences to ensure proper startup of interdependent IT systems and prevent inrush-related overloads as network equipment is first energized. Unused PDU outlets can be electronically locked off to prevent the connection of unauthorized hardware. PDU output current consumption in amps per-phase or per-receptacle can be displayed locally via visual meter or remotely via web/network interface to warn of potential overloads before critical IT mains or branch breakers trip. Highly accurate current metering offers +/-1% billing-grade current monitoring and recording ability for each output phase, breaker load bank and individual outlet.

### Features

- 28.8kW Switched 415/400/380V input 240/230/220V output PDU with built-in web/network interface
- Hardwire (3P+N+E) 415/400/380V 3 phase input
- 0U, 70 inch / 178cm vertical form factor
- 24 switched 240/230/200V outlets (12 C13, 12 C19) in 6 separately breaker load banks

### Highlights

- Switched 28.8kW 3-Phase 415/400/380V input 240/230/220V output PDU
- Reports voltage & load per-outlet or per phase via ethernet interface
- 1% billing-grade accuracy; Digital display reports detailed status information
- 70in / 1778mm 0U vertical format; Toolless button-mount installation
- 12 C13 & 12 C19 single phase outlets; Plug-lock cable retention inserts
- Hardwire 3 phase input
- TAA Compliant

### Package Includes

- Switched, vertical rackmount PDU with pre-installed mounting buttons
- 12 C13/C14 and 12 C19/C20 Plug-lock cable retention inserts
- Spare installation buttons (2 9mm / 4 6mm), Mounting brackets
- Configuration cable
- Owner's manual



- Supports power-on, power-off or reboot of each outlet on a real-time or programmable basis
- Enables reboot of locked equipment, custom power-on/power-off sequences, load shedding of optional loads and disabling unused outlets
- Network interface provides PDU control and data regarding input voltage and load levels per-outlet, per-breaker and per-phase
- Built-in local digital display and remote web/network interface reports detailed voltage, amperage and kilowatt output values per outlet, per breaker and per phase with additional reporting options for power unbalance percentage, IP address and sensor based temperature and humidity data (requires ENVIROSENSE sensor)
- In-rack environmental reporting with optional ENVIROSENSE temperature / humidity sensor and rack access notification with up to 4 optional SRSWITCH door sensors
- Local display supports electronic 180 degree display rotation for overhead or under-floor input cable orientation
- Supports user-specified alarm notification thresholds
- DHCP/Manual configuration support
- 10/100 Mbps auto-sensing
- Real-time clock backup maintains the time of day and date even if the PDU is unpowered
- Tiered access privileges allow an administrator and a guest to login via web browser
- Alert notifications via email or SNMP traps offer immediate event notification
- Firmware upgrade ability supports future product enhancements
- Supports HTTP, HTTPS, PowerAlert Network Management System, SMTP, SNMPv1, SNMPv2, SNMPv3, Telnet, SSH, FTP, DHCP, BootP, NTP protocols
- Fully compatible with FREE PowerAlert Network Management System / NMS Software
- Included set of Plug-lock inserts keep C14 and C20 power cords solidly connected to PDU outlets
- Toolless mounting supported in button-mount compatible racks, plus nut-and-bolt mounting brackets for other mounting applications (set of 2 9mm buttons pre-installed, 2 9mm and 4 6mm spare buttons included)

## Specifications

OVERVIEW	
UPC Code	037332170026
PDU Type	Switched
INPUT	
PDU Input Voltage	380; 400; 415
Recommended Electrical Service	External circuit breaker - 3 pole, 415V rated, 50A; Wiring - 5C, #8AWG (10mm <sup>2</sup> ), 75C rated minimum; Conduit - 3/4 in. (PG21) minimum, flexible



**Tripp Lite**  
 1111 W. 35th Street  
 Chicago, IL 60609 USA  
 Telephone: 773.869.1234  
 www.tripplite.com

Maximum Input Amps	40
PDU Plug Type	Hardwire
Input Phase	3-Phase
<b>OUTPUT</b>	
Output Capacity Details	28.8kW (415/240V), 27.7kW (400/230V), 26.3kW (380/220V) total capacity; 40A max per output phase (L1, L2, L3); 20A max per breakered outlet bank; 16A max per C19 outlet; 12A max (10A CE) per C13 outlet
Frequency Compatibility	50 / 60 Hz
Output Receptacles	(12) C13; (12) C19
Output Nominal Voltage	220 (380V input); 230 (400V input); 240 (415V input)
Overload Protection	6 20A circuit breakers, 1 per outlet bank
<b>USER INTERFACE, ALERTS &amp; CONTROLS</b>	
Reported Load Segments	Reports input current per phase (L1, L2,L3), plus output current for each output load bank (B1-B6) and individual output receptacle (1-24); Outlets are color-coded and labeled for phase and load bank identification; L1-N feeds black outlets (B1, B4); L2-N feeds dark-gray outlets (B2, B5); L3-N feeds light-gray outlets (B3, B6)
Front Panel LCD Display	Large digital display reports Amperage, Kilowatts, Voltage, Unbalance percentage, Temperature* and Humidity* information (*requires ENVIROSENSE option); Small digital display provides detail on the measurement the large display is reporting: Input-phase (L#), Load bank (B#), Sensor (S#), Outlet (##), Load unbalance % (UB), Output power (OP)
Front Panel LEDs	Set of 6 LEDs identify the value displayed on the large digital display: Amperage (A), Kilowatts (kW), Voltage (V), Unbalance percentage (%UB), Temperature (T), Humidity (%RH); One additional LED for each output receptacle offers power availability information: GREEN (Power ON, load bank capacity <80%), YELLOW (Power ON, load bank capacity >80%), RED (Power OFF/undervoltage), RED FLASHING (Power OFF/breaker trip)
Switches	Set of UP/DOWN arrow buttons scroll through available Input, Bank, Power, Load balance and Sensor options; Additional MODE button advances the LEDs to view the next measurement
<b>PHYSICAL</b>	
Form Factors Supported	Vertical rackmount installation supported with included mounting brackets; supports toolless mounting in button-mount compatible racks
Material of Construction	Metal
PDU Form Factor	Vertical (0U)
Shipping Dimensions (hwd / cm)	15.01 x 17.50 x 194.49
Shipping Dimensions (hwd / in.)	5.91 x 6.89 x 76.57
Shipping Weight (kg)	7.77
Shipping Weight (lbs.)	17.13
Unit Dimensions (hwd / cm)	177,8 x 5,51 x 6,4
Unit Dimensions (hwd / in.)	70 x 2.17 x 2.52
Unit Weight (kg)	5.90
Unit Weight (lbs.)	13.00
<b>ENVIRONMENTAL</b>	
Operating Temperature Range	32 to 140F (0 to 50C)



**Tripp Lite**  
1111 W. 35th Street  
Chicago, IL 60609 USA  
Telephone: 773.869.1234  
[www.tripplite.com](http://www.tripplite.com)

Storage Temperature Range	-30°C to +60°C (-22°F to +140°F)
Relative Humidity	5 to 95% non-condensing
Operating Elevation (ft.)	0-10,000
Operating Elevation (m)	0-3000
<b>STANDARDS &amp; COMPLIANCE</b>	
Certifications	Tested to CE (EN60950-1), UL60950-1 (USA), CSA22.2 (Canada), NOM (Mexico), FCC / CE Class A (Emissions), RoHS (Hazardous Substances), TAA Compliant
<b>WARRANTY</b>	
Product Warranty Period (Worldwide)	2-year limited warranty

© 2020 Tripp Lite. All rights reserved. All product and company names are trademarks or registered trademarks of their respective holders. Use of them does not imply any affiliation with or endorsement by them. Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice. Tripp Lite uses primary and third-party agencies to test its products for compliance with standards. See a list of Tripp Lite's testing agencies: <https://www.tripplite.com/products/product-certification-agencies>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.