

## APPLICATIONS

- HYDRAULIC/  
PNEUMATIC CONTROLS
- AIR  
COMPRESSORS
- ENERGY  
MANAGEMENT  
'smart' compressors,  
refrigeration/chiller  
control
- PROCESS CONTROL  
SYSTEMS
- ENGINE CONTROLS  
AND MONITORS

## MODEL ECLIPSE • OEM PRESSURE TRANSDUCER

The Eclipse is designed for OEM's needing a reliable pressure transmitter for industrial or other heavy duty applications. The Eclipse's combination of rugged packaging, internal signal amplification and price make it ideal for many applications.

The pressure media is contained by a brazed assembly of stainless steel. There are no hidden O-rings or elastomers containing the media. A plated steel case protects the internal electronics.

It is available with either a 0.5 to 4.5 volt or 4 to 20 mA output. The 4 to 20 mA output is useful for applications where electrical noise may be a concern. Units with the Hirschmann connector are CE approved.




### FEATURES

- Voltage or current output
- 15 PSIG through 7100 PSIS ranges
- CE versions available
- Weather proof type connector
- Reverse polarity protection
- Low excitation voltage
- IP65 sealed steel case

### BENEFIT

- Flexibility for the designer
- Suitable for many applications
- Ready for Europe
- High reliability in tough environments
- Not damaged by reversed excitation
- Suitable for ORV or marine use
- Complete environmental protection for electronics

### HOW TO ORDER

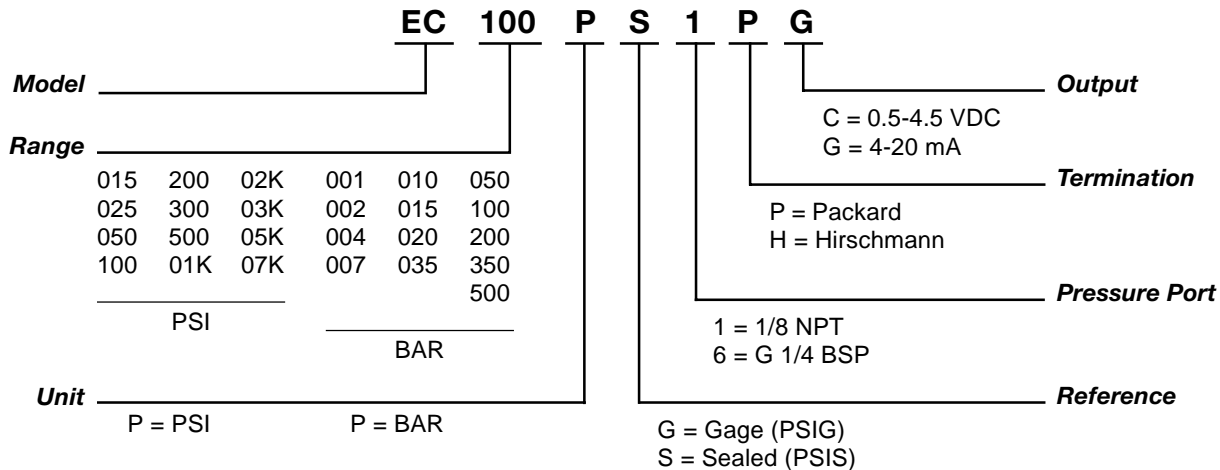

Note: Not all combinations are available. Minimum quantity orders apply. Contact the factory for more details.

## TECHNICAL SPECIFICATIONS

### RANGE

0-15, 25, 50 psig  
0-100, 200, 300, 500, 1000, 2000, 3000, 5000, 7180 psis

0-1, 2, 4, 7 bar g  
0-10, 15, 20, 35, 50, 100, 200, 350, 500 bar s

### PHYSICAL

Proof Pressure	1.5 x rated range without damage	
Burst Pressure	5 x rated range without bursting	
Material in Contact With Media	300 series SS, braze compound	
Shock	50 g's peak (5 milliseconds)	
Vibration	Meets MIL-STD 810B, Figure 514-4, Curve AK, Time Schedule II Random Vibration Test (Overall g rms = 20.7 minimum)	

ELECTRICAL	Voltage out	Current out
Span	4.00 V nominal (0.5 - 4.5 V)	16 mA (4 - 20mA)
Zero output	0.5 V nominal	4 mA nominal
Excitation	5.0 Vdc ±0.25 Vdc @ 20 mA max	10 to 40 Vdc (linear derating to 35 Vdc from 25° to 100° C)
Reverse Polarity Protection	Yes	
Insulation Resistance	1000 MW @ 250 Vdc	
Electrical Connection	Standard Packard Metri-Pack™. Requires Packard #12065287 mating connector, not included. Optional Hirschmann connector, mate included.	


### PERFORMANCE

Accuracy	±1% of F.S.O. from best fit straight line. Including effects of non-linearity, hysteresis and non-repeatability	
Compensated Temperature Range	30° to 180°F (-1° to 82°C)	
Operating and Storage Temperature Range	-40° to 221°F (-40° to 105°C)	
Total Error	±4% of full scale. Includes the effects of zero output error, calibration error, temperature, non-linearity, hysteresis, and repeatability.	

NOTE: All specifications are measured at 25°C and rated excitation unless otherwise specified.

### DIMENSIONS

xx.xx = inches  
(xx.x) = mm

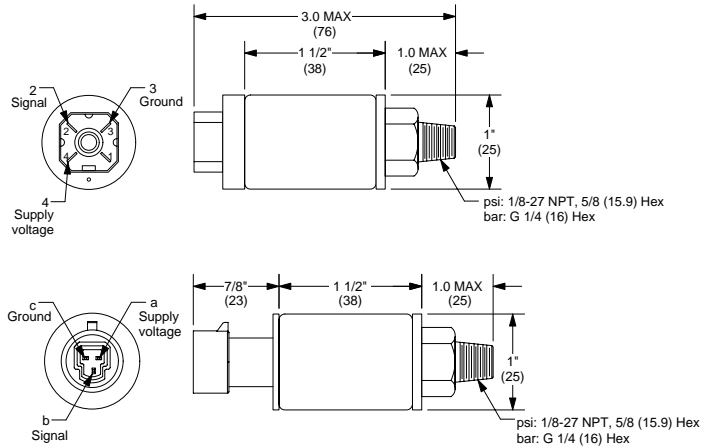

### PACKARD CONNECTOR PINS

	Voltage	Current
a	+ Excitation	+ Excitation
b	Output	- Excitation (Return)
c	Common	NC

### HIRSCHMANN CONNECTOR PINS

	Voltage	Current
Pin 1	NC	NC
Pin 2	Signal Output	NC
Pin 3	Common	- Excitation (Return)
Pin 4	+ Excitation	+ Excitation

### WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Contact your local sales office for warranty information. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace without charge those items it finds defective. The foregoing is Buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Item # 1096500 M.G. 3/01

Sensing and Control  
Honeywell  
100 Discovery Way  
Acton, MA 01720 USA

Tel: (877) 384-1300; Fax: (978) 263-0630



[www.honeywell.com/sensing/products/di](http://www.honeywell.com/sensing/products/di)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Honeywell:](#)

[EC200PS1PC](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.