



Spring Cage Feed Through Terminal Blocks with Angled Design STS 6

The ST-DESK series of spring cage terminal blocks features an angled conductor entry. This family of compact terminal blocks is used especially in wiring systems where space is to be saved using underfloor wiring. With their dual jumper channel, STS 6 and STS 6-TWIN offer a variety of options for potential bridging. Moreover, these jumper channels are conveniently positioned and are in the same location as is the case for the 2.5 and 4 mm² terminal blocks of the ST-DESK series. Using adapter bridge RB-ST 6-(4/2,5), the potential can be distributed both to the left or right to the terminal blocks with smaller nominal cross sections.




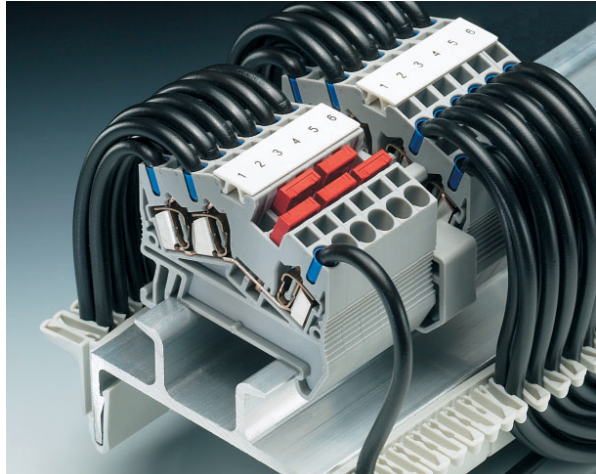


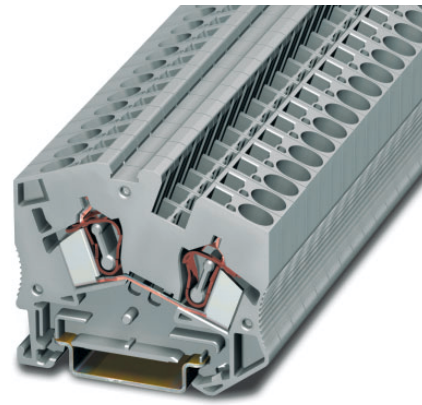





Spring Cage Feed Through Terminal Block STS 6



(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 60 947-7-1	0.2-10	0.2-6	24-8	52	800

Technical data

Spring cage terminal block, for mounting on 		gray blue	terminal width 8.2 terminal width 8.2
(1) End cover		gray	
(2) Plug-in bridge, for cross-connections in the terminal center	2-pos. 3-pos. 4-pos. 5-pos. 10-pos.		
(3) Adapter bridge, for connecting an STS 6 to an STS 4 or STS 2,5			
(4) Partition plate, for visual and electrical separation of terminal groups, 2 mm thick			
(5) Test adapter, for 4 mm Ø test plug PS and 4 mm Ø safety test plugs, making contact in the bridge shaft			
(6) 2.3 mm Ø test plug ¹⁾ , consisting of metal part and red insulating sleeve			
(7) Modular test plug, can be labeled with ZBF 5			
(8) Screwdriver, for actuating the tension spring			
(9) Zack strip, 10-section, for labeling in the terminal center		white	

Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7,5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum // Rated data	[A] / [mm ²]	52 / 10 // 41 / 6
Rated surge voltage / contamination class	[kV] / -	8 / 3
Surge voltage category / insulation material group	- / -	III / I

Connection capacity

Stranded with ferrule with plastic sleeve	[mm ²]	0.25 - 6
Stranded with ferrule without plastic sleeve	[mm ²]	0.25 - 6
Stranded with TWIN ferrule with plastic sleeve	[mm ²]	0.25 - 1.5
Stripping length	[mm]	12

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)


Nominal voltage / current / conductor sizes	UL: [V] / [A] / AWG	applied for
	CSA/CUL: [V] / [A] / AWG	applied for

¹⁾ Further colors are available on request.

Type	Order No.	Pcs. Pkt.
STS 6	30 38 12 1	50
STS 6 BU	30 38 13 4	50
D-STIS 6	30 38 18 9	50
FBS 2-8	I_{max} : 41 A 30 30 28 4	10
FBS 3-8	41 A 30 30 29 7	10
FBS 4-8	41 A 30 30 30 7	10
FBS 5-8	41 A 30 30 31 0	10
FBS 10-8	41 A 30 30 32 3	10
RB ST 6-(2,5/4)	I_{max} : 48 A 30 30 86 0	10
ATP-ST 6	30 24 48 1	50
PAI 4	30 30 92 5	10
MPS-RD	02 01 55 3	10
PS 5	30 30 98 3	10
SZF 2 - 0,8 x 4,0	12 04 52 0	10
ZB 8:UNPRINTED	10 52 00 2	10

8.2 / 58 / 2.2
50.0 / 57.5
52 / 10 // 41 / 6
8 / 3
III / I
0.25 - 6
0.25 - 6
0.25 - 1.5
12
A 5
PA
V0
applied for
applied for







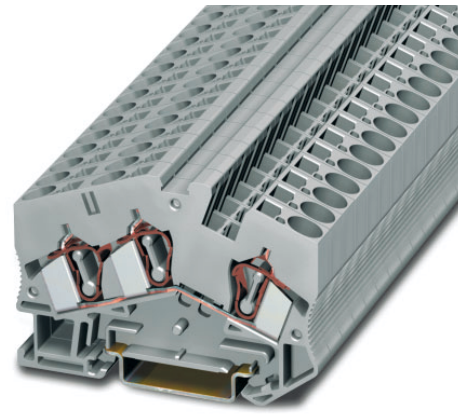



Spring Cage Feed Through Terminal Block STS 6-TWIN



(IEC) [mm ²]	rigid solid	flexible stranded	AWG	I [A]	U [V]
IEC 60 947-7-1	0.2-10	0.2-6	24-8	52*	800

* The max. load current must not be exceeded by the total current of all connected conductors.

Technical data

Spring cage terminal block, for mounting on 	gray blue	terminal width 8.2 terminal width 8.2	
(1) End cover	gray		
(2) Plug-in bridge, for cross-connections in the terminal center	2-pos. 3-pos. 4-pos. 5-pos. 10-pos.		
(3) Adapter bridge, for connecting an STS 6 to an STS 4 or STS 2,5			
(4) Partition plate, for visual and electrical separation of terminal groups, 2 mm thick			
(5) Test adapter, for 4 mm Ø test plug PS and 4 mm Ø safety test plugs, making contact in the bridge shaft			
(6) 2.3 mm Ø test plug ¹⁾ , consisting of metal part and red insulating sleeve			
(7) Modular test plug, can be labeled with ZBF 5			
(8) Screwdriver, for actuating the tension spring			
(9) Zack strip, 10-section, for labeling in the terminal center	white		

Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7,5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum // Rated data	[A] / [mm ²]	52 / 10 // 41 / 6
Rated surge voltage / contamination class	[kV] / -	8 / 3
Surge voltage category / insulation material group	- / -	III / I

Connection capacity

Stranded with ferrule with plastic sleeve	[mm ²]	0.25 - 6
Stranded with ferrule without plastic sleeve	[mm ²]	0.25 - 6
Stranded with TWIN ferrule with plastic sleeve	[mm ²]	0.25 - 1.5
Stripping length	[mm]	12

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)

Nominal voltage / current / conductor sizes	UL: [V] / [A] / AWG	applied for
	CSA/CUL: [V] / [A] / AWG	applied for

¹⁾ Further colors are available on request.

Type	Order No.	Pcs. Pkt.
STS 6-TWIN	30 38 15 0	50
STS 6-TWIN BU	30 38 16 3	50
D-STIS 6-TWIN	30 38 20 2	50
FBS 2-8	$I_{max.}: 41 A$ 30 30 28 4	10
FBS 3-8	41 A 30 30 29 7	10
FBS 4-8	41 A 30 30 30 7	10
FBS 5-8	41 A 30 30 31 0	10
FBS 10-8	41 A 30 30 32 3	10
RB ST 6-(2,5/4)	$I_{max.}: 48 A$ 30 30 86 0	10
ATP-ST 6	30 24 48 1	50
PAI 4	30 30 92 5	10
MPS-RD	02 01 55 3	10
PS 5	30 30 98 3	10
SZF 2 - 0,8 x 4,0	12 04 52 0	10
ZB 8:UNPRINTED	10 52 00 2	10

8.2 / 70 / 2.2
50.0 / 57.5


52 / 10 // 41 / 6
8 / 3
III / I

0.25 - 6
0.25 - 6
0.25 - 1.5
12

A 5
PA
V0

applied for
applied for

Spring Cage Ground Terminal Block STS 6-PE

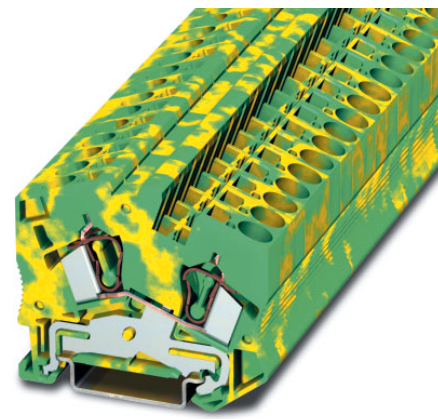










(IEC) [mm ²]	rigid solid	flexible stranded	AWG
IEC 60 947-7-2	0.2-10	0.2-6	24-8

Current carrying capacity of mounting rails, see CLIPLINE catalog.

Technical data

Spring cage ground terminal block,
for mounting on  green-yellow terminal width 8.2

(1) End cover	gray	
(2) Plug-in bridge , for cross-connections in the terminal center	2-pos. 3-pos. 4-pos. 5-pos. 10-pos.	
(3) Adapter bridge , for connecting an STS 6 to an STS 4 or STS 2,5		
(4) Partition plate , for visual and electrical separation of terminal groups, 2 mm thick		
(5) Test adapter , for 4 mm Ø test plug PS and 4 mm Ø safety test plugs, making contact in the bridge shaft		
(6) 2.3 mm Ø test plug ¹⁾ , consisting of metal part and red insulating sleeve		
(7) Modular test plug , can be labeled with ZBF 5		
(8) Screwdriver , for actuating the tension spring		
(9) Zack strip , 10-section, for labeling in the terminal center	white	

Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7,5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum // Rated data	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / -
Surge voltage category / insulation material group	- / -

Connection capacity

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]
Stripping length	[mm]

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94

Approval data (UL and CSA/CUL)

Nominal voltage / current / conductor sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG

¹⁾ Further colors are available on request.

Type	Order No.	Pcs. Pkt.
STS 6-PE	30 38 14 7	50
D-STIS 6	30 38 18 9	50
FBS 2-8	30 30 28 4	10
FBS 3-8	30 30 29 7	10
FBS 4-8	30 30 30 7	10
FBS 5-8	30 30 31 0	10
FBS 10-8	30 30 32 3	10
RB ST 6-(2,5/4)	30 30 86 0	10
ATP-ST 6	30 24 48 1	50
PAI 4	30 30 92 5	10
MPS-RD	02 01 55 3	10
PS 5	30 30 98 3	10
SZF 2 - 0,8 x 4,0	12 04 52 0	10
ZB 8:UNPRINTED	10 52 00 2	10


8.2 / 58 / 2.2
50.0 / 57.5

-
8 / 3
III / I


0.25 - 6
0.25 - 6
0.25 - 1.5

12
A 5
PA
V0

applied for
applied for



Spring Cage Ground Terminal Block STS 6-TWIN-PE

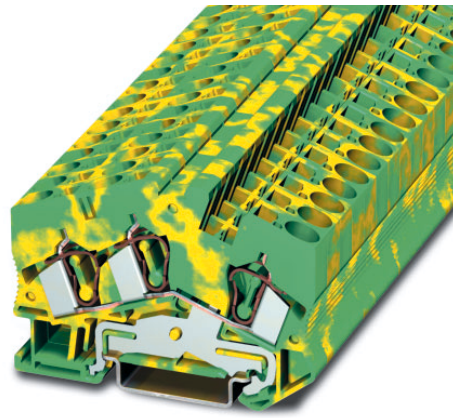










(IEC) [mm ²]	rigid solid	flexible stranded	AWG
IEC 60 947-7-2	0.2-10	0.2-6	24-8

Current carrying capacity of mounting rails, see CLIPLINE catalog.

Technical data

Spring cage ground terminal block,
for mounting on  green-yellow terminal width 8.2

(1) End cover	gray	
(2) Plug-in bridge , for cross-connections in the terminal center	2-pos. 3-pos. 4-pos. 5-pos. 10-pos.	
(3) Adapter bridge , for connecting an STS 6 to an STS 4 or STS 2,5		
(4) Partition plate , for visual and electrical separation of terminal groups, 2 mm thick		
(5) Test adapter , for 4 mm Ø test plug PS and 4 mm Ø safety test plugs, making contact in the bridge shaft		
(6) 2.3 mm Ø test plug ¹⁾ , consisting of metal part and red insulating sleeve		
(7) Modular test plug , can be labeled with ZBF 5		
(8) Screwdriver , for actuating the tension spring		
(9) Zack strip , 10-section, for labeling in the terminal center	white	

Dimensions

Width / length / end cover width	[mm]
Height (NS 35/7,5 / NS 35/15)	[mm]

Technical data in accordance with IEC/ DIN VDE

Maximum // Rated data	[A] / [mm ²]
Rated surge voltage / contamination class	[kV] / -
Surge voltage category / insulation material group	- / -

Connection capacity

Stranded with ferrule with plastic sleeve	[mm ²]
Stranded with ferrule without plastic sleeve	[mm ²]
Stranded with TWIN ferrule with plastic sleeve	[mm ²]
Stripping length	[mm]

Internal cylindrical gauge (IEC 60 947-1)

Insulating material

Inflammability class in acc. with UL 94


Approval data (UL and CSA/CUL)

Nominal voltage / current / conductor sizes	UL: [V] / [A] / AWG
	CSA/CUL: [V] / [A] / AWG

¹⁾ Further colors are available on request.

Type	Order No.	Pcs. Pkt.
STS 6-TWIN-PE	30 38 17 6	50
D-ST5 6-TWIN	30 38 20 2	50
FBS 2-8	30 30 28 4	10
FBS 3-8	30 30 29 7	10
FBS 4-8	30 30 30 7	10
FBS 5-8	30 30 31 0	10
FBS 10-8	30 30 32 3	10
RB ST 6-(2,5/4)	30 30 86 0	10
ATP-ST 6	30 24 48 1	50
PAI 4	30 30 92 5	10
MPS-RD	02 01 55 3	10
PS 5	30 30 98 3	10
SZF 2 - 0,8 x 4,0	12 04 52 0	10
ZB 8:UNPRINTED	10 52 00 2	10

8.2 / 70 / 2.2
50.0 / 57.5
-
8 / 3
III / I
0.25 - 6
0.25 - 6
0.25 - 1.5
12
A 5
PA
V0
applied for
applied for





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.