



# Quarter-Brick Series

## Dual output

**ARTESYN**  
TECHNOLOGIES

### DC/DC CONVERTERS


High Current, High Efficiency, Low Profile

1

NEW Product



- Two independent outputs
- High full load efficiency
- Wide ambient temperature range of -40 °C to +85 °C
- Up to 100% load imbalance
- Tracking, monotonic start-up
- Starts into pre-biased outputs
- Basic insulation system
- Over-voltage and over-temperature protection
- 100 V, 100 ms input voltage transient response
- Secondary side control, no optocouplers, fast transient load response
- Available RoHS compliant

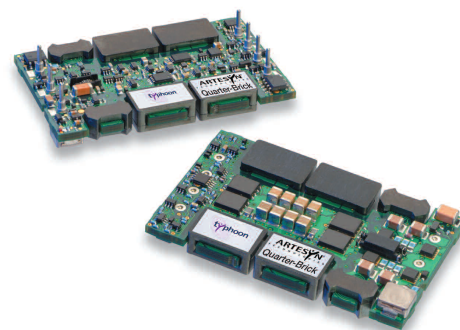

These are new high efficiency, open-frame, isolated 40 A converters in an industry standard dual quarter-brick footprint. These converters deliver high output current at low voltages, and excellent useable power density for today's high end applications. This series features an input voltage range of 36 Vdc to 75 Vdc and output voltages of 1.2 V/3.3 V, 1.5 V/3.3 V, 1.8 V/3.3 V, 2.5 V/3.3 V, and 5 V/3.3 V. The output voltage on each model is adjustable from 90% to 110% of the nominal value. Typical efficiencies are 90%. This series also has a remote ON/OFF capability. Over-current and over-voltage protection features are included as standard. Designed to meet international safety agency approvals, including EN60950-1 and UL/cUL60950, this series reduces compliance costs and time to market.



2 YEAR WARRANTY

All specifications are typical at nominal input, full load at 25 °C ambient unless otherwise stated

### SPECIFICATIONS

#### OUTPUT SPECIFICATIONS

|                          |                  |                                    |
|--------------------------|------------------|------------------------------------|
| Voltage adjustability    | Both outputs     | ±10% min.                          |
| Minimum load             | Both outputs     | 0%                                 |
| Ripple and noise         | 20 MHz bandwidth | 50 mV pk-pk max.<br>15 mV rms max. |
| Short circuit protection | Both outputs     |                                    |
| Turn-on characteristics  | Both outputs     | Monotonic                          |

#### INPUT SPECIFICATIONS

|                                                  |                           |                                                                      |
|--------------------------------------------------|---------------------------|----------------------------------------------------------------------|
| Input voltage range                              | 48 V nominal              | 36-75 Vdc                                                            |
| Input current                                    | No load<br>Remote OFF     | 80 mA max.<br>6 mA max.                                              |
| Active high remote ON/OFF<br>Logic compatibility | ON<br>OFF                 | Open collector ref to -input<br>Open circuit or >2.4 Vdc<br><0.4 Vdc |
| Undervoltage lockout                             | Power up<br>Power down    | 35.5 V (typ.)<br>33.5 V (typ.)                                       |
| Start-up time                                    | Power up<br>Remote ON/OFF | 14 ms (typ.)<br>14 ms (typ.)                                         |

#### EMC CHARACTERISTICS

|                          |                                         |
|--------------------------|-----------------------------------------|
| Immunity:                |                                         |
| ESD air enclosure        | EN61000-4-2 8 kV/6 kV(O/P within spec.) |
| Radiated field enclosure | EN61000-4-3 10 V/m (O/P within spec.)   |
| Conducted                | EN61000-4-6 10 V (O/P within spec.)     |
| Input transients         | 100 V, 100 ms                           |

#### GENERAL SPECIFICATIONS

|                         |                                       |                               |
|-------------------------|---------------------------------------|-------------------------------|
| Efficiency              | See table                             |                               |
| Basic insulation        | Input/output                          | 2250 Vdc                      |
| Switching frequency     | Fixed                                 | 480 kHz                       |
| Approvals and standards | (See Notes 1 and 2)                   | EN60950-1 VDE<br>UL/cUL 60950 |
| Material flammability   | UL94V-0                               |                               |
| Weight                  | 34 g (1.2 oz)                         |                               |
| MTBF                    | Telcordia Tech SR-332 2,883,816 hours |                               |

#### ENVIRONMENTAL SPECIFICATIONS

|                     |                                                 |                                       |
|---------------------|-------------------------------------------------|---------------------------------------|
| Thermal performance | Operating ambient, temperature<br>Non-operating | -40 °C to +85 °C<br>-55 °C to +125 °C |
|---------------------|-------------------------------------------------|---------------------------------------|

#### PROTECTION

|               |                                                     |
|---------------|-----------------------------------------------------|
| Short-circuit | Continuous                                          |
| Overvoltage   | Non-latching                                        |
| Thermal       | 125 °C hot spot temperature with automatic recovery |

International Safety Standard Approvals



UL/cUL CAN/CSA 22.2 No. 60950-00 : UL 60950  
File No. E135734/60950



VDE Certificate No. 10401-3336-0197



# Quarter-Brick Series

## Dual output



### DC/DC CONVERTERS

High Current, High Efficiency, Low Profile


2

For the most current data and application support visit [www.artesyn.com/powergroup/products.htm](http://www.artesyn.com/powergroup/products.htm)

**NEW Product**

| OUTPUT VOLTAGE                               |       |                       |             |                 |             | OUTPUT<br>CURRENT |      | OVP<br>TRIP POINT |     | EFFICIENCY |                    |                   |
|----------------------------------------------|-------|-----------------------|-------------|-----------------|-------------|-------------------|------|-------------------|-----|------------|--------------------|-------------------|
| NOMINAL                                      |       | INITIAL SET POINT (3) |             | REGULATION BAND |             |                   |      |                   |     | (TYP.)     | MODEL NUMBER (4,5) |                   |
| 1                                            | 2     | 1                     | 2           | 1               | 2           | 1                 | 2    | 1                 | 2   |            |                    |                   |
| QUARTER-BRICK DUAL OUTPUT PERFORMANCE MODELS |       |                       |             |                 |             |                   |      |                   |     |            |                    |                   |
| 1.2 V                                        | 3.3 V | 1.18-1.22 V           | 3.25-3.35 V | 1.16-1.24 V     | 3.2-3.4 V   | 20 A              | 20 A | 1.5 V             | 4 V | 90.0%      |                    | LQD40A48-3V3-1V2J |
| 1.5 V                                        | 3.3 V | 1.48-1.55 V           | 3.25-3.35 V | 1.44-1.55 V     | 3.2-3.4 V   | 20 A              | 20 A | 1.8 V             | 4 V | 90.5%      | LQD40A48-3V3-1V5J  |                   |
| 1.8 V                                        | 3.3 V | 1.77-1.83 V           | 3.25-3.35 V | 1.75-1.85 V     | 3.2-3.4 V   | 20 A              | 20 A | 2 V               | 4 V | 90.5%      | LQD40A48-3V3-1V8J  |                   |
| 2.5 V                                        | 3.3 V | 2.46-2.54 V           | 3.25-3.35 V | 2.42-2.58 V     | 3.2-3.4 V   | 20 A              | 20 A | 3 V               | 4 V | 90.5%      | LQD40A48-3V3-2V5J  |                   |
| QUARTER-BRICK DUAL OUTPUT VALUE MODELS       |       |                       |             |                 |             |                   |      |                   |     |            |                    |                   |
| 1.2 V                                        | 3.3 V | 1.18-1.22 V           | 3.25-3.35 V | 1.16-1.24 V     | 3.2-3.4 V   | 15 A              | 15 A | 1.5 V             | 4 V | 90.0%      | LQD30A48-3V3-1V2J  |                   |
| 1.5 V                                        | 3.3 V | 1.48-1.52 V           | 3.25-3.35 V | 1.44-1.55 V     | 3.2-3.4 V   | 15 A              | 15 A | 1.8 V             | 4 V | 90.5%      | LQD30A48-3V3-1V5J  |                   |
| 1.8 V                                        | 3.3 V | 1.77-1.83 V           | 3.25-3.35 V | 1.75-1.85 V     | 3.2-3.4 V   | 15 A              | 15 A | 2 V               | 4 V | 90.5%      | LQD30A48-3V3-1V8J  |                   |
| 2.5 V                                        | 3.3 V | 2.46-2.54 V           | 3.25-3.35 V | 2.42-2.58 V     | 3.2-3.4 V   | 15 A              | 15 A | 3 V               | 4 V | 91.0%      | LQD30A48-3V3-2V5J  |                   |
| 3.3 V                                        | 5 V   | 3.25-3.35 V           | 4.92-5.08 V | 3.20-3.40 V     | 4.85-5.15 V | 15 A              | 10 A | 4 V               | 6 V | 91.0%      | LQD25A48-5V0-3V3J  |                   |


### Part Number System with Options

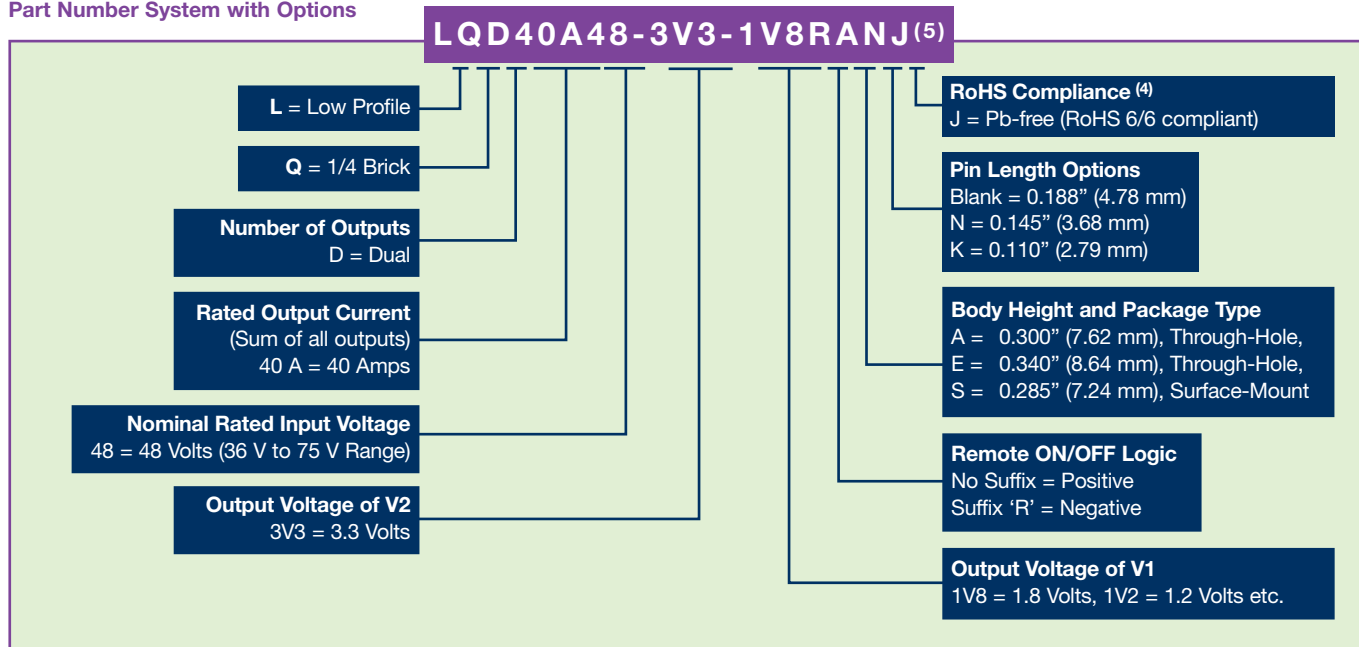


### Notes

- 1 User must provide recommended fuses in order to comply with safety approvals. See Application Note 137.
- 2 Maximum continuous output power.  
90 Watts for LQD40A48-3V3-1V2J models  
96 Watts for LQD40A48-3V3-1V5J models  
102 Watts for LQD40A48-3V3-1V8J models  
116 Watts for LQD40A48-3V3-2V5J models  
67.5 Watts for LQD30A48-3V3-1V2J models  
72 Watts for LQD30A48-3V3-1V5J models  
76.5 Watts for LQD30A48-3V3-1V8J models  
87 Watts for LQD30A48-3V3-2V5J models  
99.5 Watts for LQD25A48-5V0-3V3J models

- 3  $I_{O1} = I_{max}$ ,  $I_{O2} = I_{max}$ .
- 4 TSE RoHS 5/6 (non Pb-free) compliant versions may be available on special request, please contact your local sales representative for details.
- 5 The part number cannot exceed 18 characters. If the desired part number with options contains 19 characters then the last dash '-' in the part number is removed i.e. LQD25A48-5V0-3V3RAJ becomes LQD25A48-5V03V3RAJ. If the desired part number with options contains 20 characters then all dashes '-' are removed, i.e. LQD25A48-5V0-3V3RANJ becomes LQD25A485V03V3RANJ.

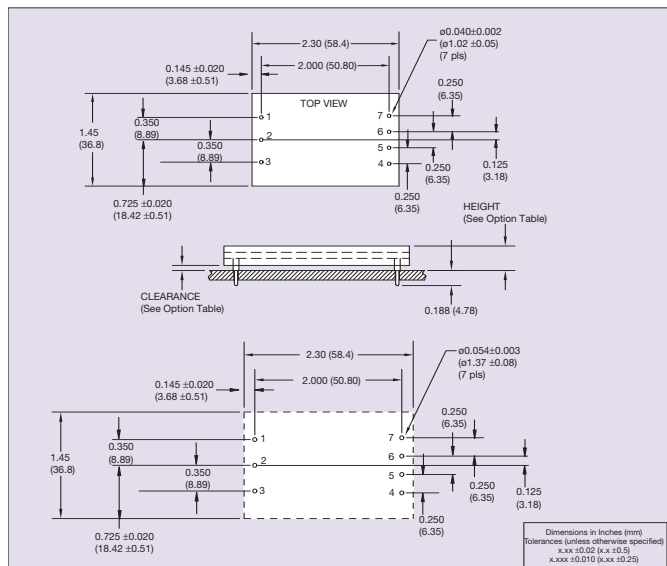

**Figure 1 - Through-Hole Mechanical Drawing**

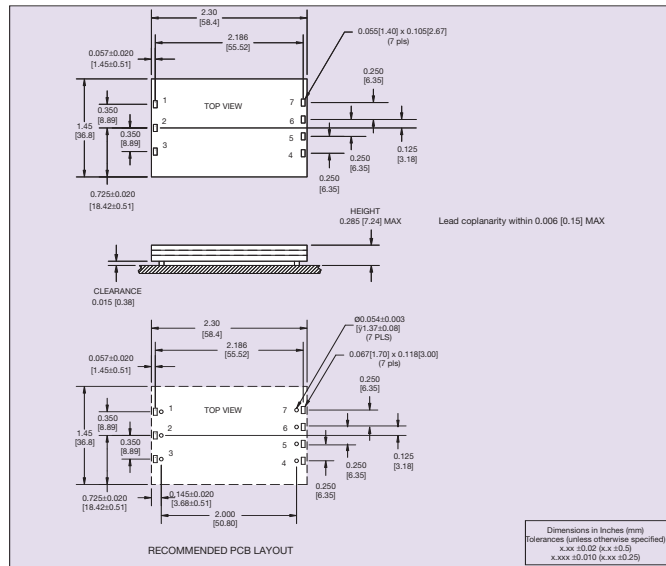

**Figure 2 - Surface-Mount Mechanical Drawing**

| PIN CONNECTIONS |          |
|-----------------|----------|
| PIN NUMBER      | FUNCTION |
| 1               | +Vin     |
| 2               | ON/OFF   |
| 3               | -Vin     |
| 4               | O/P 1    |
| 5               | O/P RTN  |
| 6               | Trim     |
| 7               | O/P 2    |

| DIMENSION OPTIONS |                   |                   |
|-------------------|-------------------|-------------------|
| OPTION            | STAND OFF HEIGHT  | BODY HEIGHT       |
| A                 | 0.030 (0.76) min. | 0.300 (7.62) max. |
| E                 | 0.070 (1.78) min. | 0.340 (8.64) max. |



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.