
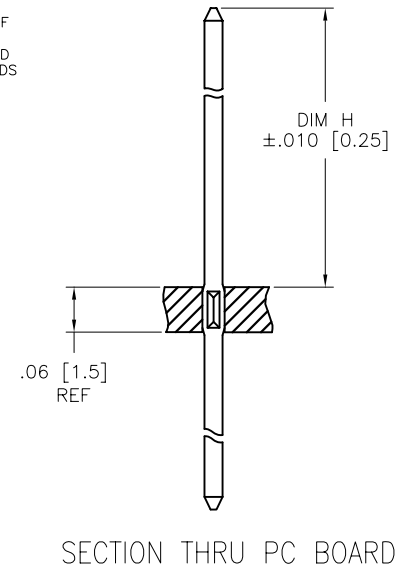
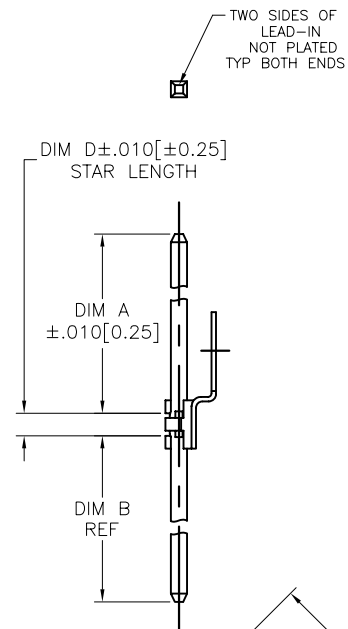
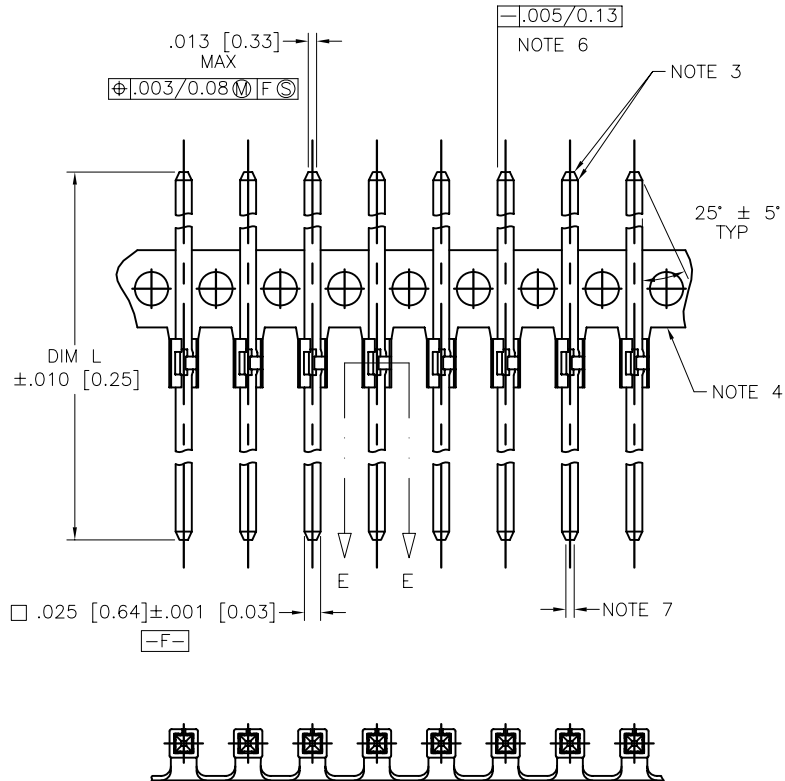


PRODUCT NUMBER
 SEE TABLE


mat'l. code SEE NOTE 1				surface ASME Y14.5	tolerance ASME Y14.5	projection	product family PIN PRODUCTS
ltr	ec'n no	dr	date	tolerances unless otherwise specified		INCH/MM	title
AA	V07-0009	HTB	2007-01-05	angles	$XX \pm .01 / X \pm .3$		BERGPIN® .100" [2.54] cc
AB	V08-0353	HTB	2008-08-15	$0^\circ \pm 2^\circ$	$XXX \pm .005 / XXX \pm .13$	scale 4:1	.039" [0.99] DIA. STAR
-	-	-	-	-	XXXX*0020/XXX*051		
v	V81389	SAR	1998-08-05	dr	J.W.BAIR	1990-01-15	dwg no
w	V01594	JRW	2000-07-12	enfr	K.D.PATEL	1990-01-15	sheet 1 of 4
x	V05-0375	VS	2005-04-22	chr	K.D.PATEL	1990-01-15	size
y	V06-0684	HTB	2006-07-24	appd	K.D.PATEL	1990-01-15	A4
sheet	revision	AB	AB	AB	AB		type
index	sheet	1	2	3	4		CUSTOMER Drawing

PRODUCT NO. NOTE 8	PLATING	UNDERPLATING
75451-YYY	30μ" [0.76μ] MIN Au	50μ" [1.27]μ MIN Ni
75451-YYLFF		
75453-YYY	50μ" [1.27μ] MIN Au	50μ" [1.27]μ MIN Ni
75453-YYLFF		
75454-YYY	120μ" [3.05μ] MIN 93/7 SnPb	50μ" [1.27]μ MIN Ni
75454-YYLFF	100μ" [2.54μ] MIN Sn	50μ" [1.27]μ MIN Ni
75455-YYY	30μ" [0.76μ] MIN GXT™	50μ" [1.27]μ MIN Ni
75455-YYLFF		
75456-YYY	15μ" [0.38μ] MIN GXT™	50μ" [1.27]μ MIN Ni
75456-YYLFF		
75459-YYY	15μ" [0.38μ] MIN Au	50μ" [1.27]μ MIN Ni
75459-YYLFF		

NOTE 10— DISCONTINUED

NOTE 9

NOTES

- PIN MATERIAL: PHOS. BRONZE, 3/4 HARD ASTM B-159-66.
- CENTER LINE OF TERMINAL MUST BE IN A TRUE POSITION WITHIN .015 [0.38] DIA. WITH RESPECT TO THE HOLE AXIS AFTER INSERTION IN A P. C. BOARD.
- BURNISH MARKS ON PIN PERMITTED.
BURR .003 [0.08] MAX. TYP.
BULGE .0005 [0.013] MAX. TYP.
- CARRIER STRIP FOR CONVEYING PURPOSES ONLY.
- SEE PRODUCT SPECIFICATION BUS-12-064 FOR P.C. BOARD HOLE DIAMETER AND P.C. BOARD PLATING INFORMATION.
- .005 [0.13] STRAIGHTNESS FOR PIN LENGTHS UP TO 1.000 [2.54].
.008 [0.20] STRAIGHTNESS FOR PIN LENGTHS GREATER THAN 1.000 [2.54].
.009 [0.23] STRAIGHTNESS FOR DASH NUMBERS INDICATED. (SEE TABLE)
- TIP WIDTH ON THIS END ONLY MAY BE .016 [0.41] MAX. FOR PARTS WITH DIM B LESS THAN .235 [5.97], OTHERWISE .013 [0.33] MAX.
- ADD AN LF SUFFIX TO PART NUMBER FOR PRODUCT THAT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THIS PRODUCT HAS 100% TIN PLATING IN THE INTERFACE AND HAS NOT BEEN TESTED FOR WHISKER GROWTH IN ALL INTERCONNECT ENVIRONMENTS.
- 75454-YYY IS NOT RoHS COMPLIANT.

mat'l. code	surface	tolerance	projection	product family
SEE NOTE 1	ASME Y14.5	ASME Y14.5		PIN PRODUCTS
ltr	ecn no	dr	date	title
AB				BERGPIN® .100"[2.54]cc
	angles	XX*.01/X*.3	INCH/MM	.039"[0.99] DIA. STAR
	0° ±2'	XXX*.005/XXX*.13	scale 1:1	
		XXXX*.0020/XXX*.051		
	dr	J.W.BAIR	1990-01-15	dwg no
	engr	K.D.PATEL	1990-01-15	sheet 2 of 4
	chr	K.D.PATEL	1990-01-15	size
	appd	K.D.PATEL	1990-01-15	A4
sheet	revision			type
index	sheet			CUSTOMER Drawing



PRODUCT NUMBER	TOTAL PIN LGTH															
	DIM L	DIM L	DIM A	DIM A	DIM B	DIM B	DIM H FOR .062/1.57 BOARD	DIM H FOR .062/1.57 BOARD	DIM H FOR .093/2.36 BOARD	DIM H FOR .093/2.36 BOARD	DIM H FOR .125/3.18 BOARD	DIM H FOR .125/3.18 BOARD	DIM C	DIM C	STAR DIM 'D'	LENGTH
NOTE 8	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC
7545X-001	0.345	8.76	0.230	5.84	0.045	1.14	0.235	5.97	0.220	5.59	0.205	5.21	0.039	0.99	0.070	1.78
7545X-002	0.380	9.65	0.265	6.73	0.045	1.14	0.270	6.86	0.255	6.48	0.240	6.10	0.039	0.99	0.070	1.78
7545X-003	0.460	11.68	0.345	8.76	0.045	1.14	0.350	8.89	0.335	8.51	0.320	8.13	0.039	0.99	0.070	1.78
7545X-004	0.515	13.08	0.400	10.16	0.045	1.14	0.405	10.29	0.390	9.91	0.375	9.53	0.039	0.99	0.070	1.78
7545X-005	0.530	13.46	0.415	10.54	0.045	1.14	0.420	10.67	0.405	10.29	0.390	9.91	0.039	0.99	0.070	1.78
7545X-006	0.550	13.97	0.435	11.05	0.045	1.14	0.440	11.18	0.425	10.80	0.410	10.41	0.039	0.99	0.070	1.78
7545X-007	0.580	14.73	0.465	11.81	0.045	1.14	0.470	11.94	0.455	11.56	0.440	11.18	0.039	0.99	0.070	1.78
7545X-008	0.630	16.00	0.515	13.08	0.045	1.14	0.520	13.21	0.505	12.83	0.490	12.45	0.039	0.99	0.070	1.78
7545X-009	0.685	17.40	0.570	14.48	0.045	1.14	0.575	14.61	0.560	14.22	0.545	13.84	0.039	0.99	0.070	1.78
7545X-010	0.700	17.78	0.585	14.86	0.045	1.14	0.590	14.99	0.575	14.61	0.560	14.22	0.039	0.99	0.070	1.78
7545X-011	0.750	19.05	0.635	16.13	0.045	1.14	0.640	16.26	0.625	15.88	0.610	15.49	0.039	0.99	0.070	1.78
7545X-012	0.770	19.56	0.655	16.64	0.045	1.14	0.660	16.76	0.645	16.38	0.630	16.00	0.039	0.99	0.070	1.78
7545X-013	0.860	21.84	0.745	18.92	0.045	1.14	0.750	19.05	0.735	18.67	0.720	18.29	0.039	0.99	0.070	1.78
7545X-014	0.580	14.73	0.265	6.73	0.245	6.22	0.270	6.86	0.255	6.48	0.240	6.10	0.039	0.99	0.070	1.78
7545X-015	0.660	16.76	0.345	8.76	0.245	6.22	0.350	8.89	0.335	8.51	0.320	8.13	0.039	0.99	0.070	1.78
7545X-016	0.715	18.16	0.400	10.16	0.245	6.22	0.405	10.29	0.390	9.91	0.375	9.53	0.039	0.99	0.070	1.78
7545X-017	0.780	19.81	0.465	11.81	0.245	6.22	0.470	11.94	0.455	11.56	0.440	11.18	0.039	0.99	0.070	1.78
7545X-018	0.885	22.48	0.570	14.48	0.245	6.22	0.575	14.61	0.560	14.22	0.545	13.84	0.039	0.99	0.070	1.78
7545X-019	0.940	23.88	0.625	15.88	0.245	6.22	0.630	16.00	0.615	15.62	0.600	15.24	0.039	0.99	0.070	1.78
7545X-020	0.970	24.64	0.655	16.64	0.245	6.22	0.660	16.76	0.645	16.38	0.630	16.00	0.039	0.99	0.070	1.78
7545X-021	0.690	17.53	0.265	6.73	0.355	9.02	0.270	6.86	0.255	6.48	0.240	6.10	0.039	0.99	0.070	1.78
7545X-022	0.770	19.56	0.345	8.76	0.355	9.02	0.350	8.89	0.335	8.51	0.320	8.13	0.039	0.99	0.070	1.78
7545X-023	0.825	20.96	0.400	10.16	0.355	9.02	0.405	10.29	0.390	9.91	0.375	9.53	0.039	0.99	0.070	1.78
7545X-024	0.890	22.61	0.465	11.81	0.355	9.02	0.470	11.94	0.455	11.56	0.440	11.18	0.039	0.99	0.070	1.78
7545X-025	0.995	25.27	0.570	14.48	0.355	9.02	0.575	14.61	0.560	14.22	0.545	13.84	0.039	0.99	0.070	1.78
7545X-026	1.050	26.67	0.625	15.88	0.355	9.02	0.630	16.00	0.615	15.62	0.600	15.24	0.039	0.99	0.070	1.78
7545X-027	1.080	27.43	0.655	16.64	0.355	9.02	0.660	16.76	0.645	16.38	0.630	16.00	0.039	0.99	0.070	1.78

mat'l. code SEE NOTE 1				surface ASME Y14.5 ☒		tolerance ASME Y14.5		projection 		product family PIN PRODUCTS	
ltr	ecr no	dr	date	tolerances unless otherwise specified						title	
AB				angles	XX*01/XX*3					BERGPIN® .100"[2.54]cc	
					XXX*005/XX*13					.039"[0.99] DIA. STAR	
				0° ±2'	XXXX*0020/XXX*051			scale 1:1		dwg no	
				dr	J.W. BAIR	1990-01-15				sheet 3 of 4	
				enr	K.D. PATEL	1990-01-15				size	
				chr	K.D. PATEL	1990-01-15				75451	
				appd	K.D. PATEL	1990-01-15				A4	
sheet index		revision sheet								type CUSTOMER Drawing	



PRODUCT NUMBER	TOTAL PIN LGTH		DIM A	DIM A	DIM B	DIM B	DIM H FOR .062/1.57 BOARD		DIM H FOR .093/2.36 BOARD		DIM H FOR .125/3.18 BOARD		DIM C	DIM C	CUST.	STAR LENGTH DIM 'D'	
	DIM L	DIM L					ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC				ENGLISH	METRIC
NOTE 8	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	ENGLISH	METRIC	RESTRI.	ENGLISH	METRIC
7545X-028	0.405	10.29	0.305	7.75	0.035	0.89	0.310	7.87	0.295	7.49	0.280	7.11	0.039	0.99	NO	0.070	1.78
7545X-029	1.170	29.72	0.755	19.18	0.345	8.76	0.760	19.30	0.745	18.92	0.730	18.54	0.039	0.99	NO	0.070	1.78
7545X-030	1.125	28.58	0.710	18.03	0.345	8.76	0.715	18.16	0.700	17.78	0.685	17.40	0.039	0.99	NO	0.070	1.78
7545X-031	0.805	20.45	0.545	13.84	0.190	4.83	0.550	13.97	0.535	13.59	0.520	13.21	0.039	0.99	NO	0.070	1.78
7545X-032	0.585	14.86	0.300	7.62	0.215	5.46	0.305	7.75	0.290	7.37	0.275	6.99	0.039	0.99	NO	0.070	1.78
7545X-033	0.780	19.81	0.335	8.51	0.375	9.53	0.340	8.64	0.325	8.26	0.310	7.87	0.039	0.99	NO	0.070	1.78
7545X-034	0.650	16.51	0.535	13.59	0.045	1.14	0.540	13.72	0.525	13.34	0.510	12.95	0.039	0.99	NO	0.070	1.78
7545X-035	0.890	22.61	0.560	14.22	0.260	6.60	0.565	14.35	0.550	13.97	0.535	13.59	0.039	0.99	NO	0.070	1.78
7545X-036	0.953	24.21	0.510	12.95	0.373	9.47	0.515	13.08	0.500	12.70	0.485	12.32	0.039	0.99	NO	0.070	1.78
7545X-037	0.515	13.08	0.325	8.26	0.120	3.05	0.330	8.38	0.315	8.00	0.300	7.62	0.039	0.99	NO	0.070	1.78
7545X-038	1.100	27.94	0.664	16.87	0.366	9.30	0.668	16.97	0.653	16.59	0.638	16.21	0.039	0.99	NO	0.070	1.78
7545X-039	1.100	27.94	0.380	9.65	0.650	16.51	0.385	9.78	0.370	9.40	0.355	9.02	0.038	0.97	YES	0.070	1.78
7545X-040	1.270	32.26	0.390	9.91	0.810	20.57	0.395	10.03	0.380	9.65	0.365	9.27	0.038	0.97	YES	0.070	1.78
7545X-041	1.760	44.70	0.510	12.95	1.180	29.97	0.515	13.08	0.500	12.70	0.485	12.32	0.038	0.97	YES	0.070	1.78
7545X-042	1.840	46.74	0.510	12.95	1.260	32.00	0.515	13.08	0.500	12.70	0.485	12.32	0.038	0.97	YES	0.070	1.78
7545X-043	0.710	18.03	0.610	15.49	0.030	0.76	0.615	15.62	0.600	15.24	0.585	14.86	0.038	0.97	YES	0.070	1.78
7545X-044	1.110	28.19	0.655	16.64	0.385	9.78	0.655	16.64	0.640	16.26	0.625	15.88	0.038	0.97	YES	0.070	1.78
7545X-045	1.270	32.26	0.810	20.57	0.390	9.91	0.815	20.70	0.800	20.32	0.785	19.94	0.038	0.97	YES	0.070	1.78
7545X-046	1.760	44.70	1.180	29.97	0.510	12.95	1.185	30.10	1.170	29.72	1.155	29.34	0.038	0.97	YES	0.070	1.78
7545X-047	1.840	46.74	1.260	32.00	0.510	12.95	1.265	32.13	1.250	31.75	1.235	31.37	0.038	0.97	YES	0.070	1.78
7545X-048	1.370	34.80	0.390	9.91	0.910	23.11	0.395	10.03	0.380	9.65	0.365	9.27	0.038	0.97	YES	0.070	1.78
7545X-049	1.370	34.80	0.910	23.11	0.390	9.91	0.915	23.24	0.900	22.86	0.885	22.48	0.038	0.97	YES	0.070	1.78
7545X-050	0.685	17.40	0.365	9.27	0.250	6.35	0.370	9.40	0.355	9.02	0.340	8.64	0.039	0.99	NO	0.070	1.78
7545X-051	1.100	27.94	0.775	19.69	0.255	6.48	0.780	19.81	0.765	19.43	0.750	19.05	0.039	0.99	NO	0.070	1.78
7545X-052	0.930	23.62	0.697	17.70	0.193	4.90	0.686	17.42	0.671	17.04	0.655	16.64	0.039	0.99	NO	0.040	1.02

NOTE 6
NOTE 6NOTE 6
NOTE 6

mat'l. code SEE NOTE 1				surface ASME Y14.5		tolerance ASME Y14.5		projection 		product family PIN PRODUCTS	
ltr	ecn no	dr	date	tolerances unless otherwise specified		angles XX*01/X*3 XXX*005/XX*13 0° ±2° XXXX*0020/XXX*051		INCH/MM		title BERGPIN® .100"[2.54]cc .039"[0.99] DIA. STAR	
AB								scale 1:1		dwg no sheet 4 of 4 size	
								FCI		75451 A4	
										type CUSTOMER Drawing	
sheet index	revision sheet										



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.