
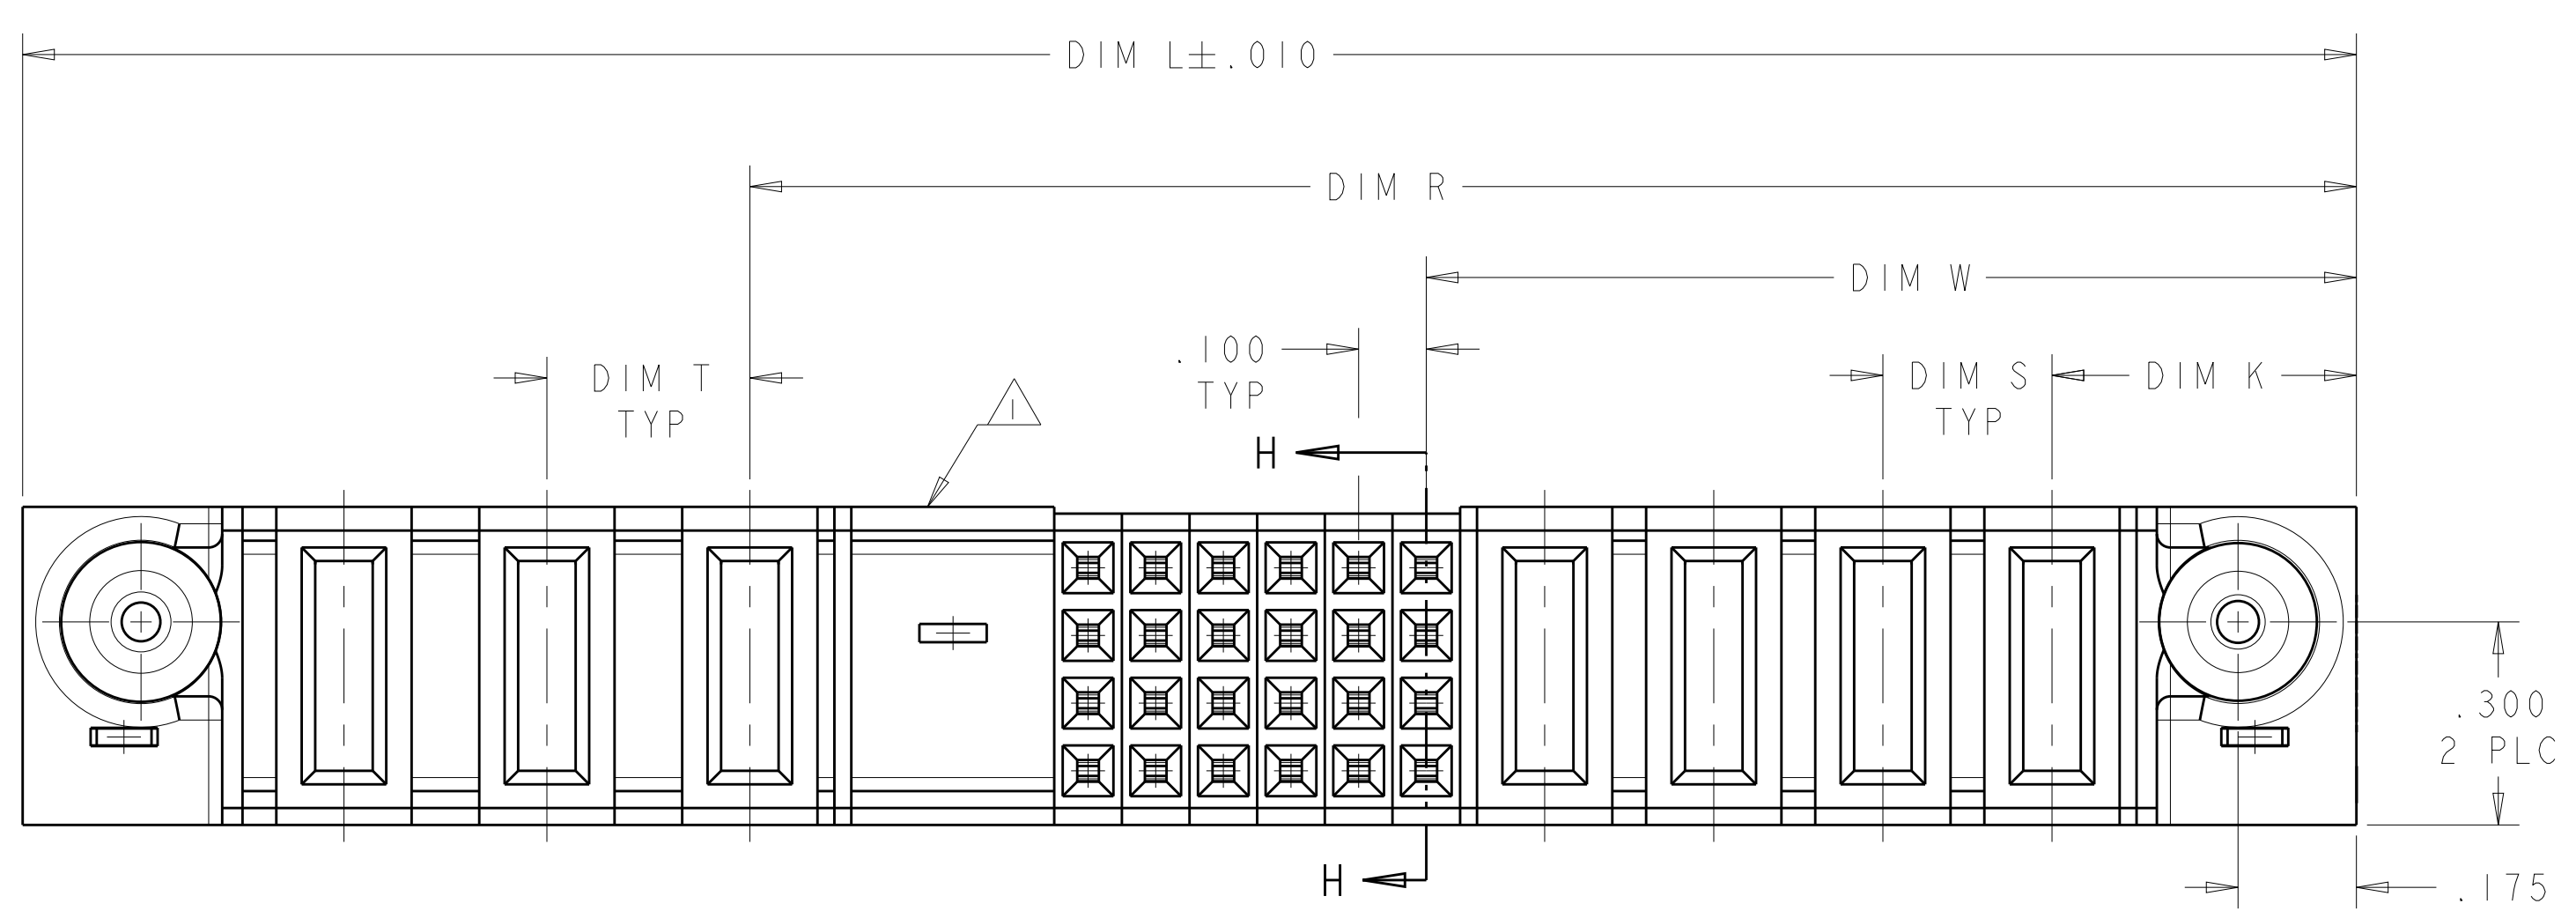
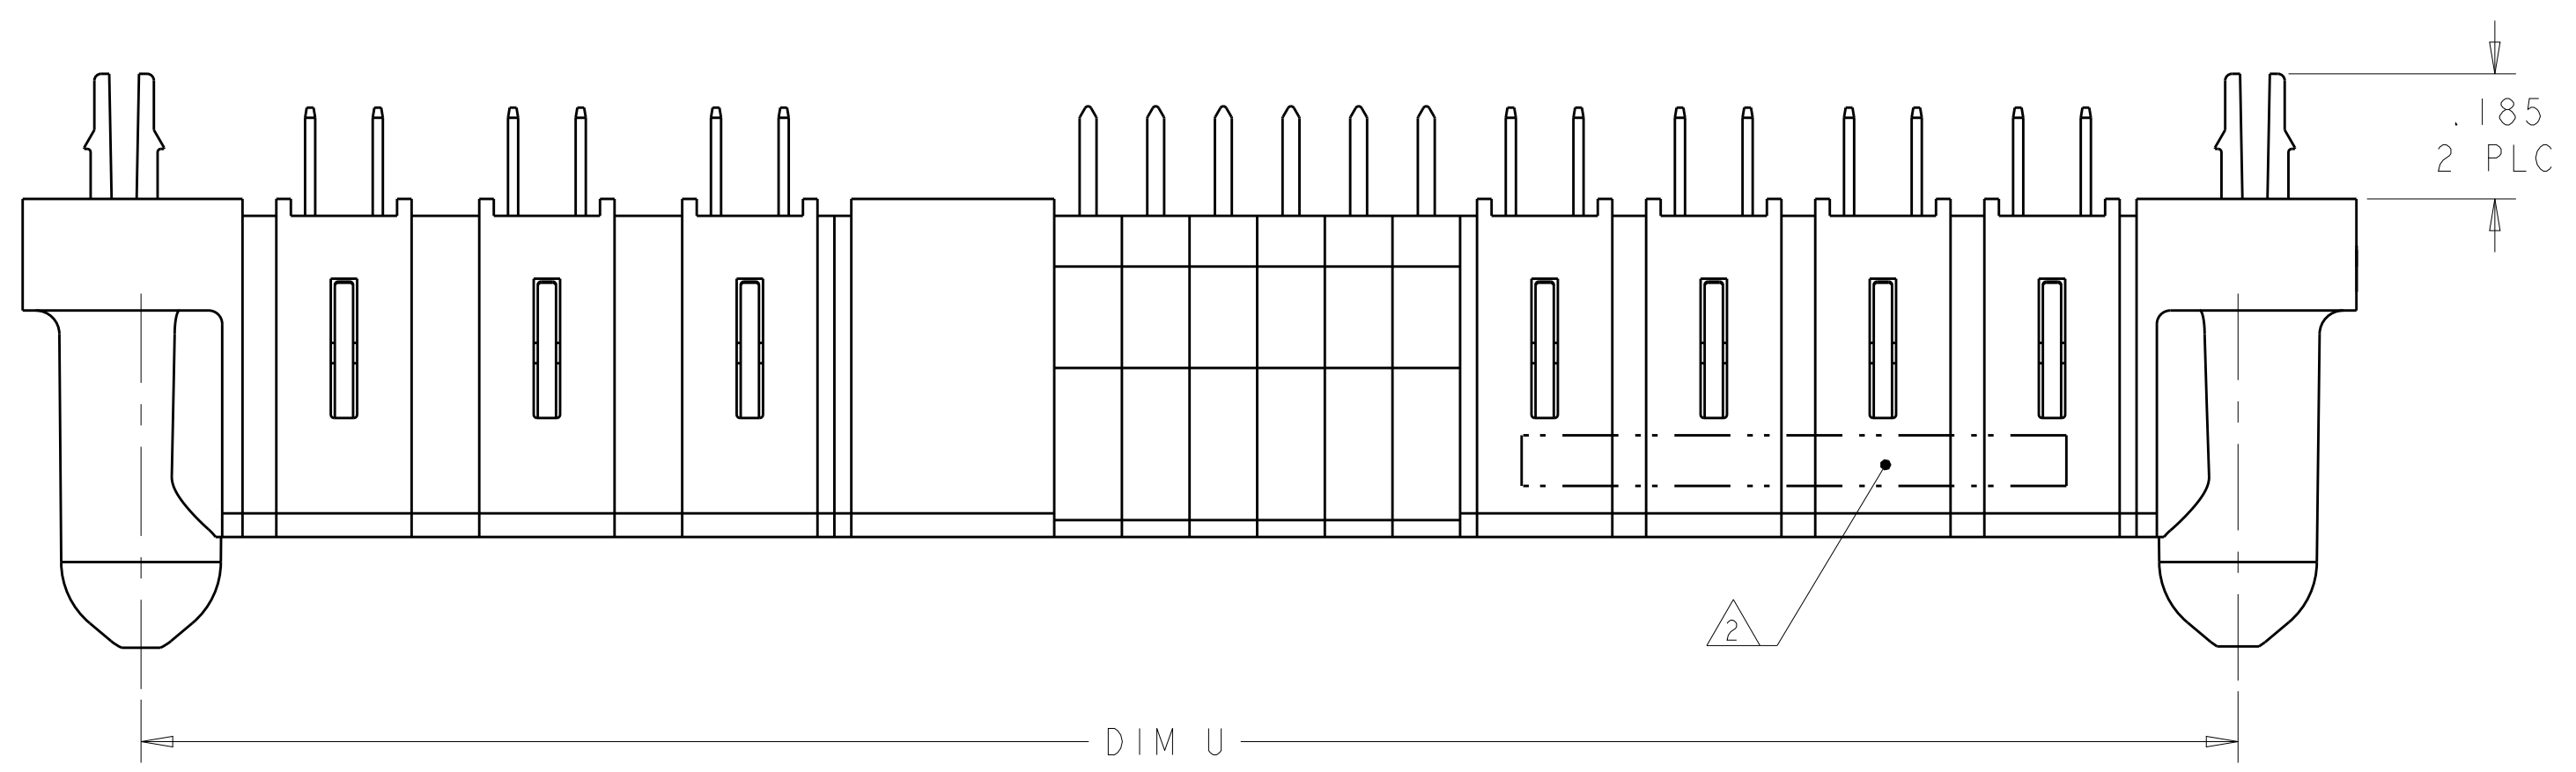
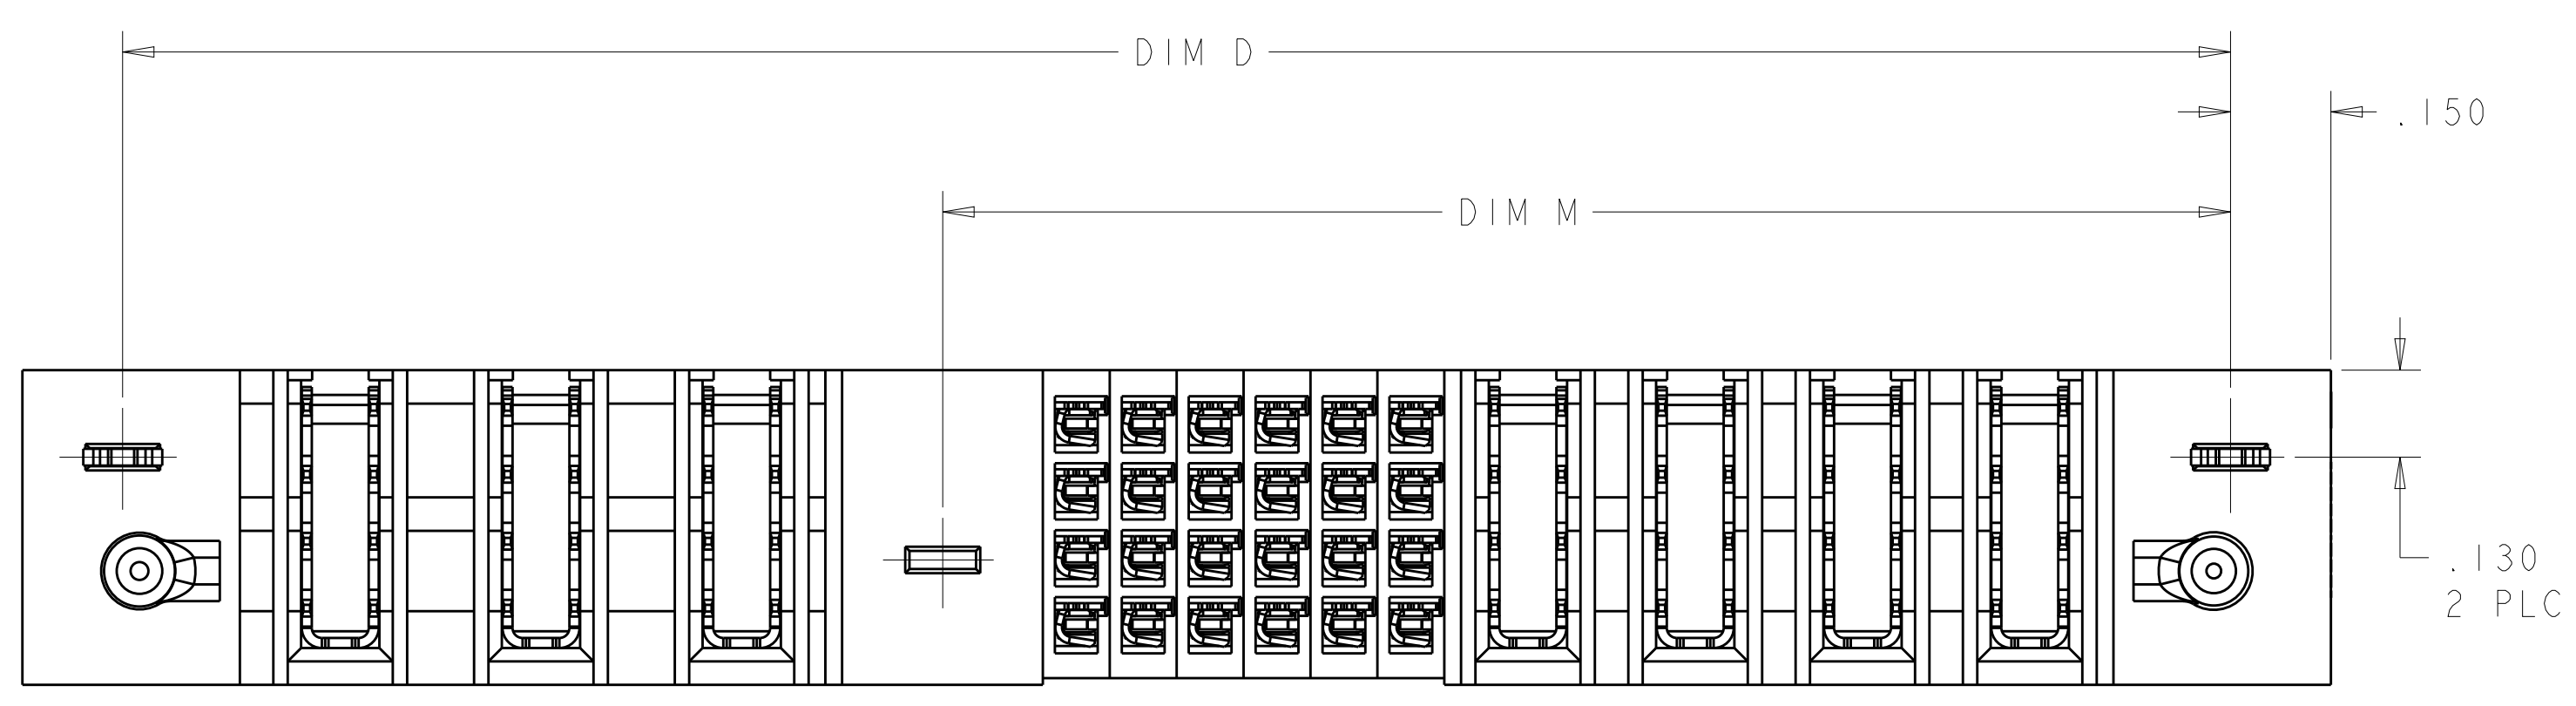
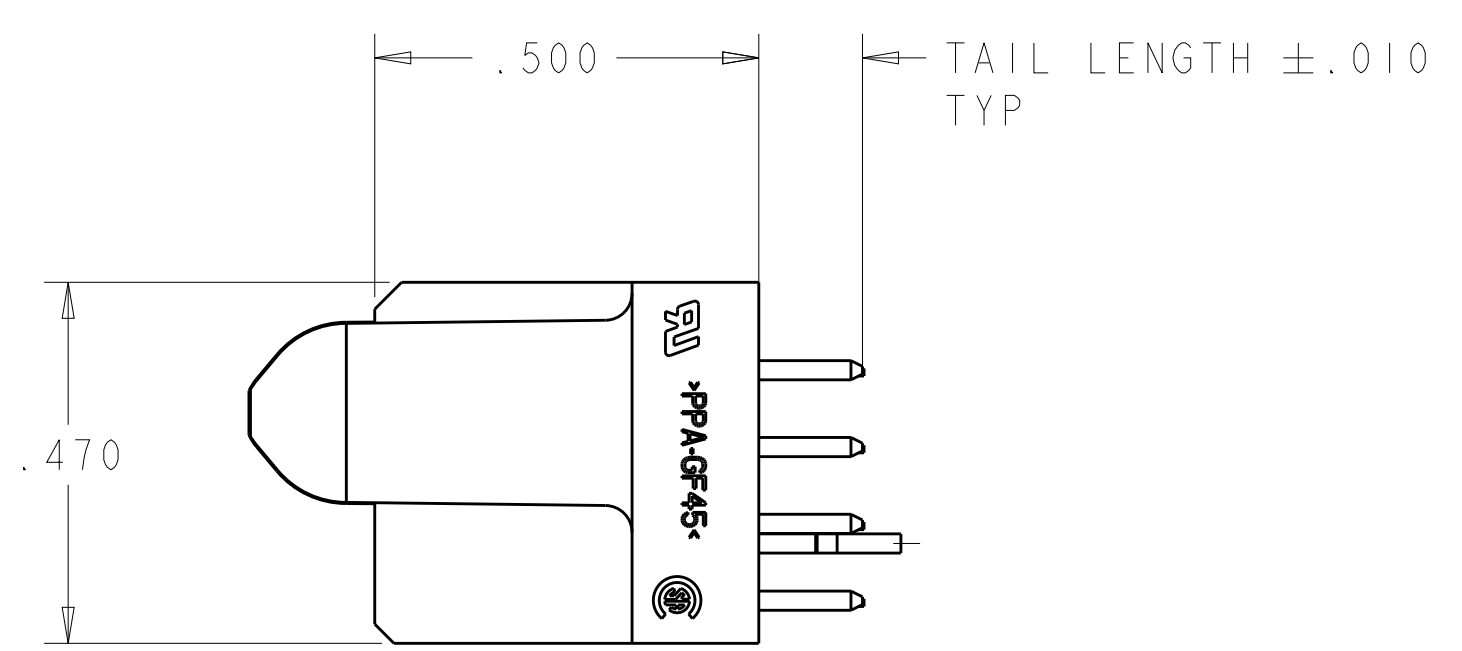


LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD		
G2		ADDED THE DASH NO -27	11MAY2011	ML	SZ		
G3		REV PER ECR-13-006828	25APR2013	CZ	SZ		
G4		ADDED NEW DASH NUMBER 2-9	03JUN2013	CZ	SZ		

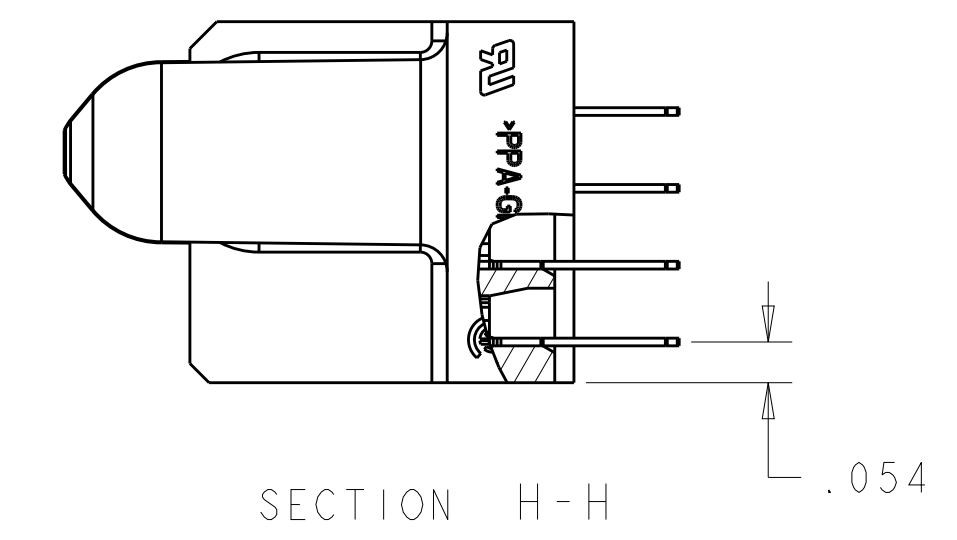

- △ OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE
- △ "AMP", TRADEMARK, PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- △ MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-0  
 SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY  
 POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- △ CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA OF POWER AND SIGNAL CONTACTS
- △ MECHANICAL CONNECTOR KEEP OUT ZONE
- △ DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- △ PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- △ PCB - .0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn OVER .001 TO .003 CU PLATING TO ACHIEVE A .040±.003 DIA HOLE
- △ FOR P/N:2-6450150-2.THE VARIABLE DIMENSIONS PLEASE SEE SHEET 7.





THIS DRAWING IS A CONTROLLED DOCUMENT.		DMN: R.GRZYBOWSKI 16FEB05	TE Connectivity
DIMENSIONS: INCHES		CHK: M.PERCHEKKE 16FEB05	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: M.PERCHEKKE	NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
0 PLC ±.01	1 PLC ±.01	PRODUCT SPEC: 108-1973	SIZE: A1
2 PLC ±.005	3 PLC ±.005	APPLICATION SPEC: 114-13038	CAGE CODE: C=6450150
4 PLC ±.0020	ANGLES ±.7°	WEIGHT: -	RESTRICTED TO: -
MATERIAL: -	FINISH: -	CUSTOMER DRAWING	SCALE: 1:1 SHEET 1 OF 12 REV: G5

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20  
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTN	DESCRIPTION	DATE	DWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

WITH	2.650	.200	.250	1.550	.875	2.700	-	3.000	.450	2P + 24S + 6P	2-6450150-9
WITH	2.300	.250	.300	1.950	1.275	2.350	-	2.650	.475	3ACP + 24S + 2P	2-6450150-8
WITH	5.150	.300	.300	3.550	2.700	5.200	-	5.500	.450	8ACP + 32S + 6ACP	2-6450150-7
WITH	2.800	.300	.250	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	2-6450150-6
WITH	3.800	.300	.250	1.875	1.375	3.850	-	4.150	.450	4P + 16S + 7ACP	2-6450150-5
WITH	2.400	.200	.200	2.100	.825	2.450	-	2.750	.450	2P + 48S + 2P	2-6450150-4
WITH	1.700	.250	.250	1.350	.875	1.750	-	2.050	.450	2P + 16S + 2P	2-6450150-3
WITHOUT	5.500	.300	.300	3.175	2.525	5.550	-	5.850	.475	7ACP+20S+4ACP+5P	2-6450150-2
WITH	2.900	.250	.250	2.550	.875	2.950	-	3.250	.450	2P + 64S + 2P	2-6450150-1
WITH	3.550	-	.300	2.550	1.275	3.600	-	3.900	.475	3ACP + 48S + 5P	2-6450150-0
WITH	4.000	-	-	-	.375	4.050	-	4.350	-	148S	1-6450150-9
WITH	2.800	.250	.250	1.700	1.125	2.850	-	3.150	.450	3P + 20S + 5P	1-6450150-8
WITH	2.200	.250	.250	1.350	.875	2.250	-	2.550	.450	2P + 16S + 4P	1-6450150-7
WITH	3.500	.300	.250	2.775	2.375	3.550	-	3.850	.450	8P + 12S + 3ACP	1-6450150-3
WITH	2.300	.250	.300	1.950	1.275	2.350	-	2.650	.475	3ACP + 24S + 2P	6450150-9
WITH	1.575	-	-	1.425	.700	1.625	-	1.925	.475	1P + 24S + 1P	6450150-8
WITH	3.000	.250	.250	2.150	1.425	3.050	-	3.350	.450	4P + 24S + 4P	6450150-6
WITH	2.500	.300	.250	1.800	1.125	2.550	-	2.850	.450	3P + 24S + 3ACP	6450150-5
WITH	2.675	.200	.200	2.375	1.650	2.725	-	3.025	.475	5P + 24S + 2P	6450150-4
WITH	2.800	.300	.250	2.075	1.375	2.850	-	3.150	.450	4P + 24S + 3ACP	6450150-3
WITH	3.550	-	.300	2.550	1.275	3.600	-	3.900	.475	3ACP + 48S + 5P	6450150-2
WITH	4.350	.250	.250	3.500	2.625	4.400	-	4.700	.450	9P + 32S + 4P	6450150-1
HOLD DOWN	U	T	S	R	W	D	M	L	K	DESCRIPTION	PART NUMBER



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI CHK M. PERCHERKE	16FEB05 16FEB05	 TE Connectivity
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. PERCHERKE	NAME	
	0 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.7°	PRODUCT SPEC	VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
MATERIAL	FINISH	APPLICATION SPEC	RESTRICTED TO	
		114-13038	SIZE CAGE CODE DRAWING NO	
		WEIGHT	A100779C=6450150	
		CUSTOMER DRAWING	SCALE 1:1 SHEET 2 OF 12 REV G5	



PART NUMBER	ROWS	POWER (L)						SIGNAL						POWER (R)															
		P7	P6	6	5	4	3	2	1	P5	P4	P3	P2	P1	P1	P2	P3	P4	P5	P6	P7								
6450150-4	D							J	J	J	J	J	J	VN	VN	VN	VN												
	C							J	J	J	J	J	J	VN	VN	VN	VN												
	B							J	J	J	J	J	J	VN	VN	VN	VN												
		HD																										HD	
		5P + 24S + 2P																											



PART NUMBER	ROWS	POWER (L)						SIGNAL						POWER (R)															
		P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	P1	P2	P3	P4	P5	P6	P7	P8						
6450150-6	D							J	J	J	J	J	J	VN	VN	VN	VN												
	C							J	J	J	J	J	J	VN	VN	VN	VN												
	B							J	J	J	J	J	J	VN	VN	VN	VN												
		HD																										HD	
		4P + 24S + 4P																											

NO CONTACT  
LOADED

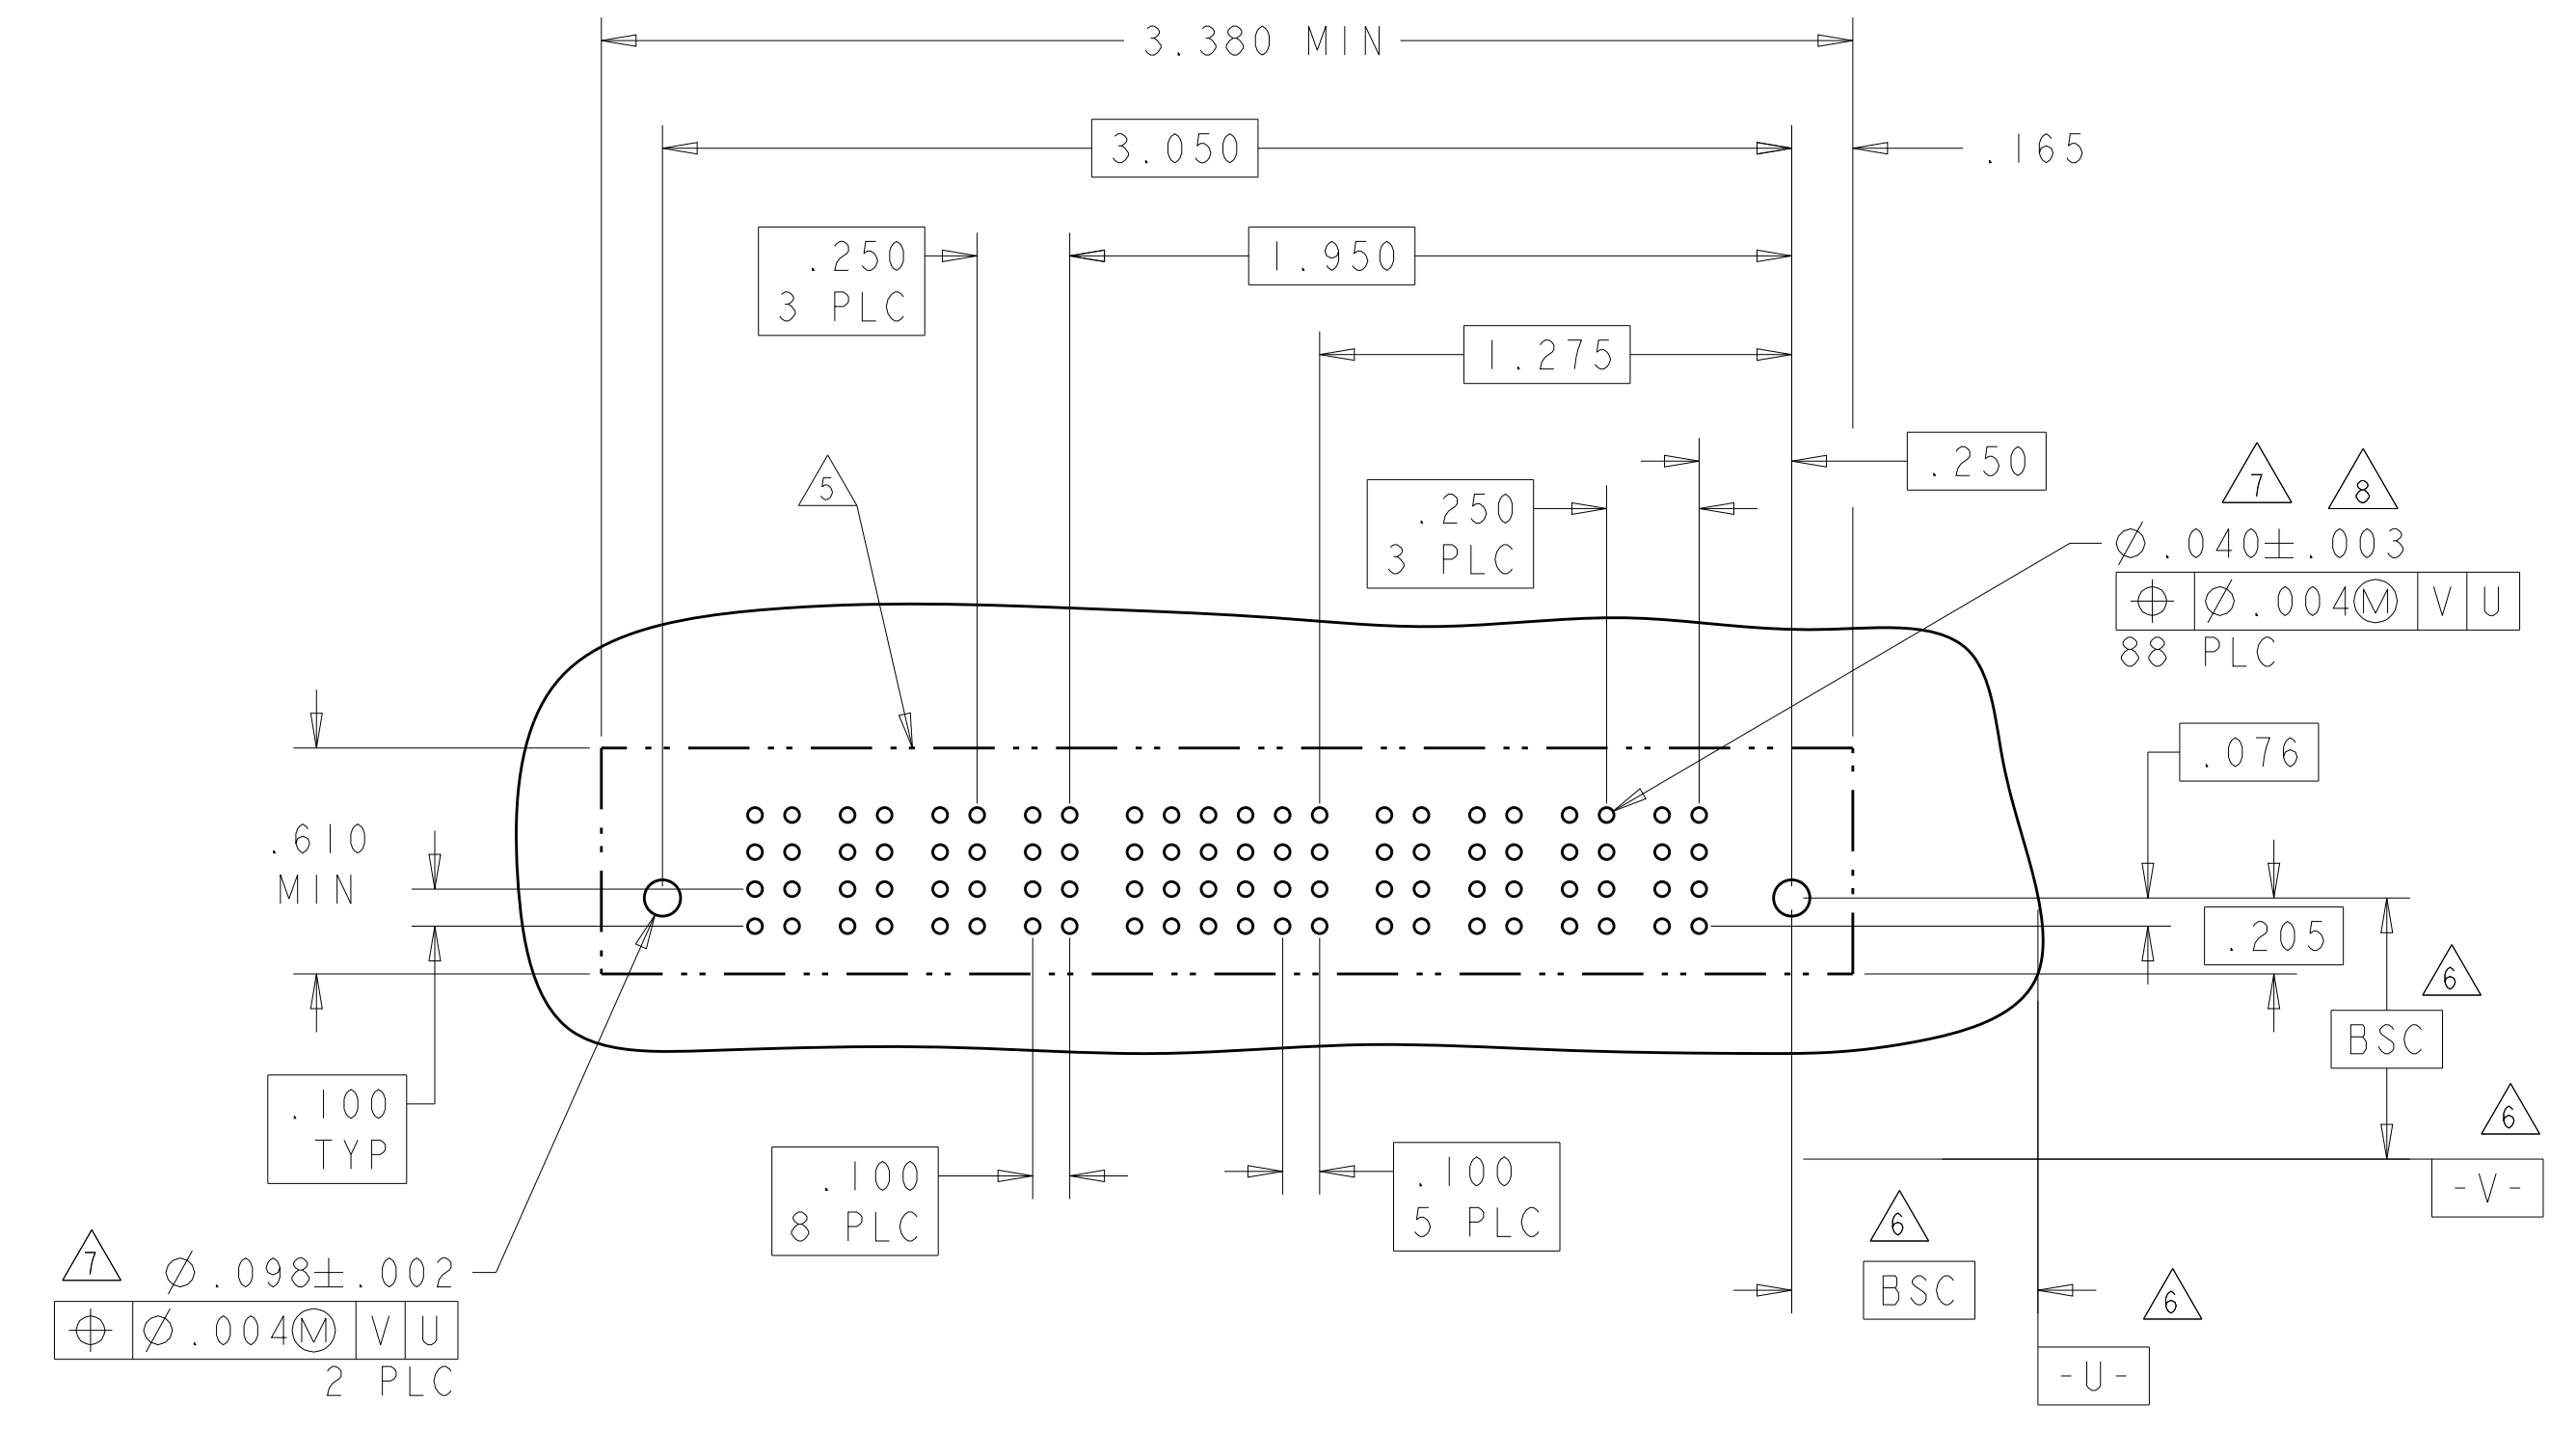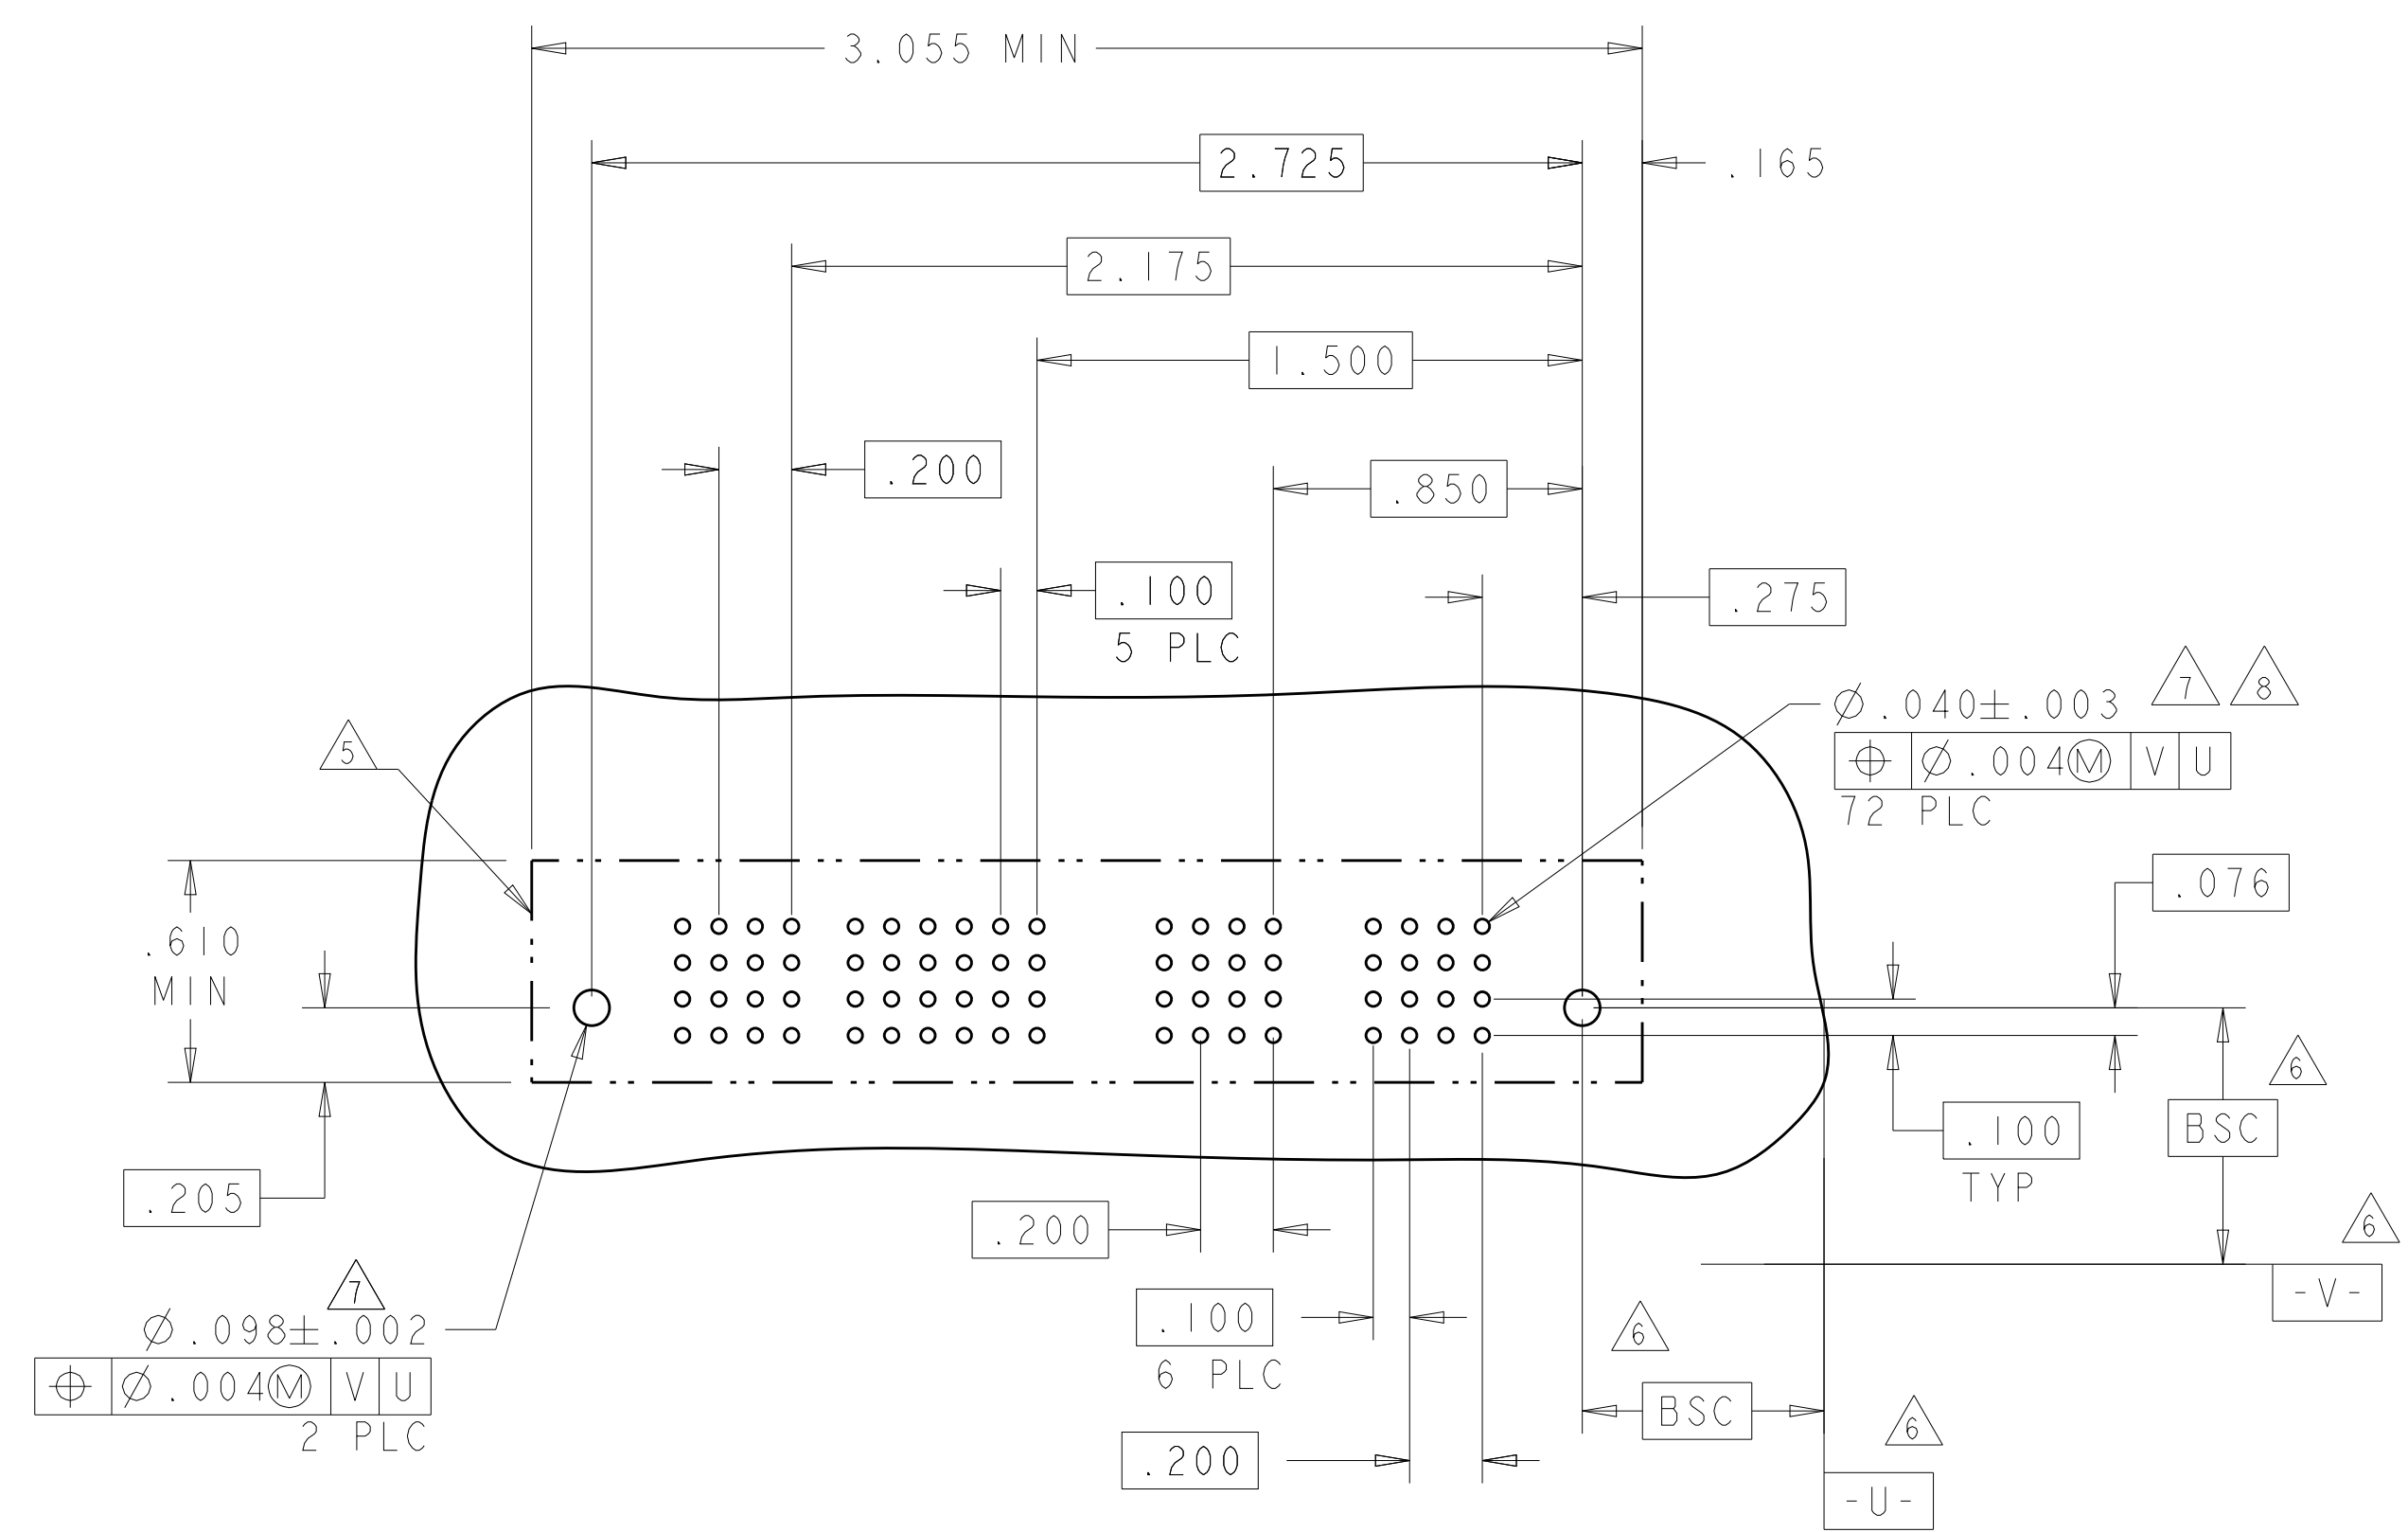

PART NUMBER	ROWS	POWER (L)						SIGNAL						POWER (R)															
		P6	P5	P4	6	5	4	3	2	1	P3	P2	P1	P1	P2	P3	P4	P5	P6	P7									
6450150-5	D							E	E	E	E	E	E	VM	VM	VM	VM												
	C							E	E	E	E	E	E	VM	VM	VM	VM												
	B							E	E	E	E	E	E	VM	VM	VM	VM												
		HD																										HD	
		3P + 24S + 3ACP																											

PART NUMBER	ROWS	POWER (L)						SIGNAL						POWER (R)															
		P2	6	5	4	3	2	1	P1	P2	P3	P4	P5	P6	P7	P8	P9	P10	P11	P12									
6450150-8	D							E	E	E	E	E	E	VM	VM	VM	VM												
	C							E	E	E	E	E	E	VM	VM	VM	VM												
	B							E	E	E	E	E	E	VM	VM	VM	VM												
		HD																										HD	
		1P + 24S + 1P																											

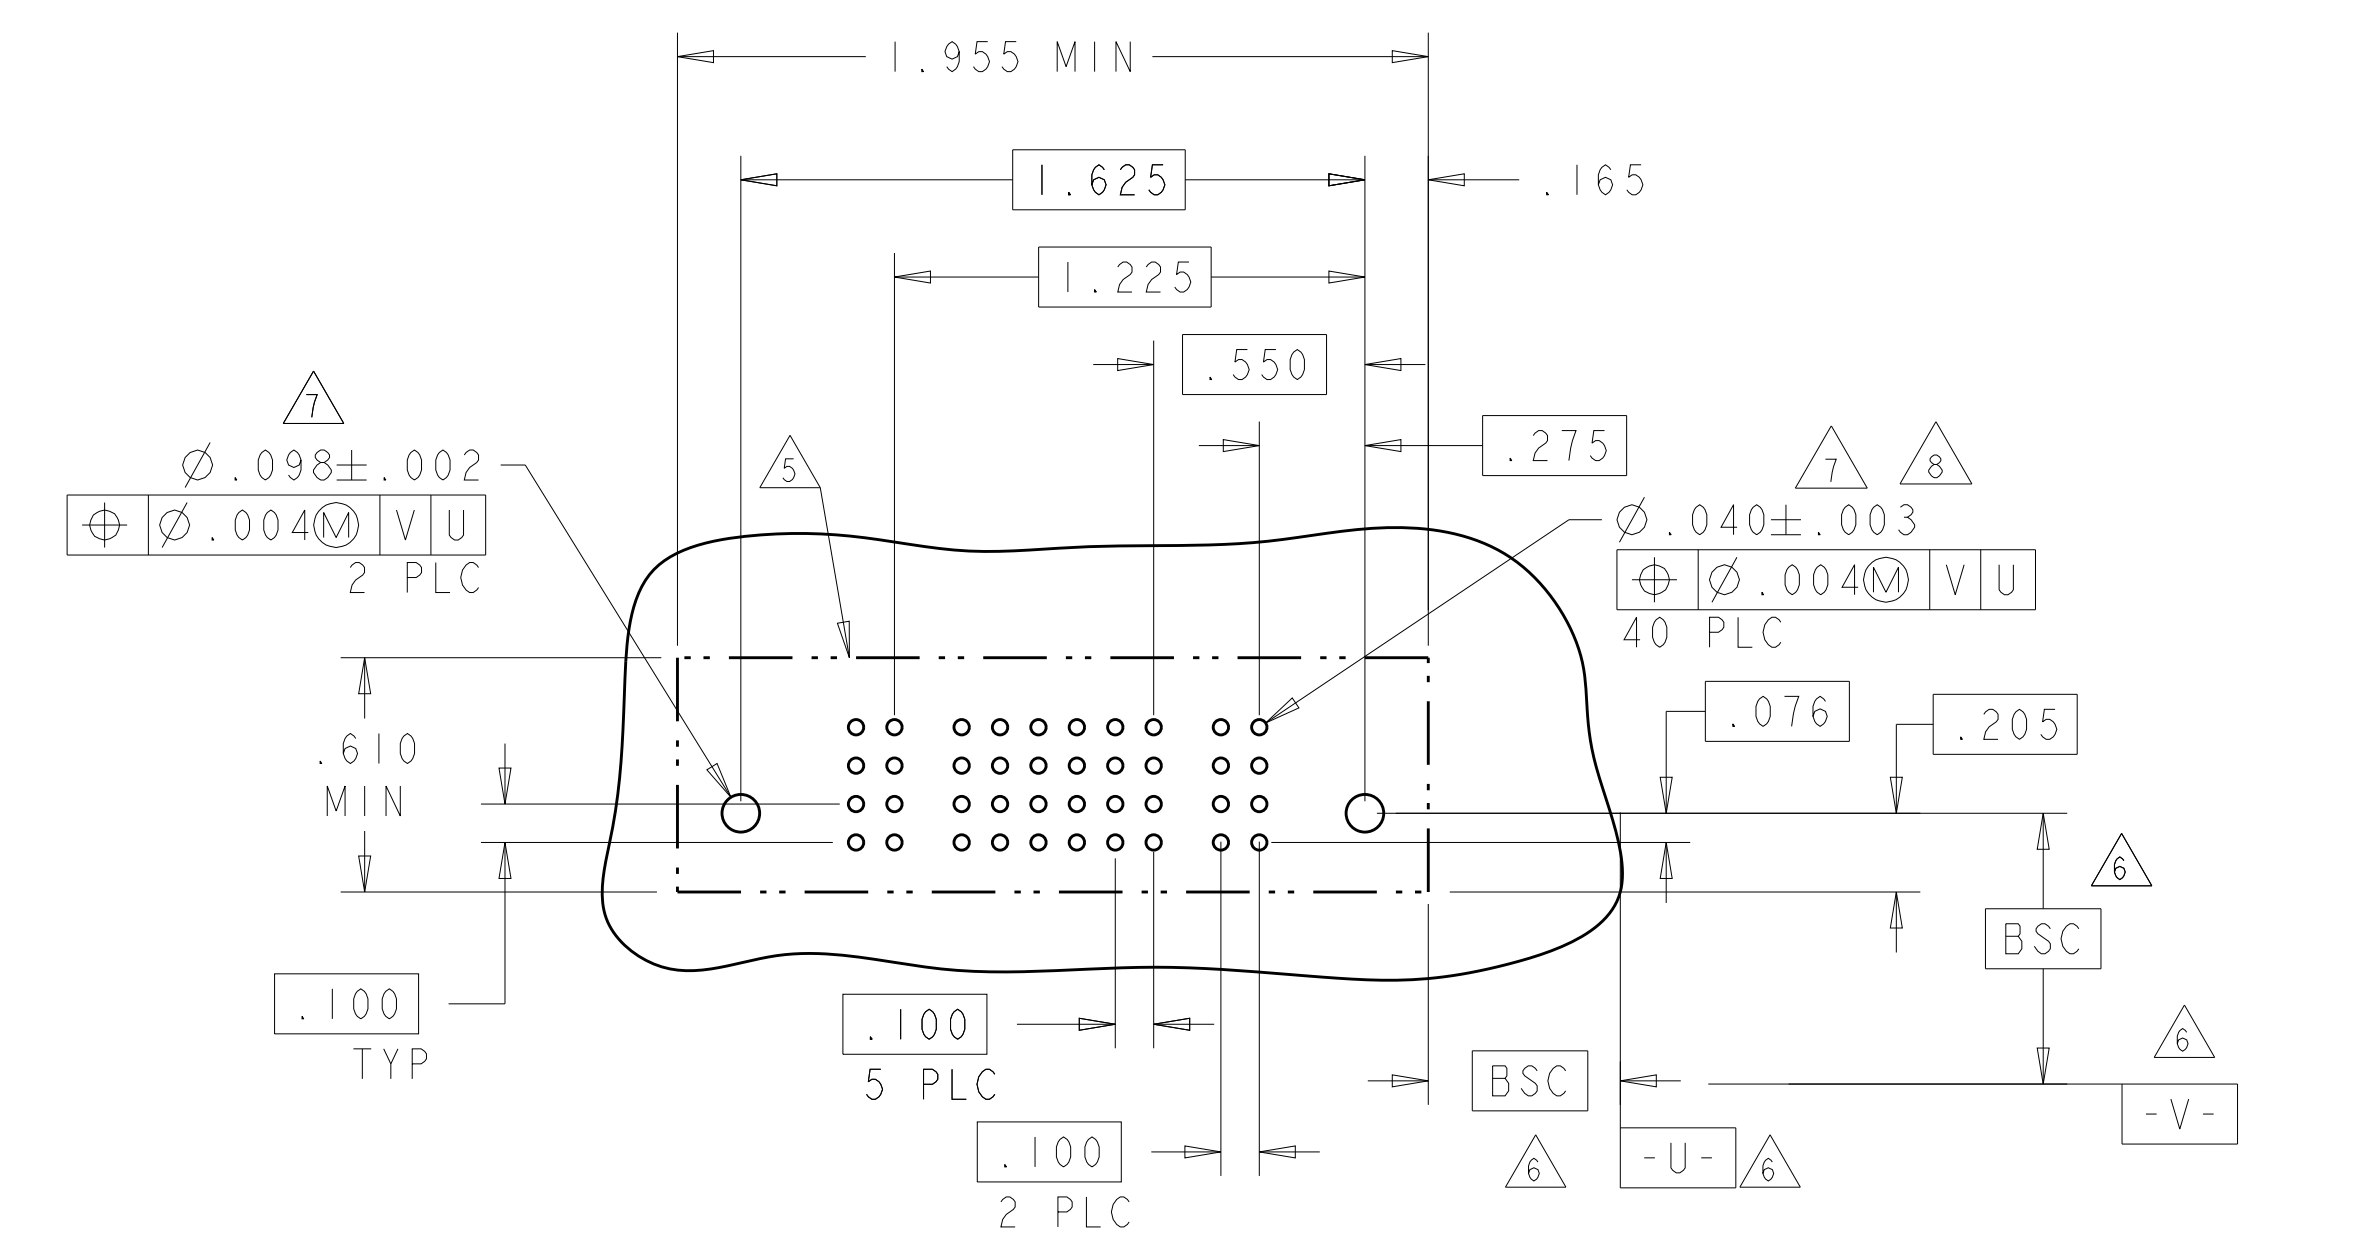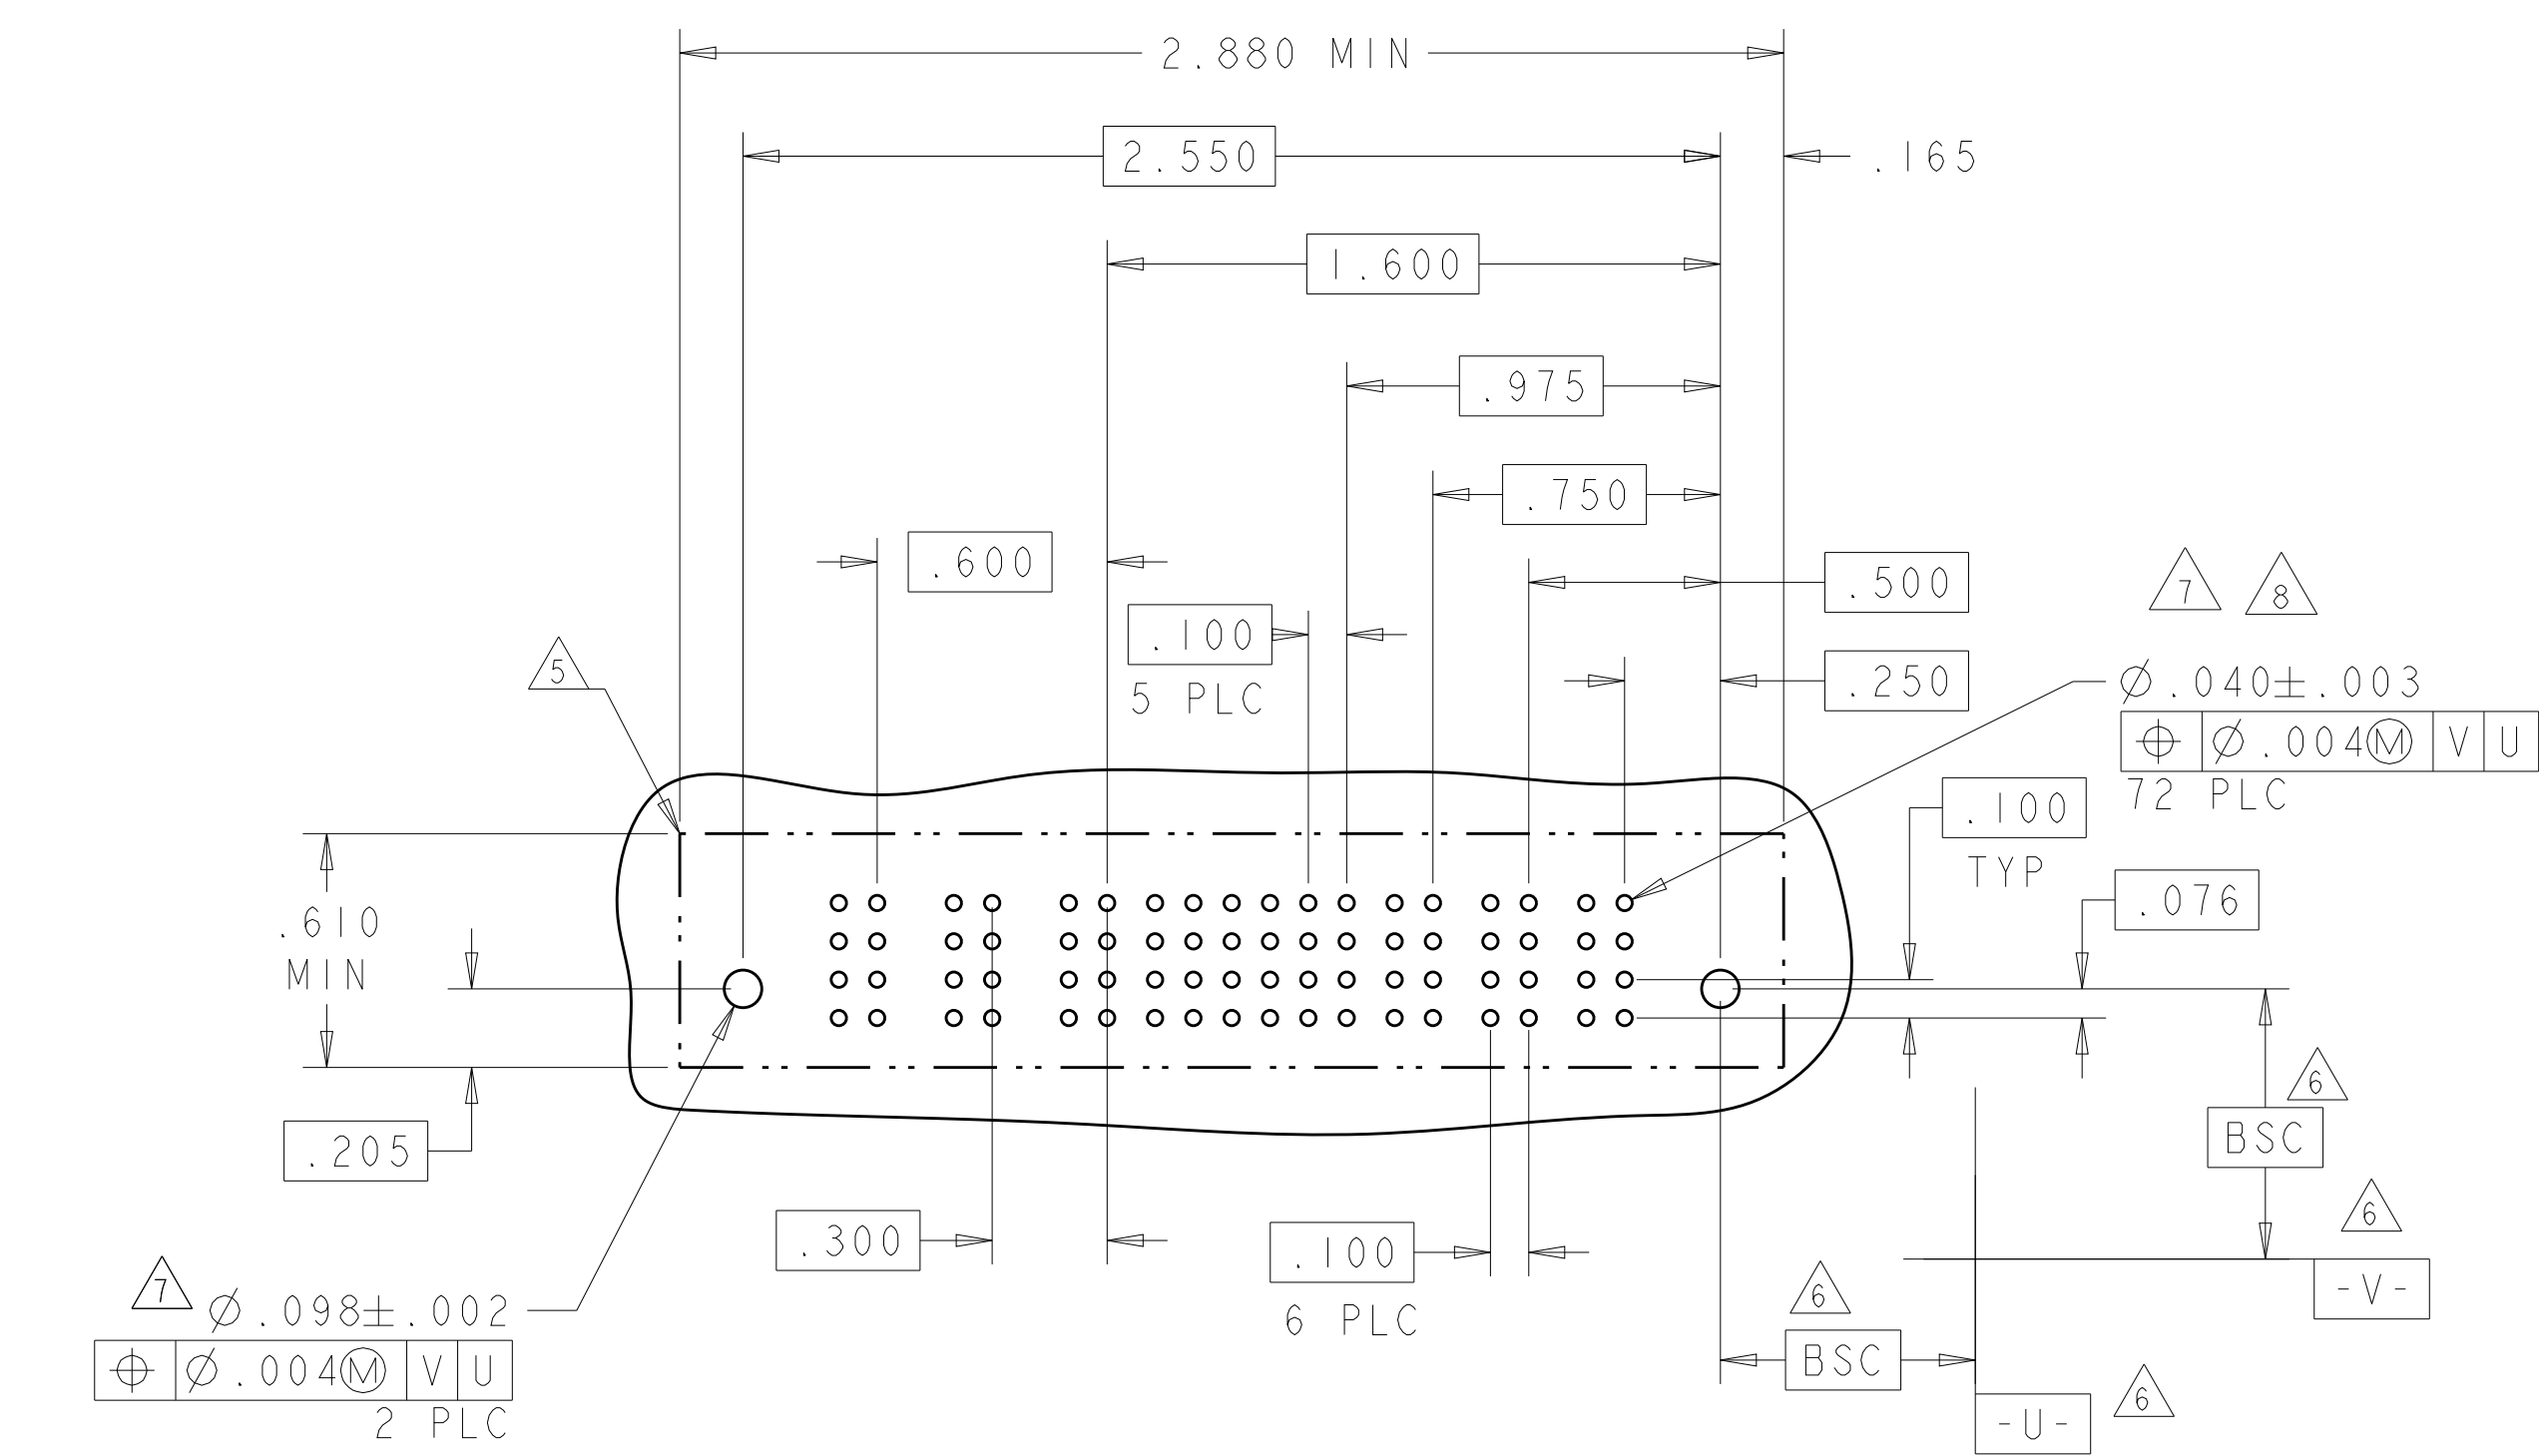



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R. GRZYBOWSKI 16FEB05		TE Connectivity
DIMENSIONS: INCHES		CHK: M. PERCHERKE 16FEB05		VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: M. PERCHERKE	PRODUCT SPEC: 108-1973	
0 PLC ±.01		PRODUCT SPEC: 108-1973	APPLICATION SPEC: 114-13038	
1 PLC ±.005		SIZE: 114-13038	WEIGHT: A100779	
2 PLC ±.002		SCALE: 1:1	SHEET 4 OF 12	
ANGLES ±.002		CUSTOMER DRAWING	REV: G5	

PART NUMBER	ROWS	POWER (L)			SIGNAL								POWER			
		P11	P10	P9	3	2	1	P8	P7	P6	P5	P4	P3	P2	P1	
I-6450150-3	D C B A	[Grid of contacts]														
		[Grid of contacts]														
		[Grid of contacts]														
		[Grid of contacts]														

8P + 12S + 3ACP


PART NUMBER	ROWS	POWER (L)					SIGNAL					POWER (R)				
		P8	P7	P6	P5	P4	5	4	3	2	1	P3	P2	P1		
I-6450150-8	D C B A	[Grid of contacts]														
		[Grid of contacts]														
		[Grid of contacts]														
		[Grid of contacts]														

3P + 20S + 5P

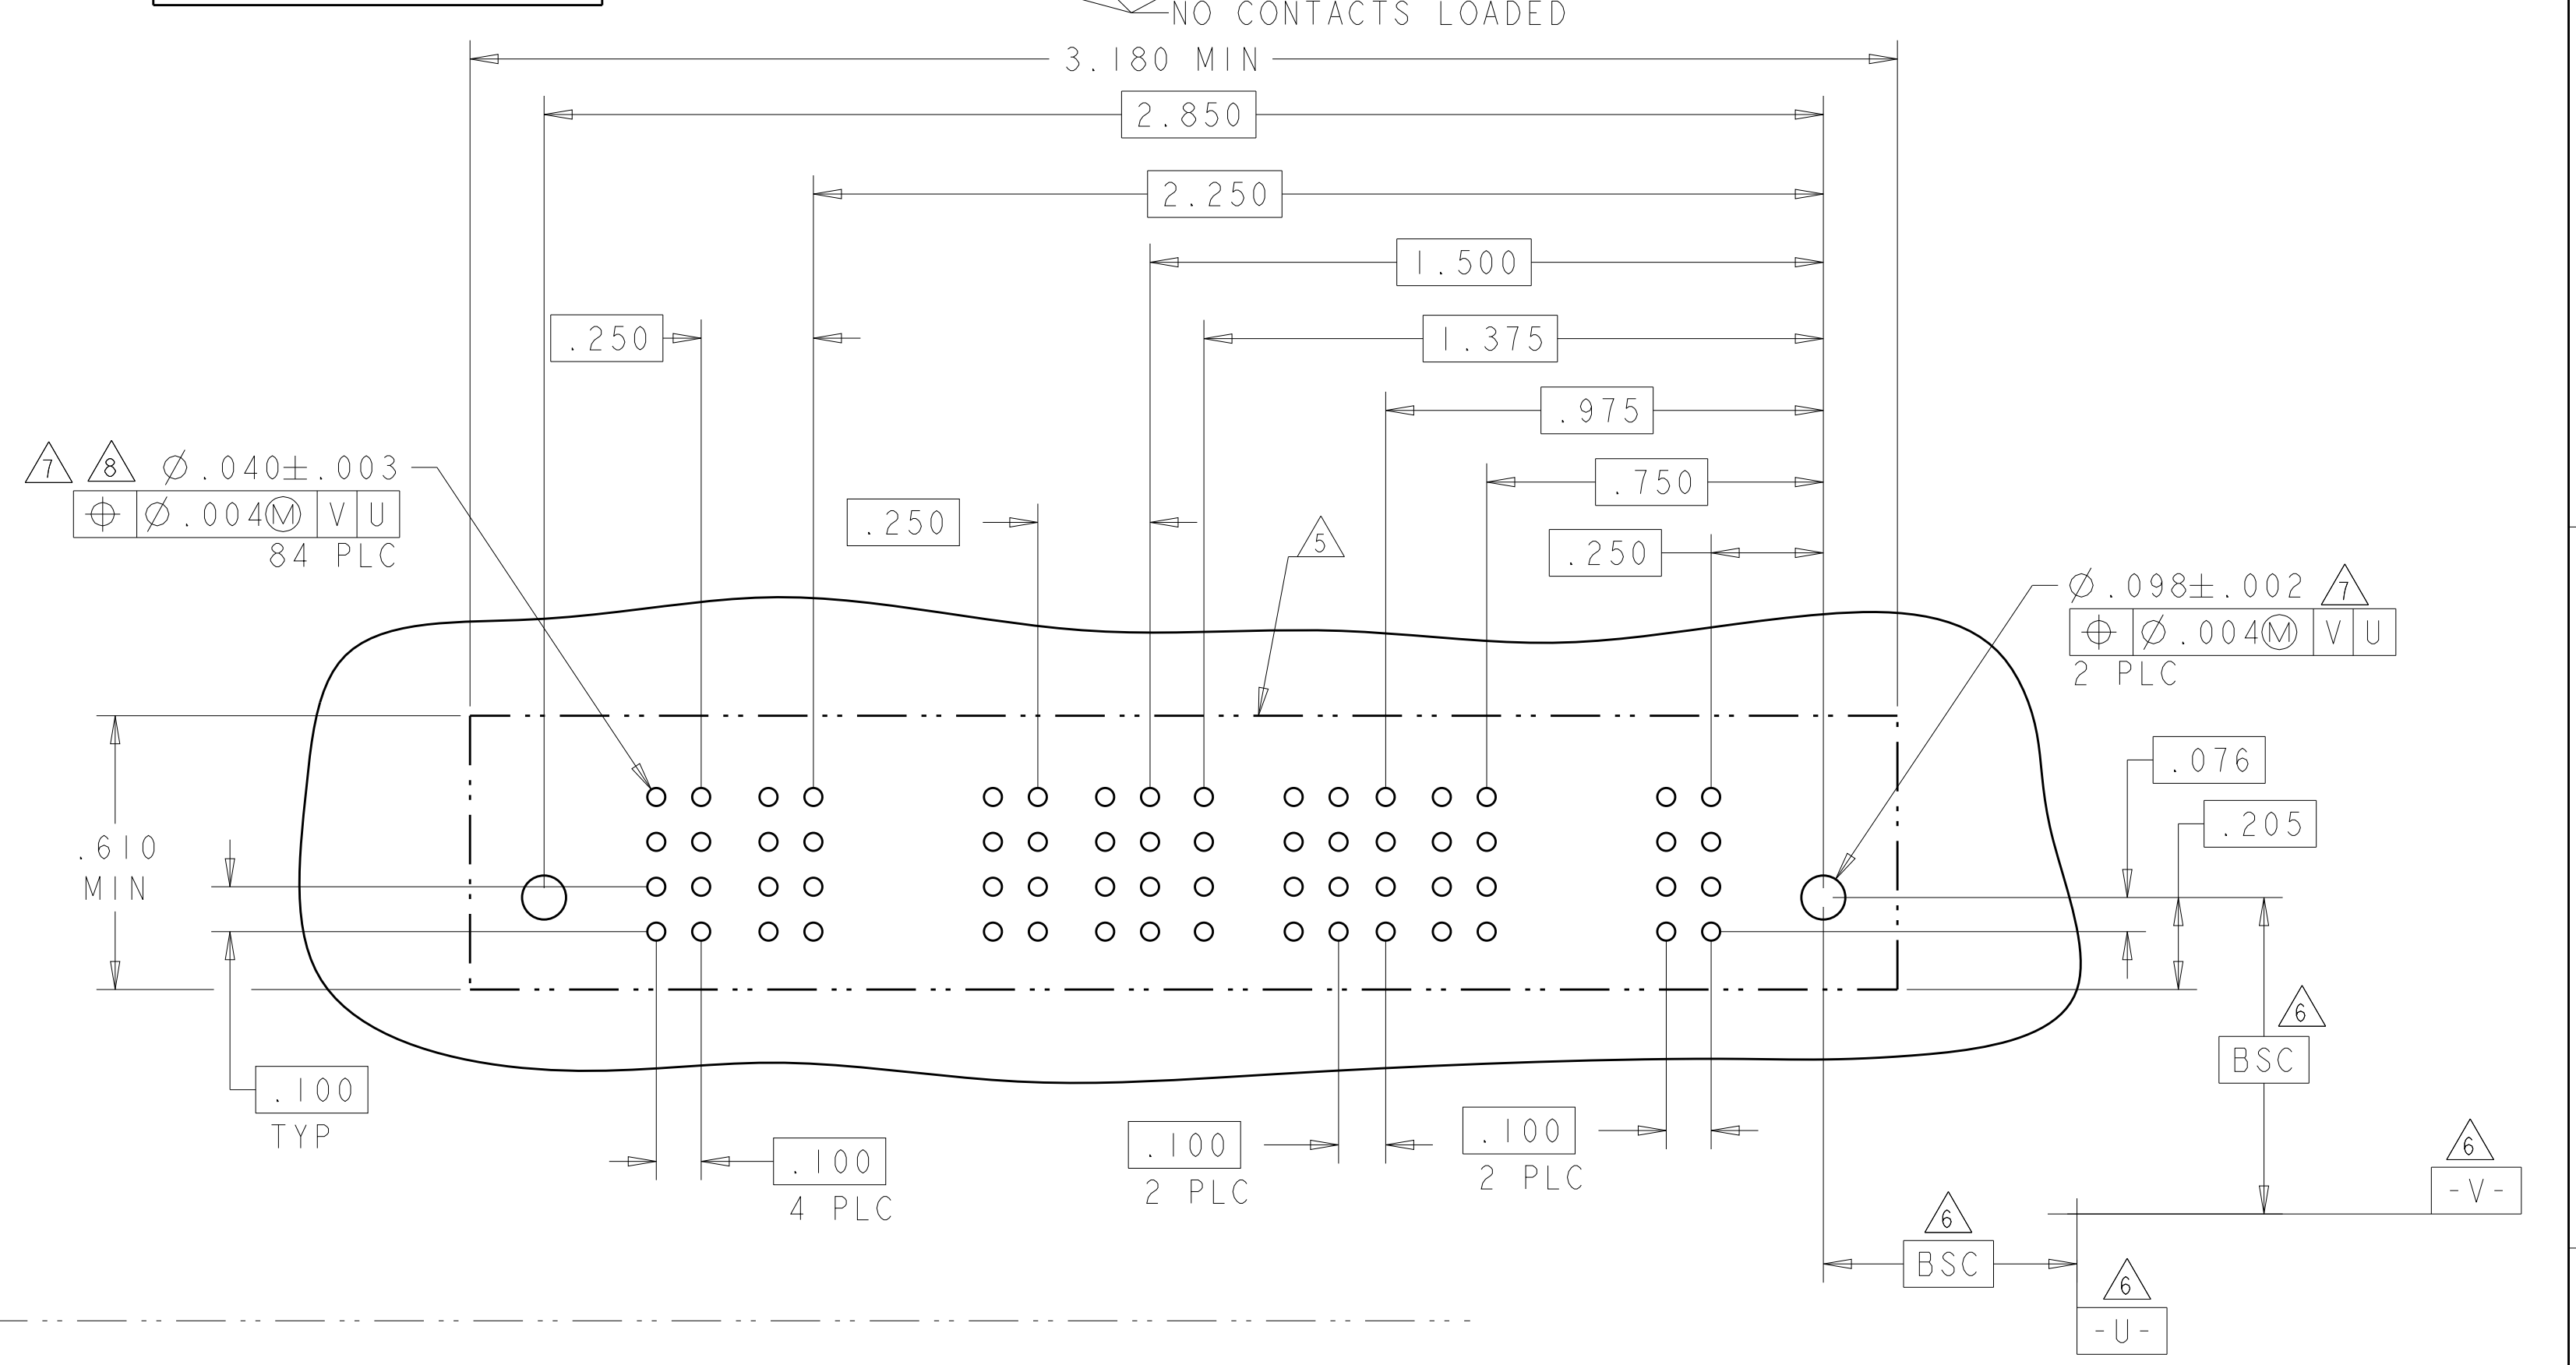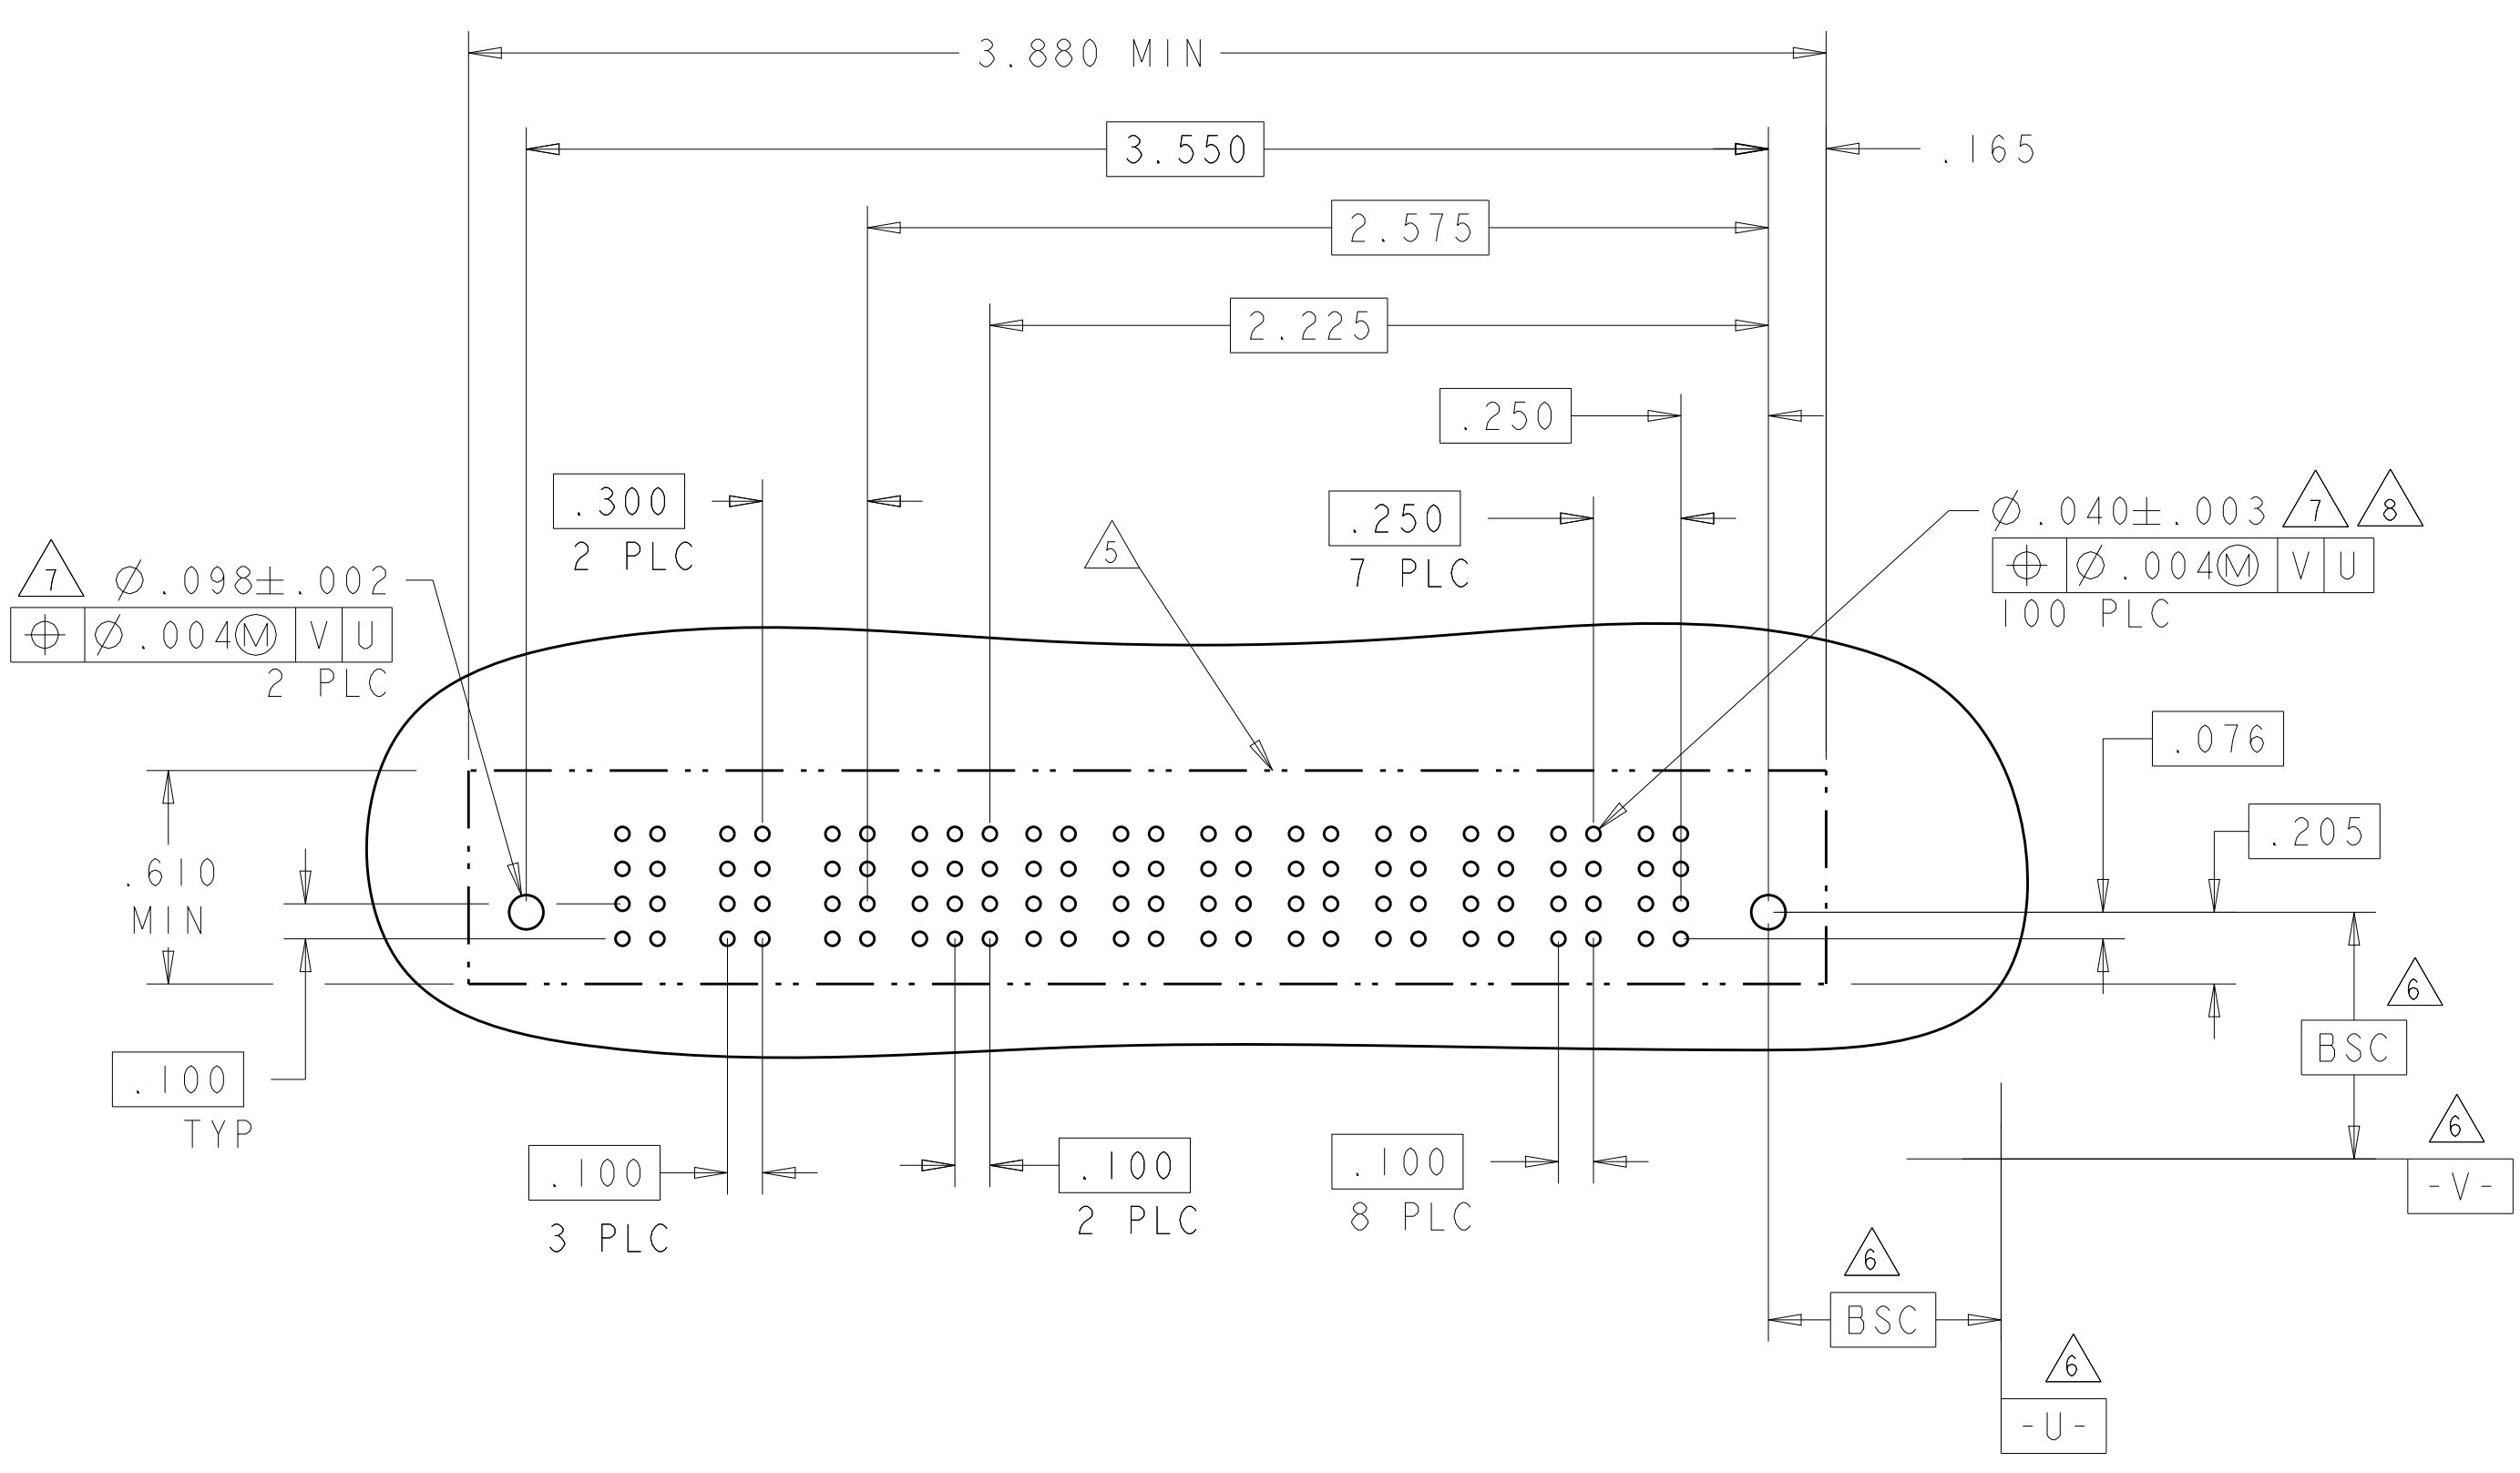

PART NUMBER	ROWS	SIGNAL																																				
		37	36	35	34	33	32	31	30	29	28	27	26	25	24	23	22	21	20	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
I-6450150-9	D C B A	[Grid of contacts]																																				
		[Grid of contacts]																																				
		[Grid of contacts]																																				
		[Grid of contacts]																																				

148S

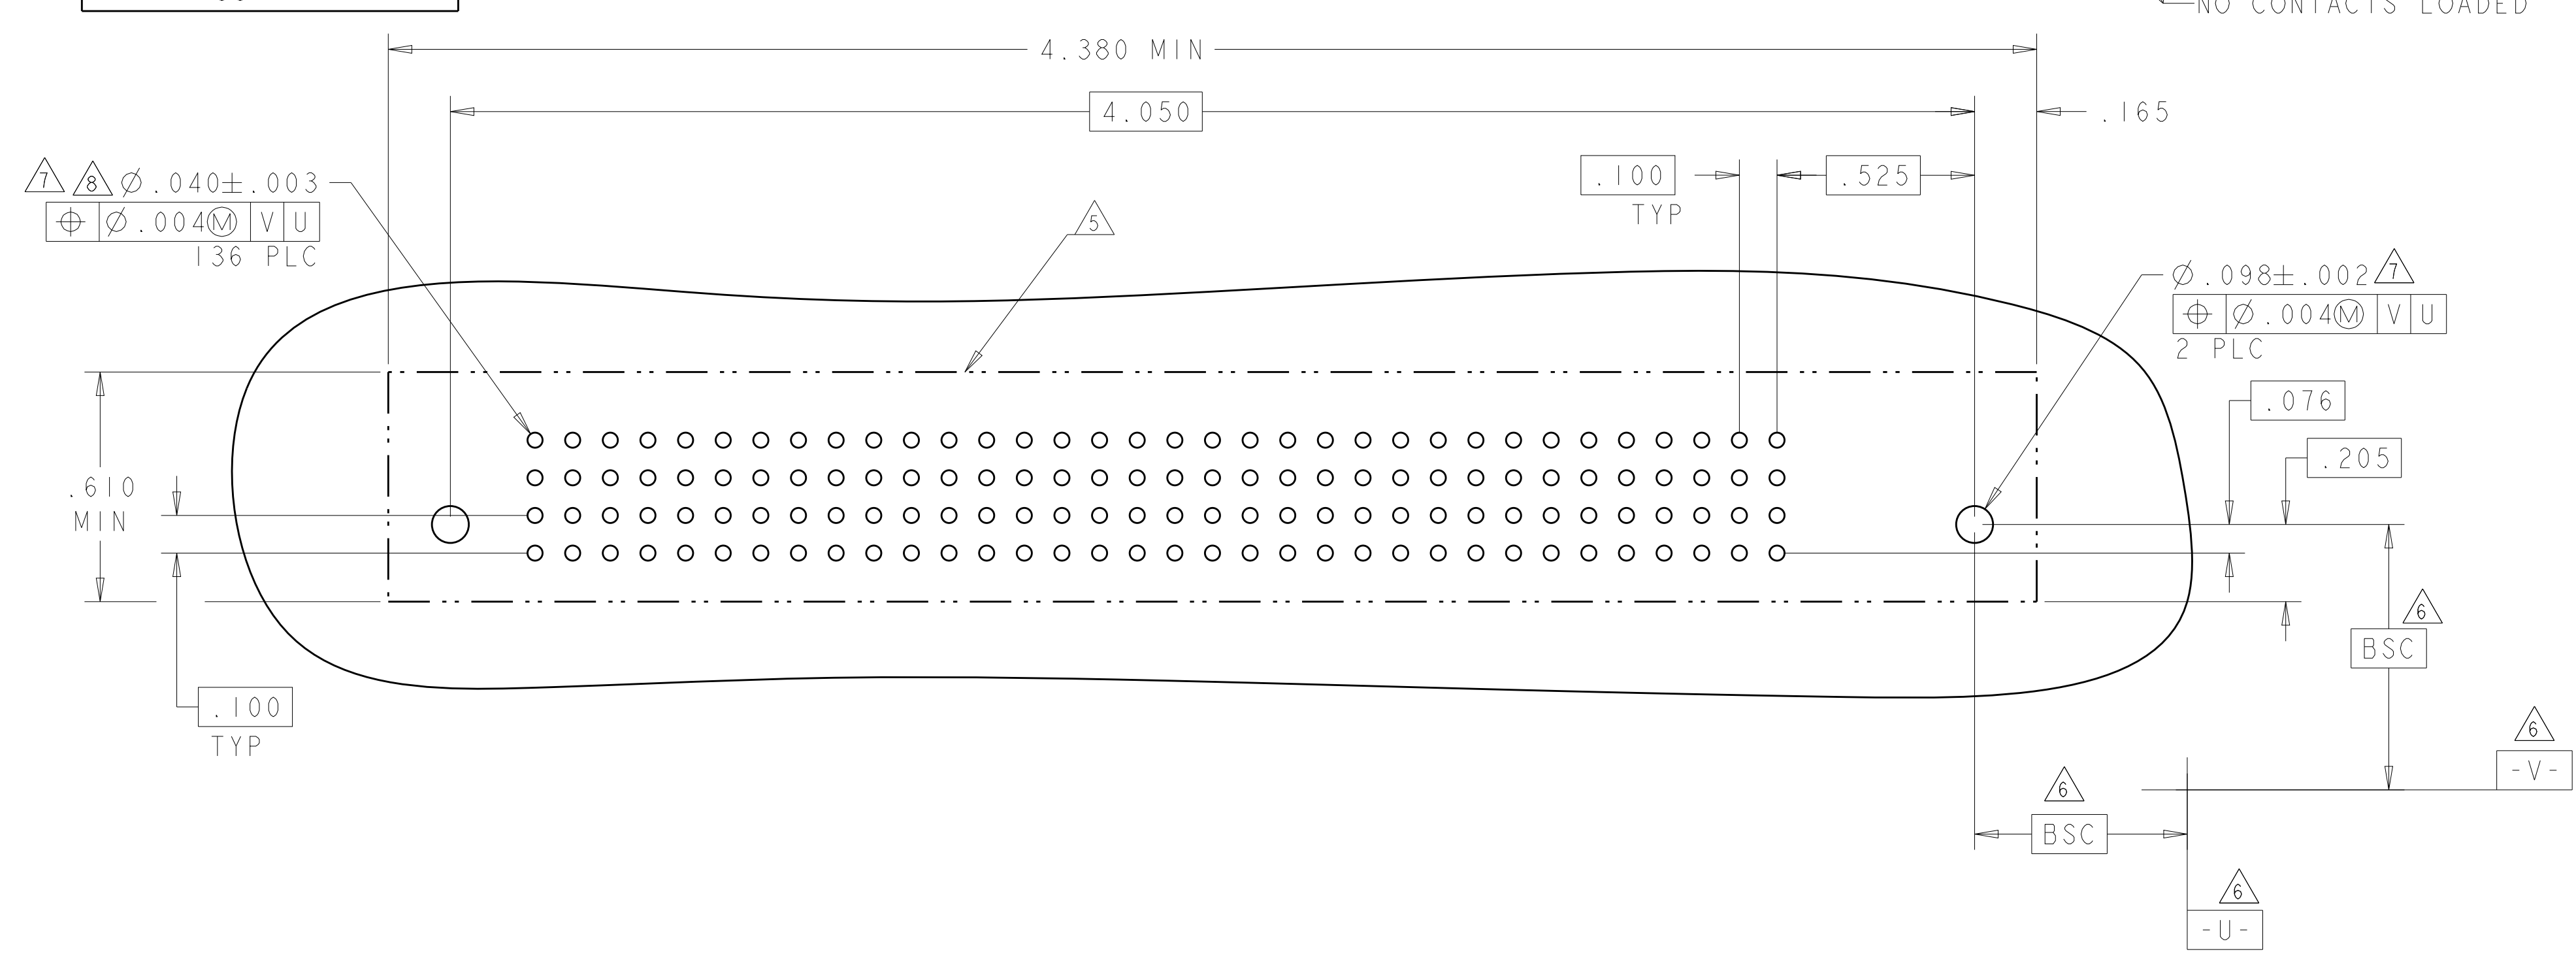


THIS DRAWING IS A CONTROLLED DOCUMENT.


DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN: R.GRZYBOWSKI 16FEB05	CHK: M.PERCHEKKE 16FEB05	APVD: M.PERCHEKKE	NAME: M.PERCHEKKE	PRODUCT SPEC: 108-1973	APPLICATION SPEC: 114-13038	SIZE: A1	CAGE CODE: 6450150	RESTRICTED TO: -
MATERIAL: -	FINISH: -	WEIGHT: -	CUSTOMER DRAWING	SCALE: 1:1	SHEET: 5	OF: 12	REV: G5			

TE Connectivity  
 VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

LOC		DIST		REVISIONS			
ES	00	P	LTN	DESCRIPTION	DATE	DMN	APVD
				SEE SHEET 1			

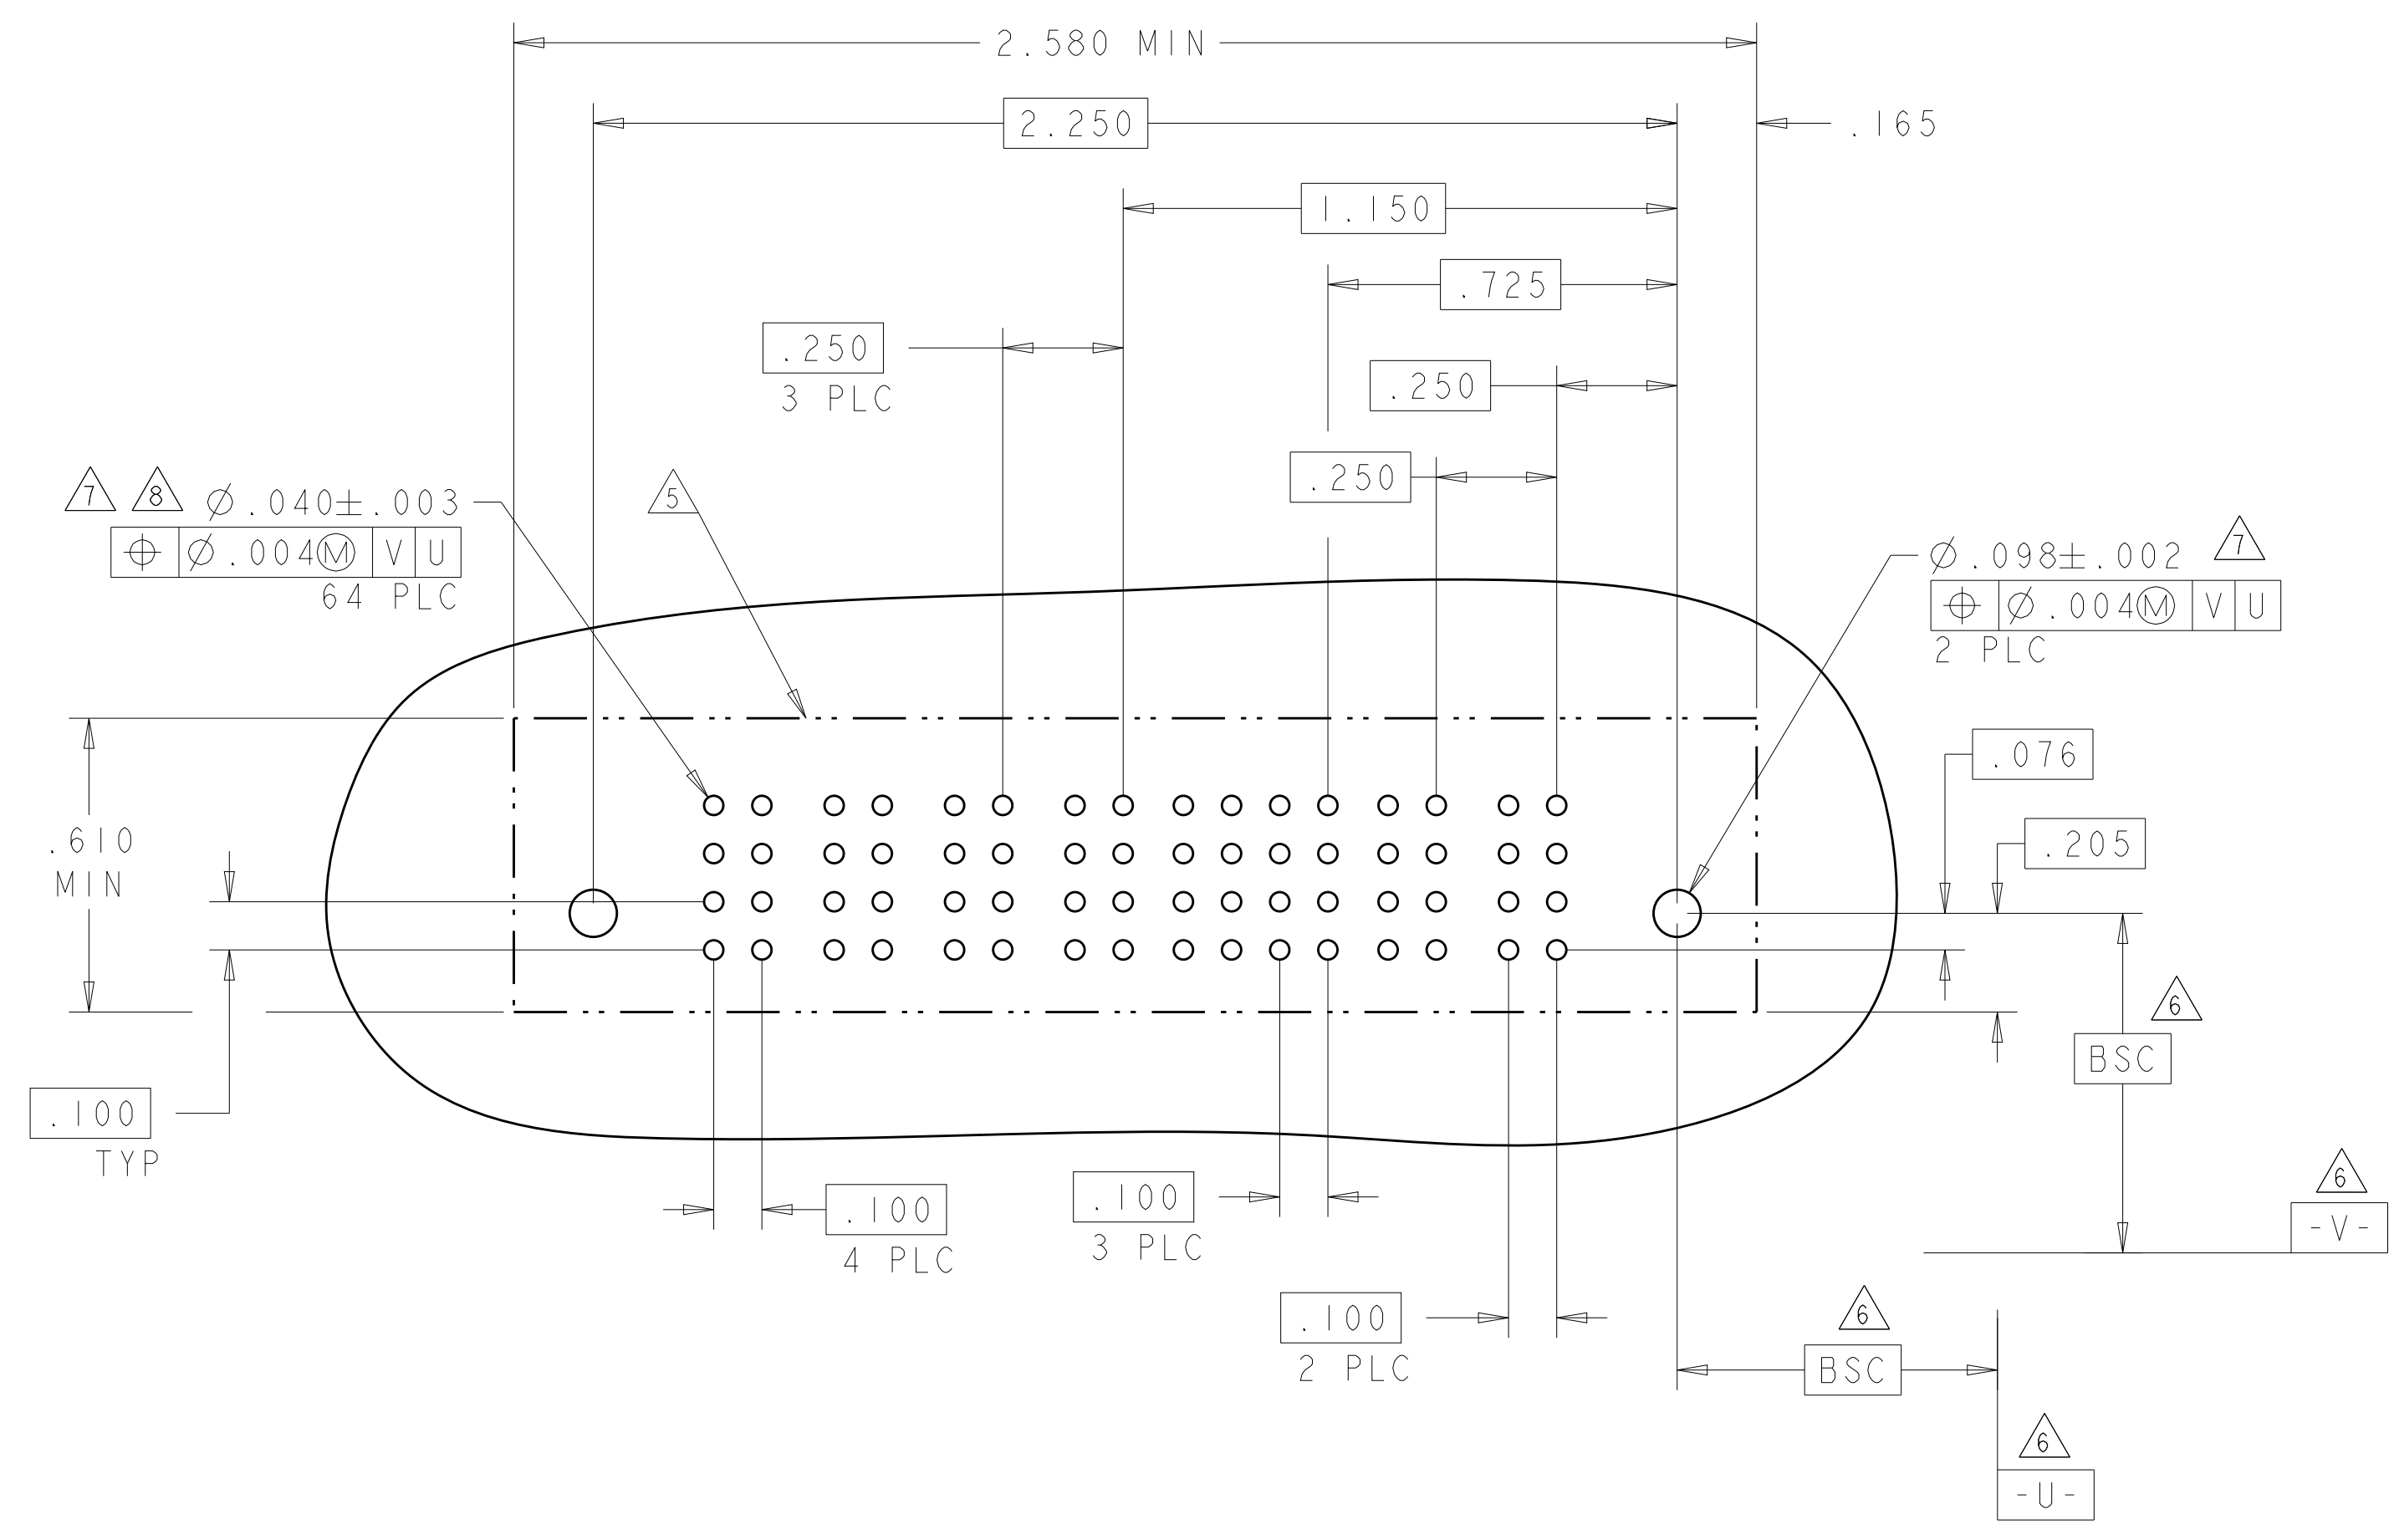

PART NUMBER	ROWS	POWER	POWER				SIGNAL				POWER		
			P6	P5	P4	P3	4	3	2	1	P2	P1	
1-6450150-7	D C B A	VM	VM	VA	VA	E	E	E	E	VA	VM	HD	
						E	E	E	E				
						E	E	E	E				
2P + 16S + 4P													

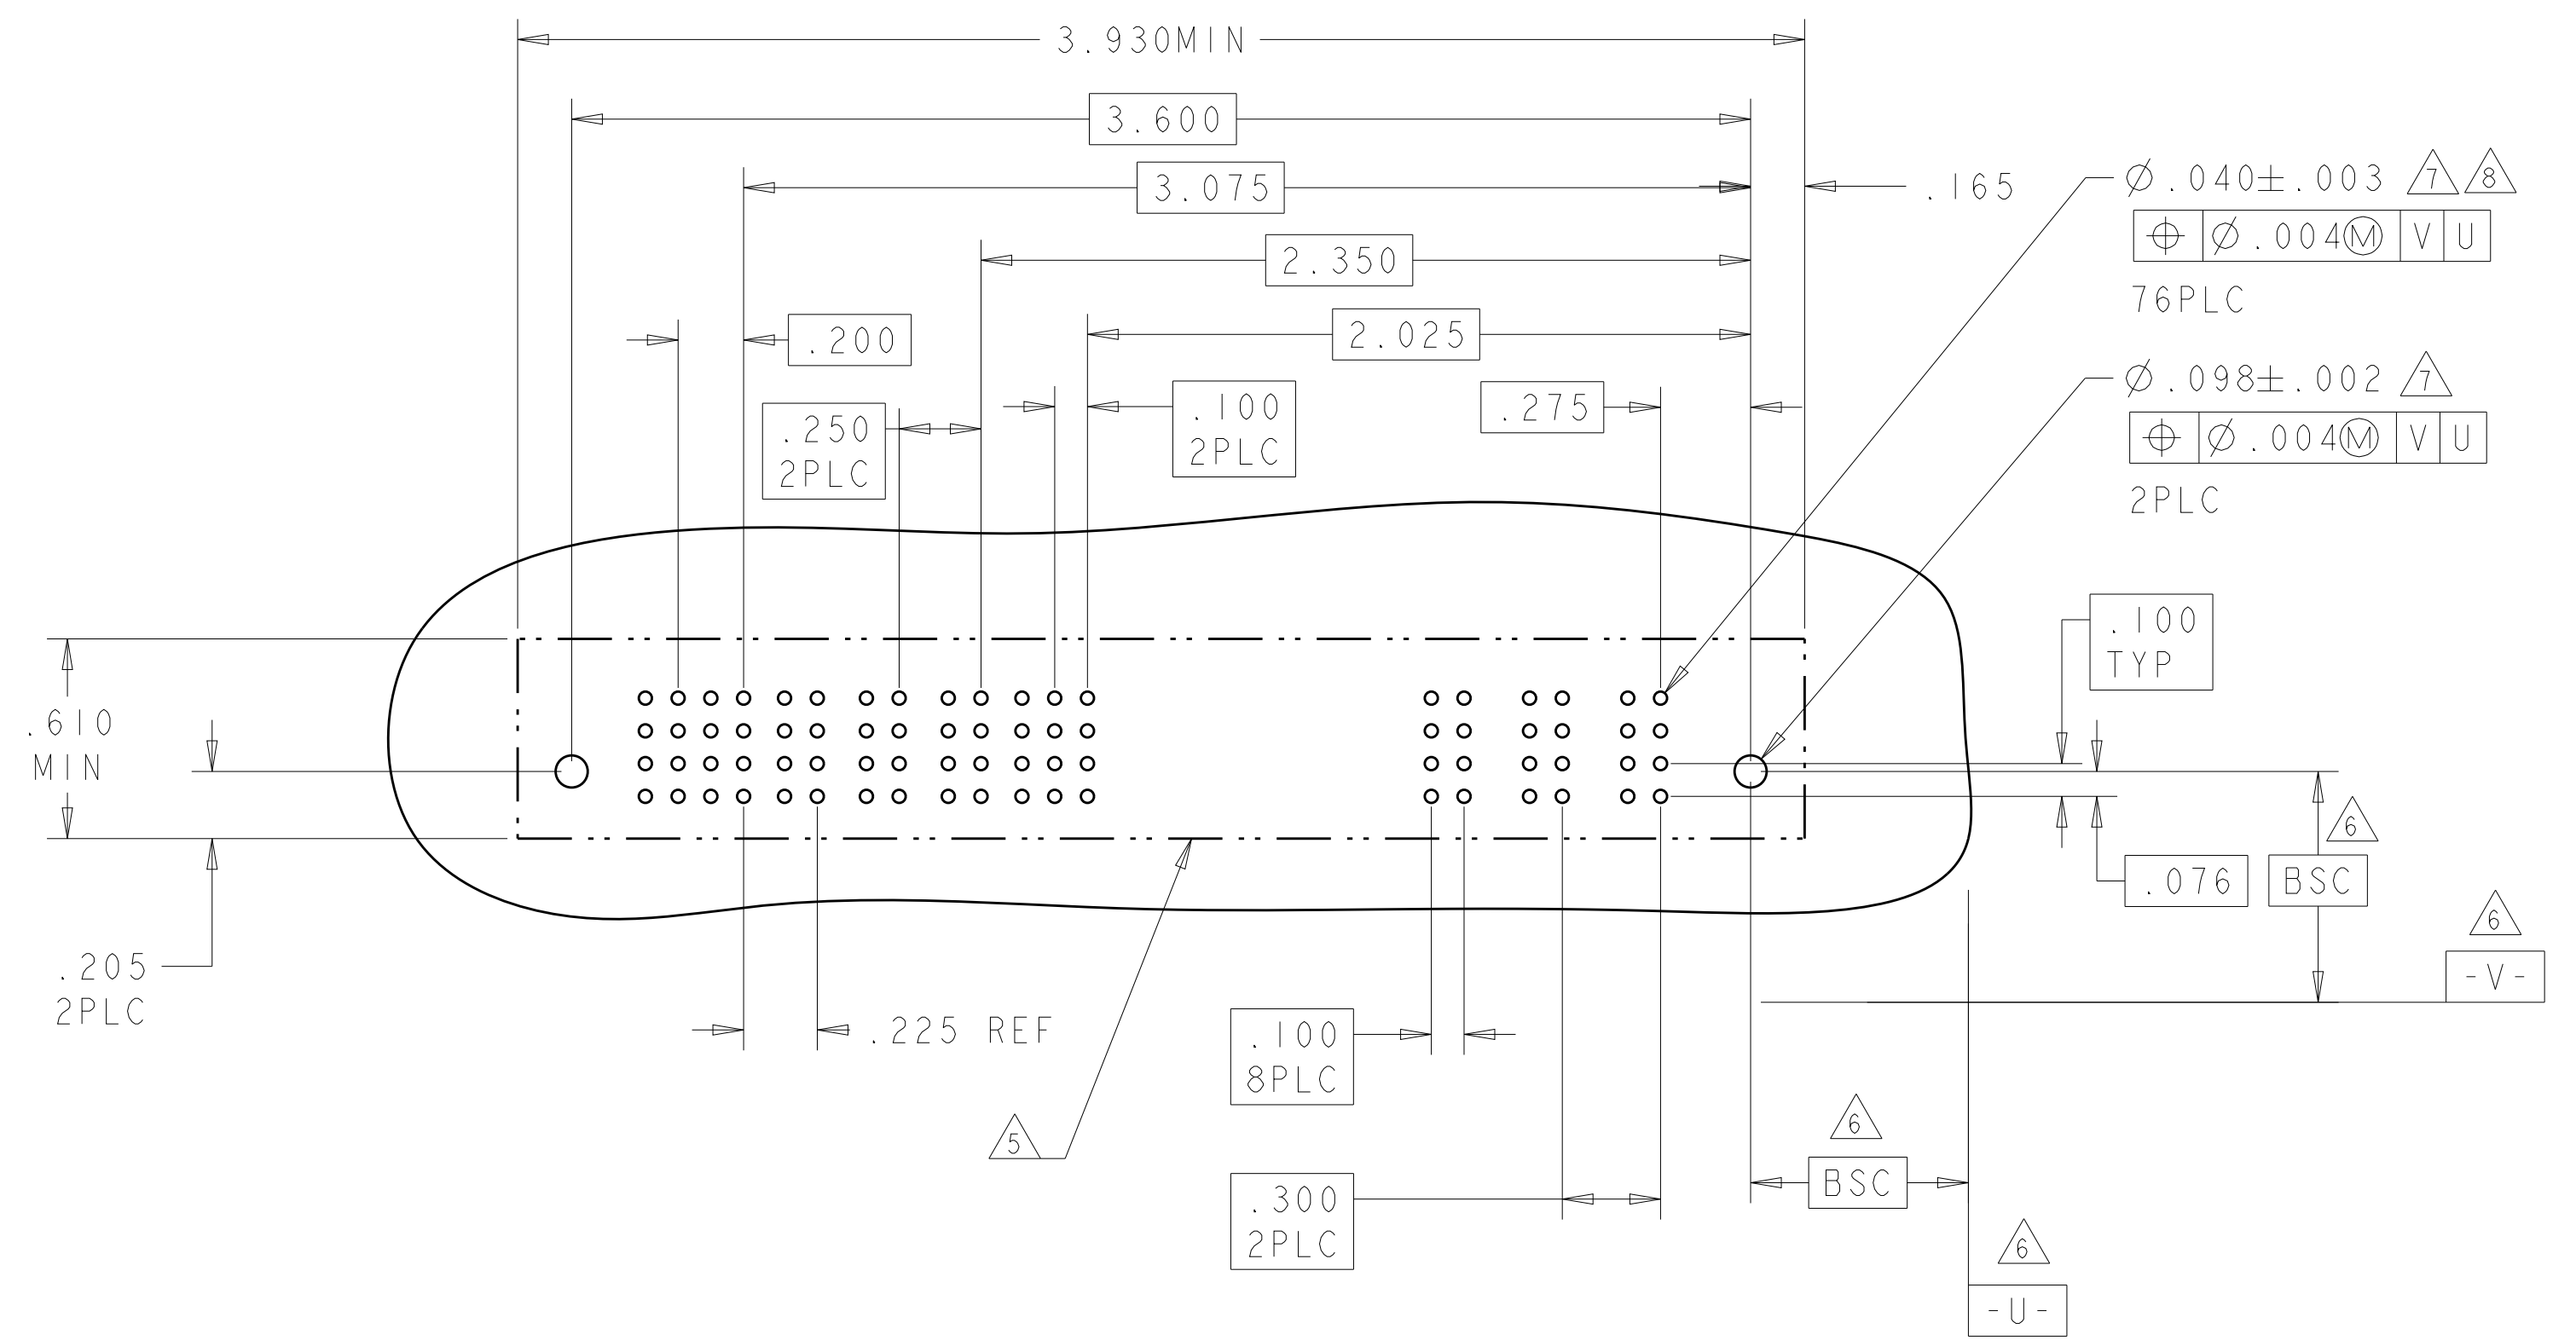

PART NUMBER	ROWS	POWER (L)	SIGNAL																POWER (R)							
			P8	P7	P6	P5	P4	12	11	10	9	8	7	6	5	4	3	2	1	P3	P2		P1			
2-6450150-0	D C B A	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	VM	HD			
																								VA	VM	VM
3ACP + 48S + 5P																										

NO CONTACTS LOADED

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: R. GRZYBOWSKI 16FEB05  
 CHK: M. PERCHERKE 16FEB05  
 APVD: M. PERCHERKE

DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 0 PLC ±.01  
 1 PLC ±.01  
 2 PLC ±.01  
 3 PLC ±.005  
 4 PLC ±.002  
 ANGLES ±.2°

MATERIAL: FINISH:


PRODUCT SPEC: 108-1973  
 APPLICATION SPEC: 114-13038  
 WEIGHT: CUSTOMER DRAWING

NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL  
 SIZE: A1  
 CAGE CODE: 100779  
 DRAWING NO: 6450150

RESTRICTED TO: SCALE: 1:1 SHEET 6 OF 12 REV: G5


LOC	DIST	REV	DATE	APPD
ES	00			
-		SEE SHEET 1		

PART NUMBER	ROWS	POWER (L)		SIGNAL																POWER (R)				
		P4	P3	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	P2	P1			
2-6450150-1	D	VB	VN	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	VN	VB	
	C			J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J			
	B			J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J			J
	A			J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J	J			J
2P + 64S + 2P		HD																		HD				

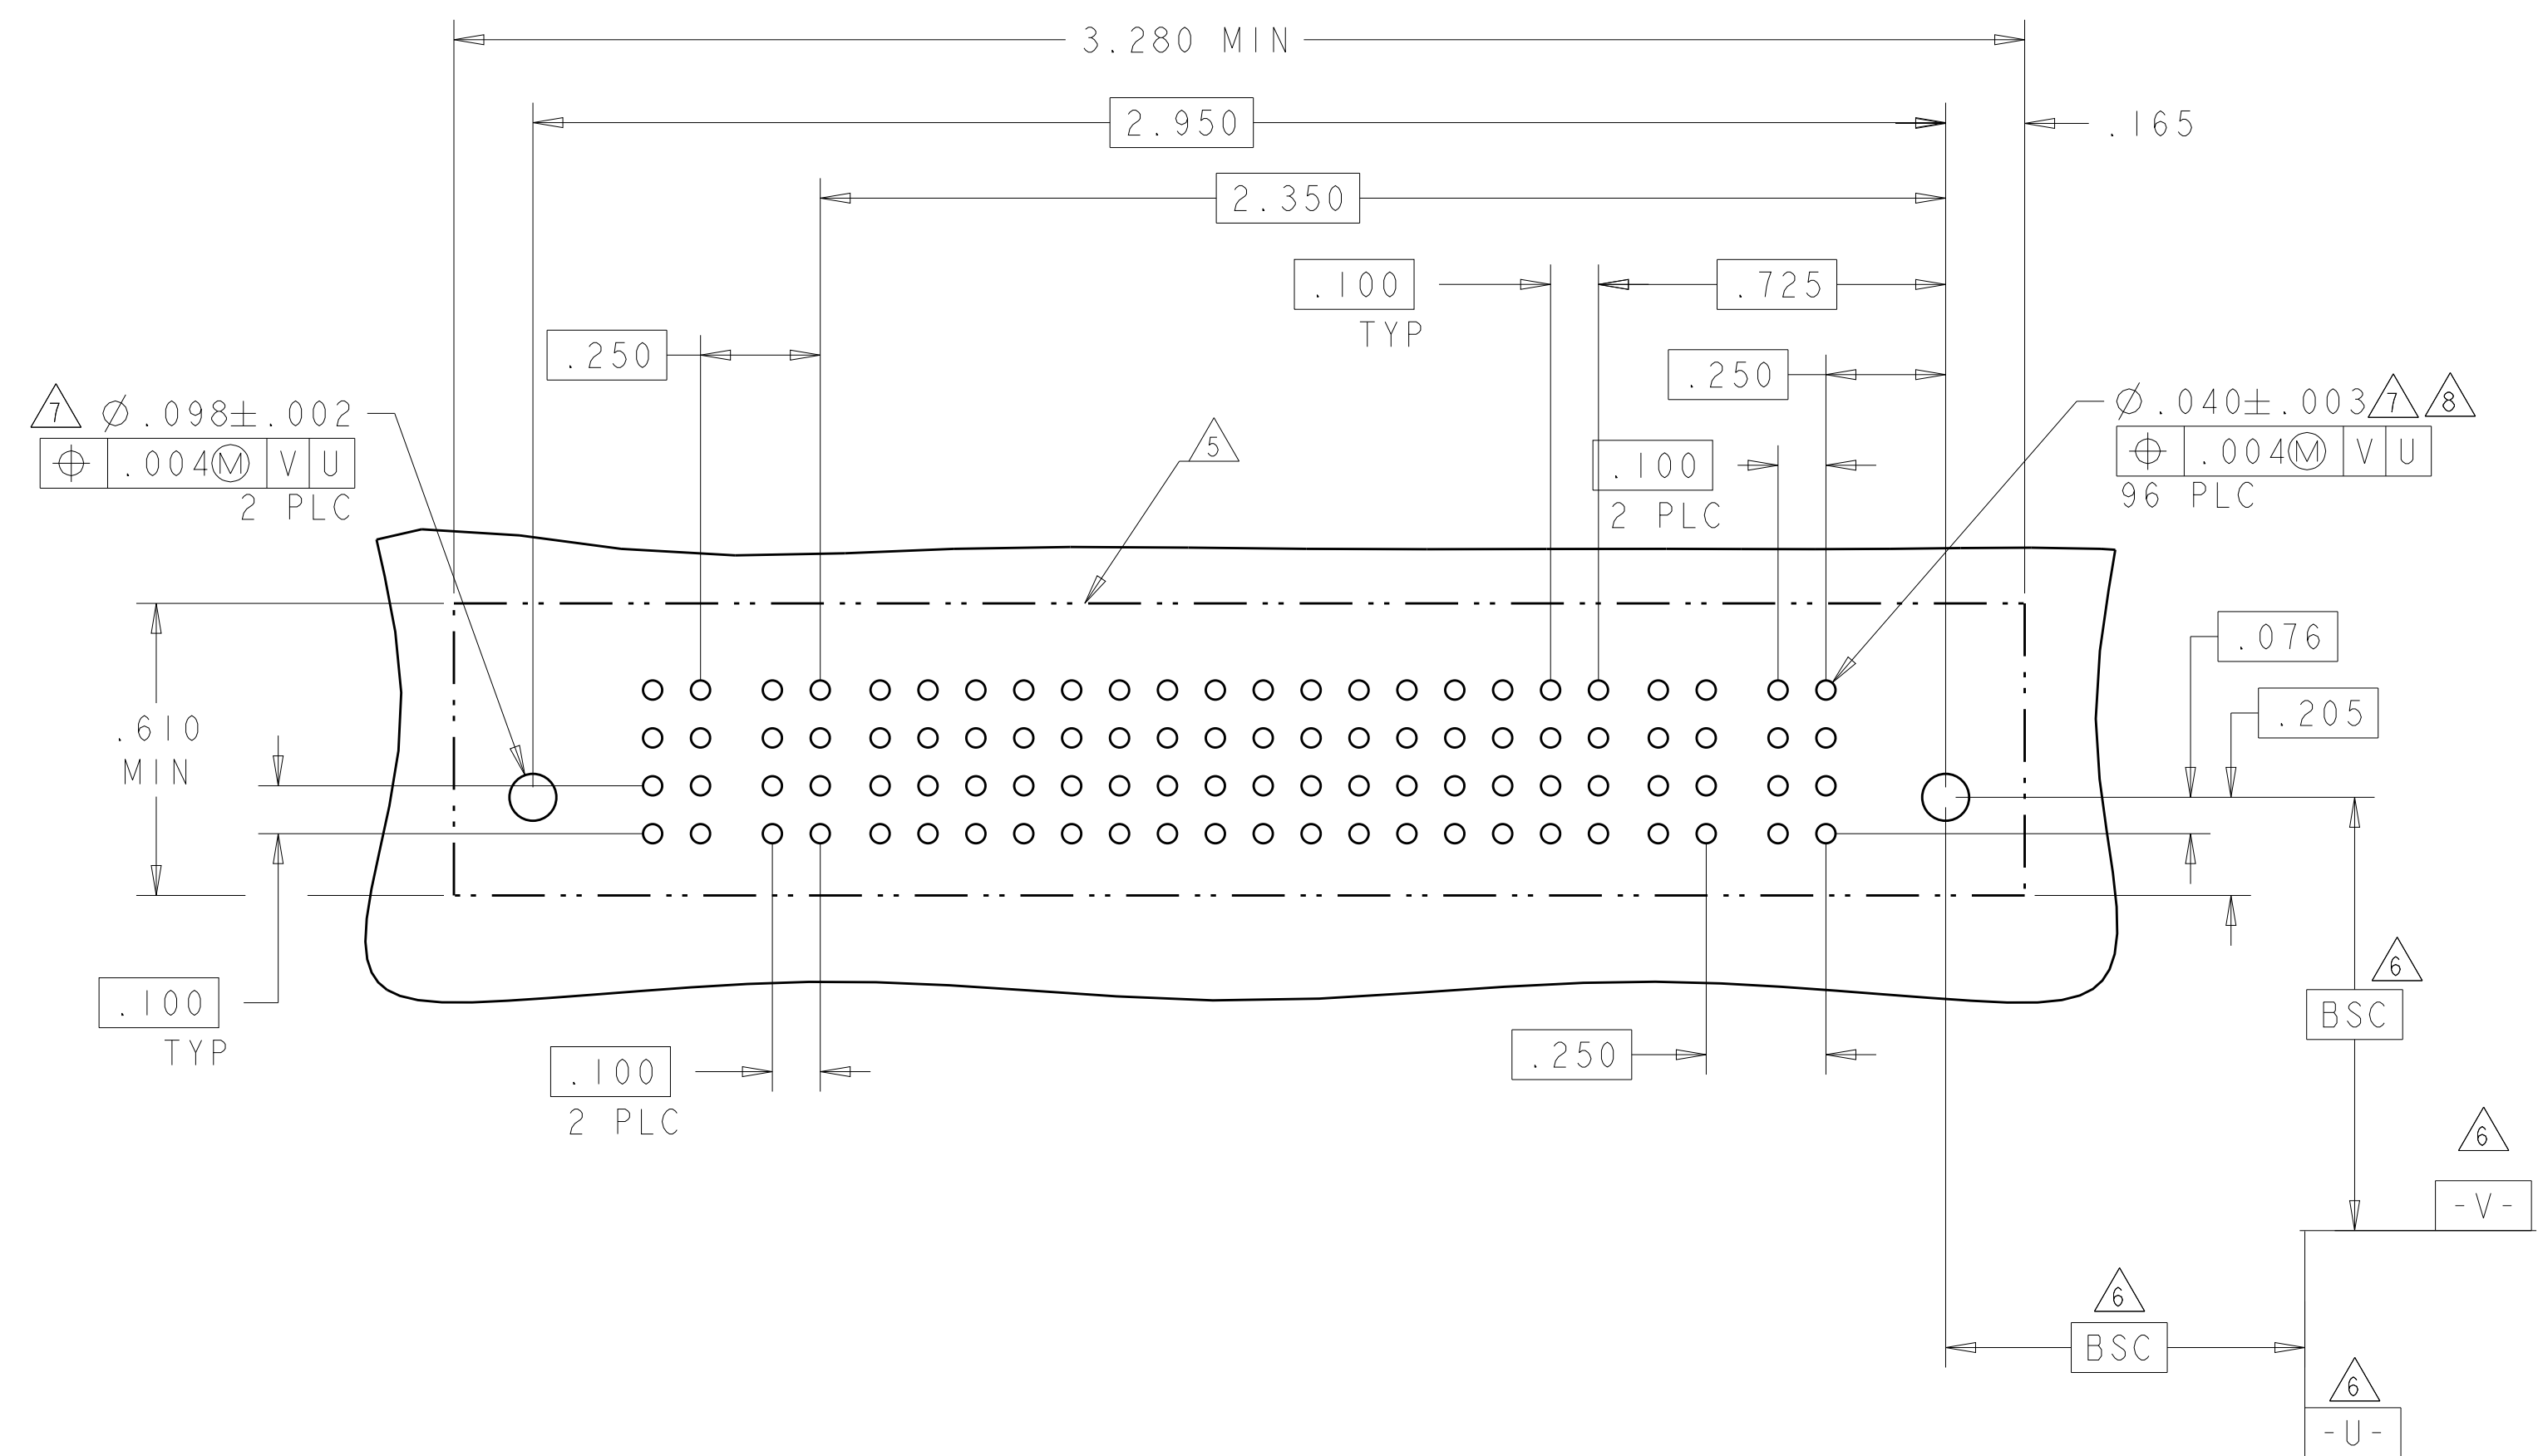

PART NUMBER	ROWS	POWER		SIGNAL						POWER				
		P5	P4	6	5	4	3	2	1	P3	P2	P1		
6450150-9	D	VM	VM	E	E	E	E	E	E	E	E	VA	VM	VM
	C			E	E	E	E	E	E	E				
	B			E	E	E	E	E	E	E				
	A			E	E	E	E	E	E	E				
3ACP+24S+2P		HD								HD				

PART NUMBER	ROWS	POWER		SIGNAL						POWER			
		P5	P4	6	5	4	3	2	1	P3	P2	P1	
2-6450150-8	D	VM	VM	E	E	E	E	E	E	E	VA	VM	VM
	C			E	E	E	E	E	E	E			
	B			E	E	E	E	E	E	E			
	A			E	E	E	E	E	E	E			
3ACP+24S+2P		HD								HD			

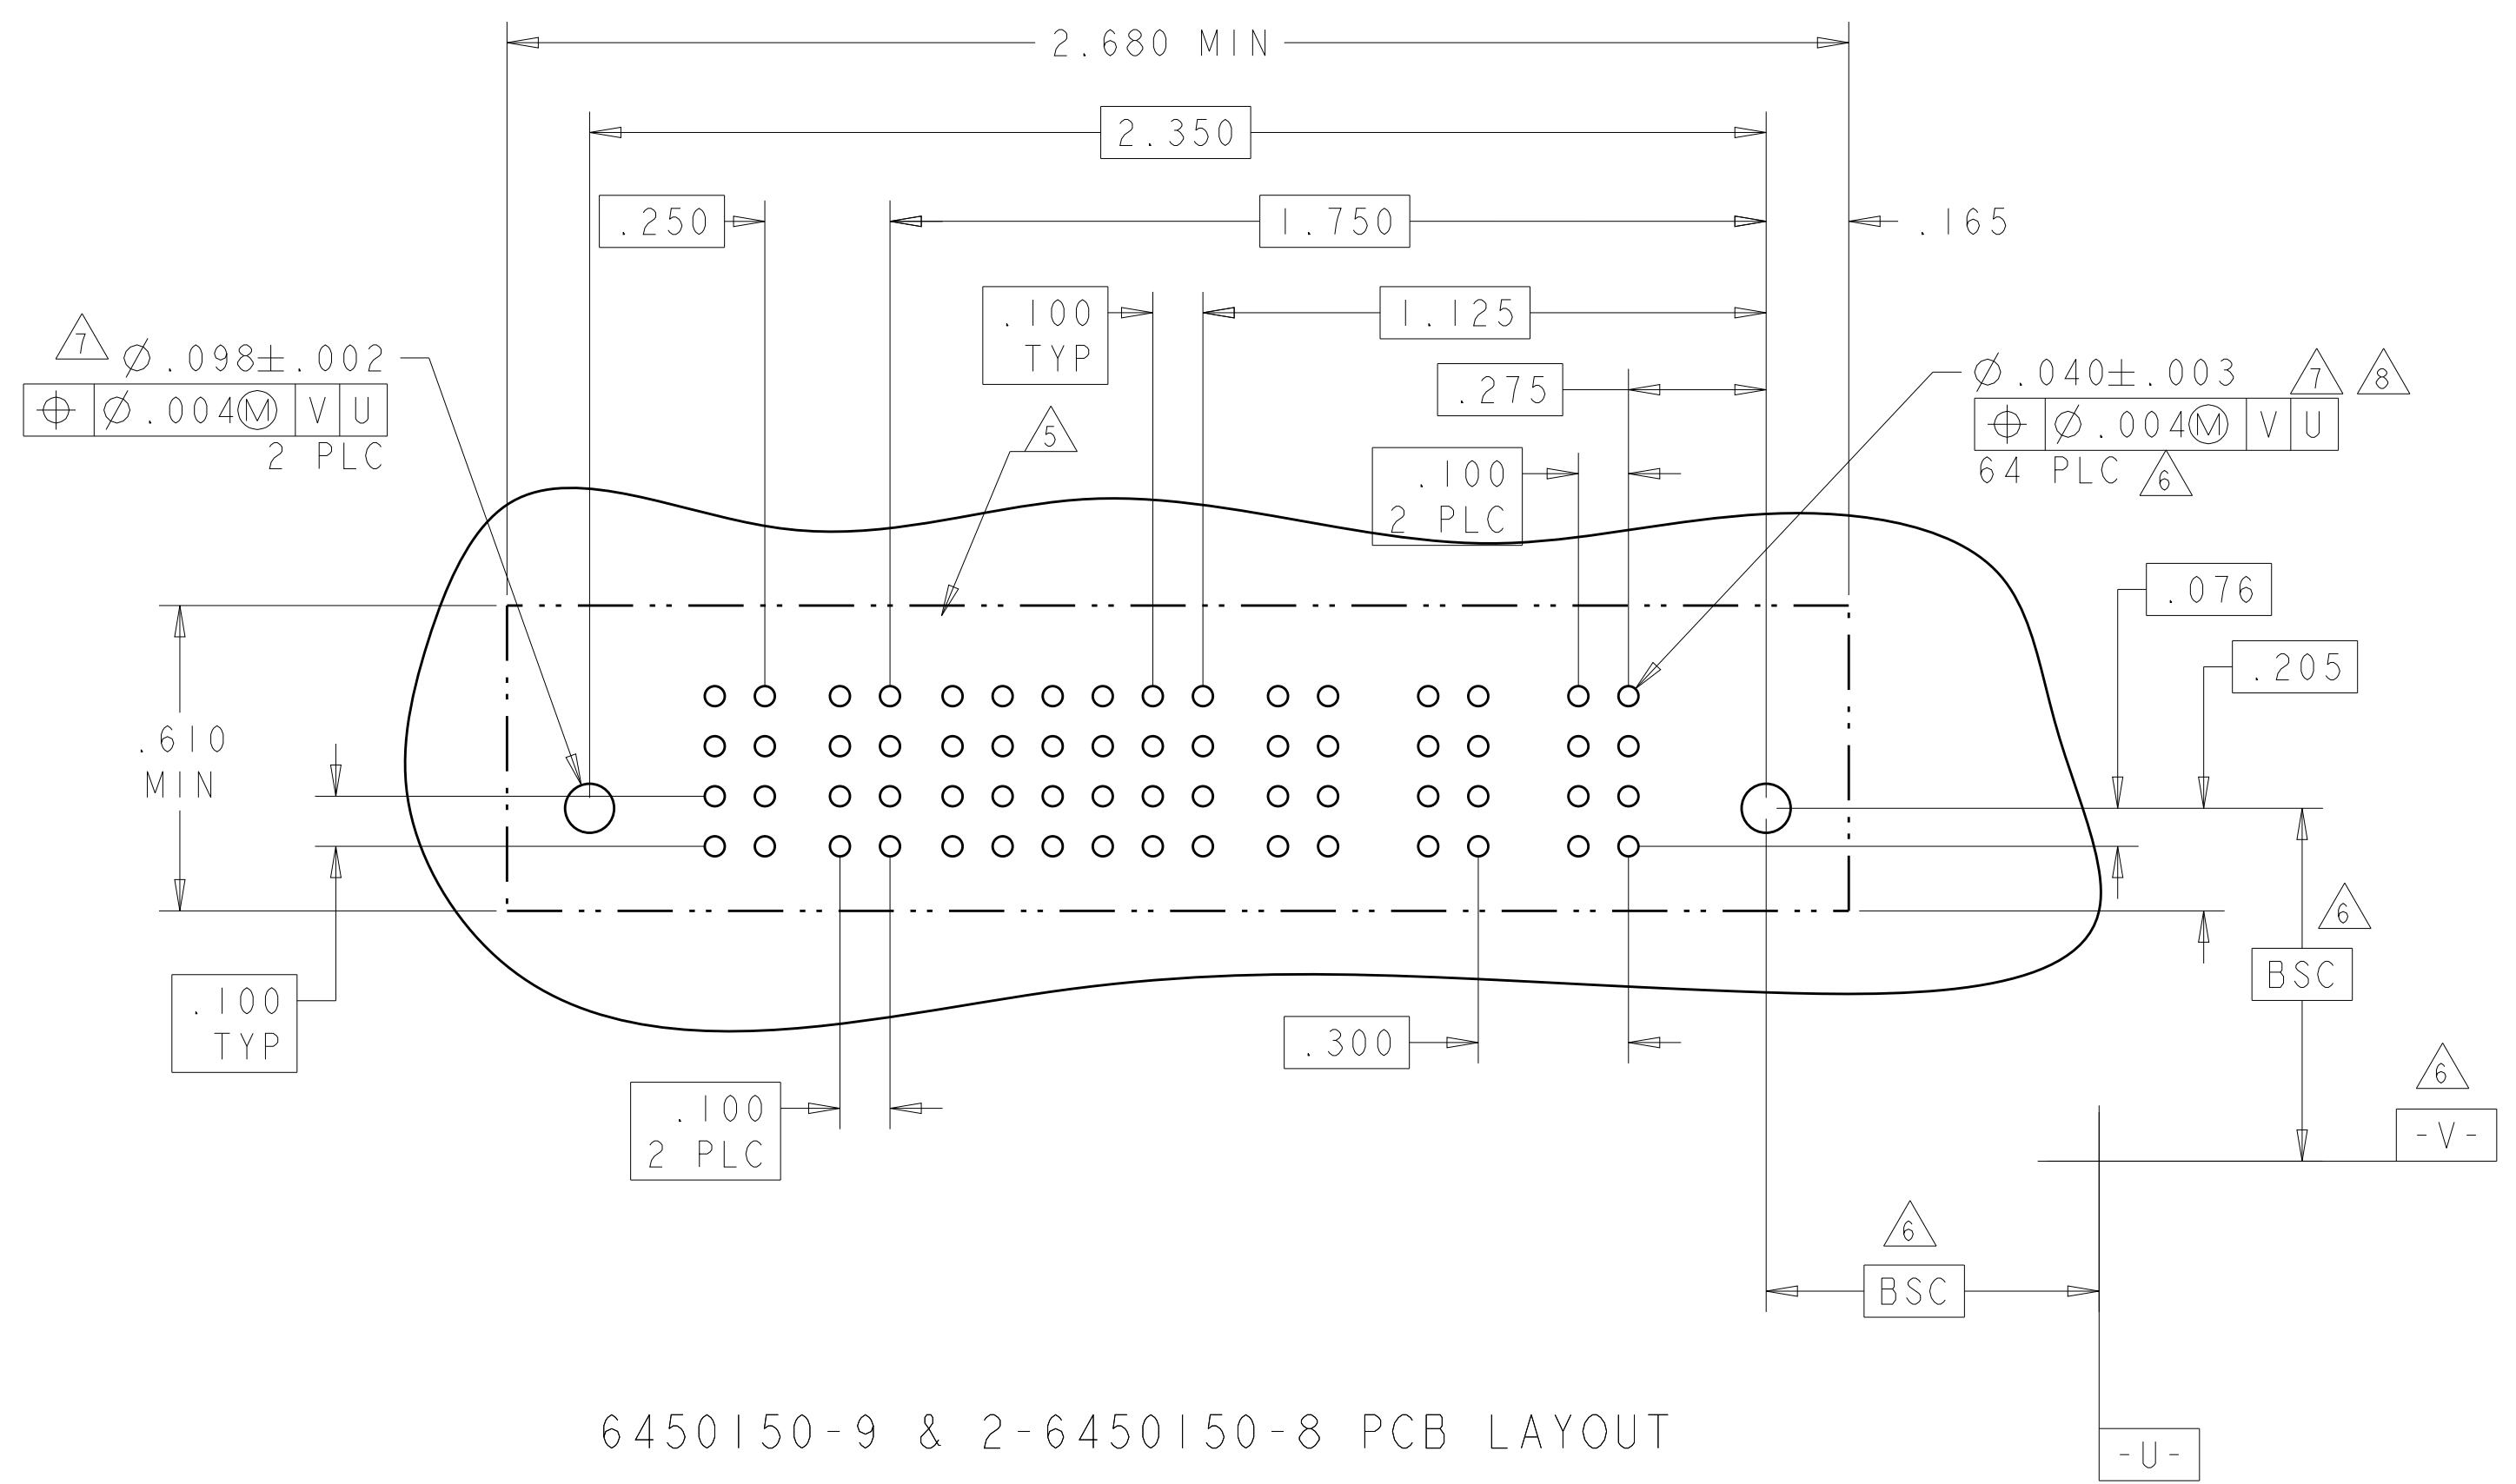

6450150-9 & 2-6450150-8 PCB LAYOUT


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: R. GRZYBOWSKI 16FEB05 CHK: M. PERCHERKE 16FEB05 APVD: M. PERCHERKE	TE Connectivity
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2°	NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL PRODUCT SPEC: 108-1973 APPLICATION SPEC: 114-13038 WEIGHT:	
MATERIAL:	FINISH:	CUSTOMER DRAWING	SCALE: 1:1

LOC		DIST		REVISIONS				
ES	00	P	LTN	DESCRIPTION	DATE	DWN	APVD	
-	-	-	-	SEE SHEET 1	-	-	-	

NO CONTACTS LOADED

PART NUMBER	ROWS	POWER (L)								SIGNAL					POWER (R)							
		P16	P15	P14	P13	P12	P11	P10	P9	P8	5	4	3	2	1	P7	P6	P5	P4	P3	P2	P1
2-6450150-2	D C B A	VA	VM	VM	VM	VM	VM	VM	VM	VM	E	E	E	E	E	VM	VM	VM	VM	VM	VM	VM
											E	E	E	E	E							
											E	E	E	E	E							
											E	E	E	E	E							

7ACP+20S+4ACP+5P

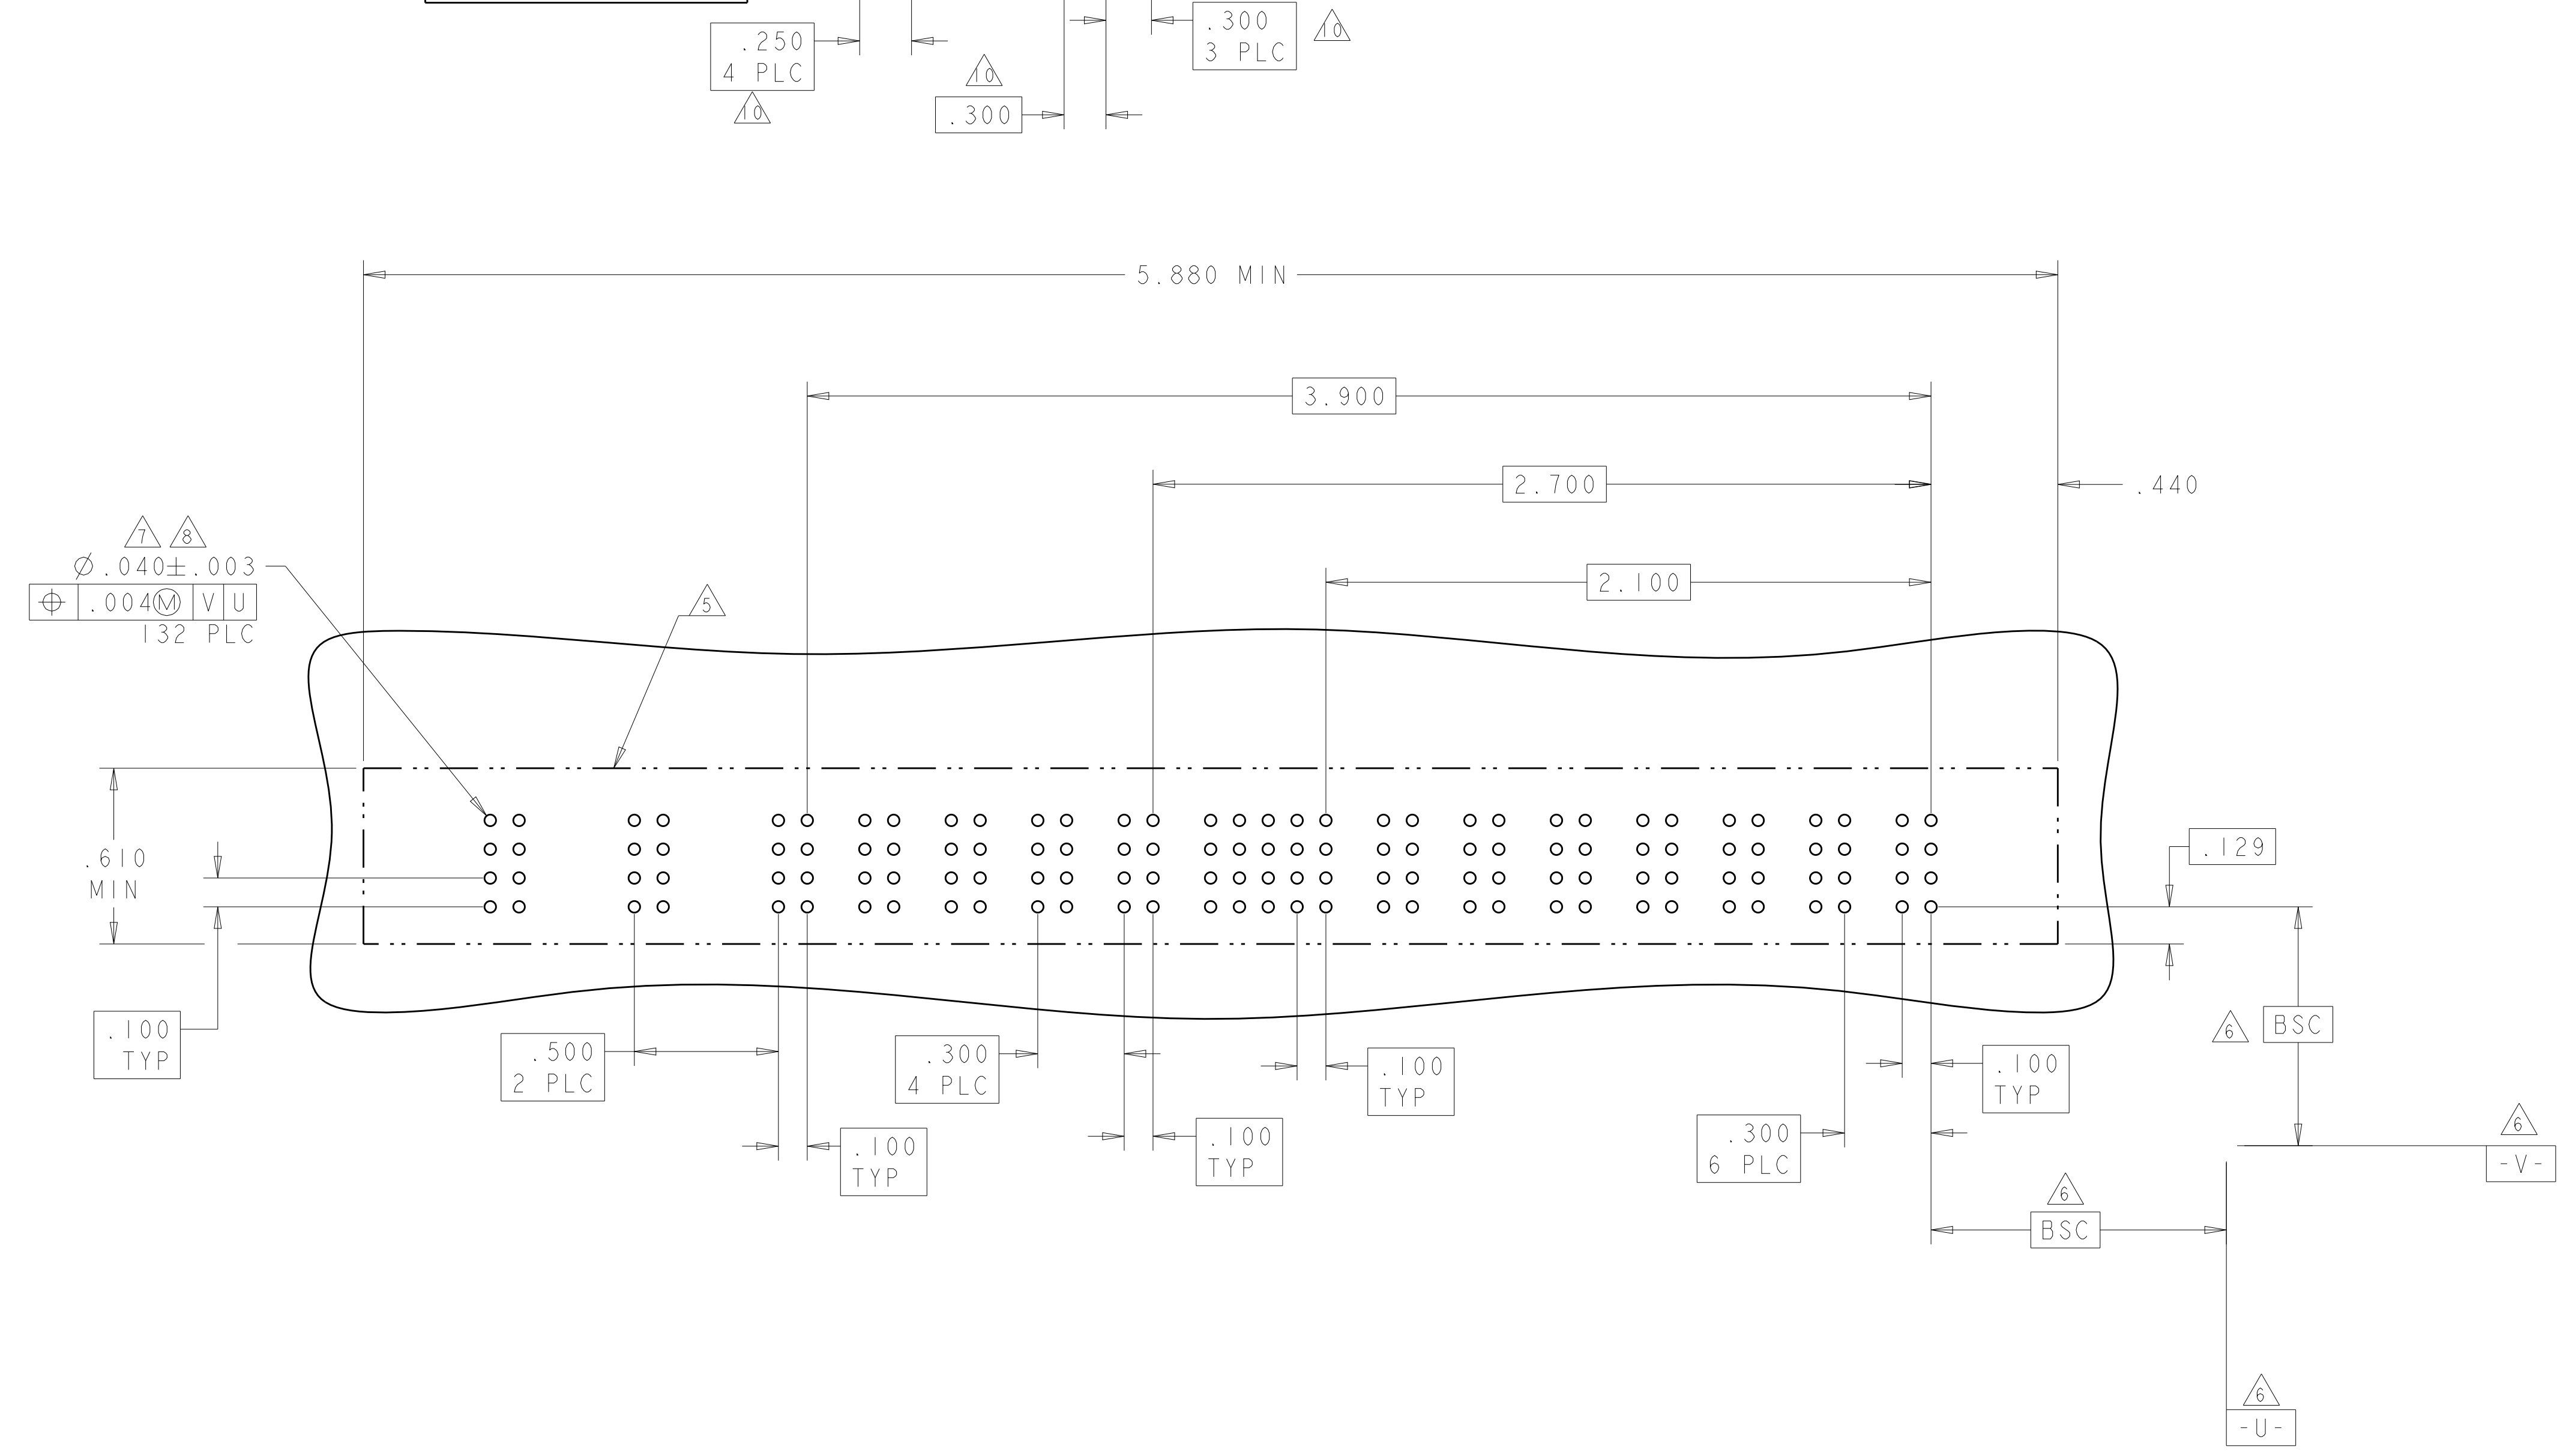



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 16FEB05	 TE Connectivity
DIMENSIONS: INCHES		CHK M. PERCHERKE 16FEB05	
 TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2° FINISH		APVD M. PERCHERKE	NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
MATERIAL		PRODUCT SPEC 108-1973	SIZE A100779C=6450150
CUSTOMER DRAWING		APPLICATION SPEC 114-13038	RESTRICTED TO
SCALE 1:1		WEIGHT	SHEET 8 OF 12
		REV G5	



LOC		DIST		REVISIONS				
P	LTN	DATE	DMN	APVD	DESCRIPTION	DATE	DMN	APVD
-	-	-	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER		SIGNAL				POWER	
		P4	P3	4	3	2	1	P2	P1
2-6450150-3	D	VM	VM	E	E	E	E	VA	VA
	C			E	E	E	E		
	B			E	E	E	E		
	A			E	E	E	E		
2P + 16S + 2P		HD						HD	

PART NUMBER	ROWS	POWER		SIGNAL								POWER							
		P4	P3	12	11	10	9	8	7	6	5	4	3	2	1	P2	P1		
2-6450150-4	D	VM	VA	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	
	C			E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	
	B			E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
	A			E	E	E	E	E	E	E	E	E	E	E	E	E	E	E	E
2P + 48S + 2P		HD										HD							

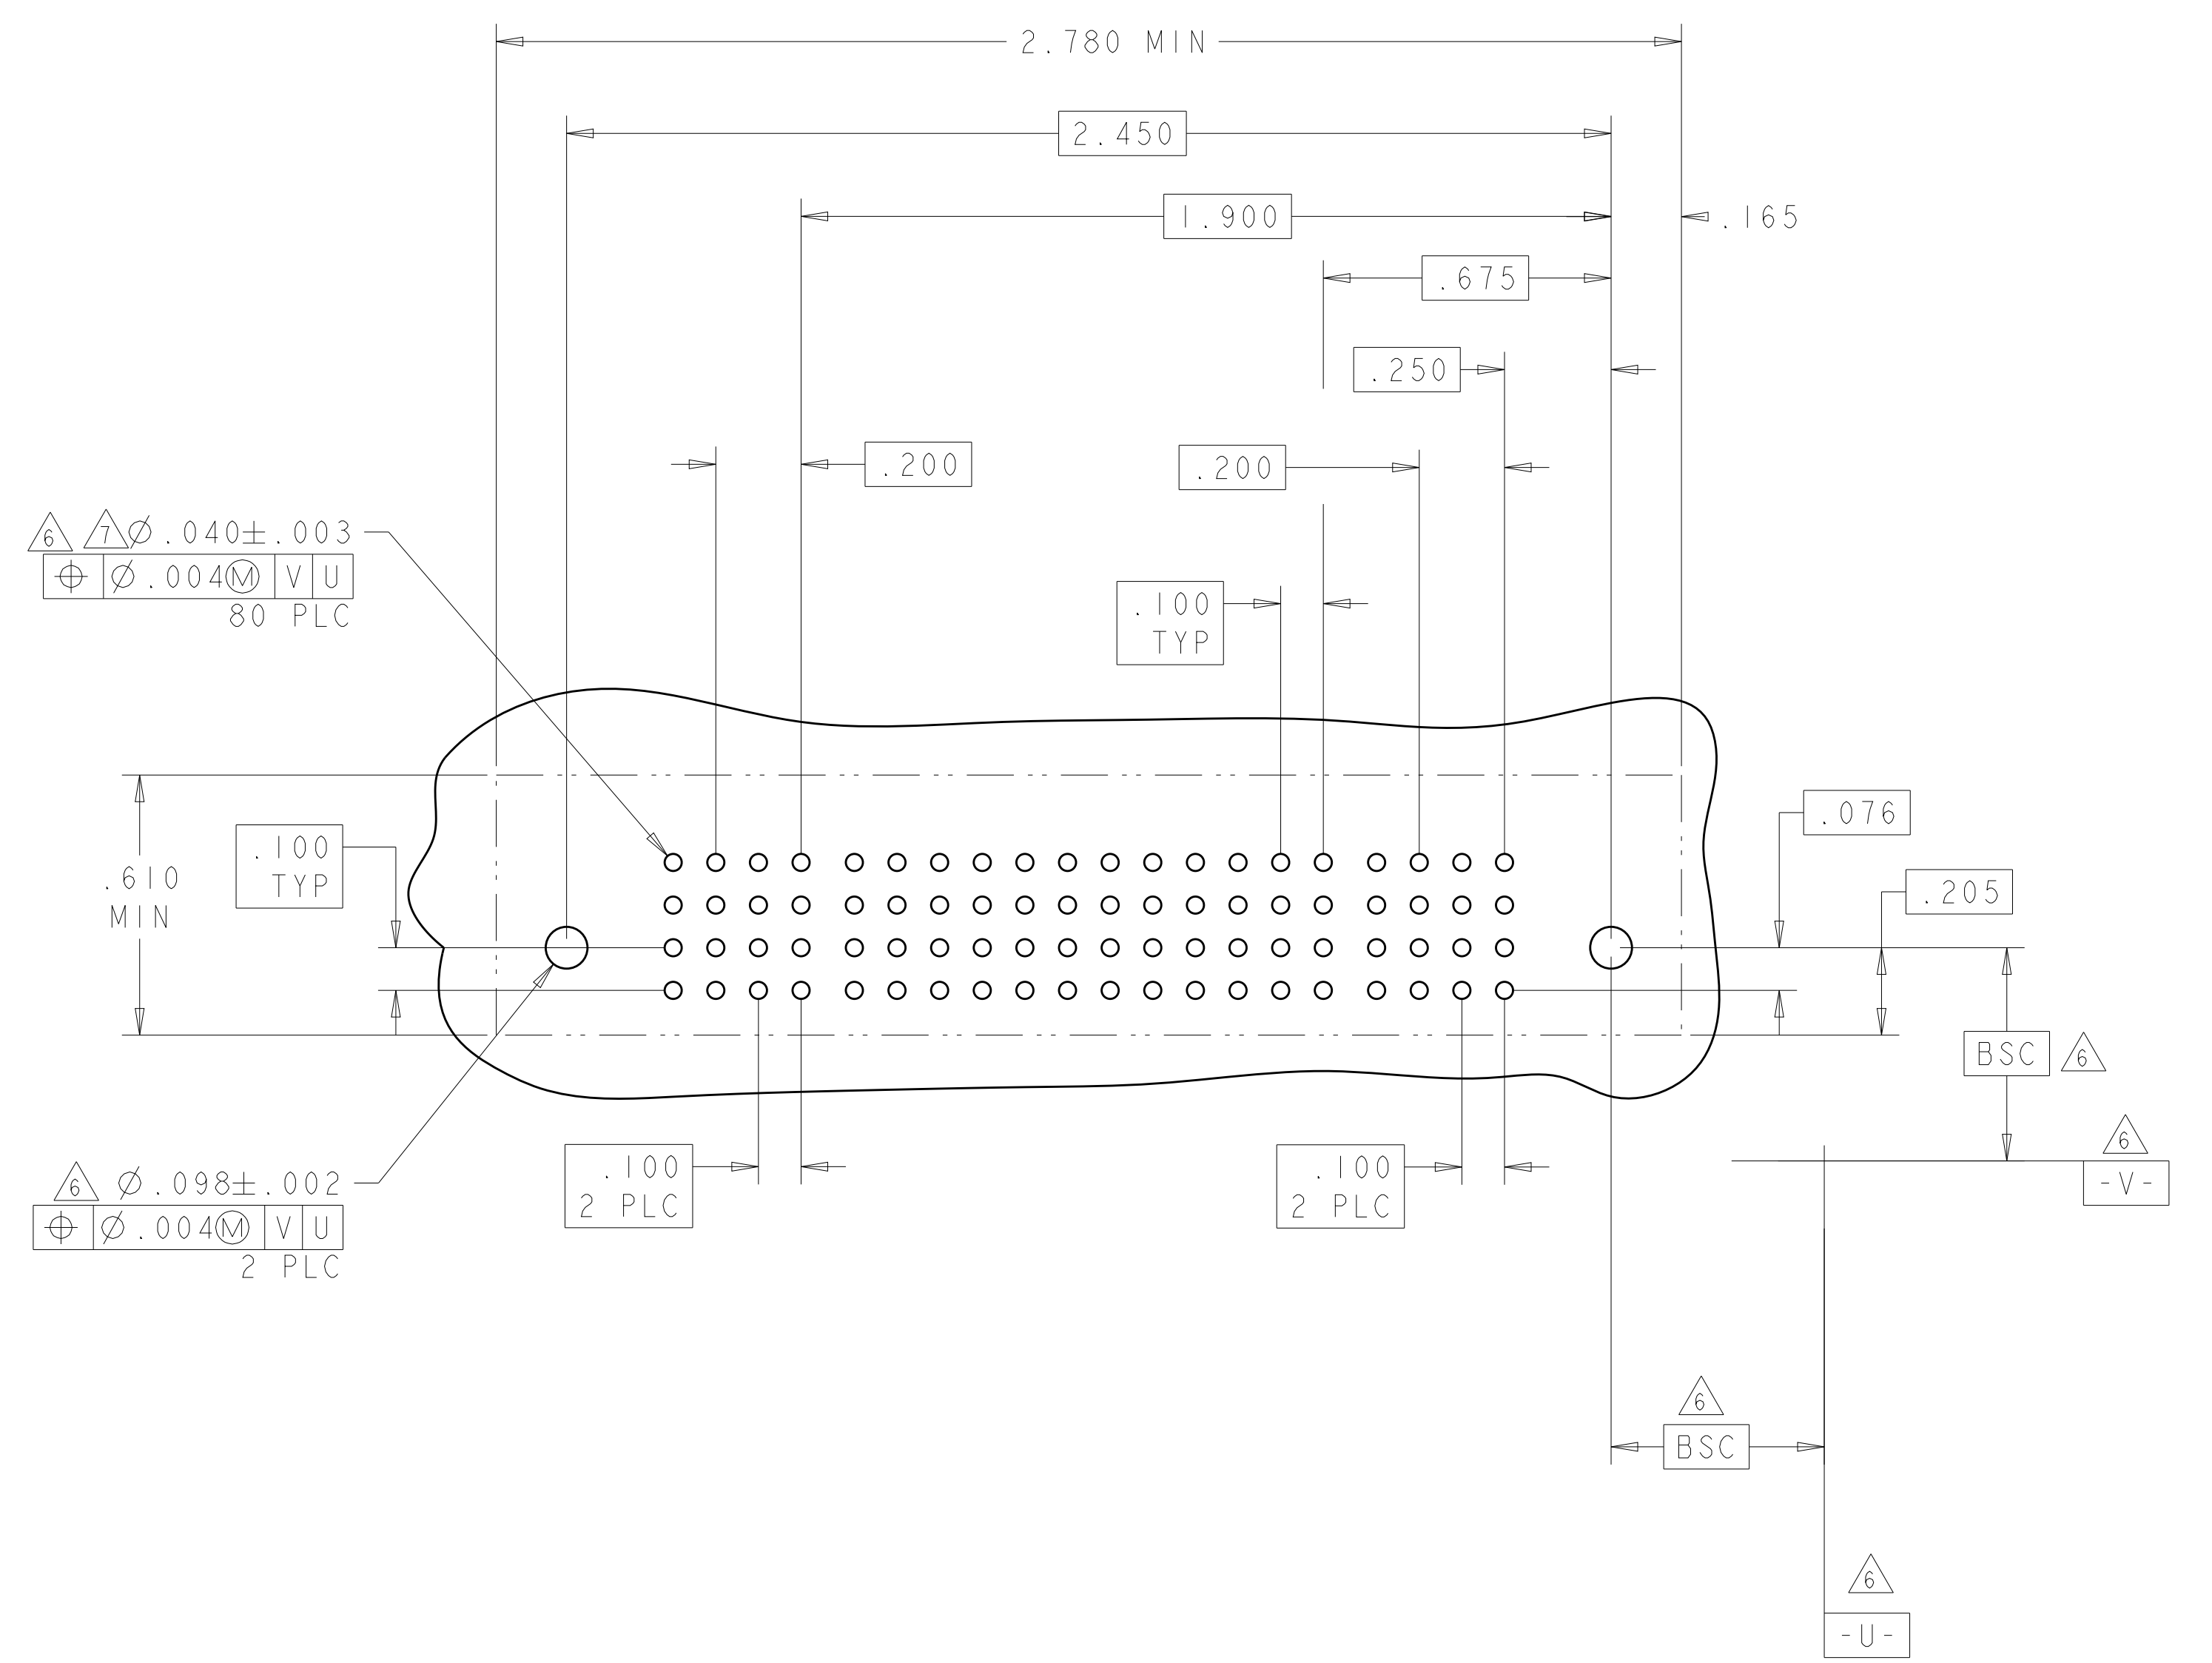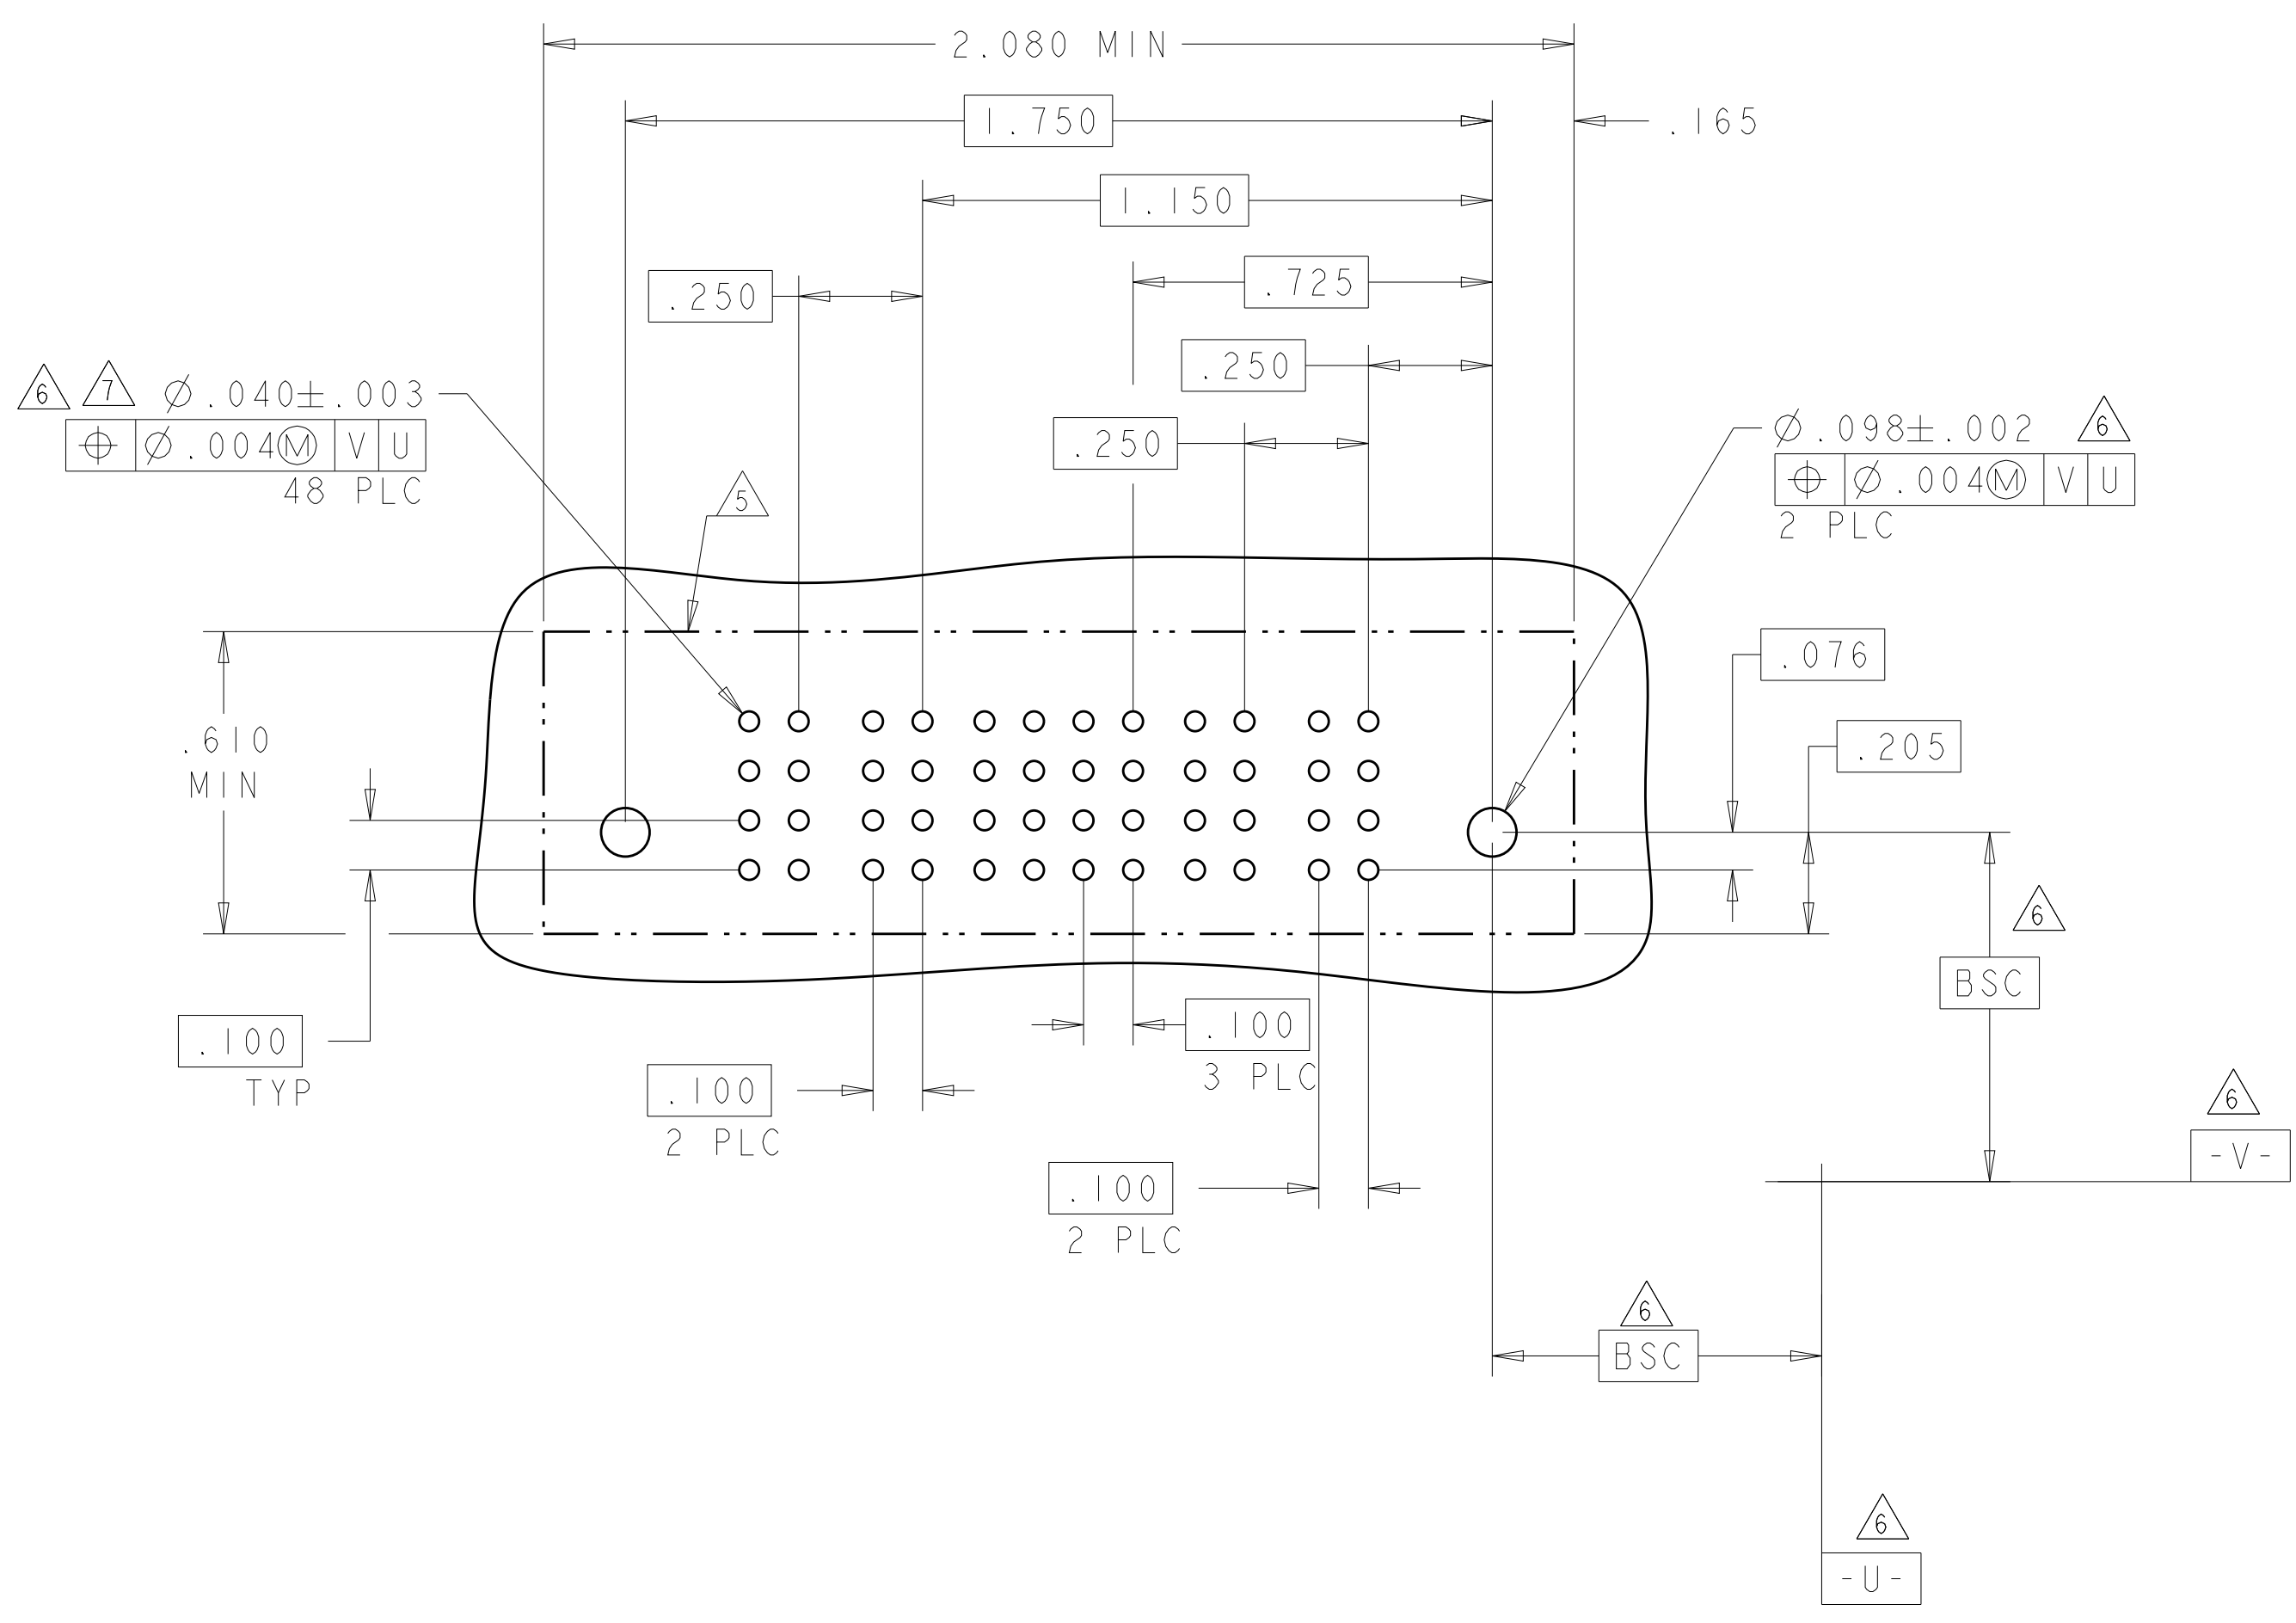

THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: R. GRZYBOWSKI 16FEB05  
 CHK: M. PERCHERKE 16FEB05  
 APVD: M. PERCHERKE

DIMENSIONS: INCHES  
 TOLERANCES UNLESS OTHERWISE SPECIFIED:  
 0 PLC ±.  
 1 PLC ±.01  
 2 PLC ±.01  
 3 PLC ±.005  
 4 PLC ±.0020  
 ANGLES ±.2°

MATERIAL: -  
 FINISH: -

PRODUCT SPEC: 108-1973  
 APPLICATION SPEC: 114-13038  
 WEIGHT: -

NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL  
 SIZE: A1  
 CAGE CODE: 100779  
 DRAWING NO: 6450150  
 CUSTOMER DRAWING

SCALE: 1:1  
 SHEET: 9 OF 12  
 REV: G5

STE TE Connectivity

LOC	DIST	REVISIONS					
		P	LTN	DESCRIPTION	DATE	OWN	APVD
ES	00	-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS	POWER						SIGNAL				POWER			
		P11	P10	P9	P8	P7	P6	P5	4	3	2	1	P4	P3	P2
2-6450150-5	D							E	E	E	E				
	C	VM	VA	VM	VM	VA	VM	E	E	E	E	VM	VM	VM	VM
	B							E	E	E	E				
	A	HD						E	E	E	E				HD



4P + 16S + 7ACP

PART NUMBER	ROWS	POWER (L)			SIGNAL						POWER (R)			
		P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1
2-6450150-6	D				E	E	E	E	E	E				
	C	VM	VM	VA	E	E	E	E	E	E	VM			VM
	B				E	E	E	E	E	E				
	A	HD			E	E	E	E	E	E				HD

4P + 24S + 3ACP

(F1)

NO CONTACT LOADED

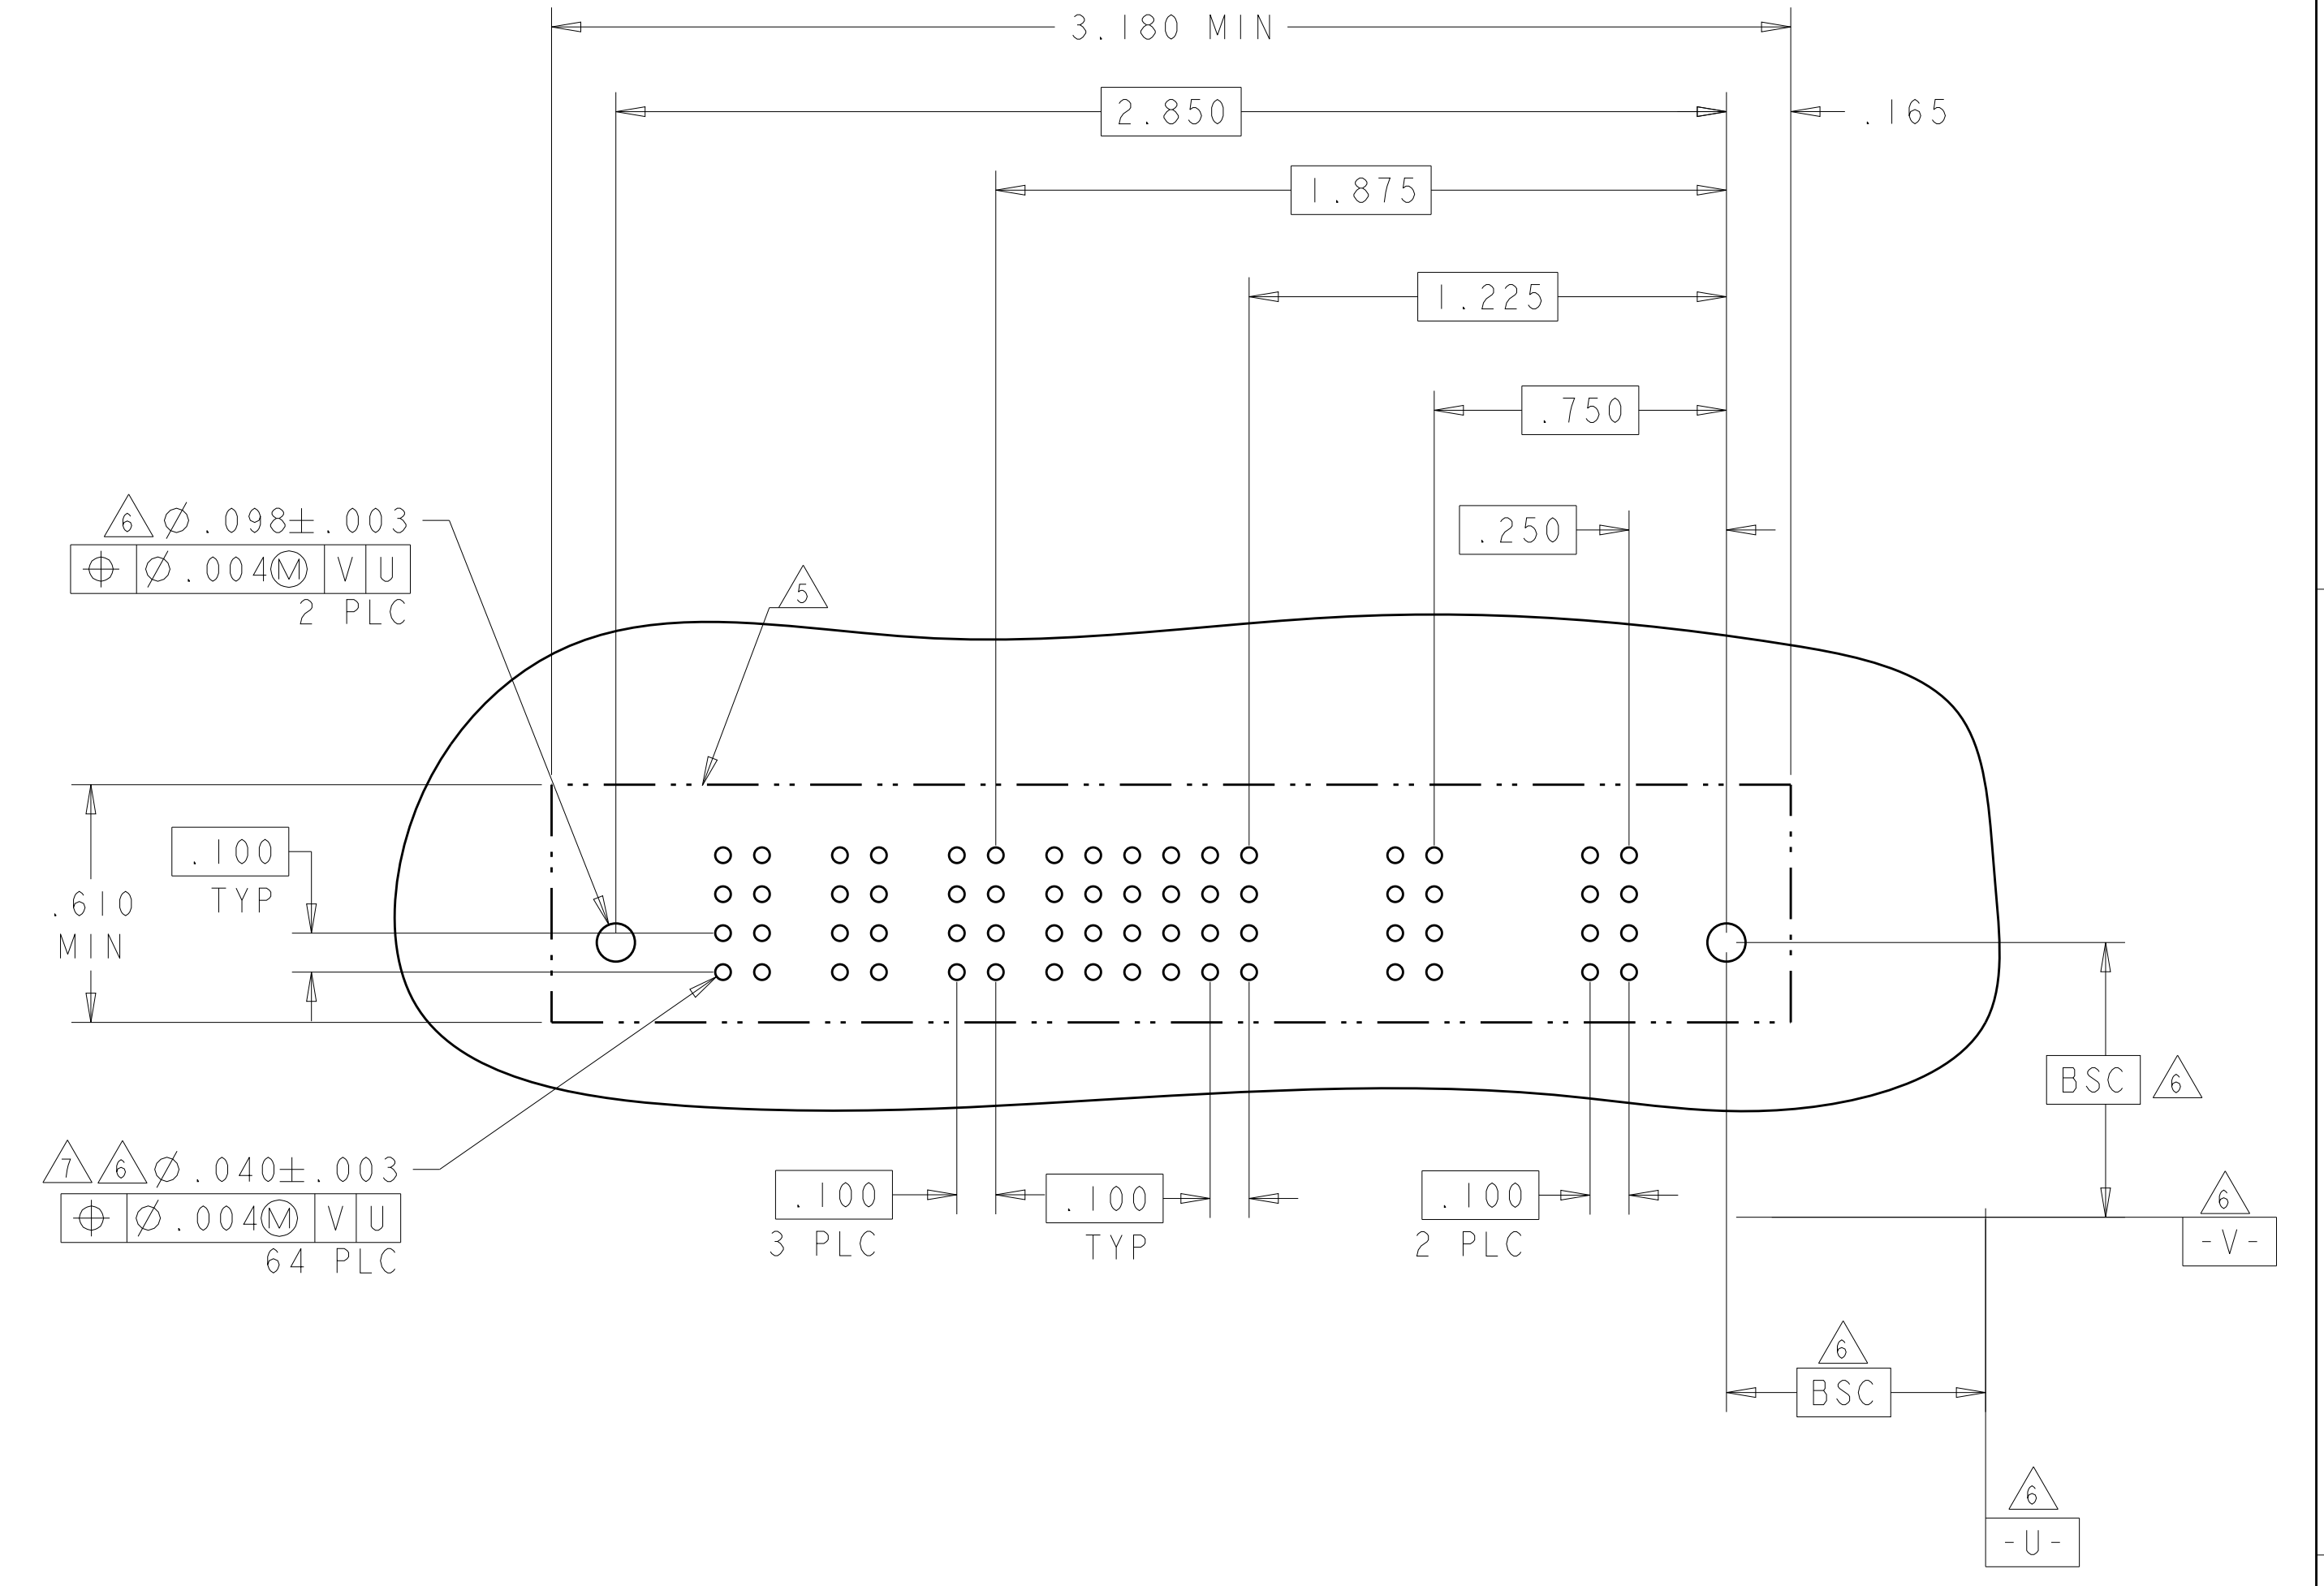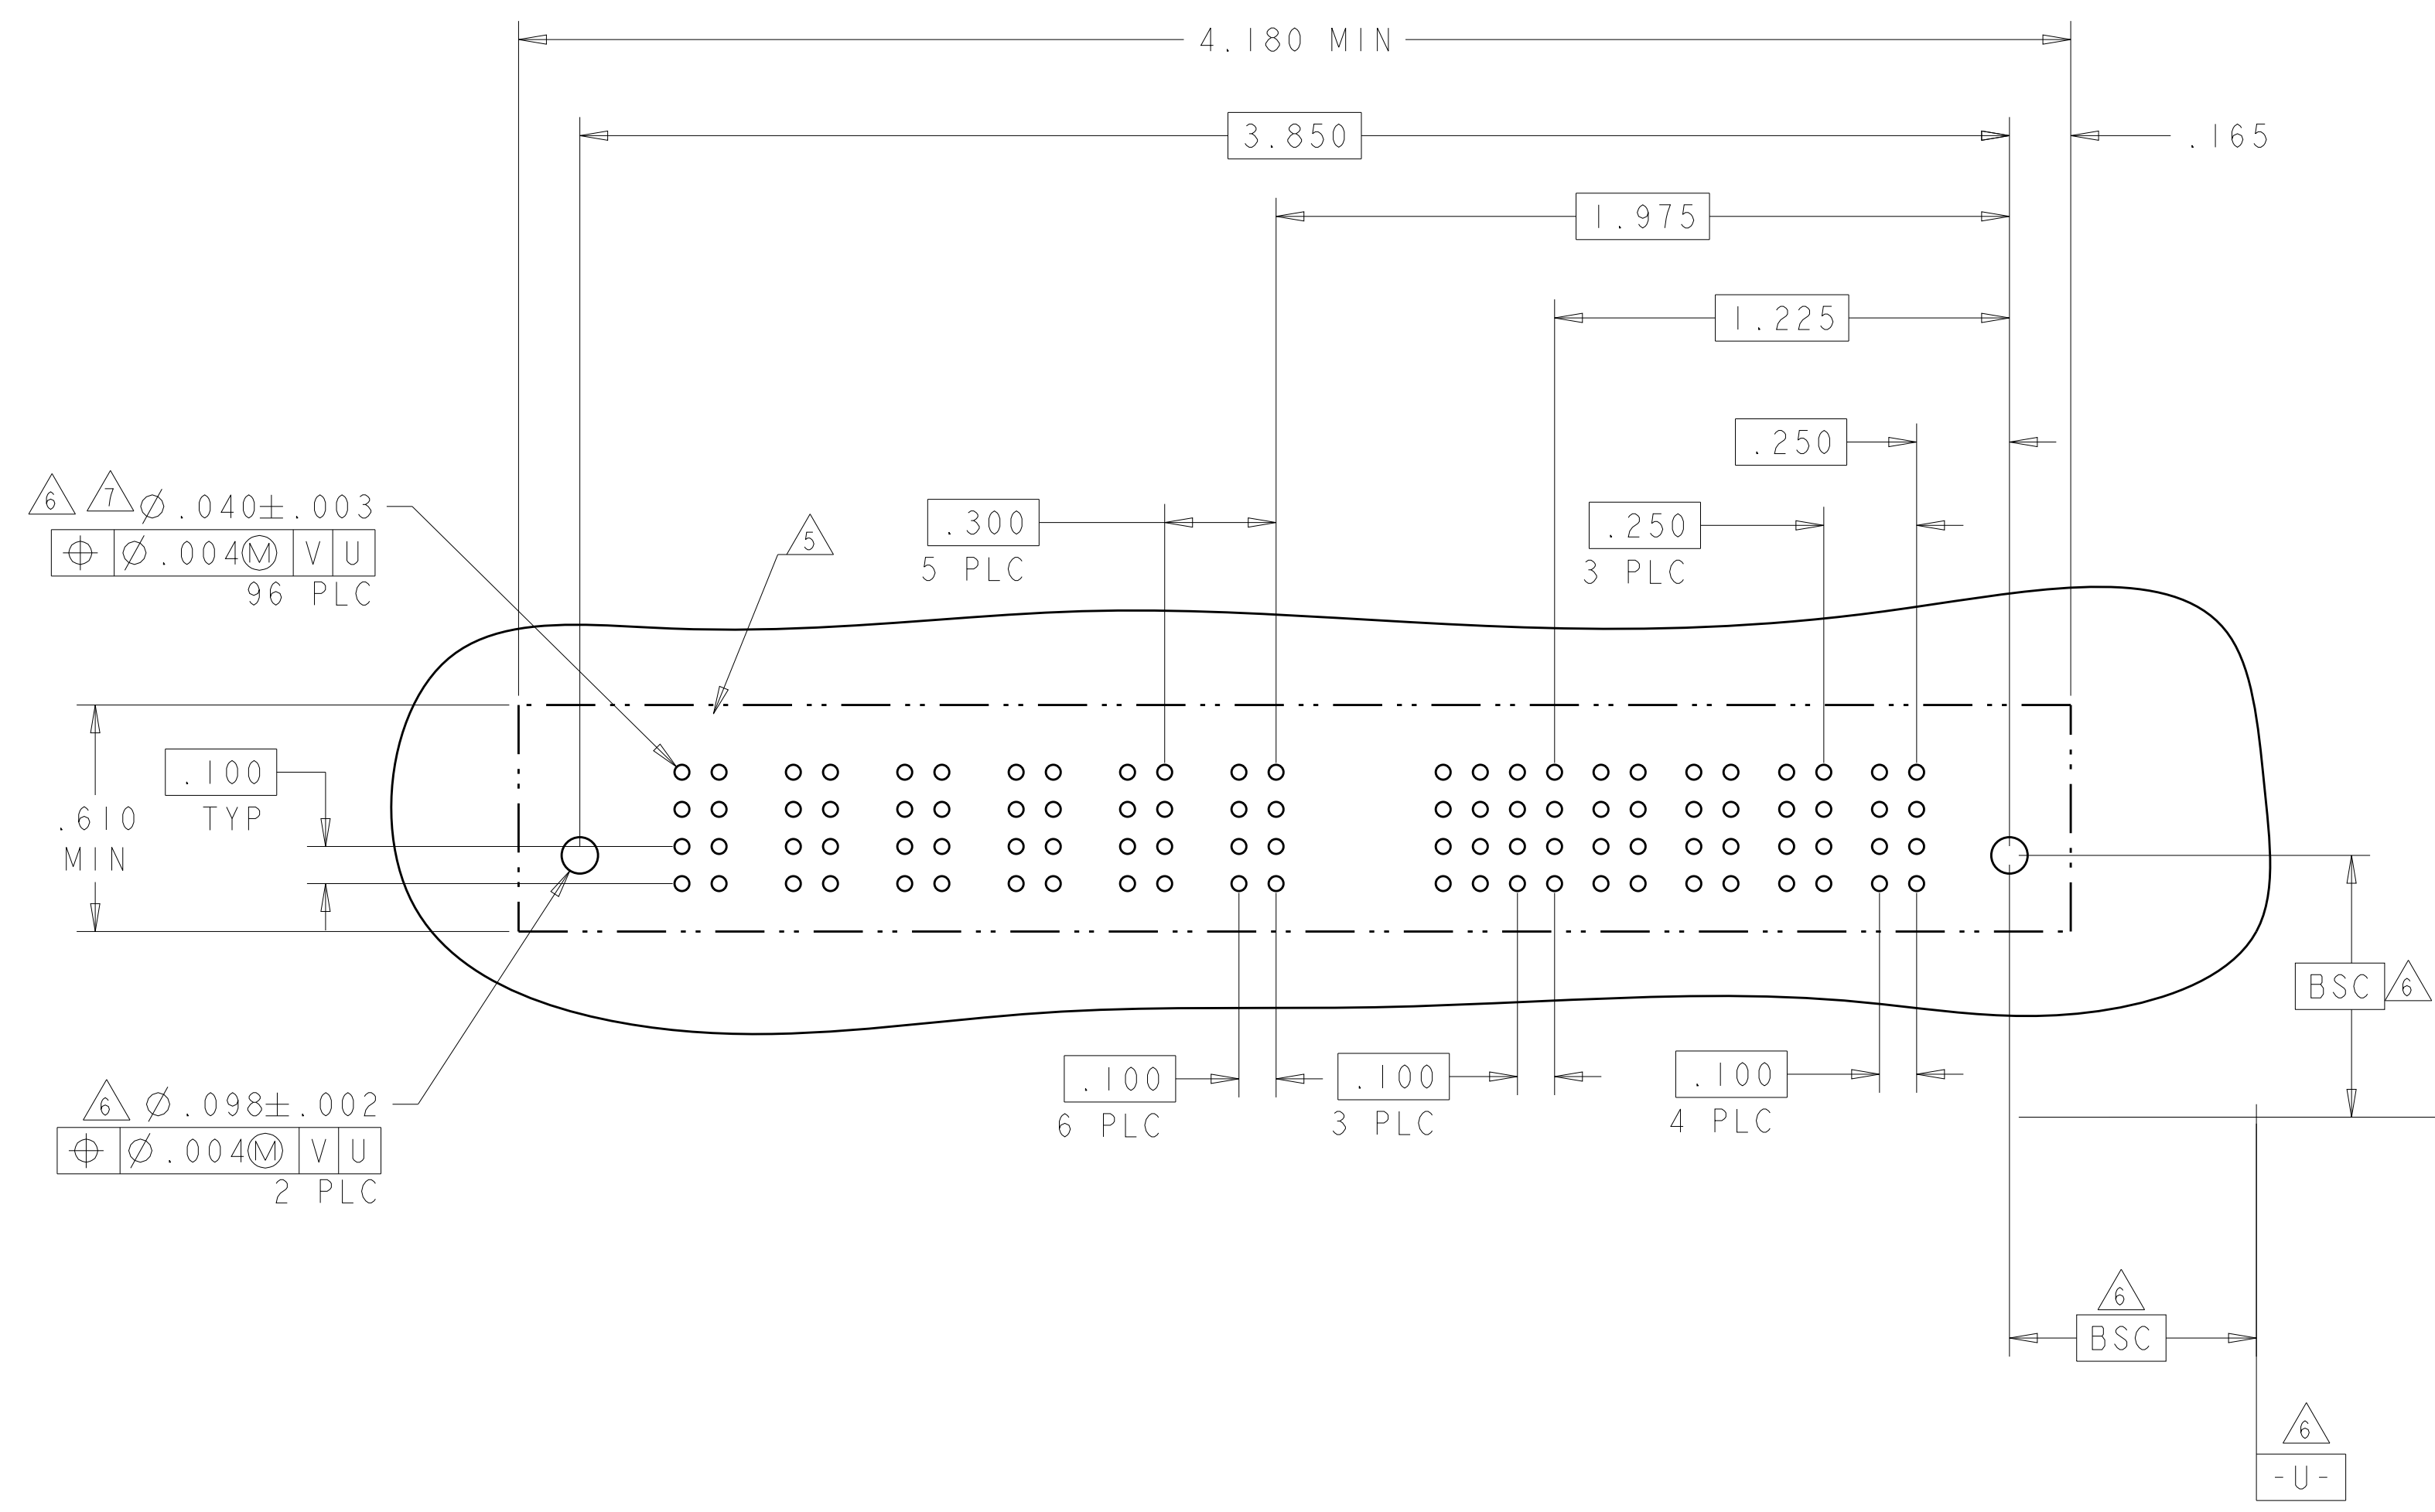

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.2°	FINISH	OTHERWISE SPECIFIED:
-----------------------	--	--------	----------------------

MATERIAL	FINISH	WEIGHT	CUSTOMER DRAWING
----------	--------	--------	------------------

OWN: R. GRZYBOWSKI 16FEB05	CHK: M. PERCHERKE 16FEB05	APVD: M. PERCHERKE	NAME: M. PERCHERKE
PRODUCT SPEC: 108-1973		APPLICATION SPEC: 114-13038	
SIZE: 114-13038		CAGE CODE: 6450150	
SCALE: 1:1		SHEET 10 OF 12	


**STE** TE Connectivity

VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL

RESTRICTED TO

LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER (L)					SIGNAL								POWER (R)									
			PI4	PI3	PI2	PI1	PI0	P9	8	7	6	5	4	3	2	1	P8	P7	P6	P5	P4		P3	P2	PI
2-6450150-7	D C B A		VM	VM		VM	VM		E	E	E	E	E	E	E	E		VA		VM	VM		VM	VM	
8ACP + 32S + 6ACP																									

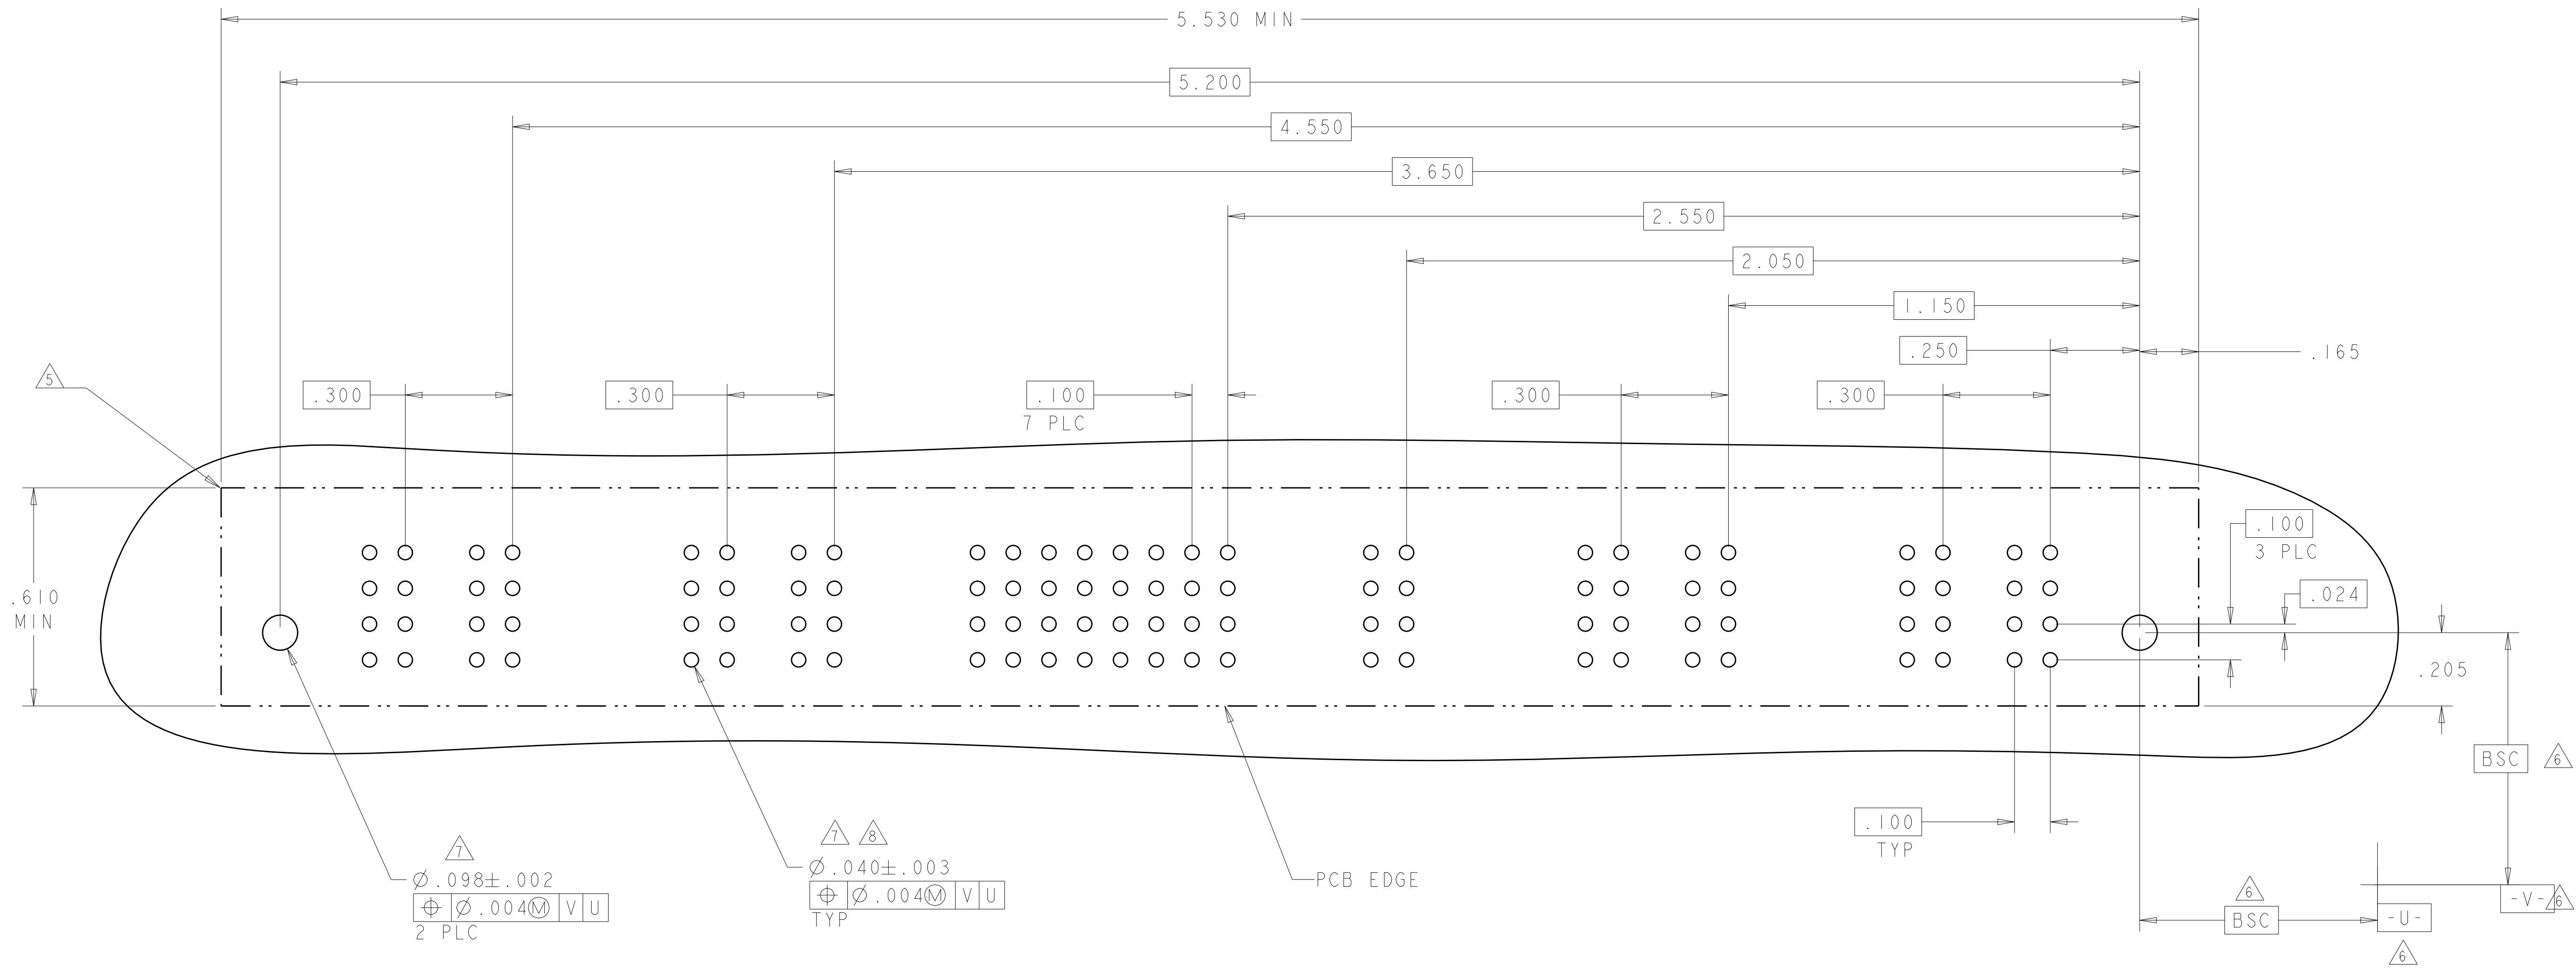

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI CHK M. PERCHERKE APVD M. PERCHERKE	16FEB05 16FEB05	 TE Connectivity
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL		
	0 PLC ±. 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±.0°	PRODUCT SPEC 108-1973	APPLICATION SPEC 114-13038	SIZE A1
MATERIAL	FINISH	WEIGHT	CAGE CODE 100779	DRAWING NO C=6450150
CUSTOMER DRAWING		SCALE 1:1	SHEET 11	OF 12
		REV G5		





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.