

# Glass Encapsulated TransGuard® Automotive Series



## Multilayer Varistors for Automotive Applications



### GENERAL DESCRIPTION

The Glass Encapsulated TransGuard® Automotive Series are zinc oxide (ZnO) based ceramic semiconductor devices with non-linear, bi-directional voltage-current characteristics.

They have the advantage of offering bi-directional overvoltage protection as well as EMI/RFI attenuation in a single SMT package. The Automotive Series high current and high energy handling capability make them well suited for protection against automotive related transients.

These large case size parts extend TransGuard range into high energy applications. In addition the glass encapsulation provides enhanced resistance against harsh environment or process such as acidic environment, salts or chlorite flux.

### GENERAL CHARACTERISTICS

- Operating Temperature: -55°C to 125°C
- Case Size: 1206-2200
- Working Voltage: 16-65Vdc
- Energy: 07-12J
- Peak Current: 200-2000A

### FEATURES

- High Reliability
- High Energy Absorption (Load Dump)
- High Current Handling
- Bi-Directional protection
- EMI/RFI attenuation in off-state
- Multi-strike capability
- Sub 1nS response to ESD strike
- AEC Q200 Qualified

### APPLICATIONS

- Various Automotive Applications
- Internal Combustion Engine (ICE) Vehicles
- Hybrid Electric Vehicles (HEV)
- Plug-in Hybrid Electric Vehicles (PHEV)
- Commercial Vehicles
- Sensors
- DC Motor
- LIN BUS
- Relays
- ECU
- and more
- Applications where Glass Encapsulation is needed for Harsh Environment/Acid-Resistance

### HOW TO ORDER

|          |                        |                   |             |                 |               |                  |              |                  |
|----------|------------------------|-------------------|-------------|-----------------|---------------|------------------|--------------|------------------|
| <b>V</b> | <b>G</b>               | <b>AS</b>         | <b>1812</b> | <b>16</b>       | <b>P</b>      | <b>400</b>       | <b>R</b>     | <b>P</b>         |
| Varistor | Glass Encapsulate Chip | Automotive Series | Chip Size   | Working Voltage | Energy Rating | Clamping Voltage | Package      | Termination      |
|          |                        |                   | 1206        | 16 = 16Vdc      | F = 0.7J      | 390 = 40V        | D = 7" reel  | P = Ni/Sn plated |
|          |                        |                   | 1210        | 18 = 18Vdc      | H = 1.2J      | 400 = 42V        | R = 7" reel  |                  |
|          |                        |                   | 1812        | 26 = 26Vdc      | J = 1.6J      | 440 = 44V        | T = 13" reel |                  |
|          |                        |                   | 2220        | 30 = 30Vdc      | S = 2.0J      | 540 = 54V        |              |                  |
|          |                        |                   |             | 31 = 31Vdc      | P = 2.5-3.7J  | 560 = 60V        |              |                  |
|          |                        |                   |             | 34 = 34Vdc      | U = 4.0-5.0J  | 570 = 57V        |              |                  |
|          |                        |                   |             | 42 = 42Vdc      | Y = 6.5-12J   | 650 = 65V        |              |                  |
|          |                        |                   |             | 48 = 48Vdc      |               | 770 = 77V        |              |                  |
|          |                        |                   |             | 60 = 60Vdc      |               | 900 = 90V        |              |                  |
|          |                        |                   |             | 65 = 65Vdc      |               | 101 = 100V       |              |                  |
|          |                        |                   |             |                 |               | 121 = 120V       |              |                  |
|          |                        |                   |             |                 |               | 131 = 135V       |              |                  |

### PHYSICAL DIMENSIONS: mm (inches)

| Size (EIA) | Length (L)                 | Width (W)                  | Max Thickness (T) | Land Length (t)           |
|------------|----------------------------|----------------------------|-------------------|---------------------------|
| 1206       | 3.20±0.20<br>(0.126±0.008) | 1.60±0.20<br>(0.063±0.008) | 1.70<br>(0.067)   | 0.94 max.<br>(0.037 max.) |
| 1210       | 3.20±0.20<br>(0.126±0.008) | 2.49±0.20<br>(0.098±0.008) | 1.70<br>(0.067)   | 0.14 max.<br>(0.045 max.) |
| 1812       | 4.50±0.30<br>(0.177±0.012) | 3.20±0.30<br>(0.126±0.012) | 2.00<br>(0.079)   | 1.00 max.<br>(0.040 max.) |
| 2220       | 5.70±0.40<br>(0.224±0.016) | 5.00±0.40<br>(0.197±0.016) | 2.50<br>(0.098)   | 1.00 max.<br>(0.040 max.) |

# Glass Encapsulated TransGuard® Automotive Series



## Multilayer Varistors for Automotive Applications

### ELECTRIAL CHARACTERISTICS


| AVX PN         | V <sub>W</sub> (DC) | V <sub>W</sub> (AC) | V <sub>B</sub> | V <sub>C</sub> | I <sub>Vc</sub> | I <sub>L</sub> | E <sub>T</sub> | E <sub>LD</sub> | I <sub>P</sub> | Cap   | Freq | V <sub>Jump</sub> | P <sub>Diss, MAX</sub> |
|----------------|---------------------|---------------------|----------------|----------------|-----------------|----------------|----------------|-----------------|----------------|-------|------|-------------------|------------------------|
| VGAS120616K390 | 16                  | 11                  | 24.5±10%       | 40             | 1               | 15             | 0.6            | 1.5             | 200            | 1100  | K    | 27.5              | 0.01                   |
| VGAS120616N390 | 16                  | 11                  | 24.5±10%       | 40             | 1               | 15             | 1.1            | 2               | 200            | 1300  | K    | 27.5              | 0.01                   |
| VGAS121016J400 | 16                  | 13                  | 25.5±10%       | 42             | 5               | 15             | 1.6            | 3               | 500            | 2300  | K    | 27.5              | 0.03                   |
| VGAS181216P390 | 16                  | 11                  | 24.5±10%       | 40             | 5               | 15             | 2.9            | 10              | 1000           | 7000  | K    | 27.5              | 0.07                   |
| VGAS181216P400 | 16                  | 11                  | 24.5±10%       | 42             | 5               | 10             | 2.9            | 10              | 1000           | 5000  | K    | 27.5              | 0.07                   |
| VGAS222016Y400 | 16                  | 11                  | 24.5±10%       | 42             | 10              | 10             | 7.2            | 25              | 1500           | 13000 | K    | 25.5              | 0.10                   |
| VGAS120618D400 | 18                  | 13                  | 25.5±10%       | 42             | 1               | 15             | 0.4            | 1.5             | 150            | 1200  | K    | 27.5              | 0.008                  |
| VGAS181218P440 | 18                  | 14                  | 27.5±10%       | 44             | 5               | 15             | 2.9            | 6               | 800            | 5000  | K    | 27.5              | 0.05                   |
| VGAS120626F540 | 26                  | 18                  | 33.0±10%       | 54             | 1               | 15             | 0.7            | 1.5             | 200            | 600   | K    | 27.5              | 0.008                  |
| VGAS121026H560 | 26                  | 18                  | 34.5±10%       | 60             | 5               | 15             | 1.2            | 3               | 300            | 1200  | K    | 27.5              | 0.018                  |
| VGAS181226P570 | 26                  | 23                  | 35.0±10%       | 57             | 5               | 15             | 3.0            | 8               | 600            | 3000  | K    | 30                | 0.015                  |
| VGAS222026Y570 | 26                  | 23                  | 35±10%         | 57             | 10              | 15             | 6.8            | 20              | 1100           | 7000  | K    | 30                | 0.03                   |
| VGAS121030H620 | 30                  | 21                  | 41.0±10%       | 67             | 5               | 15             | 1.2            | 3               | 280            | 1000  | K    | 30                | 0.018                  |
| VGAS181231P650 | 31                  | 25                  | 39.0±10%       | 65             | 5               | 15             | 3.7            | 8               | 800            | 2600  | K    | 30                | 0.06                   |
| VGAS121034S770 | 34                  | 30                  | 47.0±10%       | 77             | 2.5             | 15             | 2              | 3               | 400            | 1000  | K    | 48                | 0.04                   |
| VGAS181234U770 | 34                  | 30                  | 47.0±10%       | 77             | 5               | 15             | 5              | 6.1             | 800            | 1500  | K    | 48                | 0.08                   |
| VGAS222034Y770 | 34                  | 30                  | 47.0±10%       | 77             | 10              | 15             | 12             | 25              | 2000           | 6300  | K    | 48                | 0.24                   |
| VGAS181242U900 | 42                  | 35                  | 56.0±10%       | 90             | 5               | 15             | 4.0            | 6               | 500            | 1800  | K    | 48                | 0.015                  |
| VGAS121048H101 | 48                  | 34                  | 62.0±10%       | 100            | 5               | 15             | 1.2            | -               | 250            | 500   | K    | 48                | 0.022                  |
| VGAS121060J121 | 60                  | 42                  | 76.0±10%       | 120            | 5               | 15             | 1.5            | -               | 250            | 400   | K    | 48                | 0.03                   |
| VGAS121065P131 | 65                  | 50                  | 82.0±10%       | 135            | 2.5             | 15             | 2.7            | -               | 350            | 600   | K    | 48                | 0.05                   |

|                     |   |                   |   |
|---------------------|---|-------------------|---|
| V <sub>W</sub> (DC) | DC Working Voltage [V]                                    | E <sub>T</sub>    | Transient Energy Rating [J, 10x1000µS]  |
| V <sub>W</sub> (AC) | AC Working Voltage [V]                                    | E <sub>LD</sub>   | Load Dump Energy (x10) [J]  |
| V <sub>B</sub>      | Typical Breakdown Voltage [V @ 1mA <sub>Vc</sub> , 25°C]  | I <sub>P</sub>    | Peak Current Rating [A, 8x20µS]   |
| V <sub>C</sub>      | Clamping Voltage [V @ I <sub>Vc</sub> ]                   | Cap               | Typical capacitance [pF] @ frequency specified and 0.5V <sub>VMS</sub> , 25°C, M = 1MHz, K = 1kHz |
| I <sub>Vc</sub>     | Test Current for V <sub>C</sub> [A, 8x20µs]               | V <sub>Jump</sub> | Jump Start [V, 5 min]   |
| I <sub>L</sub>      | Maximum leakage current at the working voltage, 25°C [µA] | P <sub>Diss</sub> | Power Dissipation [W]   |

### AUTOMOTIVE SERIES – LOAD DUMP TEST

#### According to ISO DP7637 rev 2 Pulse 5

#### Automotive Load Dump Pulse (According to ISO 7637 Pulse 5)

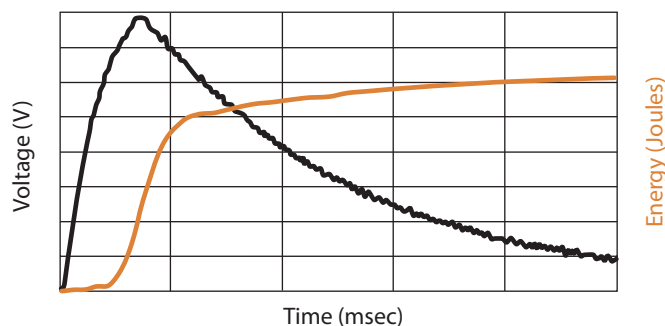

When using the test method indicated below, the amount of Energy dissipated by the varistor must not exceed the Load Dump Energy value specified in the product table.

#### 12V SYSTEMS

|                       |      |    |    |
|-----------------------|------|----|----|
| <b>VGAS181216P400</b> | 0.5Ω | 1Ω | 4Ω |
| 100ms                 | 46   | 52 | 72 |
| 200ms                 | 37   | 41 | 59 |
| 400ms                 | 32   | 35 | 51 |
| <b>VGAS222016Y400</b> | 0.5Ω | 1Ω | 4Ω |
| 100ms                 | 53   | 60 | 77 |
| 200ms                 | 50   | 55 | 73 |
| 400ms                 | 47   | 50 | 66 |





Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.