



Micro Commercial Components



Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

**MT200C08T2**  
**MT200C12T2**  
**MT200C16T2**  
**MT200C18T2**


**200 Amp**  
**THYRISTOR MODULE**  
**800~1800 Volts**

## Features

- Lead Free Finish/RoHS Compliant (NOTE 1) ("P" Suffix designates RoHS Compliant. See ordering information)
- International standard package
- Heat transfer through aluminum oxide DBC ceramic isolated metal baseplate
- Glass passivated chip
- Simple Mounting


## Applications

- Power Converters
- Lighting Control
- DC Motor Control and Drives
- Heat and temperature control

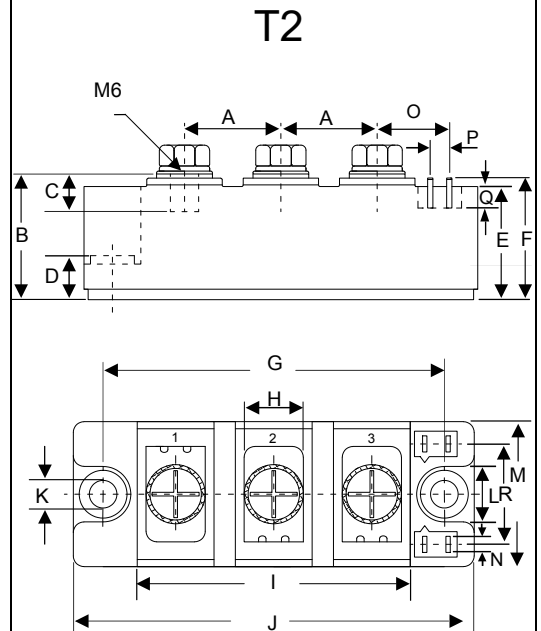

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.894	0.917	22.50	23.50	
B	1.169	1.193	29.50	30.50	
C	0.343	0.366	8.50	9.50	
D	0.323	0.343	8.00	8.90	
E	1.051	1.075	26.50	27.50	
F	1.130	1.154	28.50	29.50	
G	0.120	0.130	79.50	80.50	
H	0.500	0.524	12.50	13.50	
I	2.501	2.531	63.50	64.50	
J	3.689	3.713	93.50	94.50	
K	0.256		6.50		∅
L	0.500	0.524	12.50	13.50	
M	1.327	1.350	33.50	34.50	
N	0.032X0.11		0.8X2.8		
O	0.677	0.700	17.00	18.00	
P	0.185	0.209	4.50	5.50	
Q	0.185	0.209	4.50	5.50	
R	0.902	0.925	22.70	23.70	

**Circuit**

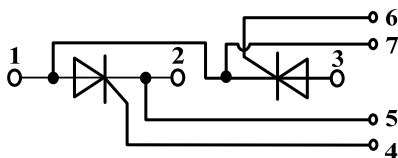

## Module Type

TYPE	VRRM	VRSM
MT200C08T2	800V	900V
MT200C12T2	1200V	1300V
MT200C16T2	1600V	1700V
MT200C18T2	1800V	1900V

## Maximum Ratings


Symbol	Conditions	Values	Units
$I_{TAV}$	Sine 180°; $T_c=85^\circ\text{C}$	200	A
$I_{TSM}$	$T_{VJ}=45^\circ\text{C}$ t=10ms, sine	5500	A
	$T_{VJ}=125^\circ\text{C}$ t=10ms, sine	5000	
$i^2t$	$T_{VJ}=45^\circ\text{C}$ t=10ms, sine	151000	A <sup>2</sup> s
	$T_{VJ}=125^\circ\text{C}$ t=10ms, sine	125000	
Visol	a.c.50HZ;r.m.s.;1min	3000	V
$T_{vj}$		-40 to 130	$^\circ\text{C}$
$T_{stg}$		-40 to 125	$^\circ\text{C}$
Mt	To terminals(M6)	$3 \pm 15\%$	Nm
Ms	To heatsink(M6)	$5 \pm 15\%$	Nm
di/dt	$T_{VJ}=T_{VJM}$ , $2/3V_{DRM}$ , $I_G=500\text{mA}$ $T_r < 0.5\mu\text{s}$ , $t_p > 6\mu\text{s}$	200	A/us
dv/dt	$T_J = T_{VJM}$ , $2/3V_{DRM}$ , linear voltage rise	1000	V/us
a	Maximum allowable acceleration	50	$\text{m/s}^2$
Weight	Module(Approximately)	165	g

## Thermal Characteristics


Symbol	Conditions	Values	Units
$R_{th(j-c)}$	Cont.; thyristor / per module	0.16/0.08	$^\circ\text{C/W}$
$R_{th(c-s)}$	per thyristor / per module	0.1/0.05	$^\circ\text{C/W}$

Symbol	Conditions	Values		Units
$V_{TM}$	$T=25^\circ\text{C}$ $I_{TM}=620\text{A}$		1.7	V
$I_{RRM}/I_{DRM}$	$T_{VJ}=T_{VJM}$ , $V_R=V_{RRM}$ , $V_D=V_{DRM}$		40	mA
$V_{TO}$	For power-loss calculations only ( $T_{VJ}=125^\circ\text{C}$ )		0.85	V
$r_T$	$T_{VJ}=T_{VJM}$		1.5	$\text{m}\Omega$
$V_{GT}$	$T_{VJ}=25^\circ\text{C}$ , $V_D=6\text{V}$		3	V
$I_{GT}$	$T_{VJ}=25^\circ\text{C}$ , $V_D=6\text{V}$		200	mA
$V_{GD}$	$T_{VJ}=125^\circ\text{C}$ , $V_D=2/3V_{DRM}$		0.25	V
$I_{GD}$	$T_{VJ}=125^\circ\text{C}$ , $V_D=2/3V_{DRM}$		10	mA
$I_L$	$T_{VJ}=25^\circ\text{C}$ , $R_G=33\Omega$	300	1000	mA
$I_H$	$T_{VJ}=25^\circ\text{C}$ , $V_D=6\text{V}$	150	400	mA
tg <sub>d</sub>	$T_{VJ}=25^\circ\text{C}$ , $I_G=1\text{A}$ , $di_G/dt=1\text{A/us}$	1		us
tq	$v_J=T_{VJM}$	100		us


**Performance Curves**

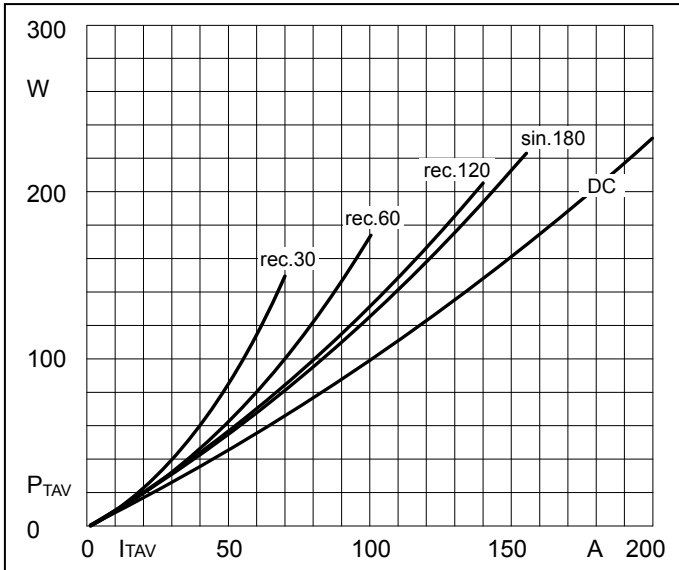


**Fig1. Power dissipation**

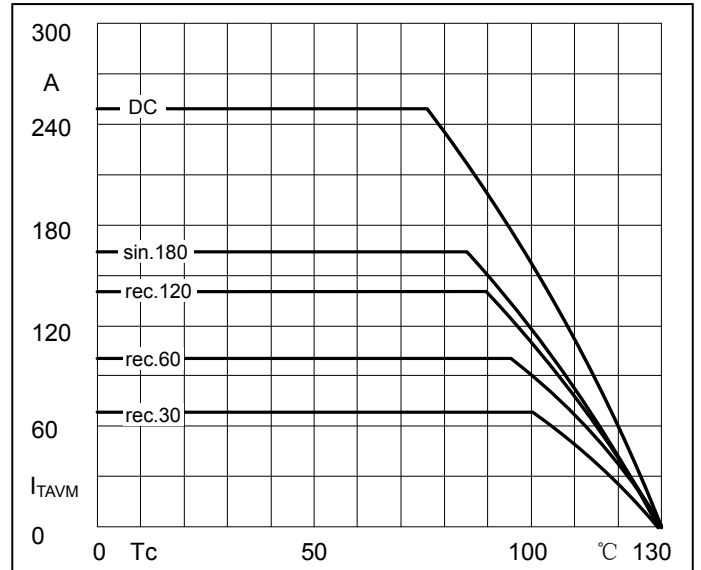

**Fig2. Forward Current Derating Curve**

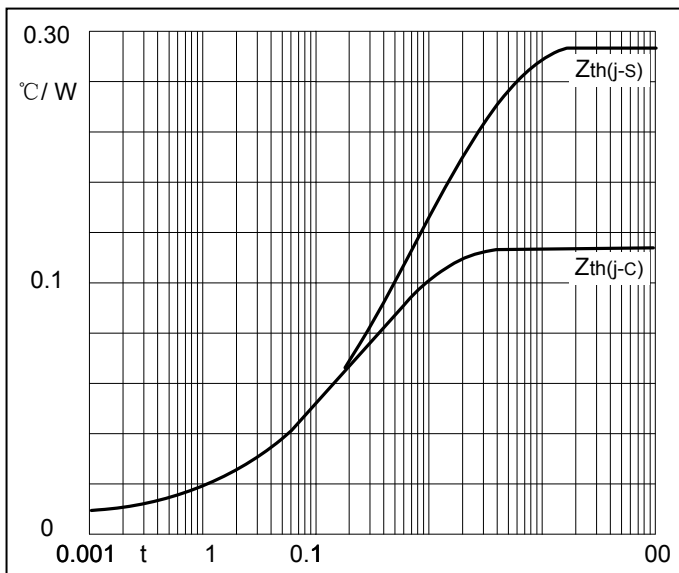

**Fig3. Transient thermal impedance**

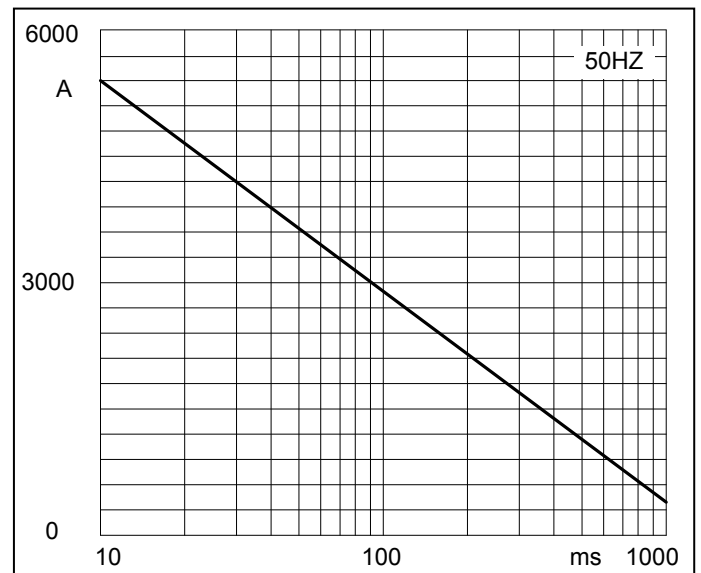

**Fig4. Max Non-Repetitive Forward Surge Current**

Performance Curves

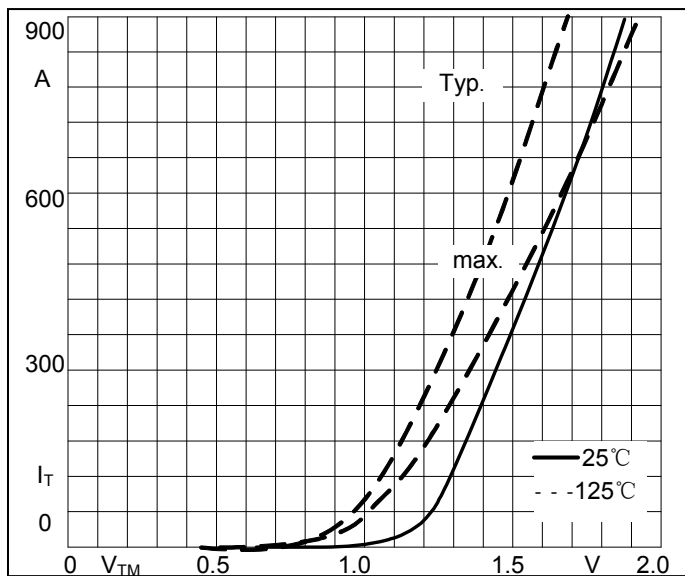


Fig5. Forward Characteristics

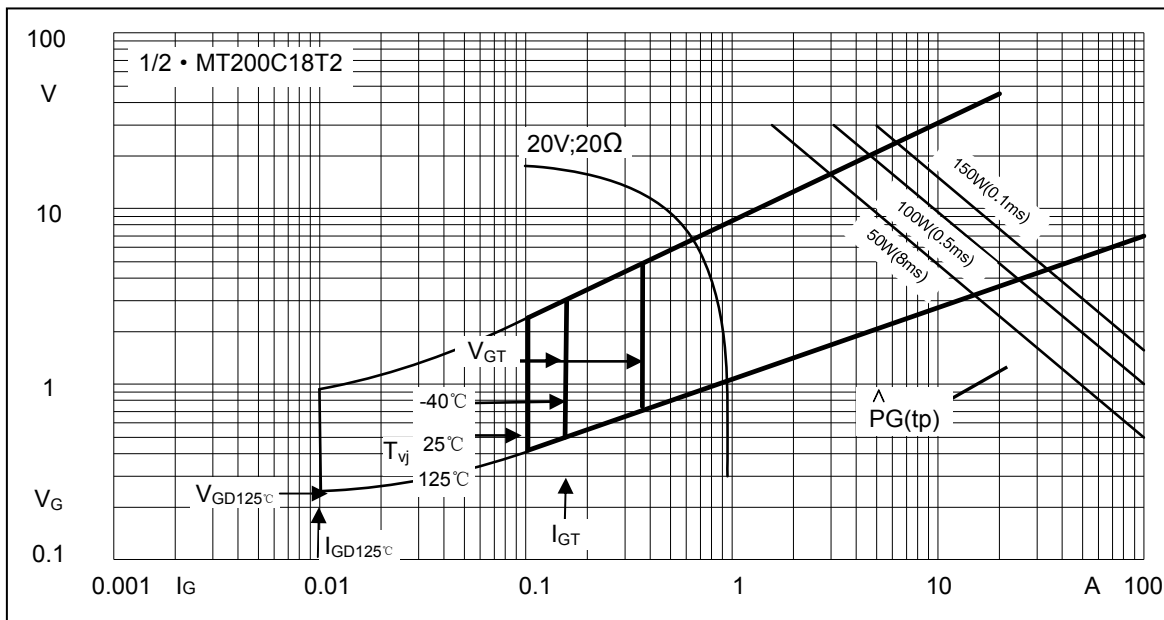


Fig6. Gate trigger Characteristics



Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-BP	Bulk: 8PCS/BOX ;80PCS/CTN

**\*\*\*IMPORTANT NOTICE\*\*\***

**Micro Commercial Components Corp.** reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . **Micro Commercial Components Corp .** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold **Micro Commercial Components Corp .** and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*LIFE SUPPORT\*\*\***

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

**\*\*\*CUSTOMER AWARENESS\*\*\***

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

[www.mccsemi.com](http://www.mccsemi.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.