

# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR1220

### ■ Dimensions(mm)



Weight: 0.7g

### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 35        |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |

### ■ Temperature Characteristics



### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)




### ■ Capacity vs. load resistance



## BR1225

### ■ Dimensions(mm)




Weight: 0.8g


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 48        |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

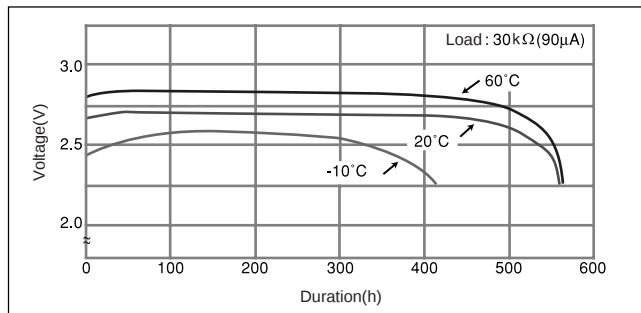

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

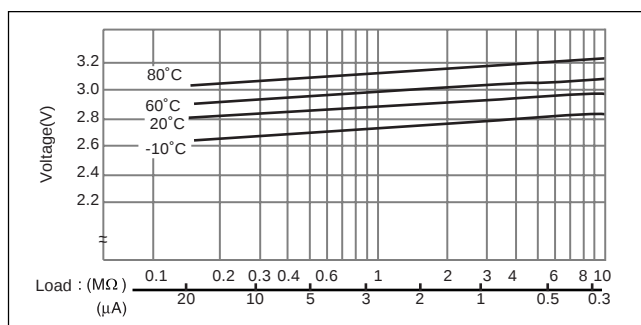


### ■ Capacity vs. load resistance

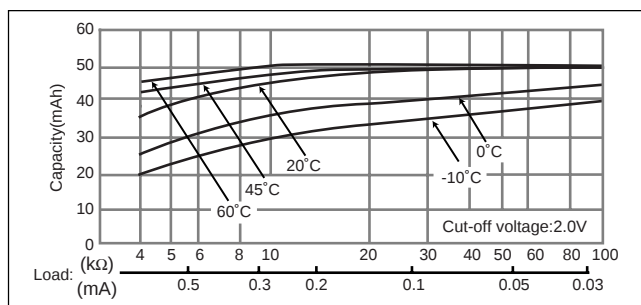

# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR1220

### ■ Dimensions(mm)




Weight: 0.7g


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 35        |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

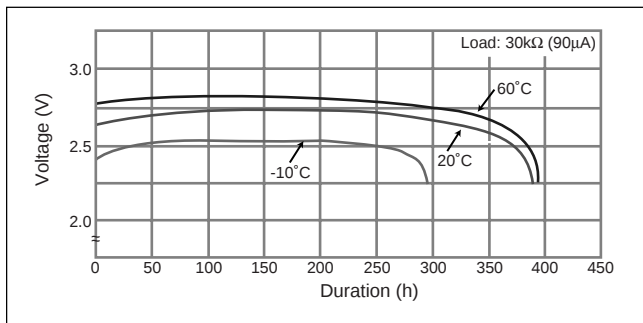

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

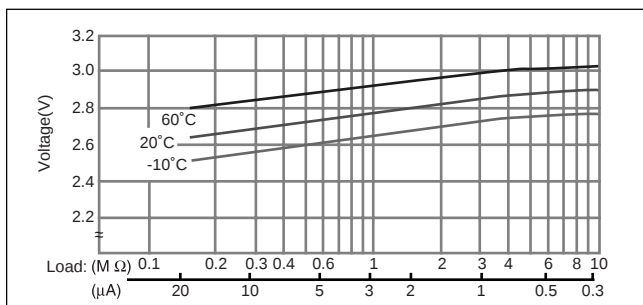


### ■ Capacity vs. load resistance

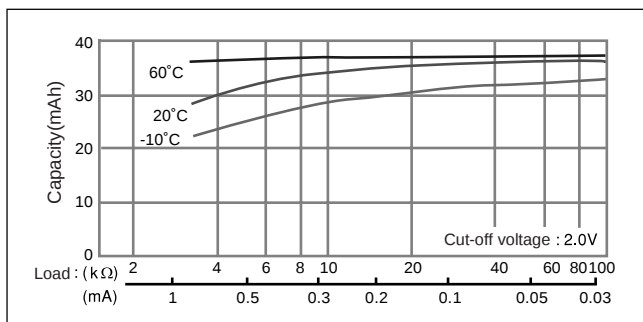

## BR1225

### ■ Dimensions(mm)




Weight: 0.8g


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 48        |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

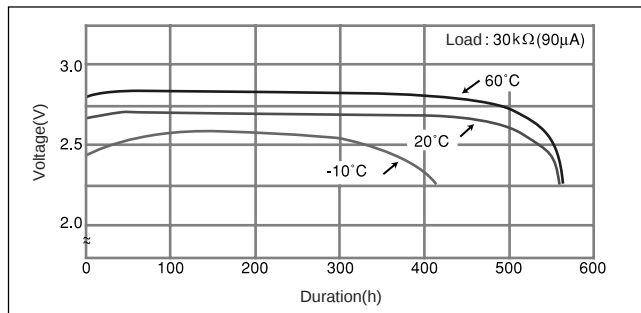

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

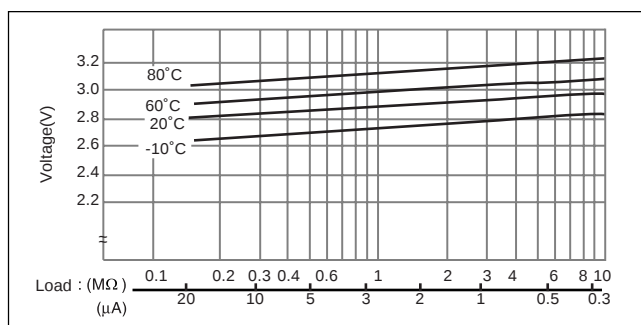


### ■ Capacity vs. load resistance

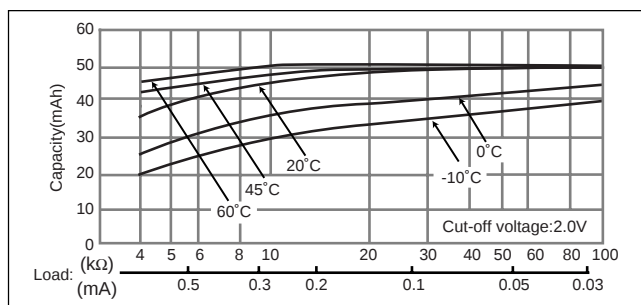

# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR1632


### ■ Dimensions(mm)

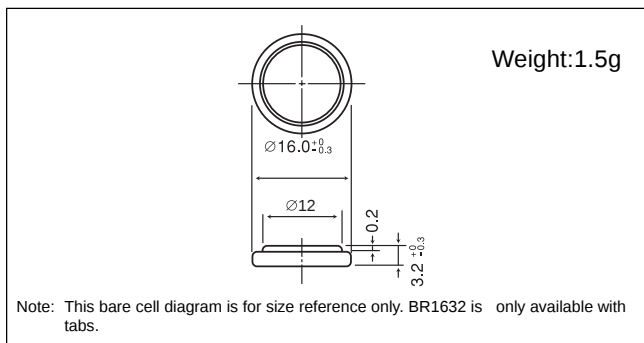


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 120       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

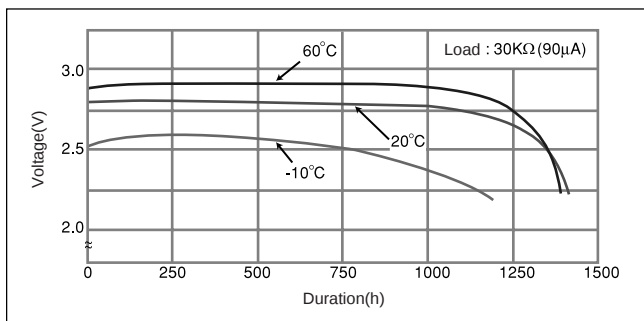

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

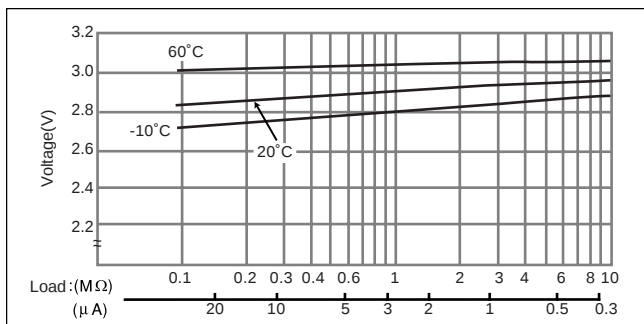


### ■ Capacity vs. load resistance

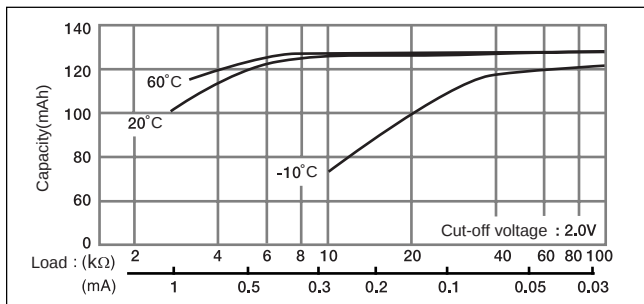

## BR2032


### ■ Dimensions(mm)

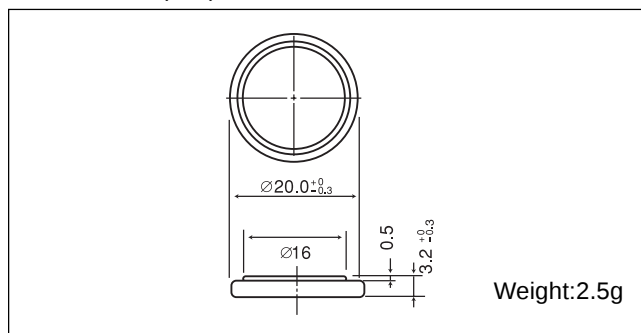


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 190       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

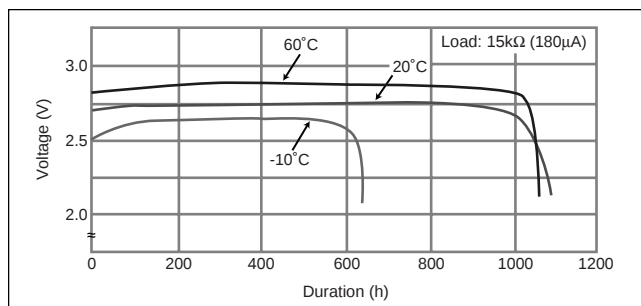

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

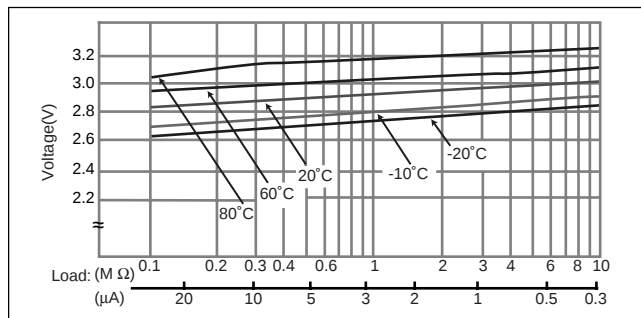


### ■ Capacity vs. load resistance

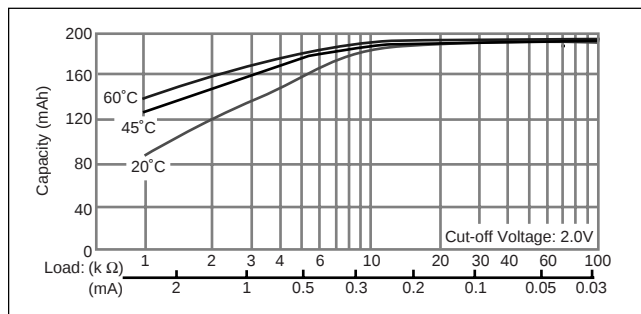

# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR1632


### ■ Dimensions(mm)

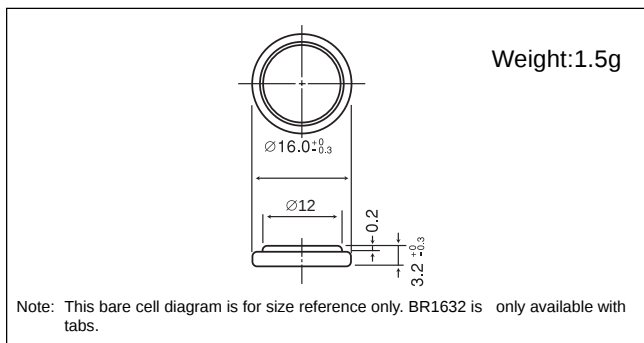


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 120       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

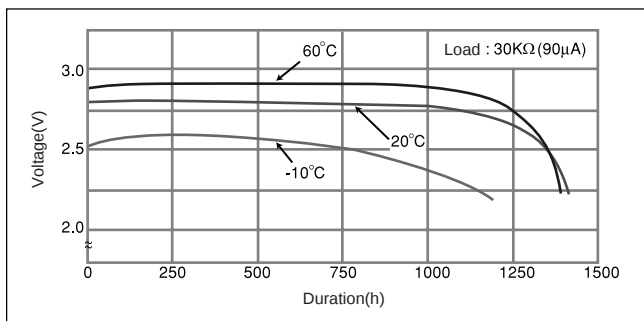

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

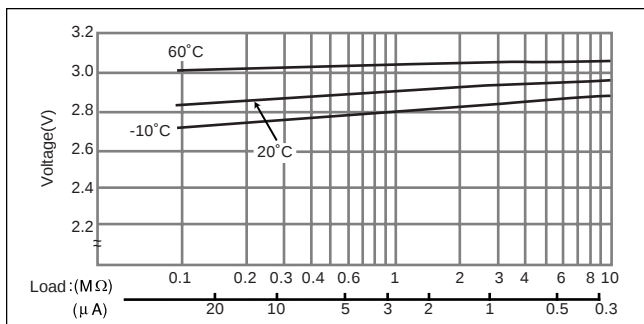


### ■ Capacity vs. load resistance

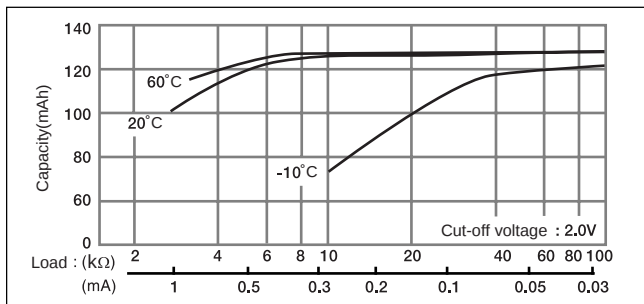

## BR2032


### ■ Dimensions(mm)

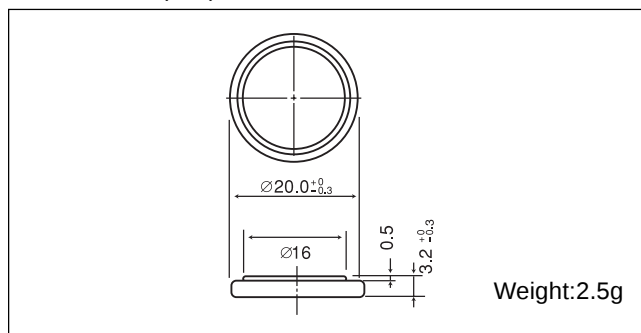


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 190       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

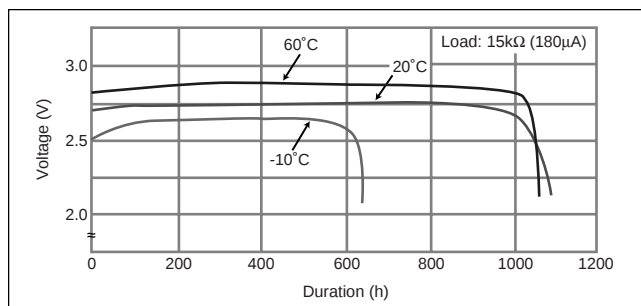

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

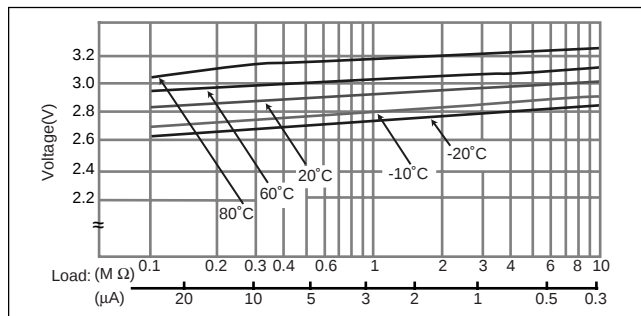


### ■ Capacity vs. load resistance

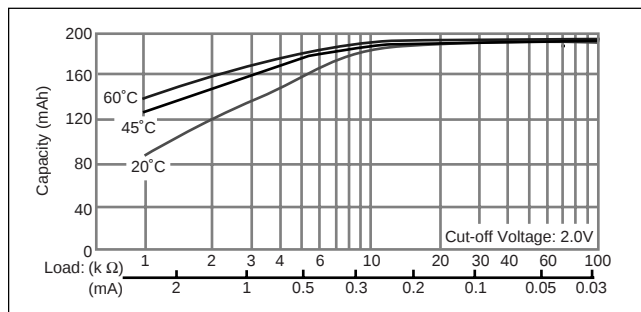

# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR2325


### ■ Dimensions(mm)

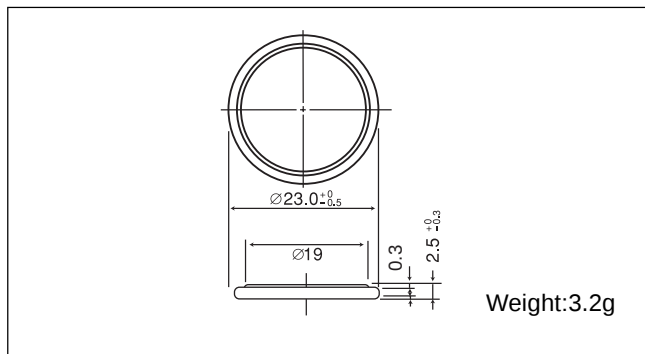


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 165       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

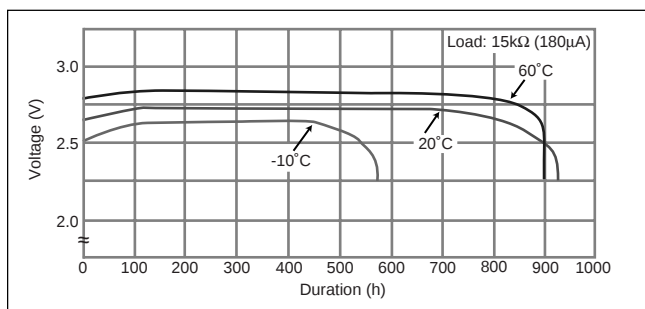

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

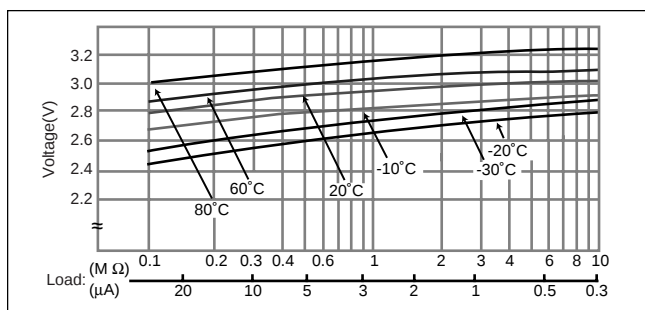


### ■ Capacity vs. load resistance

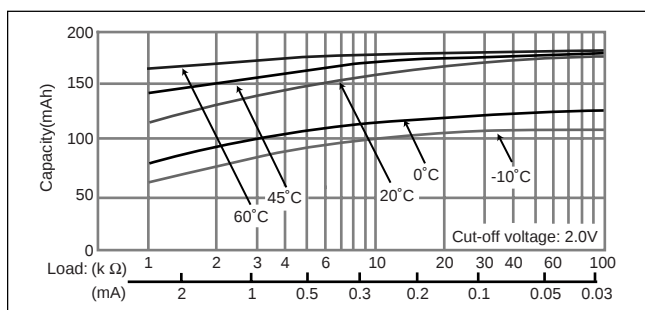

## BR2330


### ■ Dimensions(mm)

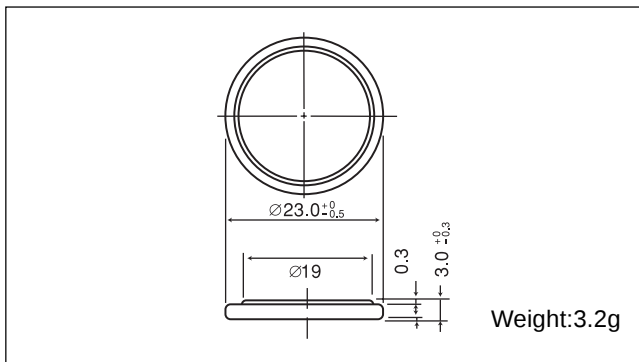


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 255       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

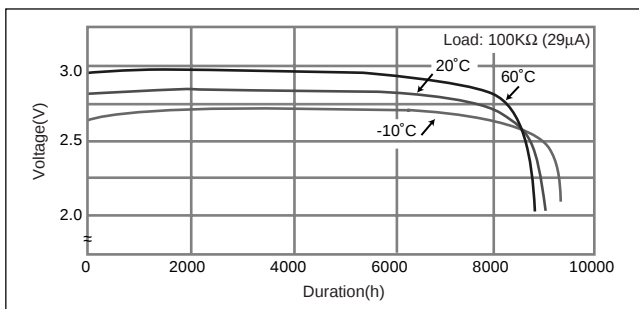

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

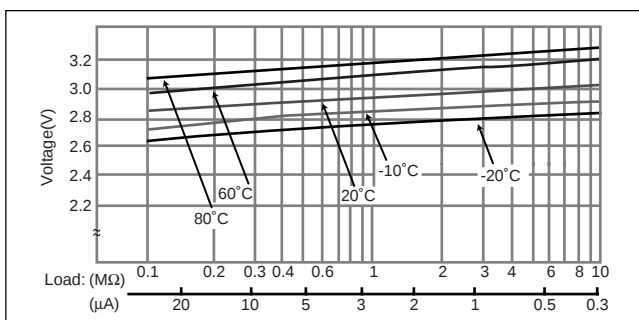


### ■ Capacity vs. load resistance

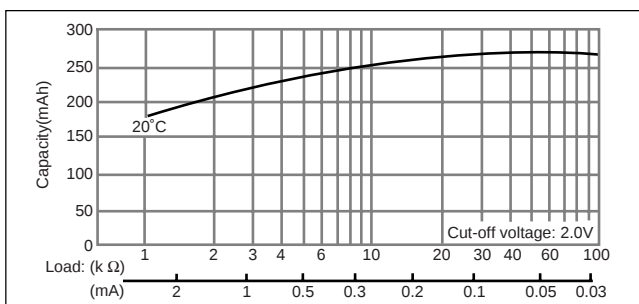

# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR2325


### ■ Dimensions(mm)

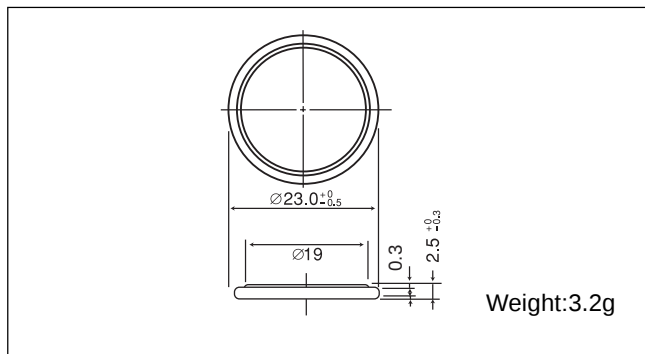


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 165       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

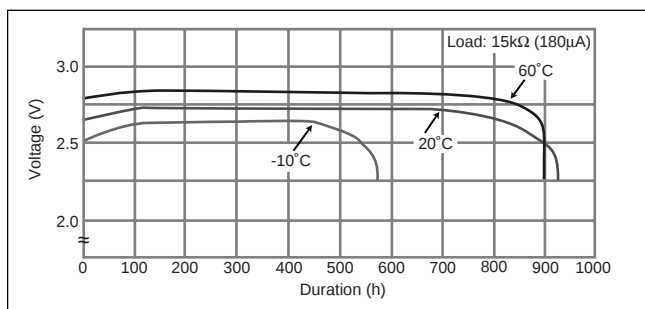

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

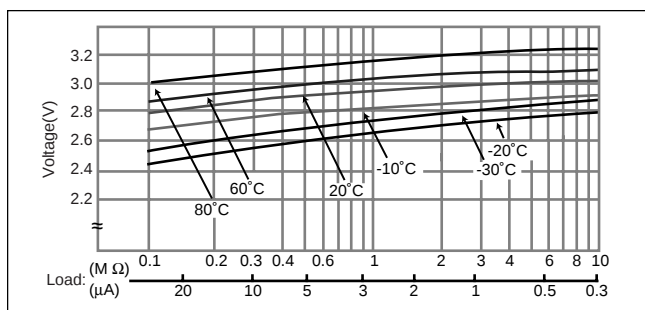


### ■ Capacity vs. load resistance

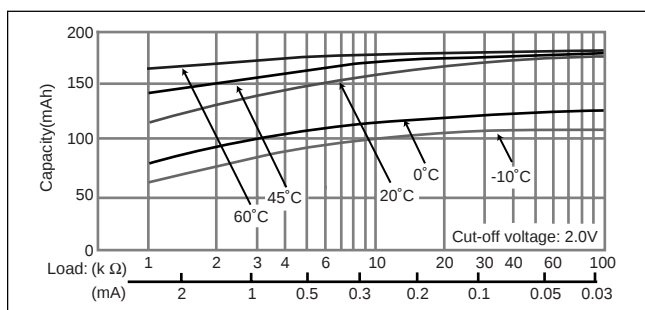

## BR2330


### ■ Dimensions(mm)

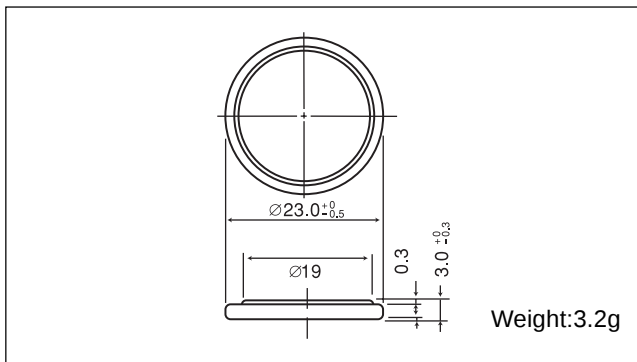


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 255       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

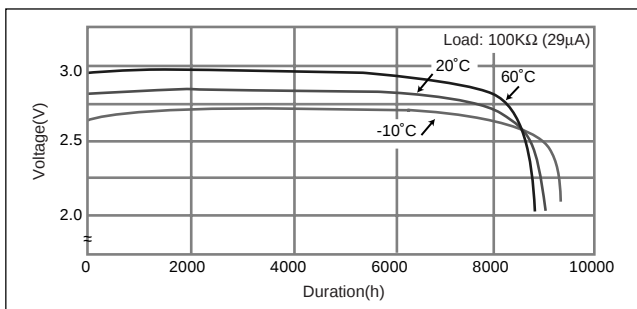

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

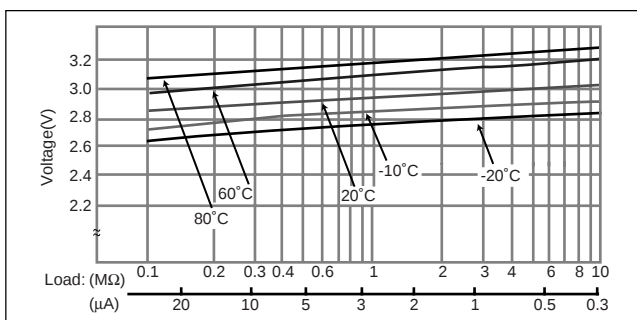


### ■ Capacity vs. load resistance

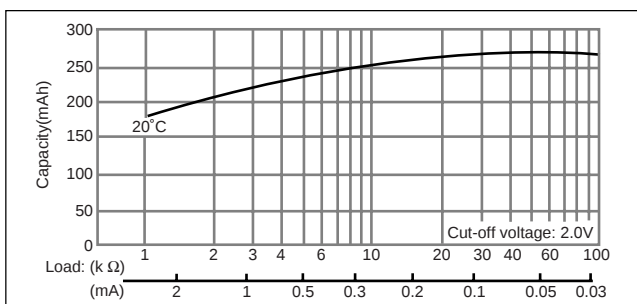

# Poly-carbonmonofluoride Lithium Coin Batteries: Individual Specifications

## BR3032


### ■ Dimensions(mm)

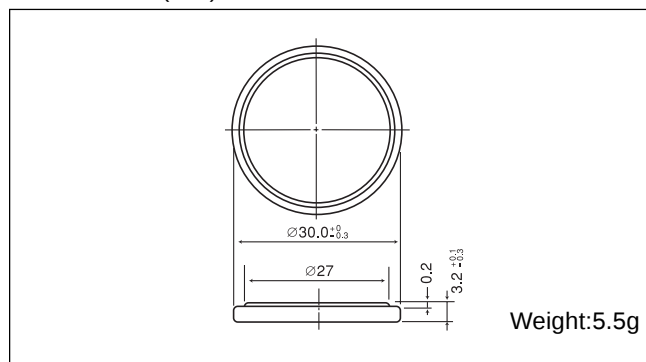


### ■ Specification

|                               |           |
|-------------------------------|-----------|
| Nominal voltage (V)           | 3         |
| Nominal capacity (mAh)        | 500       |
| Continuous standard load (mA) | 0.03      |
| Operating temperature (C)     | -30 ~ +80 |


### ■ Temperature Characteristics

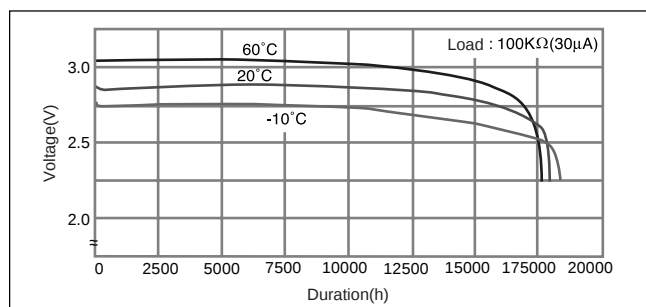

### ■ Operating voltage vs. load resistance (voltage at 50% discharge depth)

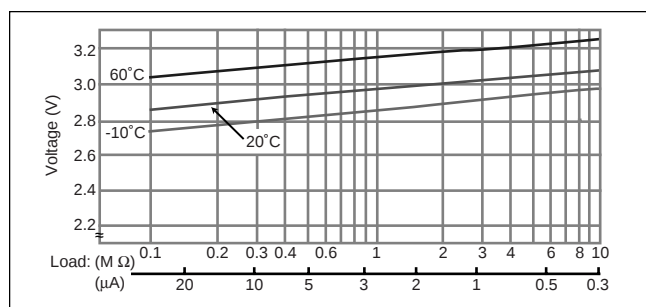

### ■ Capacity vs. load resistance

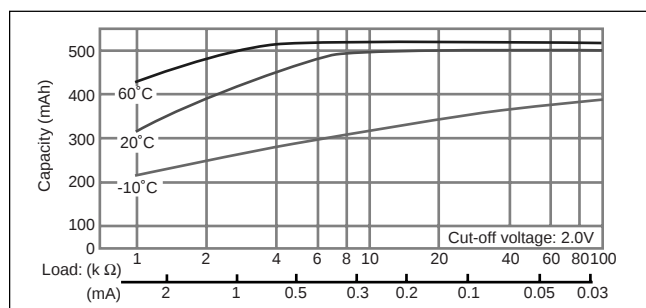



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.